

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 April 2006 (27.04.2006)

PCT

(10) International Publication Number
WO 2006/044744 A1

(51) International Patent Classification:
H04L 12/28 (2006.01)

(21) International Application Number:
PCT/US2005/037167

(22) International Filing Date: 13 October 2005 (13.10.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/969,689 19 October 2004 (19.10.2004) US

(71) Applicant (for all designated States except US): **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **STEPHENS, Adrian** [GB/GB]; 64 Lamb's Lane, Cottenham, Cambridge CB4 8TA (GB).

(74) Agents: **VINCENT, Lester, J.** et al.; Blakely, Sokoloff, Taylor & Zafman, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RESPONSE SCHEDULING FOR MULTIPLE RECEIVERS

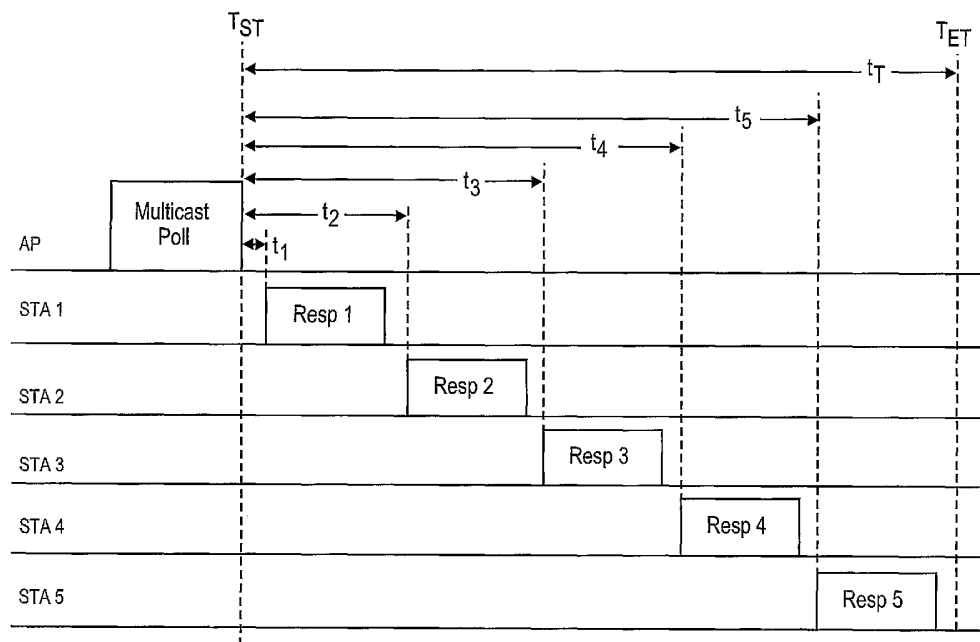

(57) Abstract: A base station may poll multiple mobile devices with the same multicast poll, and the polled mobile stations may respond separately at different times based on an assigned delay period for each mobile station that was specified in the poll message.

RESPONSE SCHEDULING FOR MULTIPLE RECEIVERS

BACKGROUND

5

[0001] This application is a Continuation-In-Part of application serial number 10/740,648, filed December 18, 2003, and claims the priority of that filing date for all common subject matter.

[0002] Because of the ever-increasing use of wireless devices, the existing RF
10 spectrum is becoming increasingly busy and crowded. As more and more devices try to share the same communications channels, the use of traditional communications protocols may cause the existing channels to reach the limits of their capacity, resulting in network congestion, communications delays, and sometimes even loss of service. For example, some communications protocols use a polling technique: a device that has data to transmit
15 may wait until it is polled by a base station. After being given permission to transmit in the form of this poll, the device may transmit some or all of the data it has queued up for transmission. This polling technique may prevent multiple devices from trying to transmit at the same time and interfering with each other. However, if the responses are short, and numerous devices are being separately polled by the base station in this manner, the
20 overhead of this polling protocol may use up a significant portion of the bandwidth, resulting in inefficient use of the channel. One technique for reducing the overhead consumed by this technique is to poll multiple devices in the same poll. However, this technique may create addition problems as multiple devices respond to the poll at the same time and thus interfere with each other.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] The invention may be understood by referring to the following description and accompanying drawings that are used to illustrate embodiments of the invention. In
5 the drawings:

Fig. 1 shows a diagram of a communications network, according to an embodiment of the invention.

Fig. 2 shows a timing diagram of a communications sequence, according to an embodiment of the invention.

10 Fig. 3 shows a flow chart of a method of operation of a base station, according to an embodiment of the invention.

Fig. 4 shows a flow chart of a method of operation of a mobile device, according to an embodiment of the invention.

15 Fig. 5 shows a block diagram of a base station, according to an embodiment of the invention.

Fig. 6 shows a block diagram of a mobile device, according to an embodiment of the invention.

Fig. 7 shows a diagram of a communications sequence, according to an embodiment of the invention.

20

DETAILED DESCRIPTION OF THE INVENTION

[0004] In the following description, numerous specific details are set forth. However, it is understood that embodiments of the invention may be practiced without

these specific details. In other instances, well-known methods, structures and techniques have not been shown in detail in order not to obscure an understanding of this description.

[0005] References to “one embodiment”, “an embodiment”, “example embodiment”, “various embodiments”, etc., indicate that the embodiment(s) of the invention so described may include a particular feature, structure, or characteristic, but not every embodiment necessarily includes the particular feature, structure, or characteristic. Further, repeated use of the phrase “in one embodiment” does not necessarily refer to the same embodiment, although it may.

[0006] In the following description and claims, the terms “coupled” and “connected,” along with their derivatives, may be used. It should be understood that these terms are not intended as synonyms for each other. Rather, in particular embodiments, “connected” may be used to indicate that two or more elements are in direct physical or electrical contact with each other. “Coupled” may mean that two or more elements are either in direct physical or electrical contact, or that two or more elements are not in direct contact with each other but yet still co-operate or interact with each other.

[0007] As used herein, unless otherwise specified the use of the ordinal adjectives “first”, “second”, “third”, etc., to describe a common object, merely indicate that different instances of like objects are being referred to, and are not intended to imply that the objects so described must be in a given sequence, either temporally, spatially, in ranking, or in any other manner.

[0008] The term “processor” may refer to any device or portion of a device that processes electronic data from registers and/or memory to transform that electronic data into other electronic data that may be stored in registers and/or memory. A “computing platform” may comprise one or more processors.

[0009] In the context of this document, the term “wireless” and its derivatives may be used to describe circuits, devices, systems, methods, techniques, communications channels, etc., that may communicate data through the use of modulated electromagnetic radiation through a non-solid medium. The term does not imply that the associated devices do not contain any wires, although in some embodiments they might not.

[0010] In keeping with common industry terminology, the terms “base station”, “access point”, and “AP” may be used interchangeably herein to describe an electronic device that may communicate wirelessly and substantially simultaneously with multiple other electronic devices, while the terms “mobile device” and “STA” may be used interchangeably to describe any of those multiple other electronic devices, which may have the capability to be moved and still communicate, though movement is not a requirement. However, the scope of the invention is not limited to devices that are labeled with those terms.

[0011] In some embodiments of the invention, a base station may poll multiple mobile devices with a single transmission, with the mobile devices responding in a specified order after specified delays. A single transmission addressed to multiple devices may be referred to herein as a ‘multicast’ transmission, although the scope of various embodiments of the invention may not be limited to devices described with this term.

[0012] Fig. 1 shows a diagram of a communications network that may use multicast polls, according to an embodiment of the invention. A poll may be a request for the addressed device(s) to respond by transmitting data. For each addressed device, the poll may specify a delay for the addressed device to wait before responding, and the various delays may be specified by the base station so that the responding devices will not interfere with one another by transmitting at the same time. The illustrated embodiment of a network shows an AP 110 that may communicate with multiple STAs 131-134.

Although AP 110 is shown with four antennas 120, other embodiments may have other arrangements (e.g., AP 110 may have one, two, three, or more than four antennas). Each STA may have at least one antenna, shown as 121-124, to communicate wirelessly with the AP 110. In some embodiments the STA antenna(s) may be adapted to operate
5 omnidirectionally, but in other embodiments the STA antenna(s) may be adapted to operate directionally. In some embodiments the STAs may be in fixed locations, but in other embodiments at least some of the STAs may be moving during and/or between communications sequences. In some embodiments the AP 110 may be in a fixed location, but in other embodiments the AP 110 may be moving during and/or between
10 communications sequences.

[0013] Fig. 2 shows a timing diagram of a communications sequence, according to an embodiment of the invention. By way of example, the illustrated embodiment shows 5 STAs, labeled STA1 through STA5, but the scope of the invention is not limited to this quantity. The AP may poll each STA in a group (e.g., in the illustrated embodiment a
15 group consists of STA1-STA5), the poll requesting each of the selected STAs to send a response back to the AP. Each response may occur at a different time so that the responses from multiple STAs do not interfere with each other. In the illustrated embodiment, all five of the relevant STAs are polled in a single transmission by using a multicast transmission for a poll. A multicast transmission is addressed to multiple
20 specific devices, each of which is expected to act upon the content of the transmission. This is in contrast to the more common singly-addressed transmission (addressed to a single specific device), or a broadcast (which may be intended to be acted upon by any devices able to receive it). In some embodiments the multicast poll may be sent
25 omnidirectionally, so that all STAs within range may receive the poll, but only those that are addressed should respond to it, although the invention is not limited in this respect.

Along with its individual address, each addressed STA may also receive an individual timing indicator directing the STA to wait for a particular time duration before responding with a response. In the illustrated embodiment of Fig. 2A, the individual timing durations are shown as $t_1 - t_5$ for STA1 –STA5, respectively. In some embodiments the timing indicator may be a simple ranking (e.g., 1, 2, 3, etc.) which the indicated STA may multiply by a time increment to determine how long to wait, but other embodiments may use other techniques (e.g., an indicator may be directly expressed in units of time; t_1 may be unspecified but commonly understood to have a particular value, etc.). The time t_T for the responses is shown in Fig. 2A as the time between the response start time (T_{ST}) and the response end time (T_{ET}). T_{ST} may be set for any convenient point that is commonly understood by the AP and the addressed STAs, such as but not limited to the end of the poll.

[0014] The determination of which STAs to include in a poll may be determined by various factors. Each of the STAs may have previously established its presence with the AP, and may have provided information on its address, mode of wireless communication, possible data rates, etc. These and/or other factors may be considered by the AP in determining which STAs to place into the same poll group. If the AP does not receive a satisfactory response from a particular STA, that STA may be polled again (e.g., in another multicast poll with other STAs that may not have been included in the first poll).

[0015] Fig. 3 shows a flow chart of a method of operation which may be performed by a base station, according to an embodiment of the invention. In flow chart 300, a poll group may be formed at 310. Various criteria may be used to determine which of the currently available STAs are to be associated with the particular poll group. For example, some STAs may already be known to be in a sleep mode or otherwise known not

to have data to send, and those STAs might be excluded from the poll group in favor of other STAs.

[0016] After deciding which STAs to include in the group, at 320 the AP may assign a different time delay for each STA in the group. These time delays may be in any usable form, e.g., a direct time delay, a quantity of known increments of time, an ordinal ranking which can be multiplied by known increments of time, etc. In some embodiments, the time delays may be determined such that each device is allotted the same time to respond as the other devices, but in other embodiments different time delays may be allotted for each device, depending on various factors.

[0017] The time delays may also include time periods that are not expected to contain transmissions from the addressed devices. For example, the time delays may include a delay between the end of the poll and the beginning of the first response. This delay may be a short interframe space (SIFS), although various embodiments of the invention may not be limited in this manner. The time delays may contain a minimum delay time between any two consecutive responses, although various embodiments of the invention may not be limited in this manner. Such 'no-transmission' delays may be inserted for various reasons, such as allowing time for the various devices to process received information, transition between transmit and receive modes, etc. At 330 a multicast poll may be transmitted, containing the addresses of the STAs being polled, the time delays for the STAs being polled, and any other information deemed useful in the poll.

[0018] After the poll has been transmitted and the response period has begun, the AP may receive the first response at 340. At 350 the AP may process the received response and store the processed information for further processing at a later time. The

amount of processing performed at this point may vary (e.g., digitizing the signal and storing it for further processing, calculating parameters, etc.).

[0019] If further responses are expected, as indicated at 360, the AP may return to 340 to receive the next response. The loop formed by 340, 350 and 360 may continue
5 until all the STAs in the poll group have had time to respond, at which time this phase may end. If any of the polled STAs do not respond, or if the received response is not useable for its intended purpose (e.g., due to corrupted data), that STA may be polled again at a later time, possibly in another poll group. A maximum number of retries for such polls may be established, although the scope of various embodiments of the invention is not
10 limited in this respect.

[0020] Fig. 4 shows a flow chart of a method of operation which may be performed by a mobile device, according to an embodiment of the invention. In flow chart 400, at 410 a multicast poll may be received, containing the address or other identifier of this mobile device. At 420 the timing indicator associated with this mobile device may be
15 extracted from the multicast poll and a time delay may be determined from the timing indicator. At 430 the mobile device may wait until the time delay determined at 420 has expired. The time delay may be measured from any feasible starting point, as previously described. Upon expiration of the time delay, the mobile device may transmit its own response at 440.

20 [0021] Embodiments of the invention may be implemented in one or a combination of hardware, firmware, and software. Embodiments of the invention may also be implemented as instructions stored on a machine-readable medium, which may be read and executed by a processing platform to perform the operations described herein. A machine-readable medium may include any mechanism for storing or transmitting
25 information in a form readable by a machine (e.g., a computer). For example, a machine-

readable medium may include read only memory (ROM); random access memory (RAM); magnetic disk storage media; optical storage media; flash memory devices; electrical, optical, acoustical or other form of propagated signals (e.g., carrier waves, infrared signals, digital signals, etc.), and others.

5 **[0022]** Fig. 5 shows a block diagram of a base station, according to an embodiment of the invention. Computing platform 550 may include one or more processors, and at least one of the one or more processors may be a digital signal processor (DSP). In the illustrated embodiment, AP 110 has four antennas 120, but other embodiments may have one, two, three, or more than four antennas. For each antenna, base station 110 may have
10 a modulator/demodulator 520, an analog-to-digital converter (ADC) 530, and a digital-to-analog converter (DAC) 540. The combination of demodulator-ADC may convert received radio frequency signals from the antenna into digital signals suitable for processing by the computing platform 550. Similarly, the combination of DAC-modulator may convert digital signals from the computing platform 550 into radio frequency signals
15 suitable for transmission through an antenna. Other components not shown may be included in the illustrated blocks as needed, such as but not limited to amplifiers, filters, oscillators, multiple DACs and/or ADCs where only one is shown, etc.

[0023] Fig. 6 shows a block diagram of a mobile device, according to an embodiment of the invention. The illustrated components of mobile device 131 may
20 include a computing platform 650, antenna 121, modulator/demodulator 620, ADC 630, and DAC 640 that may be functionally similar to those similarly-named components of Fig. 5, but the device of Fig. 6 is shown with a single antenna/ modulator/demodulator/ ADC/ DAC combination, and the computing platform 650 may perform the operations previously described for a mobile device rather than a base station, although various
25 embodiments of the invention are not limited in these respects.

[0024] Fig. 7 shows a diagram of a communications sequence, according to an embodiment of the invention. In the illustrated embodiment, a wireless device (such as a base station, although some embodiments of the invention may not be limited in this respect) may make a transmission addressed to several STAs. Three STAs are shown, but the same principles may be used with any feasible number of STAs. The transmission may be in the form of a Physical layer convergence Protocol Data Unit (PPDU), although some embodiments of the invention may not be limited in this manner. The transmission may comprise multiple blocks, with each block addressed to specific STAs. Each block may be in the form of a Medium access control Protocol Data Unit (MPDU), although some embodiments of the invention may not be limited in this manner. In the illustrated embodiment, each block may comprise various information, such as 1) an address specifying which STA is being addressed, 2) an offset specifying how long after completion of the base station's transmission the STA should wait before beginning its response, and 3) a duration specifying how long the STA has to respond. Each offset and its associated duration, when combined, may be the equivalent of one of the time periods t_1 , t_2 , etc., shown in Fig. 2.

[0025] The base station may determine the offsets and durations to specify, using various criteria. For example, the first offset may be based on a determination of how long it might take the addressed STA to recognize it is being addressed and prepare itself for transmission, as well as a determination of how long it might take the base station to switch to a receive mode after completing its transmission. In some embodiments the first offset may be determined to have a minimum value of some predefined time period, such as a Short Interframe Space (SIFS). The first duration may be based on various criteria. For example, some embodiments may dictate that the addressed STA must terminate its response within the indicated duration time, even if it has addition data to send, while

other embodiments may use other techniques (e.g., determining before the poll how much data the STA has to send and specifying a duration that will accommodate that amount of data). Other techniques may also be used.

[0026] The second offset may be based on the first offset and first duration. In

5 some embodiments, the second offset may be equal to the first offset plus the first duration. Alternatively, the second offset may be equal to the sum of those two time periods plus additional time. Such additional time may be, for example, a defined delay between the end of the response from the first STA and the beginning of the response from the second STA, although various embodiments of the invention may not be limited in this
10 manner. When included, such additional time may be determined in various ways, such as but not limited to the ability of the base station to switch from receiving data from one STA to receiving data from another STA. As before, the second duration may also be determined in various ways. In some embodiments, the time to switch between receiving data from different STAs may be less than the time to switch between transmitting and
15 receiving.

[0027] In a similar manner, the third offset may comprise the second offset plus the second duration, and may possibly include additional time as well, while the third duration may be determined in various ways. These same techniques may be extended to include additional offsets and durations for additional STAs. In some embodiments the
20 various offsets may be determined in different ways (e.g., some offsets may include additional time between responses while other do not), and/or the various durations may be determined in various ways (e.g., some STAs may be granted enough time to transmit all queued-up data, while others are limited to a defined response time without regard to how much data they have queued up to send). Some embodiments may use other factors to
25 determine offsets.

[0028] The responses from the STAs may have various formats. For example, in some embodiments the response from a STA may comprise a PPDU, which may in turn comprise multiple MPDUs, but other embodiments may use other techniques.

[0029] The foregoing description is intended to be illustrative and not limiting.

- 5 Variations may occur to those of skill in the art. Those variations are intended to be included in the various embodiments of the invention, which are limited only by the spirit and scope of the appended claims.

What is claimed is:

1. An apparatus, comprising

a first electronic device adapted to wirelessly transmit a poll comprising:

5 a first address of a second electronic device and a first time delay indicator indicating a time for the second electronic device to wait before transmitting a first response; and

a second address of a third electronic device and a second time delay indicator indicating a time for the third electronic device to wait before transmitting a
10 second response.

2. The apparatus of claim 1, wherein the first time delay includes a delay between an end of the poll and a beginning of the first response.

3. The apparatus of claim 1, wherein the first electronic device is further adapted to create a poll group by assigning the first and second addresses to the poll group.

15 4. The apparatus of claim 1, wherein a difference between a time delay indicated by the first time delay indicator and a time delay indicated by the second time delay indicator is at least as great as a time for the second electronic device to transmit the first response.

5. The apparatus of claim 1, wherein the poll comprises a first block of data containing the first address and the first time delay indicator, and further comprises a
20 second block of data containing the second address and the second time delay indicator.

6. The apparatus of claim 5, wherein the first and second blocks of data each have a format of a medium access control protocol data unit.
7. The apparatus of claim 1, further comprising multiple antennas, wherein the apparatus is to transmit the poll from at least one of the antennas.
8. The apparatus of claim 1, wherein the apparatus comprises a base station.
- 5 9. An apparatus comprising
an electronic device adapted to:
receive a poll with multiple addresses including a particular address
associated with the electronic device, the poll further including a time delay indicator
associated with the particular address; and
10 wirelessly transmit a response to the poll subsequent to an expiration of a
time delay indicated by the time delay indicator.
10. The apparatus of claim 9, wherein the poll comprises multiple blocks of data, with
each block containing a different one of the multiple addresses.
11. The apparatus of claim 10, wherein each of the multiple blocks of data has a
15 format of a medium access control protocol data unit.
12. The apparatus of claim 9, wherein the apparatus is a mobile wireless device.

13. The apparatus of claim 9, further comprising at least one antenna to transmit the response.

14. The apparatus of claim 9, further comprising at least one antenna to receive the poll.

5

15. A method, comprising
transmitting a poll addressed to multiple electronic devices, the poll containing timing indicators to specify how long each addressed electronic device should wait before transmitting a response.

10 16. The method of claim 15, wherein each of the timing indicators indicates a different amount of time.

17. The method of claim 15, further comprising determining a poll group for the poll prior to said transmitting, the poll group comprising the multiple addresses.

18. The method of claim 15, wherein the poll comprises data formatted as medium
15 access control protocol data units.

19. The method of claim 18, wherein each medium access control protocol data unit comprises one of the device addresses and the associated one of the timing indicators.

20. A method, comprising:

receiving a multicast poll containing a particular identifier and also containing a time delay indicator associated with the particular identifier; and

transmitting a response to the multicast poll subsequent to a time delay indicated
5 by the time delay indicator.

21. The method of claim 20, wherein said receiving comprises determining the particular time delay from the timing indicator.


22. The method of claim 21, wherein said receiving comprises determining a duration of time for said transmitting indicated by a duration indicator received in the multicast
10 poll.

23. An article comprising
a machine-readable medium that provides instructions, which when executed by a processing platform, cause said processing platform to perform operations comprising:
transmitting a multicast poll addressed to multiple electronic devices, the
15 multicast poll containing a different time delay indicator for each of the multiple addresses; and
receiving a response from each of the multiple electronic devices, each of the responses being received at different times indicated by the time delay indicators.

24. The article of claim 23, wherein the multicast poll comprises multiple blocks of data, each block comprising one of the addresses and one of the associated time delay indicators.

25. The article of claim 24, wherein at least one block comprises a duration indicator
5 indicating a length of time for the associated response.

1/7

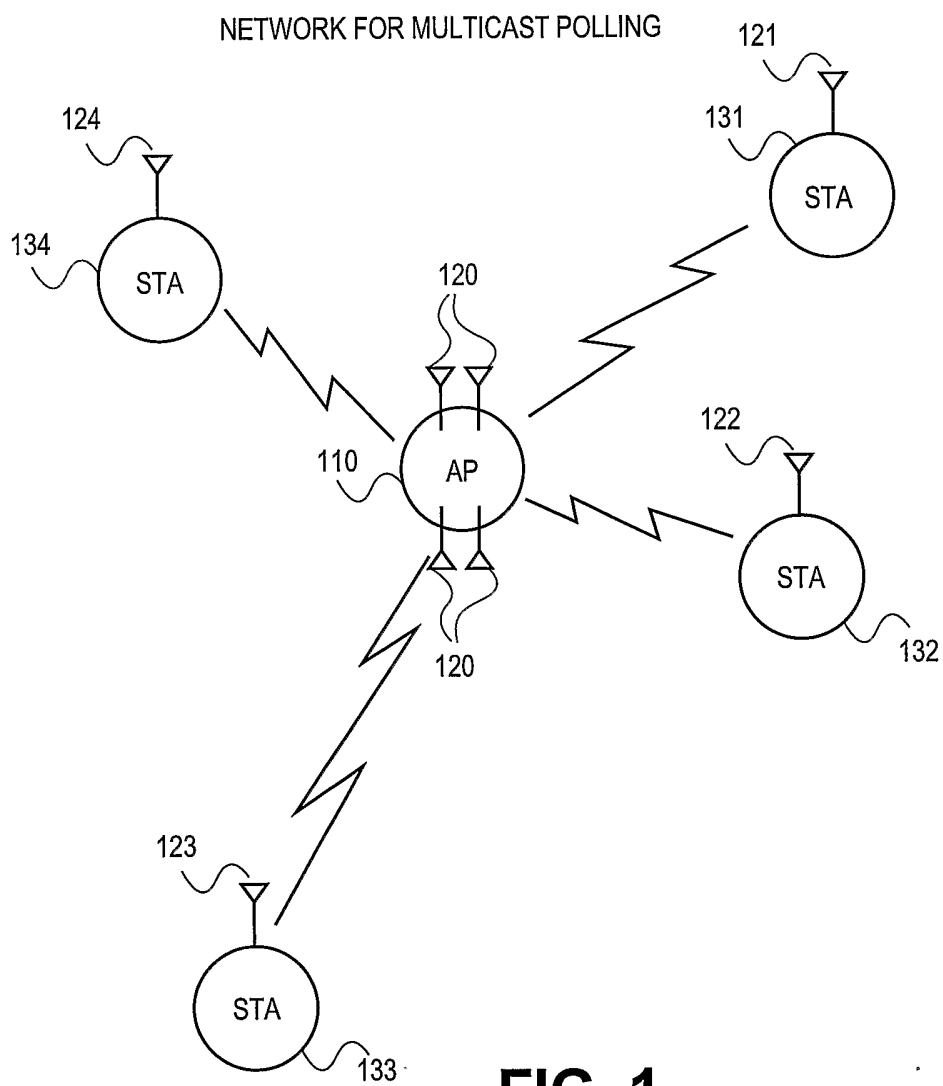**FIG. 1**

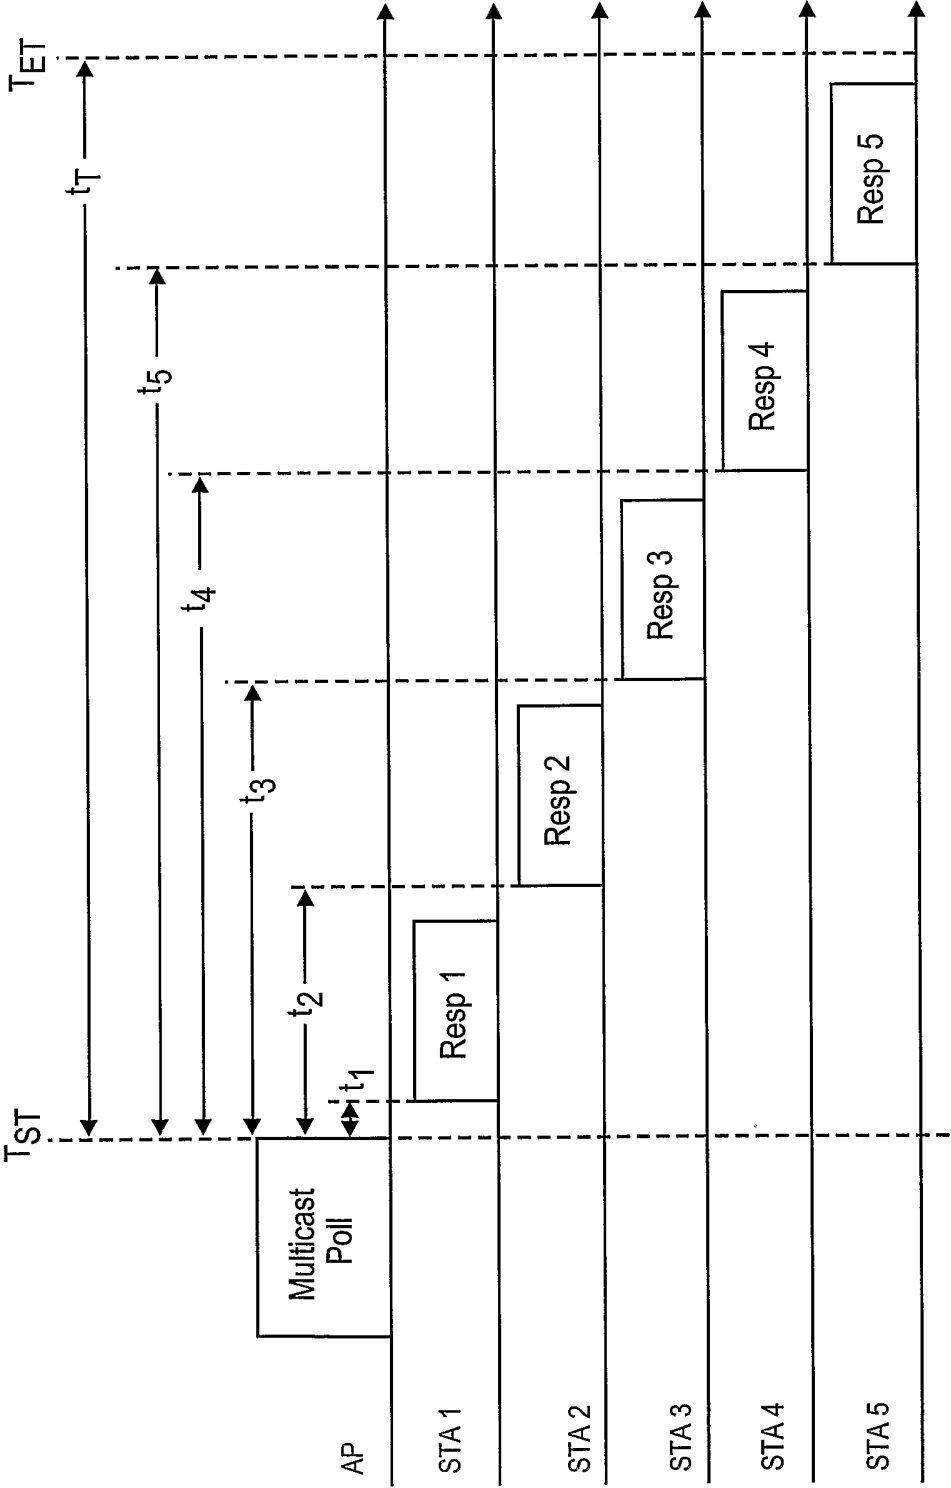
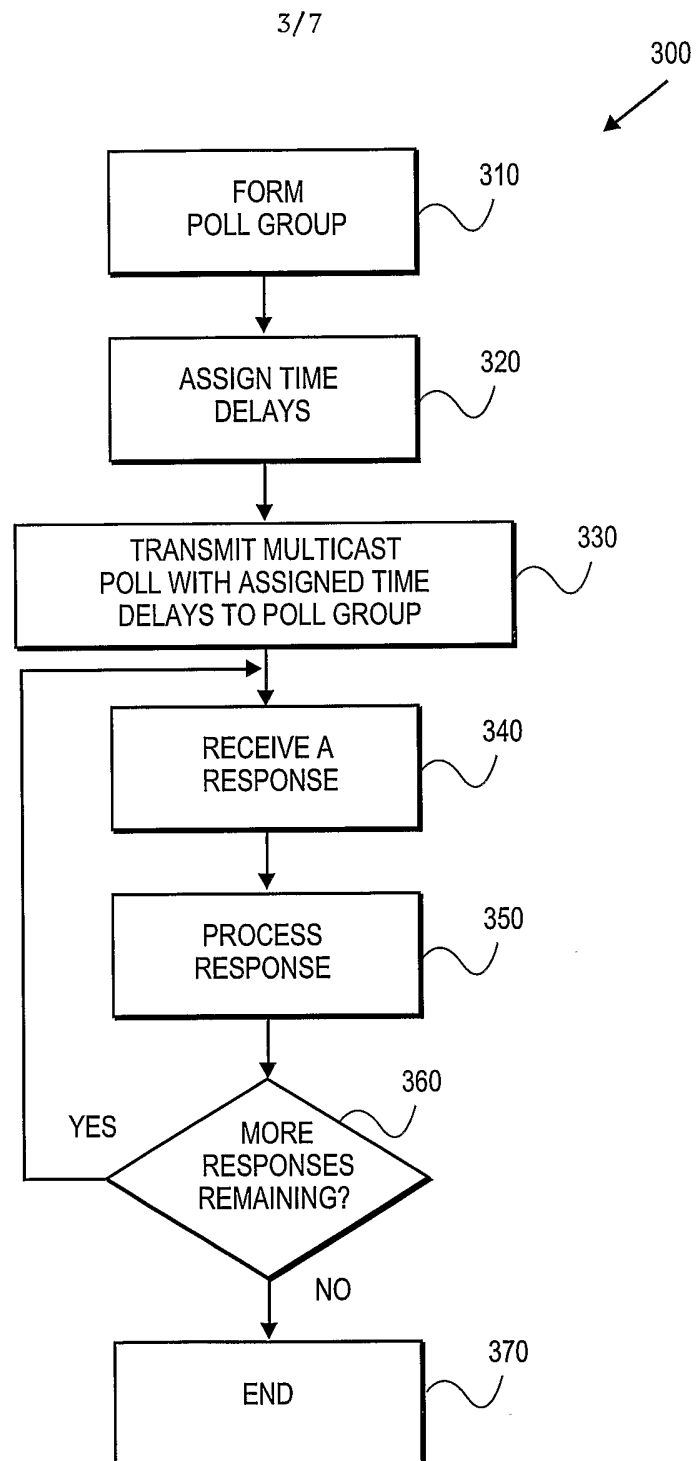
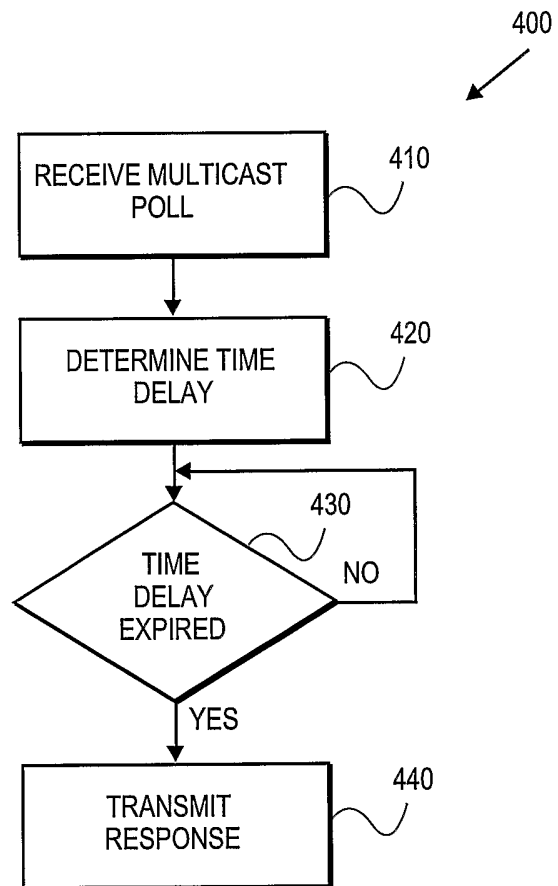



FIG. 2

**FIG. 3**


4/7

**FIG. 4**

5/7

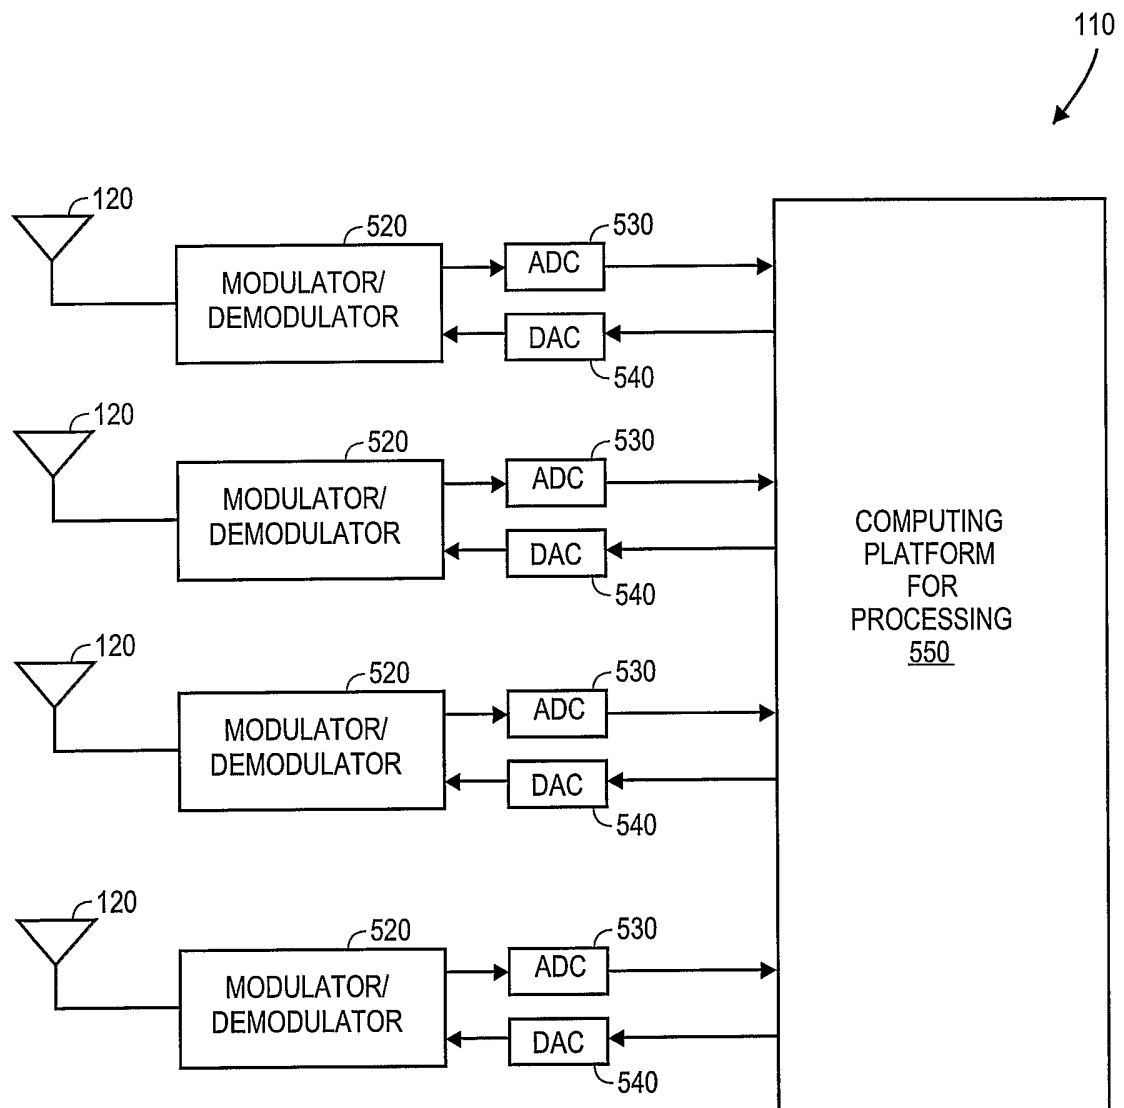**FIG. 5**

6/7

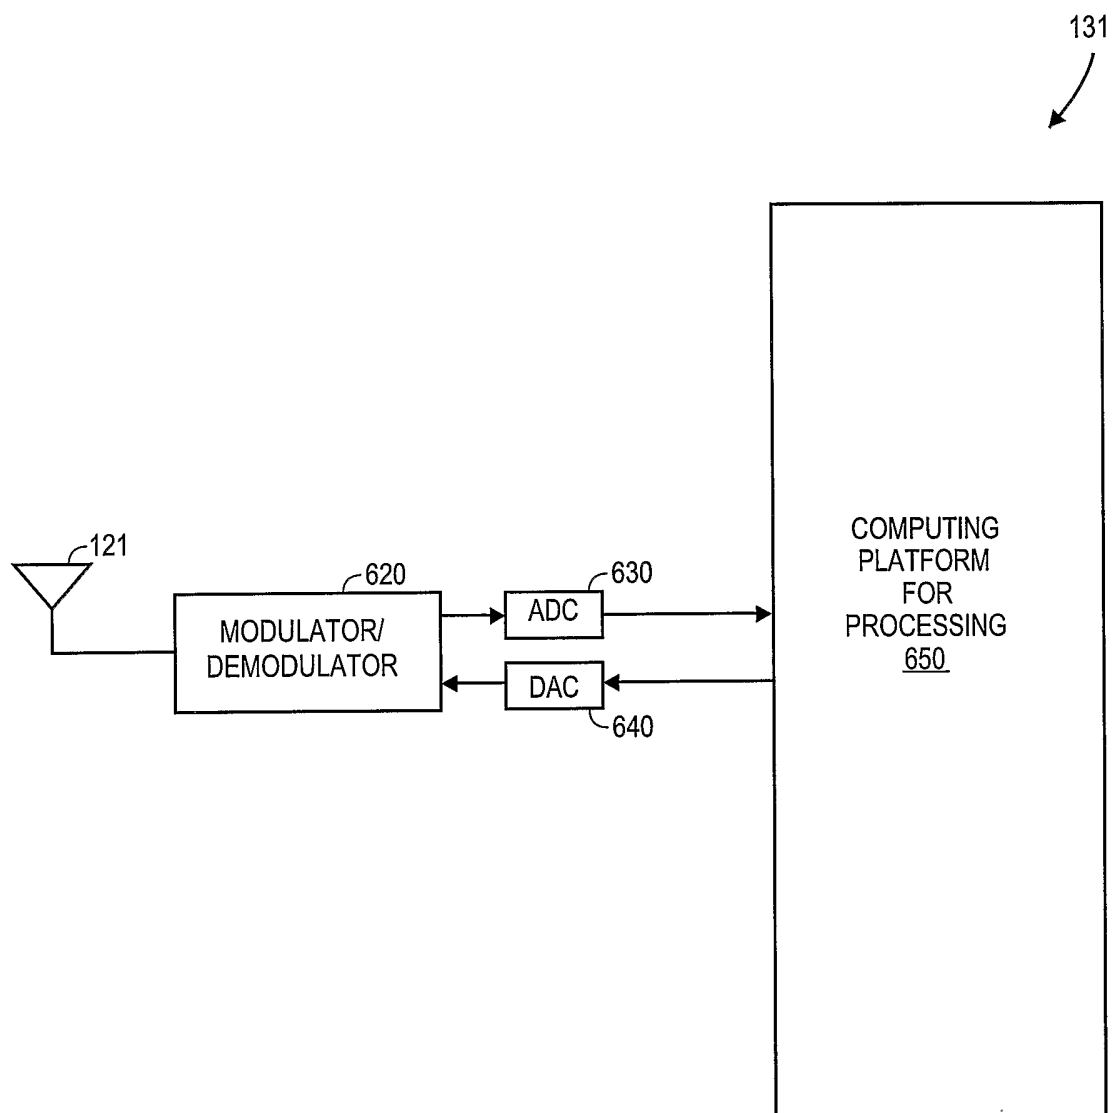**FIG. 6**

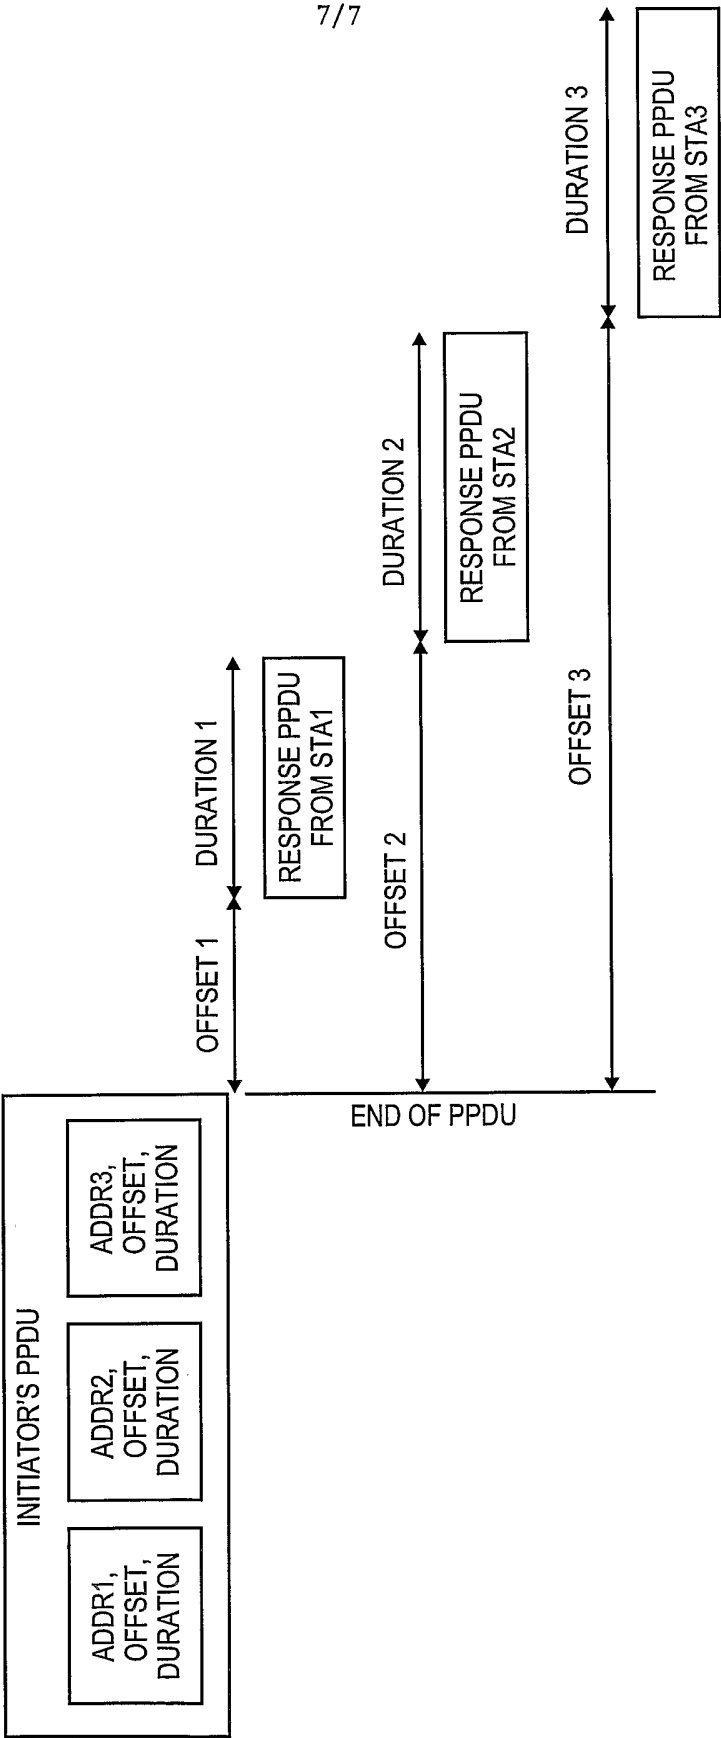


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No
US2005/037167

A. CLASSIFICATION OF SUBJECT MATTER
H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 282 187 B1 (EVANS ALLAN ET AL) 28 August 2001 (2001-08-28) column 1, line 5 - column 3, line 59 column 6, line 26 - line 44 column 10, line 26 - line 32 column 13, line 48 - line 52 column 14, line 10 - line 51 column 15, line 47 - column 16, line 13	1,5-16, 18-23
Y	-----	2-4,17
Y	US 6 021 137 A (KATO ET AL) 1 February 2000 (2000-02-01) column 1, line 4 - column 3, line 42 column 4, line 30 - line 37 column 8, line 7 - line 31 column 13, line 41 - column 14, line 23 figures 6,11	2-4,17
A	-----	1,9,15, 20,23

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

24 February 2006

Date of mailing of the international search report

06/03/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vaskimo, K

INTERNATIONAL SEARCH REPORT

International application No

US2005/037167

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6282187	B1	28-08-2001	AU 710466 B2	23-09-1999
			AU 1828097 A	22-08-1997
			BR 9707331 A	20-07-1999
			CA 2242194 A1	07-08-1997
			EP 0868791 A1	07-10-1998
			JP 2000504180 T	04-04-2000
			WO 9728616 A1	07-08-1997
US 6021137	A	01-02-2000	JP 10070780 A	10-03-1998