



(51) International Patent Classification:
B41J 2/175 (2006.01)

(21) International Application Number:
PCT/US2011/029503

(22) International Filing Date:
23 March 2011 (23.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/750,729 31 March 2010 (31.03.2010) US

(71) Applicant (for all designated States except US): **EAST KODAK COMPANY** [US/US]; 343 State Street, Rochester, NY 14650-2201 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MURRAY, Richard, A.** [US/US]; 16275 Technology Drive, San Diego, CA 92127 (US).

(74) Agent: **EASTMAN KODAK COMPANY**; 343 State Street, Rochester, NY 14650-2201 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HOLDING RECEPTACLE FOR INKJET TANK

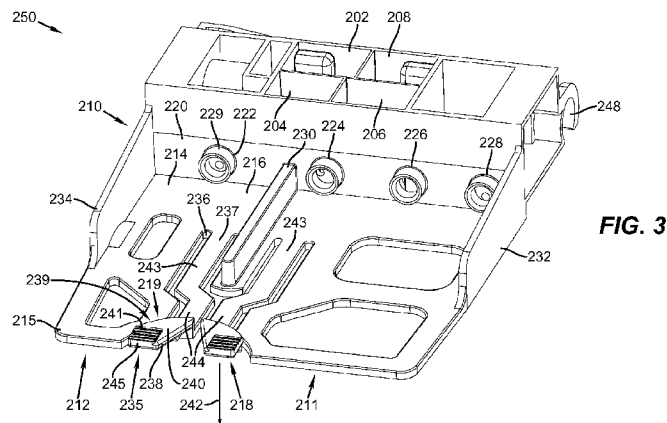


FIG. 3

(57) Abstract: A holding receptacle for at least one ink tank in an inkjet printer, the holding receptacle includes a base surface for supporting the ink supply, the base surface including a first end and a second end that is opposite the first end; a latch proximate the first end of the base surface for retaining the ink tank in the holding receptacle; and a wall that includes an ink inlet port configured to receive ink from the ink tank, wherein the wall is proximate the second end of the base surface.

HOLDING RECEPTACLE FOR INKJET INK TANK

FIELD OF THE INVENTION

The present invention relates generally to a holding receptacle for
5 at least one ink tank in an inkjet printer, and more particularly to a holding
receptacle that facilitates horizontal installation of an ink tank in the printer.

BACKGROUND OF THE INVENTION

An inkjet printing system typically includes one or more printheads
10 and their corresponding ink supplies. Each printhead includes an ink inlet that is
connected to its ink supply and an array of drop ejectors, each ejector consisting
of an ink pressurization chamber, an ejecting actuator and a nozzle through which
droplets of ink are ejected. The ejecting actuator may be one of various types,
including a heater that vaporizes some of the ink in the pressurization chamber in
15 order to propel a droplet out of the orifice, or a piezoelectric device which changes
the wall geometry of the chamber in order to generate a pressure wave that ejects
a droplet. The droplets are typically directed toward paper or other recording
medium in order to produce an image according to image data that is converted
into electronic firing pulses for the drop ejectors as the recording medium is
20 moved relative to the printhead.

A common type of printer architecture is the carriage printer,
where the printhead nozzle array is somewhat smaller than the extent of the region
of interest for printing on the recording medium and the printhead is mounted on a
carriage. In a carriage printer, the recording medium is advanced a given distance
25 along a media advance direction and then stopped. While the recording medium
is stopped, the printhead carriage is moved in a direction that is substantially
perpendicular to the media advance direction as the drops are ejected from the
nozzles. After the carriage has printed a swath of the image while traversing the
recording medium, the recording medium is advanced; the carriage direction of
30 motion is reversed, and the image is formed swath by swath.

The ink supply on a carriage printer can be mounted on the carriage
or off the carriage. For the case of ink supplies being mounted on the carriage, the

ink tank can be permanently integrated with the printhead as a print cartridge so that the printhead needs to be replaced when the ink is depleted, or the ink tank can be detachably mounted to a holding receptacle in the printhead so that only the ink tank itself needs to be replaced when the ink tank is depleted. Carriage
5 mounted ink tanks typically contain only enough ink for up to about several hundred prints. This is because the total mass of the carriage needs to be limited so that accelerations of the carriage at each end of the travel do not result in large forces that can shake the printer back and forth. As a result, users of carriage printers need to replace carriage-mounted ink tanks periodically depending on
10 their printing usage, typically several times per year. Consequently, the task of replacing a detachably mounted ink tank in the holding receptacle should be simple and reliable.

In addition, it is desired to reduce the size of the inkjet printer. Smaller printer size is helpful to the user for fitting the printer in available
15 workspace. In some cases, a user will locate the printer on a shelf rather than on a desktop in order to provide more working space on the desktop. In such cases, it is particularly advantageous to reduce the height and depth of the printer. Especially for a printer located on an elevated shelf it is also desirable to install ink tanks from the front of the printer in horizontal fashion, rather than opening a
20 clamshell printer lid and installing the ink tanks from the top of the printer. Compact printer size is also consistent with lower cost of manufacturing and shipping the printer.

What is needed is a holding receptacle that facilitates easy installation of one or more ink tanks from the front of a printer (especially a
25 compact-sized printer) and securely latches the ink tank(s) in place.

SUMMARY OF THE INVENTION

The present invention is directed to overcoming one or more of the problems set forth above. Briefly summarized, according to one aspect of the
30 invention, the invention resides in a holding receptacle for at least one ink tank in an inkjet printer, the holding receptacle comprising (a) a base surface for supporting the ink supply, the base surface including a first end and a second end

that is opposite the first end; (b) a latch proximate the first end of the base surface for retaining the ink tank in the holding receptacle; and (c) a wall that includes an ink inlet port configured to receive ink from the ink tank, wherein the wall is proximate the second end of the base surface.

5 These and other objects, features, and advantages of the present invention will become apparent to those skilled in the art upon a reading of the following detailed description when taken in conjunction with the drawings wherein there is shown and described an illustrative embodiment of the invention.

10 **BRIEF DESCRIPTION OF THE DRAWINGS**

 The above and other objects, features, and advantages of the present invention will become more apparent when taken in conjunction with the following description and drawings wherein identical reference numerals have been used, where possible, to designate identical features that are common to the
15 figures, and wherein:

 FIG. 1 is a schematic representation of an inkjet printer system;

 FIG. 2 is a bottom perspective view of a printhead frame;

 FIG. 3 is a front perspective view of a printhead frame including a holding receptacle according to an embodiment of the invention;

20 FIG. 4 is a side perspective view of the printhead frame of FIG. 3;

 FIG. 5 is a rear perspective view of the printhead frame of FIG. 3;

 FIG. 6 is a top perspective view of the printhead frame of FIG. 3;

 FIG. 7 is a perspective side view of an ink tank in an orientation for loading into a holding receptacle of the printhead frame of FIG. 3;

25 FIG. 8 is a perspective view of the ink tank of FIG. 7 installed and latched into a holding receptacle of the printhead frame FIG. 3;

 FIG. 9 is a perspective view similar to FIG. 8, but with two ink tanks installed and latched into the holding receptacle;

 FIGS. 10-13 are perspective views of a single chamber ink tank
30 according to an embodiment of the invention;

 FIG. 14 is a top view of a single chamber ink tank according to an embodiment of the invention;

FIGS. 15-18 are perspective views of a multichamber ink tank according to an embodiment of the invention;

FIG. 19 is a top view of a multichamber ink tank according to an embodiment of the invention;

5 FIG. 20 is a top view of a portion of a carriage printer according to an embodiment of the invention; and

FIGS. 21 and 22 are perspective views of the carriage printer of FIG. 20.

10 **DETAILED DESCRIPTION OF THE INVENTION**

Referring to FIG. 1, a schematic representation of an inkjet printer system 10 is shown, for its usefulness with the present invention and is fully described in U.S. Patent No. 7,350,902. Inkjet printer system 10 includes an image data source 12, which provides data signals that are interpreted by a
15 controller 14 as being commands to eject drops. Controller 14 includes an image processing unit 15 for rendering images for printing, and outputs signals to an electrical pulse source 16 of electrical energy pulses that are inputted to an inkjet printhead 100, which includes at least one inkjet printhead die 110.

In the example shown in FIG. 1, there are two nozzle arrays.
20 Nozzles 121 in the first nozzle array 120 have a larger opening area than nozzles 131 in the second nozzle array 130. In this example, each of the two nozzle arrays has two staggered rows of nozzles, each row having a nozzle density of 600 per inch. The effective nozzle density then in each array is 1200 per inch (i.e. $d = 1/1200$ inch in FIG. 1). If pixels on the recording medium 20 were sequentially
25 numbered along the paper advance direction, the nozzles from one row of an array would print the odd numbered pixels, while the nozzles from the other row of the array would print the even numbered pixels.

In fluid communication with each nozzle array is a corresponding ink delivery pathway. Ink delivery pathway 122 is in fluid communication with
30 the first nozzle array 120, and ink delivery pathway 132 is in fluid communication with the second nozzle array 130. Portions of ink delivery pathways 122 and 132 are shown in FIG. 1 as openings through printhead die substrate 111. One or

more inkjet printhead die 110 will be included in inkjet printhead 100, but for greater clarity only one inkjet printhead die 110 is shown in FIG. 1. In FIG. 1, first fluid source 18 supplies ink to first nozzle array 120 via ink delivery pathway 122, and second fluid source 19 supplies ink to second nozzle array 130 via ink delivery pathway 132. Although distinct fluid sources 18 and 19 are shown, in some applications it may be beneficial to have a single fluid source supplying ink to both the first nozzle array 120 and the second nozzle array 130 via ink delivery pathways 122 and 132 respectively. Also, in some embodiments, fewer than two or more than two nozzle arrays can be included on printhead die 110. Each nozzle array is supplied by a fluid source. In some embodiments, all nozzles on inkjet printhead die 110 can be the same size, rather than having multiple sized nozzles on inkjet printhead die 110.

The drop forming mechanisms associated with the nozzles are not shown in FIG. 1. Drop forming mechanisms can be of a variety of types, some of which include a heating element to vaporize a portion of ink and thereby cause ejection of a droplet, or a piezoelectric transducer to constrict the volume of a fluid chamber and thereby cause ejection, or an actuator which is made to move (for example, by heating a bi-layer element) and thereby cause ejection. In any case, electrical pulses from electrical pulse source 16 are sent to the various drop ejectors according to the desired deposition pattern. In the example of FIG. 1, droplets 181 ejected from the first nozzle array 120 are larger than droplets 182 ejected from the second nozzle array 130, due to the larger nozzle opening area. Typically other aspects of the drop forming mechanisms (not shown) associated respectively with nozzle arrays 120 and 130 are also sized differently in order to optimize the drop ejection process for the different sized drops. During operation, droplets of ink are deposited on a recording medium 20.

FIG. 2 shows a bottom perspective view of a printhead frame 250, which is an example of an inkjet printhead 100. Printhead frame 250 includes two printhead die 251 (similar to printhead die 110 in FIG. 1), each printhead die 251 containing two nozzle arrays 253, so that printhead frame 250 contains four nozzle arrays 253 altogether. The four nozzle arrays 253 in this example can each be connected to separate ink sources (not shown in FIG. 2); such as cyan,

magenta, yellow, and black. Each of the four nozzle arrays 253 is disposed along nozzle array direction 254, and the length of each nozzle array along the nozzle array direction 254 is typically on the order of 1 inch or less. Typical lengths of recording media are 6 inches for photographic prints (4 inches by 6 inches) or 11 inches for paper (8.5 by 11 inches). Thus, in order to print a full image, a number of swaths are successively printed while moving printhead frame 250 across the recording medium 20. Following the printing of a swath, the recording medium 20 is advanced along a media advance direction that is substantially parallel to nozzle array direction 254.

FIG. 3 shows a front perspective view of a printhead frame 250 including holding receptacle 210 for ink tanks (not shown in FIG. 3) according to an embodiment of the invention. Similarly, FIGS. 4-6 show side perspective, rear perspective and top perspective views of the printhead frame 250 of FIG. 3. Holding receptacle 210 includes a first part 211 for holding a multichamber ink tank and a second part 212 for holding a single chamber ink tank. Holding receptacle 210 has a base surface 214 for supporting the ink tanks. Base surface 214 has a first end 215 and a second end 216 that is opposite first end 215. Latch 218 is located near the first end 215 of the base surface 214 of first part 211 of holding receptacle 210, and latch 219 is located near the first end 215 of the base surface 214 of second part 212 of holding receptacle 210 for retaining the respective ink tanks. Wall 220 is located near the second end 216 of base surface 214 and adjoins base surface 214. Wall 220 includes ink inlet ports 224, 226 and 228 corresponding to first part 211 of holding receptacle 210, and also includes ink inlet port 222 corresponding to second part 212 of holding receptacle 210. Ink inlet ports 222, 224, 226 and 228 are connected to ink chambers 202, 204, 206 and 208, which are arranged in two rows, as is described in more detail in commonly assigned US Patent Application Serial No. 12/750,752. The ink inlet ports are configured to receive ink from respective ink tanks (not shown in FIG. 3). The ink inlet ports 222, 224, 226 and 228 include pipes 229 that extend from wall 220 toward the first end 215 of base surface 214 in order to fluidly connect to corresponding ink outlet ports on the ink tanks.

Partition 230 adjoins both base surface 214 and wall 220, and is located between a portion of first part 211 and a portion of second part 212 of holding receptacle 210. First sidewall 232 of holding receptacle 210 also adjoins both base surface 214 and wall 220. Second sidewall 234 of holding receptacle 210 is opposite first sidewall 232 and is substantially parallel to it. Partition 230 is located between first sidewall 232 and second sidewall 234. Partition 230 adjoins wall 220 between ink inlet port 222 and ink inlet port 224. In order to spread out ink inlet ports 224, 226 and 228 within first part 211 of holding receptacle 210, ink inlet port 224 is located close to partition 230 and ink inlet port 228 is located close to first sidewall 232. Ink inlet port 222 is more centrally located within second part 212 of holding receptacle 210. As a result, ink inlet port 224 is located closer to partition 230 than ink inlet port 222 is.

In the embodiment shown in FIGS 2-6, latches 218 and 219 are preferably cantilevered latches that extend from base surface 214. Latches 218 and 219 each contain a free end 235 near the first end 215 of base surface 214. Latches 218 and 219, base surface 214, and other elements of printhead frame 250 can be integrally formed together, for example by injection molding. Cantilevered latches 218 and 219 include a cantilevered arm 236 and a latching member 238 (see FIG. 3) that is located near free end 235. Cantilevered arm 236 includes a surface 237 that is coplanar or substantially coplanar with base surface 214. Latching member 238 includes a latching surface 239 (see FIGS. 3-5) that is substantially perpendicular to the base surface 214. In the embodiment shown in FIGS. 2-6, latching surface 239 is preferably curved. Latching member 238 also includes a pressing member 240 that extends from the latching surface 239 toward the free end 235 of the cantilevered latches 218 and 219. Pressing member 240 includes a pressing surface 241 that is substantially parallel to base surface 214. As shown in FIG. 3, pressing surface 241 can be textured. In the normal position shown most clearly in FIGS. 3-5, the pressing surface 241 is located at a first position, corresponding to a latching position, which is above base surface 214. If pressing member 240 of cantilevered latch 218 or 219 is depressed along pressing direction 242, pressing surface 241 can be relocated to a second position, corresponding to an unlatching position, which is below base surface 214.

The cantilevered arms 236 of latches 218 and 219 include a first portion 243 located near partition 230, such that the first portion 243 of latch 218 is disposed adjacent a first side of partition 230, and the first portion 243 of latch 219 is disposed adjacent a second side of partition 230, where the second side is opposite the first side. Cantilevered arms 236 of latches 218 and 219 extend past partition 230, such that second portion 244 of cantilevered latch 218 is adjacent second portion 244 of cantilevered latch 219. Latching member 238 of cantilevered latch 218 is located near latching member 238 of cantilevered latch 219. In order to facilitate pressing the pressing member 240 of latches 218 and 219 independently of each other, latching member 238 of latch 218 is angled away from latching member 238 of latch 219 near their free ends 235. It is preferable that tip end 245 of the latching member 238 of latch 218 be a distance d (see FIG. 5) of at least 3 mm away from tip end 245 of the latching member 238 of latch 219. In addition, in some embodiments, the free ends 235 of cantilevered latches 218 and 219 extend past first end 215 of base surface 214 of holding receptacle 210.

In some embodiments for a carriage printer, printhead frame 250 also has at least one bearing surface 248 integrally formed together with holding receptacle 210. Bearing surface 248 is intended to ride on a carriage guide in the carriage printer, so that printhead frame 250 also serves as the carriage. In fact, all of the labeled features in FIG. 3 can be integrally formed, for example, in a single injection molding step. This decreases the cost of forming and assembling the printhead and carriage while retaining the required functionality. It can also make the design more compact.

FIG. 7 shows a perspective side view of a single chamber ink tank 264 in an orientation for loading into second part 212 of holding receptacle 210 of printhead frame 250. Single chamber ink tank 264 is described in more detail below. It consists of an ink chamber (not shown) within the interior of body 270, which includes a bottom wall 271, a first end wall 272 including an ink outlet port (not shown in FIG. 7), a second end wall 273 opposite first end wall 272, a first sidewall 274 that extends a first length from the first end wall 272 to the second end wall 273, a second sidewall 275 that extends a second length (less than the

first length) from the first end wall 272, and a connecting wall 276 that forms a recess and that connects the second end wall 273 and the second sidewall 275. In this embodiment, connecting wall 276 is arcuate-shaped and curves inward toward the interior of body 270 in order to form the recess. The first end wall 272,
5 second end wall 273, first sidewall 274 and second sidewall 275 are flat or substantially flat. Optionally, rather than being arcuate-shaped, connecting wall 276 can include a plurality of flat or substantially flat walls (not shown) to provide the recess. Second sidewall 275 extends from first end wall 272 at an angle that is less than obtuse. More preferably, both first sidewall 274 and second sidewall
10 275 are perpendicular (or substantially perpendicular) to first end wall 272 in order to facilitate inserting single chamber ink tank 264 along insertion direction 246 into second part 212 of holding receptacle 210. As single chamber ink tank 264 is being inserted, first sidewall 274 of the ink tank moves along second sidewall 234 of holding receptacle 210, and indented region 265 of single
15 chamber ink tank 264 moves along partition 230 to guide the insertion so that ink inlet port 222 will engage an ink outlet port (not shown) at the first end wall 272 of the ink tank. Connecting wall 276 is curved inward to accommodate a finger or thumb so that the user can grasp single chamber ink tank 264 between connecting wall 276 and first sidewall 274. Because of the recess provided by connecting
20 wall 276, latch 219 begins to extend beyond connecting wall 276 as the ink tank is being inserted. The user can use the finger or thumb grasping connecting wall 276 to depress latch 219 in pressing direction 242 as the ink tank continues to be inserted. Latching surface 239 of latching member 238 of latch 219 (see also FIGS. 3-5, 8) is curved to fit against the recessed surface of connecting wall 276.
25 When single chamber ink tank 264 is completely inserted, as in FIG. 8, the user can release latch 219 so that pressing surface 241 of pressing member 240 is at its normal latching position above base surface 214. Latching surface 239 of latch 219 thus engages connecting wall 276 of single chamber ink tank 264 to hold it in place in holding receptacle 210. In order to facilitate the user grasping the ink
30 tank, an exterior surface of at least a portion of connecting wall 276 can be textured with a ribbed surface, for example (not shown). To facilitate a compact design, in some embodiments tip end 245 of latch 219 does not extend past second

end wall 273 of single chamber ink tank 264 when the ink tank is installed and the latching member 238 engages connecting wall 276. Alternatively in other embodiments, tip end 245 of latch 219 extends past second end wall 273 when the ink tank is installed, but it extends past by less than 3 mm. In FIG. 8, no
5 multichamber ink tank is present in first part 211 of holding receptacle 210.

FIG. 9 shows the same view as FIG. 8, but with both the multi-chamber ink tank 262 and the single chamber ink tank 264 inserted and latched into holding receptacle 210. Latching surface 238 of latch 218 holds connecting wall 276 of multichamber ink tank 262, and latching surface 238 of latch 219
10 holds connecting wall 276 of single chamber ink tank 264. The features and insertion method described above relative to single chamber ink tank 264 are similar for multi-chamber ink tank 262 and will not be repeated herein. When the single chamber ink tank 264 is placed next to the multichamber ink tank 262 such that the second sidewall 275 of the single chamber ink tank 264 is adjacent the
15 second sidewall 275 of the multichamber ink tank 262 (as in FIG. 9), then the first end walls 272 of both ink tanks face the same direction. Thus the ink outlet ports (not shown) on end walls 272 of the ink tanks face end wall 220 (see FIG. 3) and the ink inlet ports 222, 224, 226 and 228. Similarly, when the single chamber ink tank 264 is placed next to the multichamber ink tank 262 such that the first end
20 walls 272 of the two ink tanks are aligned with each other (as in FIG. 9), then the connecting wall 276 of the single chamber ink tank 264 is adjacent the connecting wall 276 of the multichamber ink tank 262. Because the connecting walls 276 are curved toward the interior of the respective ink tanks 262 and 264, thus providing recesses, the adjacent recessed connecting walls 276 provide additional room for
25 the user's finger or thumb to latch or unlatch latches 218 and 219 independently. By making the connecting wall 276 of single chamber ink tank 264 mirror-symmetric relative to connecting wall 276 of multichamber ink tank 262, the two ink tanks 262 and 264 making up the ink supply system have a pleasing appearance in addition to contributing to the ease of replacing ink tanks.
30 Similarly, the first length of the first sidewall 274 of single chamber ink tank 264 is substantially equal to the first length of the first sidewall 274 of multichamber ink tank 262, and the second length of the second sidewall 275 of single chamber

ink tank 264 is substantially equal to the second length of the second sidewall 275 of multichamber ink tank 262. In addition, the ink supply system of the two tanks 262 and 264 are volume efficient, simple and sleek in form. The recessed connecting walls 276 do not impact the ink holding volume of ink tanks 262 and 264 very much, as the ink chambers (not shown) on the interior of the ink tank body 270 can extend to the interior side of connecting wall 276 and second end wall 273. Rather than having an additional handle or latch on the ink tank body 270, the "handle" is simply first sidewall 274 and connecting wall 276. By eliminating an additional handle or latch from the replaceable ink tanks 262 and 264, the ink tanks are less expensive to make, are more compact and have a more streamlined appearance. Such an ink tank design also allows for a smaller printing envelope and a smaller printer.

The overall appearance of single chamber ink tank 264 is shown in FIGS. 10-14, and the overall appearance of multichamber ink tank 262 is shown in FIGS. 15-19. FIGS. 10 and 15 are perspective views showing second end wall 273, second sidewall 275 with indented region 265, and connecting wall 276. FIGS. 11 and 16 are perspective views showing first end wall 272 with associated ink outlet port(s) and second sidewall 275 with indented region 265. Ink outlet port 282 of single chamber ink tank 264 engages with ink inlet port 222 of holding receptacle 210 (see FIGS. 3 and 7) when single chamber ink tank 264 is inserted into holding receptacle 210. Similarly, ink outlet ports 284, 286 and 288 engage with ink inlet ports 224, 226 and 228 when multichamber ink tank 262 is inserted into holding receptacle 210. Indented region 265 engages with partition 230 of holding receptacle 210 in order to guide the ink tanks into position during insertion. Ink outlet ports 282, 284, 286, and 288 are located near the bottom wall 271 of ink tanks 262 and 264 in order to facilitate extracting ink from the ink tanks. FIGS. 12 and 17 are perspective views showing first sidewall 274 and first end wall 272 plus associated ink outlet ports. FIGS. 13 and 18 are perspective views showing bottom wall 271 and a portion of the interior of ink tanks 264 and 262 respectively through ink outlet ports 282, 284, 286 and 288. Through ink outlet port 282 of single chamber ink tank 264 it is possible to see the joining of second sidewall 275, connecting wall 276 and a top wall that is opposite bottom

wall 271. Through ink outlet port 284 of multichamber ink tank 262 it is possible to see the joining of second sidewall 275, connecting wall 276 and a top wall that is opposite bottom wall 271. Through ink outlet port 288 of multichamber ink tank 262 it is possible to see the joining of first sidewall 274, connecting wall 276 and a top wall that is opposite bottom wall 271. What is not visible in the view of FIG. 18 are the internal chamber walls that divide the interior of multichamber ink tank 262 into three ink chambers, each corresponding to a different one of ink outlet ports 284, 286 and 288. It is possible to provide equal volumes for ink storage within each of the three chambers by appropriately adjusting the spacing of the internal chamber walls to compensate for the recess at connecting wall 276 and the indented region 265. FIGS. 14 and 19 are top views that clearly show that the length L_1 of first sidewall 274 extending from first end wall 272 to second end wall 273 is longer than length L_2 of second sidewall 275 extending from first end wall 272. The curved or arcuate shape of connecting wall 276 forming a recess is also plainly seen in these figures.

FIG. 20 shows a top view of a desktop carriage printer 300 according to an embodiment of the invention. Some of the parts of the printer have been hidden in the view shown in FIG. 20 so that other parts can be more clearly seen. Printer 300 has a print region 303 across which carriage 200 is moved back and forth in carriage guide direction 305, while drops are ejected from nozzle array 253 on printhead die 251 (not shown in FIG. 20) on printhead frame 250 that is mounted on carriage 200. In some embodiments, printhead frame 250 is integrally formed with carriage 200 as described above. Carriage motor 380 moves belt 384 to move carriage 200 along carriage guide 382.

Multichamber ink tank 262 and single chamber ink tank 264 are mounted in the holding receptacle of printhead frame 250. Latch 218, and its tip end 245 are labeled and shown in proximity to the second end wall 273 of multichamber ink tank 262. Printer 300 includes a base 309 on which the printer rests during operation (see FIGS. 21 and 22). A front wall 308 extends upward from base 309. To facilitate compact and low cost design of printer 300, tip end 245 of latch 218 and/or latch 219 is disposed less than 5 mm from an interior surface of the front wall 308 of printer 300. Because the second end walls 273 of

single chamber ink tank 264 and multichamber ink tank 262 are very near tip ends 245 of their corresponding latches, this means that second end walls 273 are also located close to the interior surface of front wall 308. The mounting orientation of printhead frame 250 is rotated relative to the view in FIG. 2, so that the printhead die 251 are located at the bottom side of printhead frame 250, the droplets of ink being ejected downward onto the paper or other recording medium (not shown) in print region 303. Paper advance motor 386 is shown but the various rollers that move the paper along media advance direction 304 are not shown in FIG. 20. Maintenance station 330 is provided for wiping and capping the nozzle face.

10 FIGS. 21 and 22 more clearly show front wall 308 of printer 300 and a doorway 310 through which the ink tanks 262 and 264 can be accessed for horizontal installation and removal. Printer 300 also includes a top surface (not shown), but the user can reach through doorway 310. Doorway 310 can consist of an opening as shown in FIGS. 21 and 22, or it can also optionally include a door
15 (not shown) that the user can open in order to access the ink tanks 262 and 264. When an ink tank needs to be replaced, the carriage 200 is moved along carriage guide 382 until the ink tanks are located next to doorway 310. The user reaches through doorway 310 and releases the latch corresponding to the ink tank and grasps an end of the ink tank at the recessed connecting wall. The ink tank is then
20 removed horizontally through the doorway 310. A replacement ink tank can then be inserted horizontally through doorway 310. The user can slide the replacement ink tank horizontally into the holding receptacle. After gently depressing the latching member as the ink tank is inserted into the holding receptacle, the latching member can be released so that it latches against the connecting wall 276
25 of the ink tank.

 The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

PARTS LIST

10	Inkjet printer system
12	Image data source
14	Controller
15	Image processing unit
16	Electrical pulse source
18	First fluid source
19	Second fluid source
20	Recording medium
100	Inkjet printhead
110	Inkjet printhead die
111	Substrate
120	First nozzle array
121	Nozzle(s)
122	Ink delivery pathway (for first nozzle array)
130	Second nozzle array
131	Nozzle(s)
132	Ink delivery pathway (for second nozzle array)
181	Droplet(s) (ejected from first nozzle array)
182	Droplet(s) (ejected from second nozzle array)
200	Carriage
202	Ink chamber
204	Ink chamber
206	Ink chamber
208	Ink chamber
210	Holding receptacle
211	First part (of holding receptacle)
212	Second part (of holding receptacle)
214	Base surface
215	First end
216	Second end
218	Latch

219	Latch
220	Wall
222	Ink inlet port
224	Ink inlet port
226	Ink inlet port
228	Ink inlet port
229	Pipe
230	Partition
232	First sidewall
234	Second sidewall
235	Free end
236	Cantilevered arm
237	Surface (of cantilevered arm)
238	Latching member
239	Latching surface
240	Pressing member
241	Pressing surface
242	Pressing direction
243	First portion (of latch)
244	Second portion (of latch)
245	Tip end
246	Insertion direction
248	Bearing surface
250	Printhead frame
251	Printhead die
253	Nozzle array
254	Nozzle array direction
262	Multi-chamber ink tank
264	Single-chamber ink tank
265	Indented region
270	Body (of ink tank)
271	Bottom wall (of ink tank)

272	First end wall (of ink tank)
273	Second end wall (of ink tank)
274	First sidewall (of ink tank)
275	Second sidewall (of ink tank)
276	Connecting wall (of ink tank)
282	Ink outlet port
284	Ink outlet port
286	Ink outlet port
288	Ink outlet port
300	Printer
303	Print region
304	Media advance direction
305	Carriage scan direction
308	Front wall (of printer)
309	Base (of printer)
310	Doorway
330	Maintenance station
380	Carriage motor
382	Carriage guide rail
384	Belt
386	Paper advance motor

CLAIMS:

1. A holding receptacle for at least one ink tank in an inkjet printer, the holding receptacle comprising:
 - a base surface for supporting the ink supply, the base surface
 - 5 including a first end and a second end that is opposite the first end;
 - a latch proximate the first end of the base surface for retaining the ink tank in the holding receptacle; and
 - a wall that includes an ink inlet port configured to receive ink from the ink tank, wherein the wall is proximate the second end of the base surface.
- 10 2. The holding receptacle as in claim 1, wherein the latch is a cantilevered latch extending from the base surface
3. The holding receptacle as in claim 2, wherein the
- 15 cantilevered latch includes a free end that is proximate the first end of the base surface.
4. The holding receptacle as in claim 1, wherein the latch is integrally formed with the base surface.
- 20 5. The holding receptacle as in claim 3, the cantilevered latch further including a cantilevered arm and a latching member, wherein the latching member is disposed proximate the free end and includes a latching surface.
- 25 6. The holding receptacle as in claim 2, wherein the cantilevered arm includes a surface that is substantially coplanar with the base surface.
- 30 7. The holding receptacle as in claim 5, wherein the latching surface of the latching member is substantially perpendicular to the base surface.

8. The holding receptacle as in claim 5, wherein a portion of the latching surface of the latching member is curved.

5 9. The holding receptacle as in claim 5, wherein the latching member further includes a pressing member that extends from the latching surface toward the free end of the cantilevered latch, and wherein the pressing member includes a pressing surface that is substantially parallel to the base surface.

10 10. The holding receptacle as in claim 9, wherein the pressing surface is textured.

11. The holding receptacle as in claim 9, wherein the pressing surface is normally disposed at a first position above the base surface, and wherein
15 the pressing member of the cantilevered latch can be depressed so that the pressing surface is disposed at a second position below the base surface.

12. The holding receptacle as in claim 1, wherein the ink inlet port comprises a pipe that extends from the wall toward the first end of the base
20 surface.

13. The holding receptacle as in claim 2 further comprising:
a first sidewall adjoining both the base surface and the wall that includes the ink inlet port;
25 a second sidewall that is opposite and substantially parallel to the first sidewall; and
a partition adjoining both the base surface and the wall that includes the ink inlet port, wherein the partition is disposed between the first and second sidewalls.

30

14. The holding receptacle as in claim 13, the ink port being a first ink inlet port and the wall further including at least a second ink inlet port, wherein the partition adjoins the wall between the first ink inlet port and the second ink inlet port.

5

15. The holding receptacle as in claim 14, the cantilevered latch being a first cantilevered latch, further comprising a second cantilevered latch, wherein the first cantilevered latch includes a first portion disposed on a first side of the partition and the second cantilevered latch includes a first portion disposed on a second side of the partition.

10

16. The holding receptacle as in claim 15, wherein the first portion of the first cantilevered latch is adjacent the partition, and wherein the first portion of the second cantilevered latch is adjacent the partition.

15

17. The holding receptacle as in claim 16, wherein the first cantilevered latch and the second cantilevered latch extend past the partition, so that a second portion of the first cantilevered latch is adjacent a second portion of the second cantilevered latch.

20

18. The holding receptacle as in claim 15, wherein the first cantilevered latch further includes a first latching member disposed proximate the free end of the first cantilevered latch, and wherein the second cantilevered latch further includes a second latching member disposed at a free end of the second cantilevered latch proximate the first latching member.

25

19. The holding receptacle as in claim 18, wherein the first latching member and the second latching member are angled away from each other near their free ends.

20. The holding receptacle as in claim 19, wherein a tip end of the first latching member is at least 3 mm away from a tip end of the second latching member.

5

21. The holding receptacle as in claim 14, wherein the second ink inlet port is closer to the partition than the first inlet port is.

22. The holding receptacle as in claim 3, wherein the free end
10 of the cantilevered latch extends past the first end of the base surface.

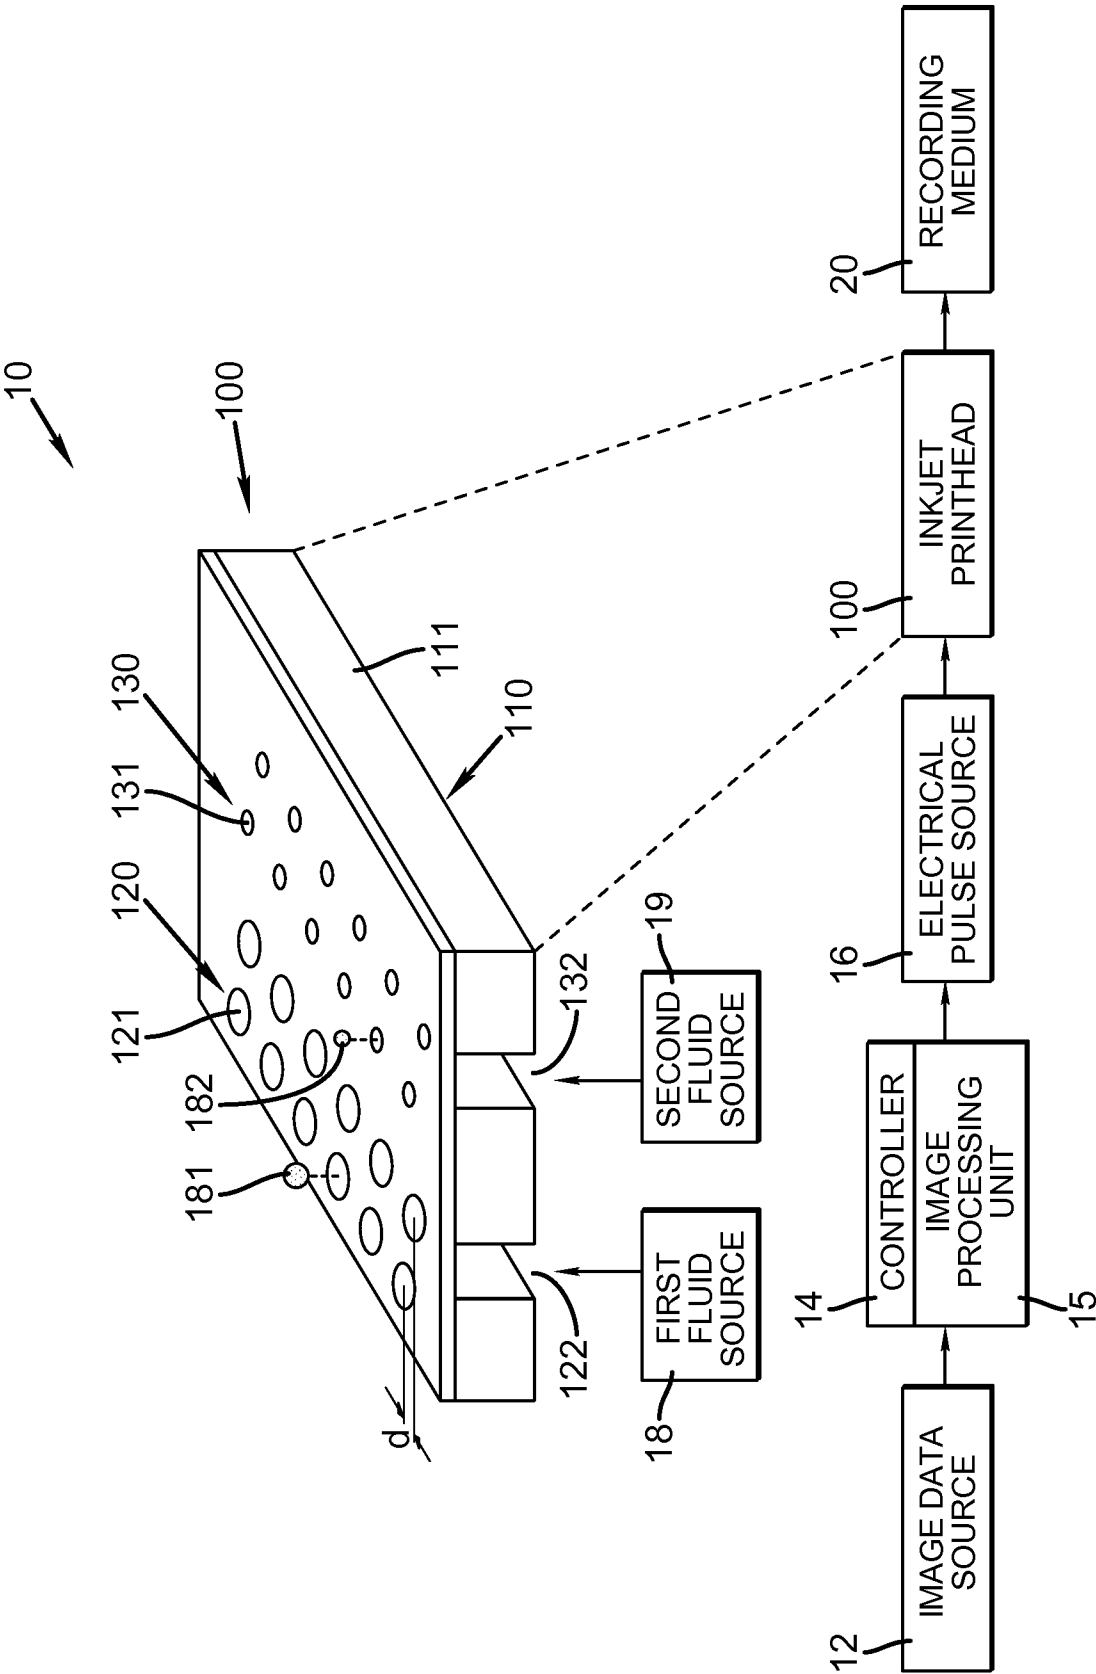


FIG. 1

2/22

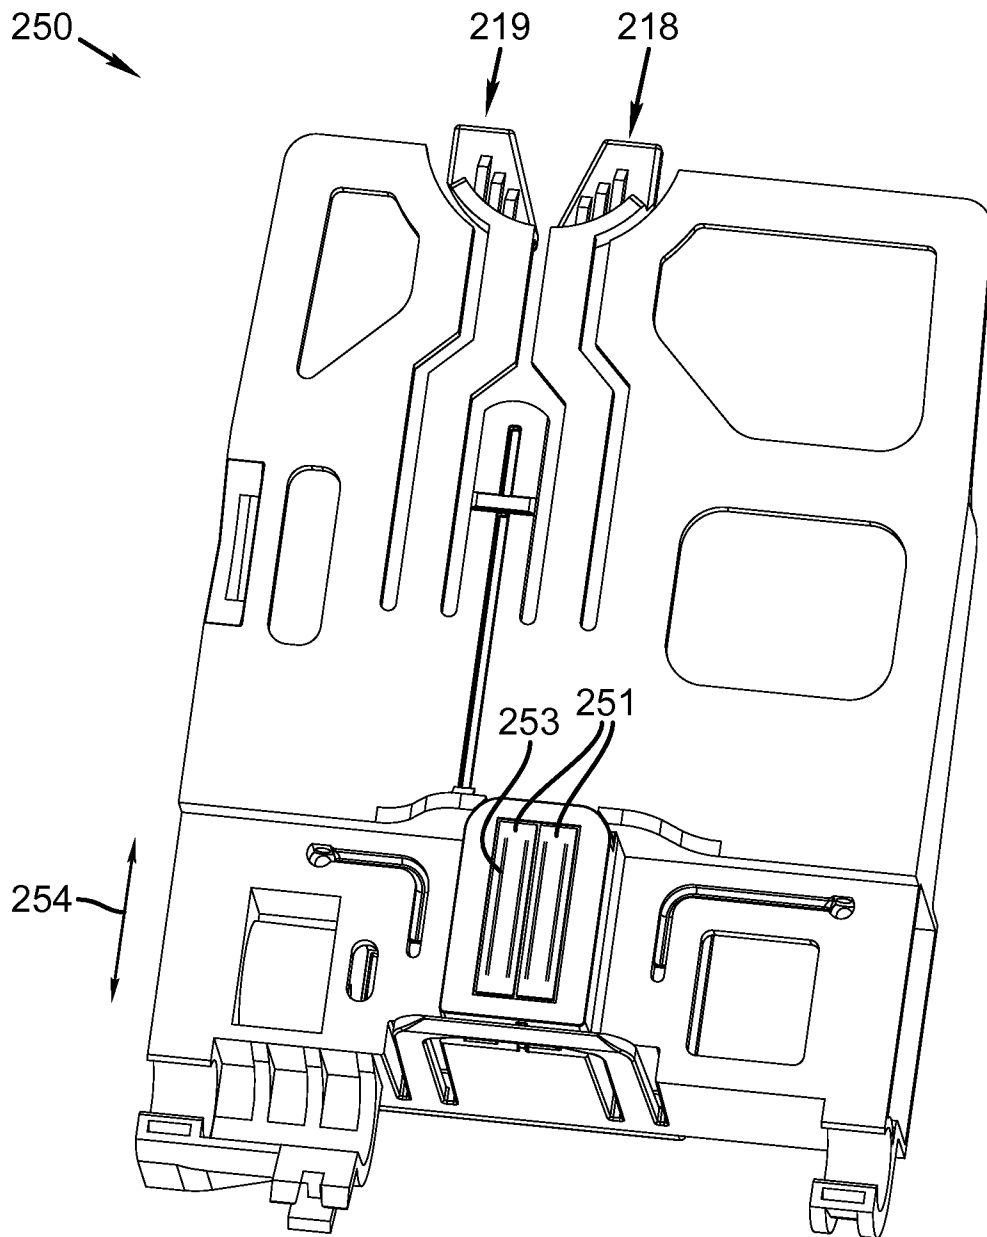


FIG. 2

3/22

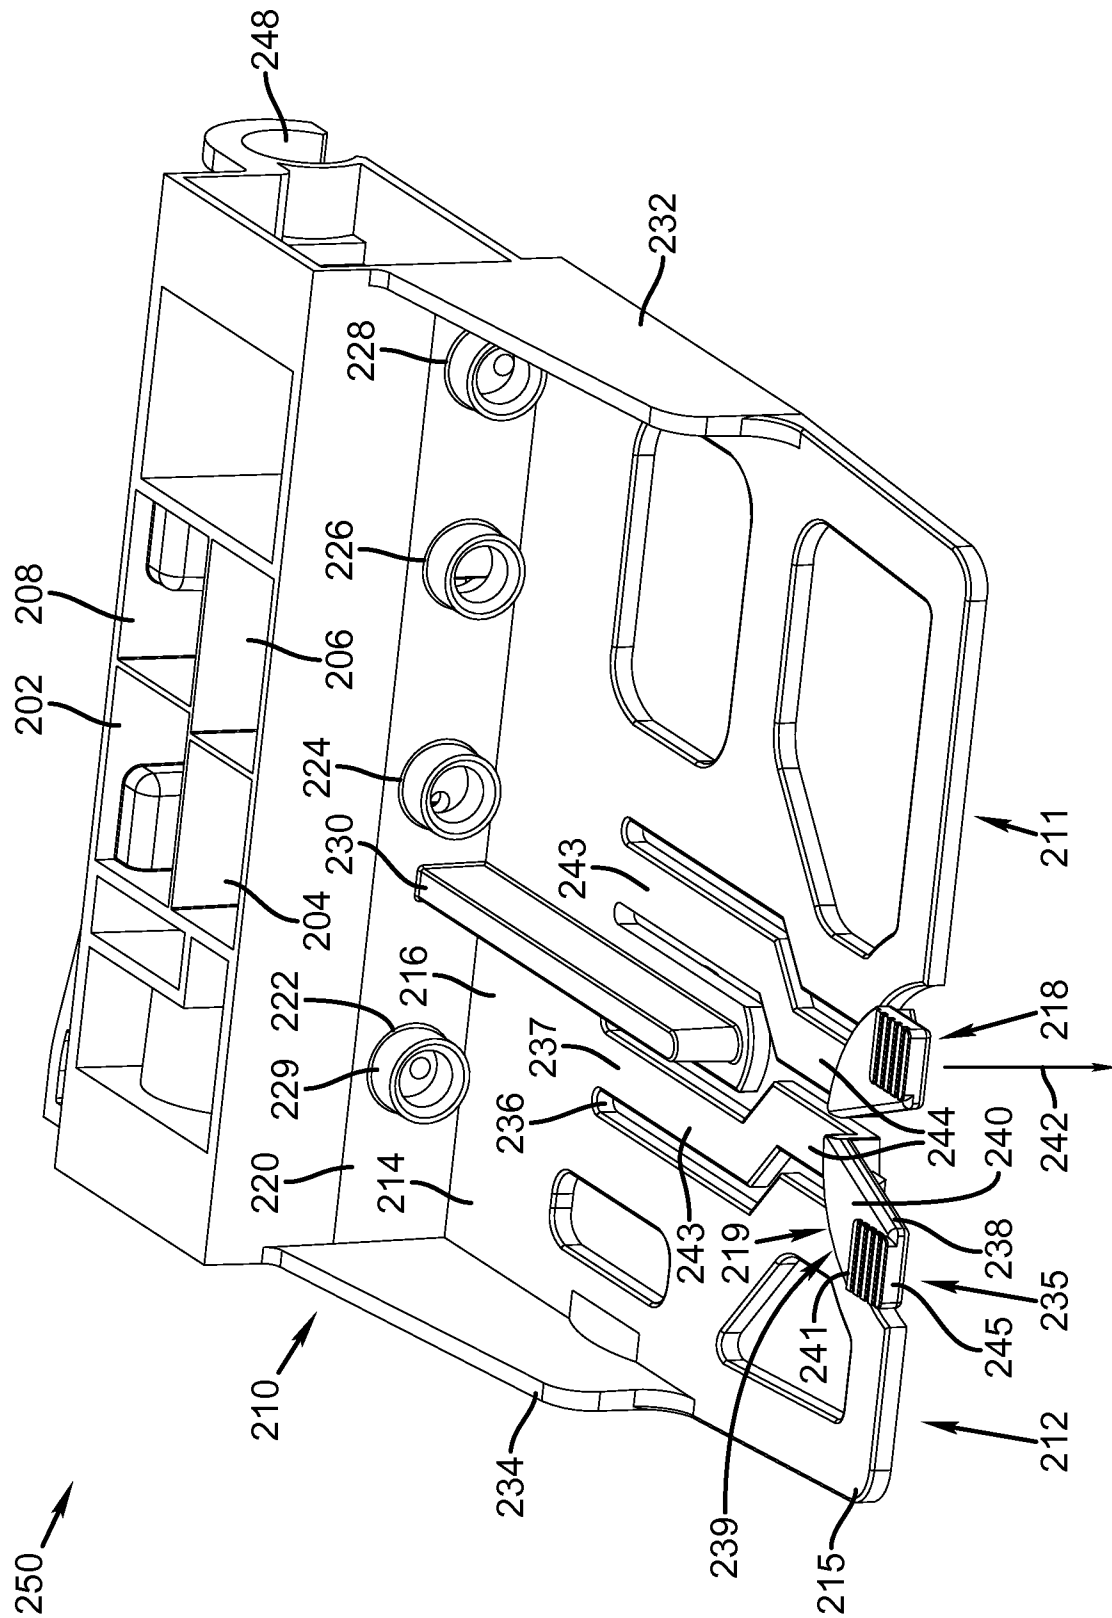


FIG. 3

4/22

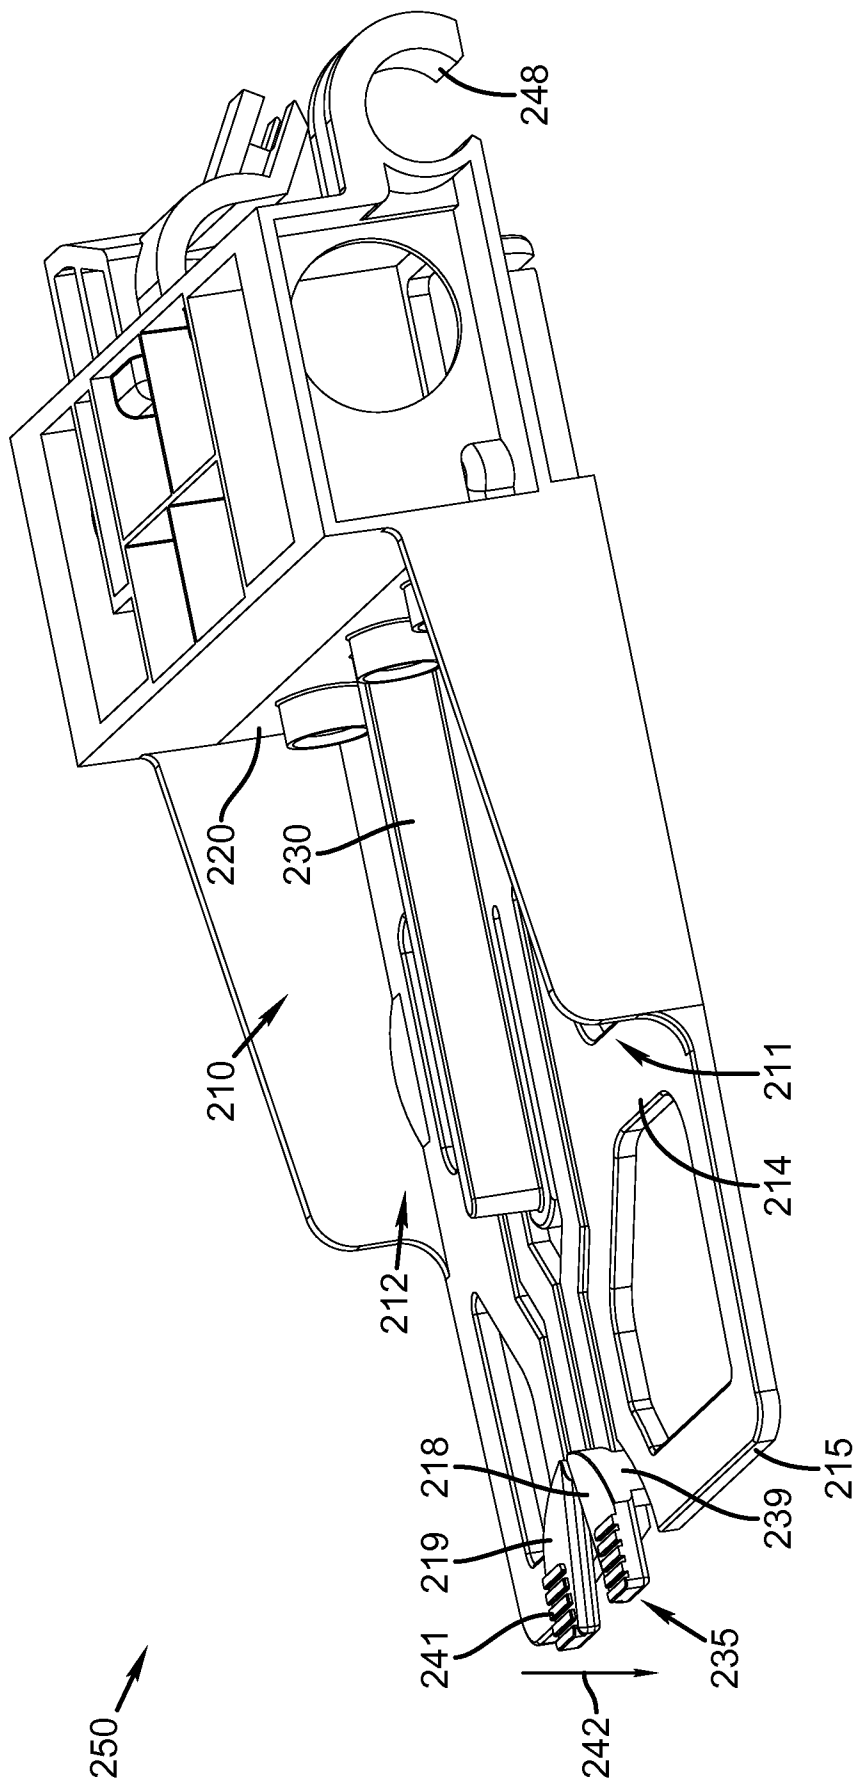


FIG. 4

5/22

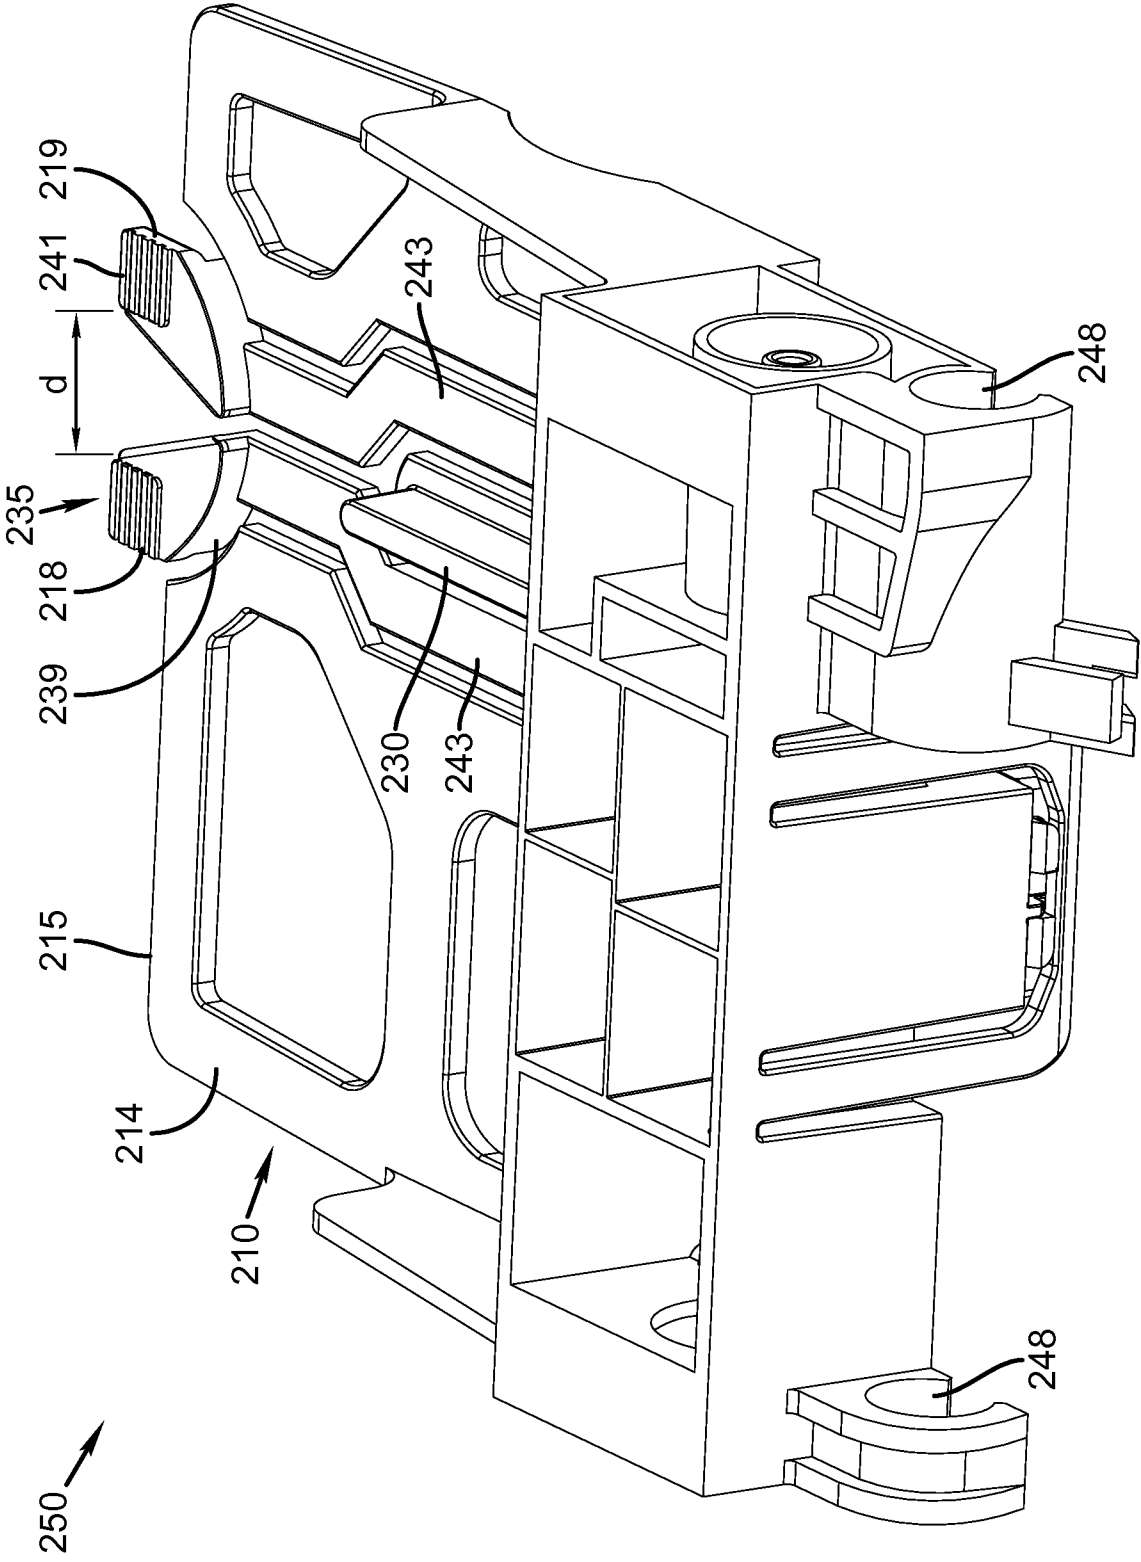


FIG. 5

6/22

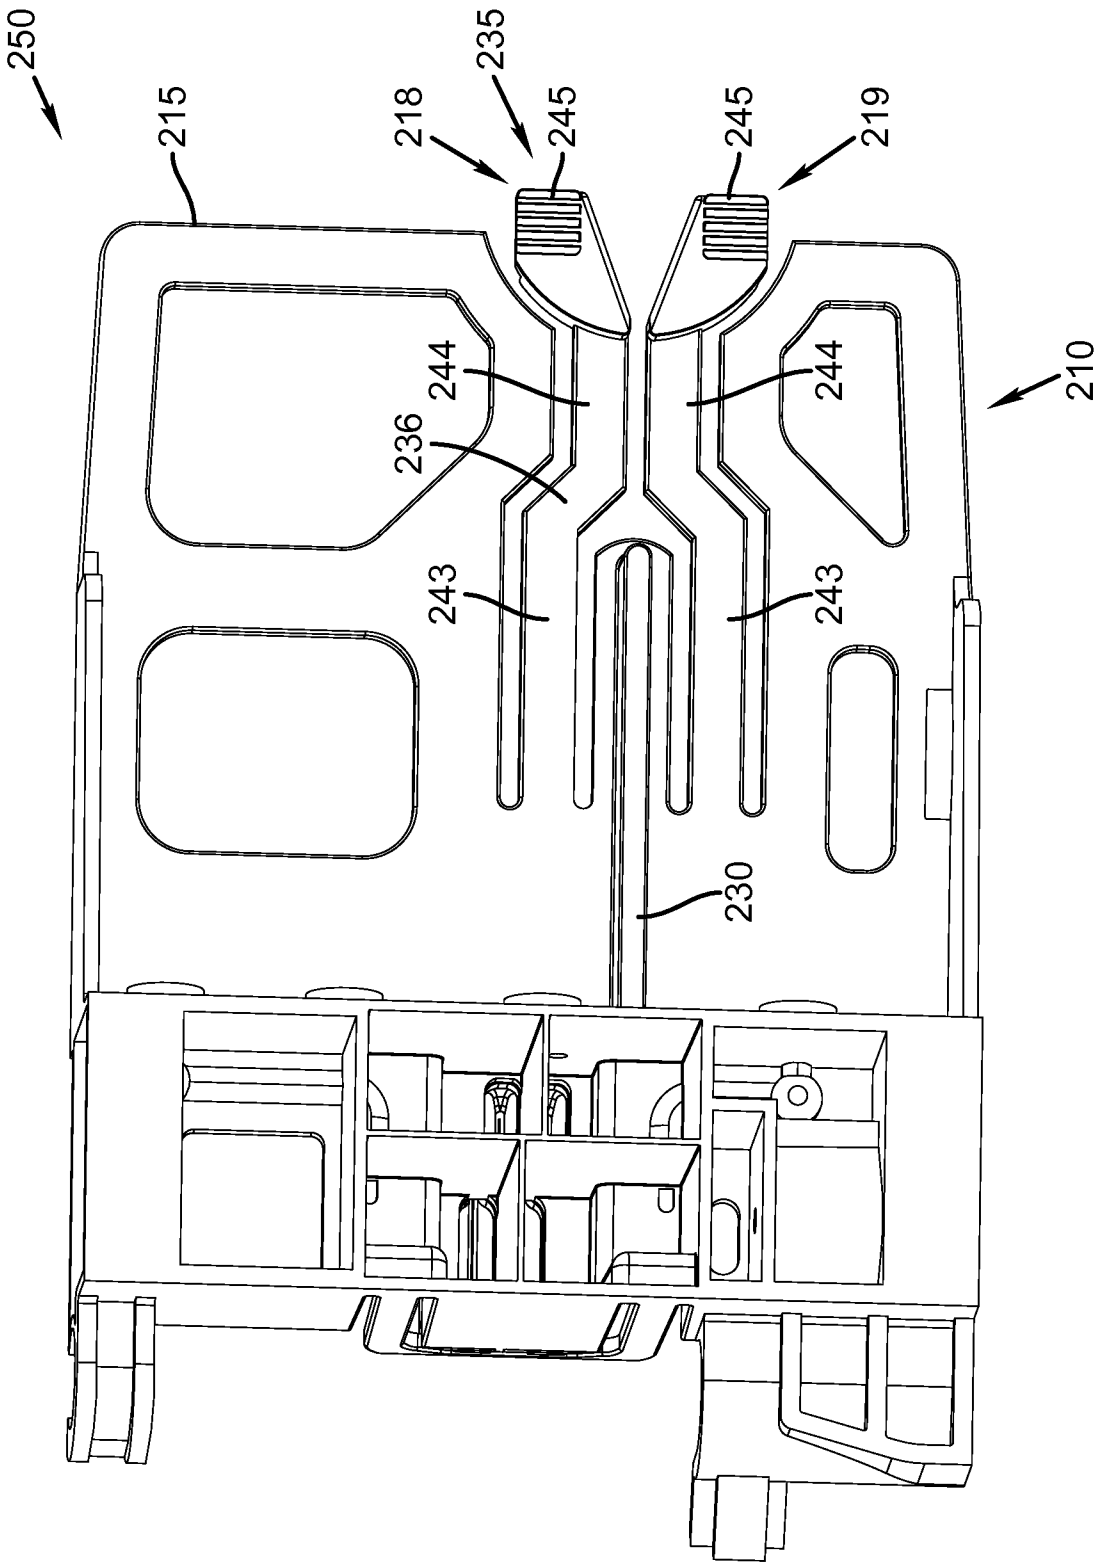


FIG. 6

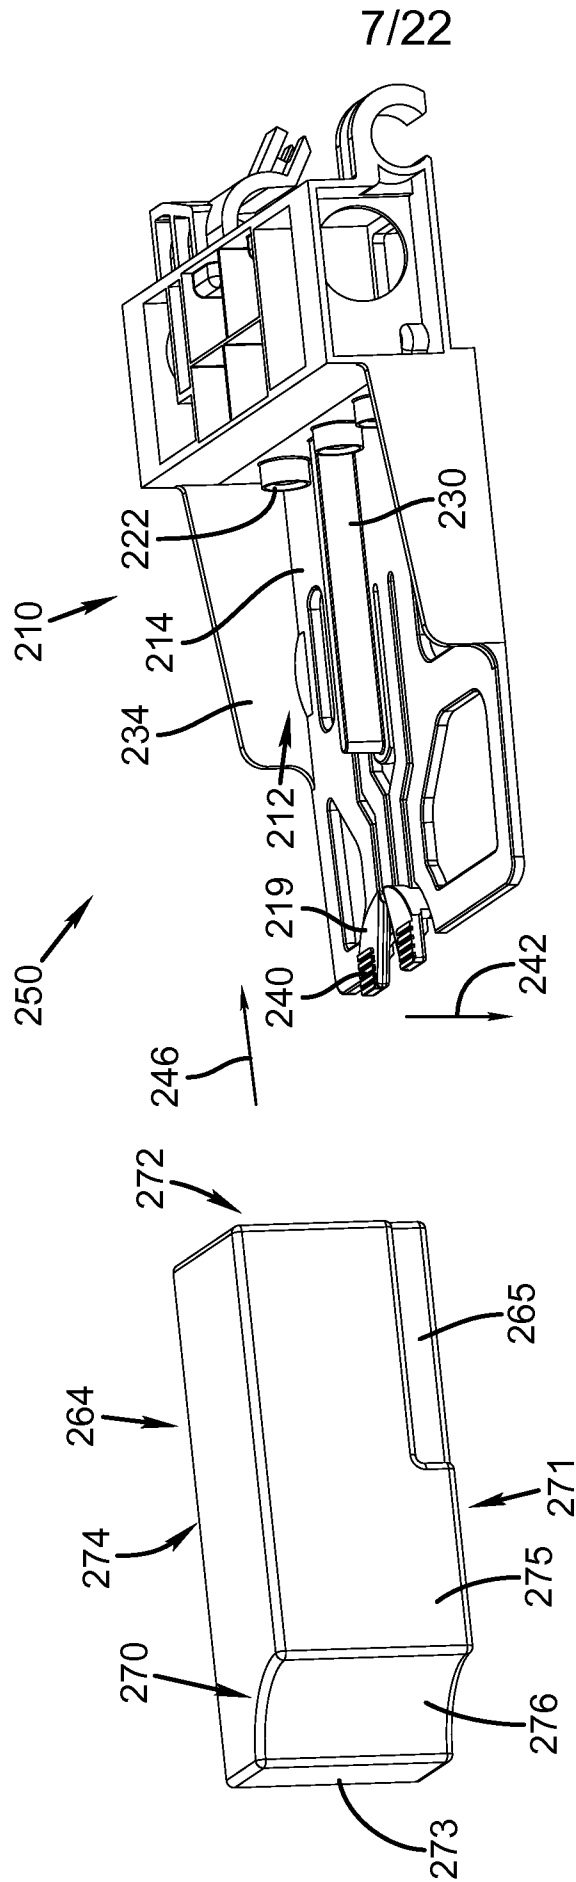


FIG. 7

8/22

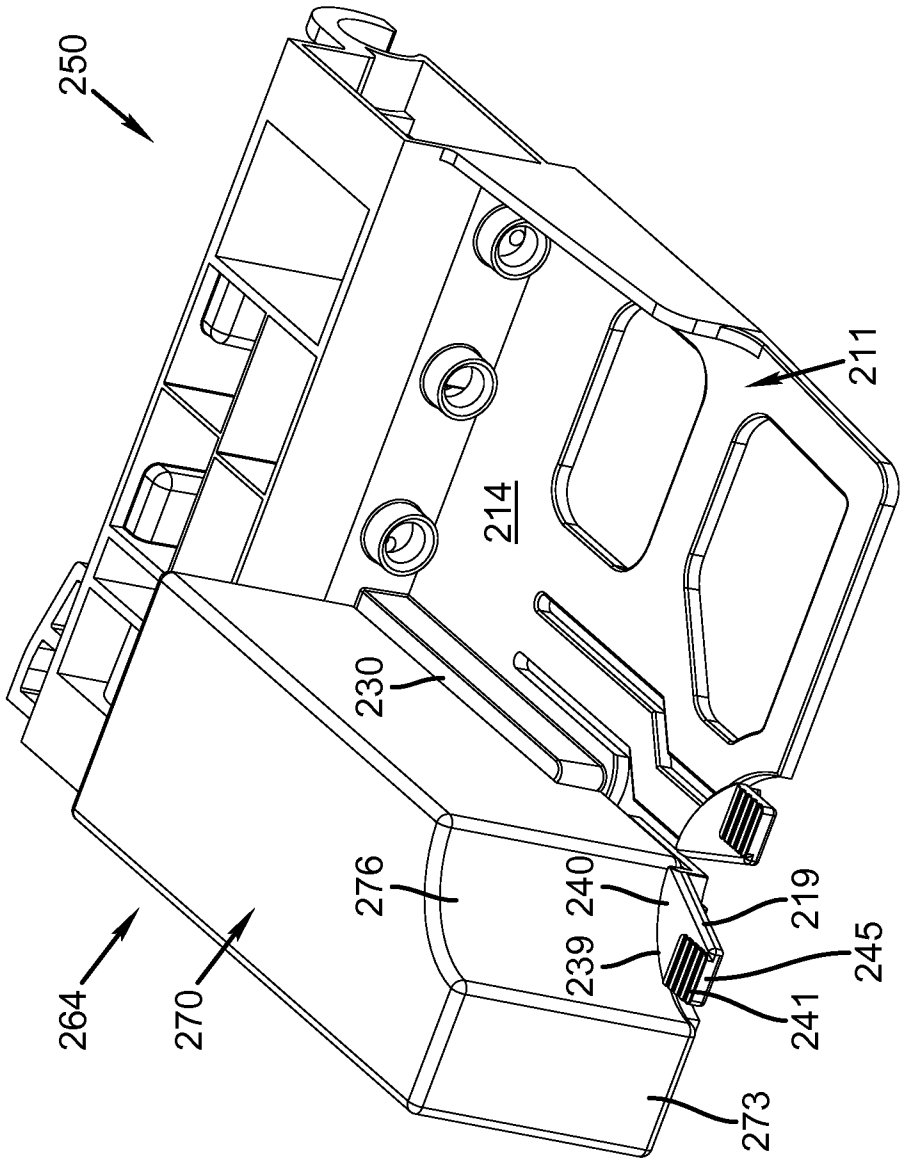


FIG. 8

9/22

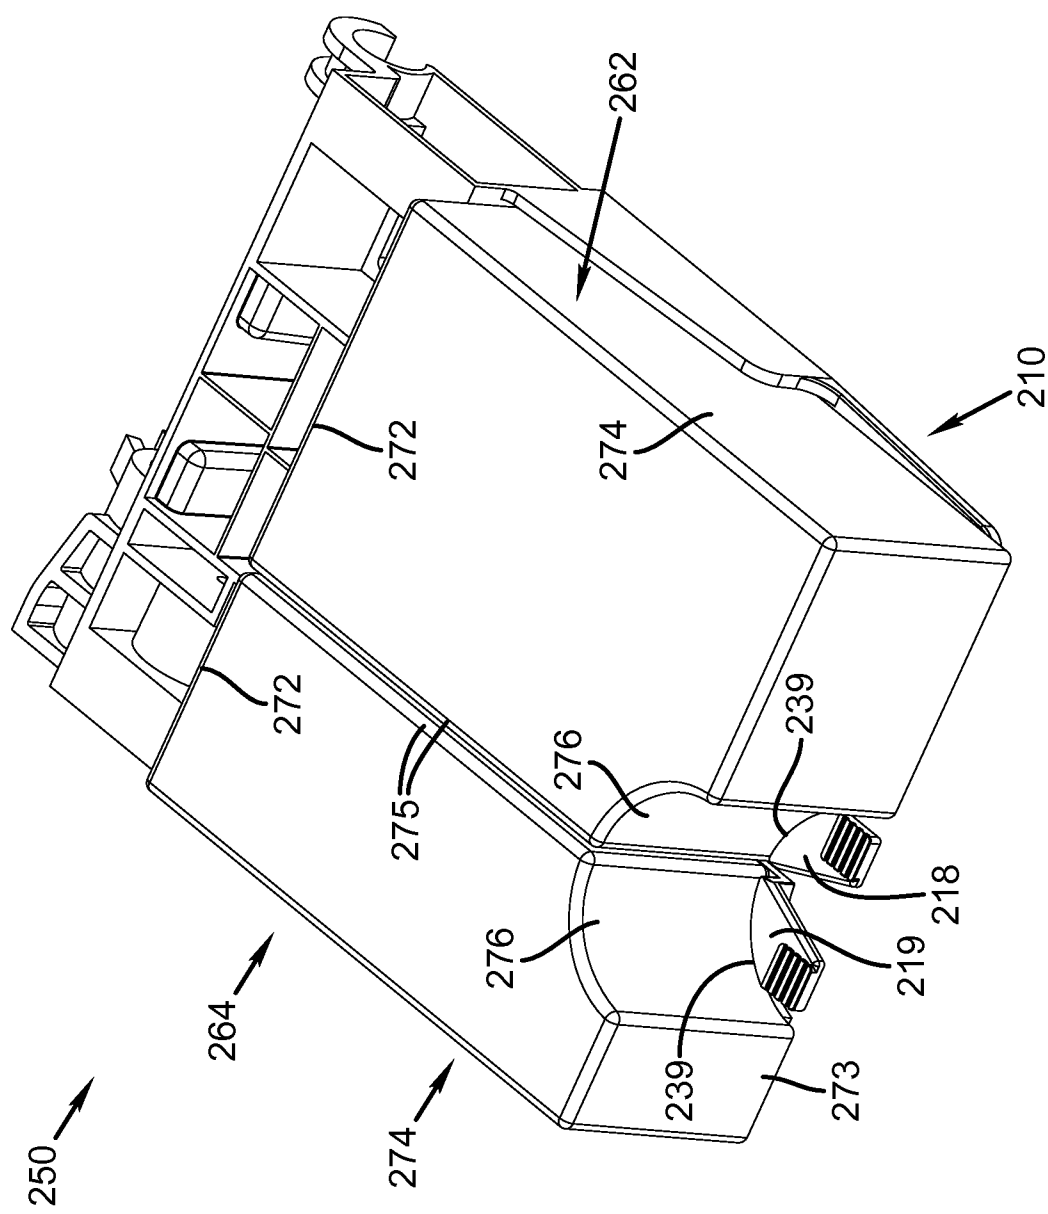


FIG. 9

10/22

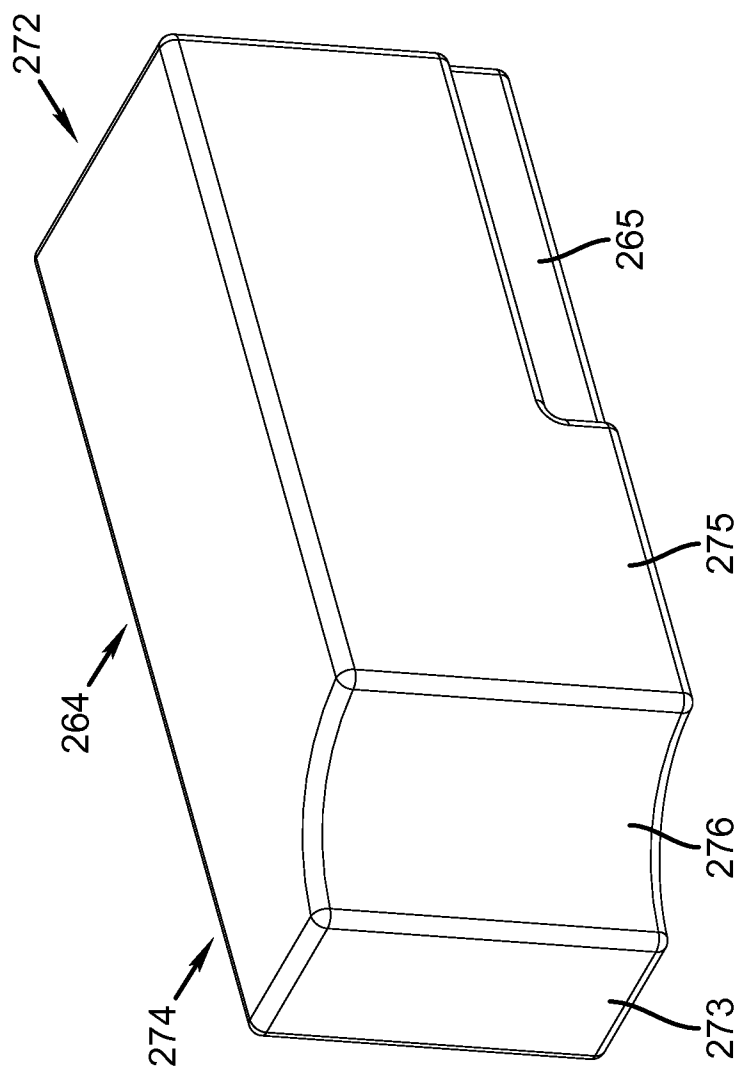


FIG. 10

11/22

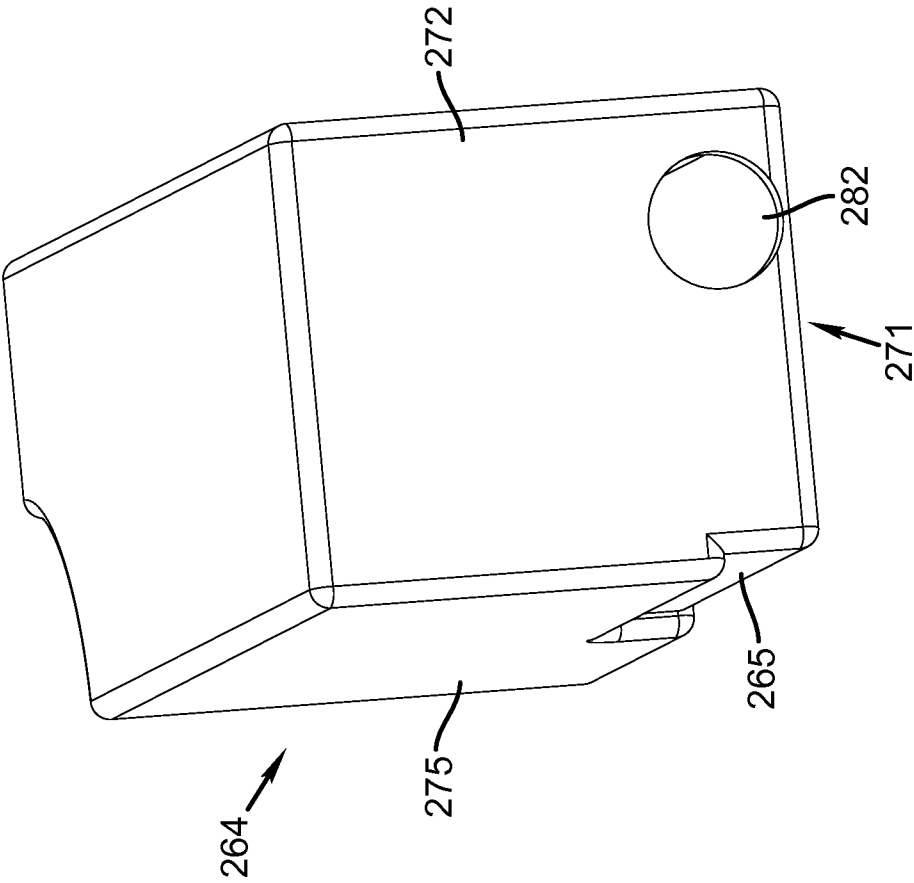


FIG. 11

12/22

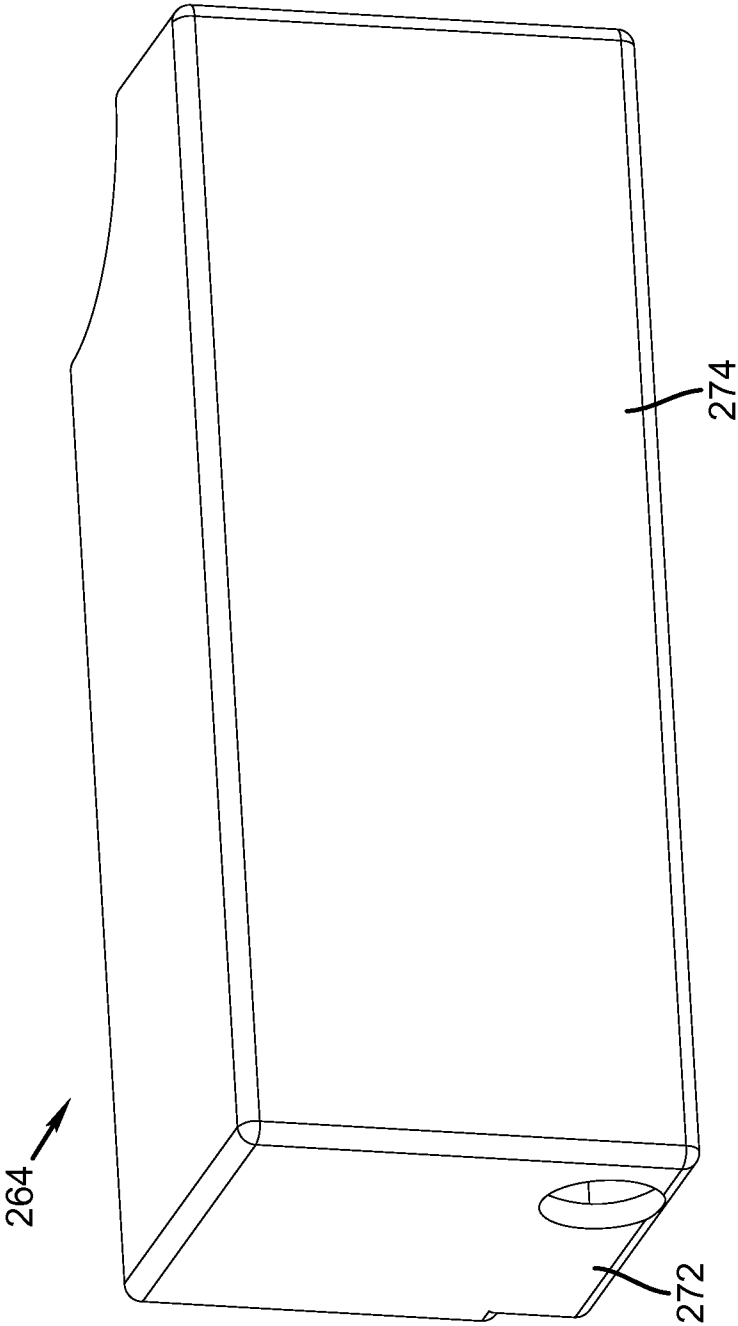


FIG. 12

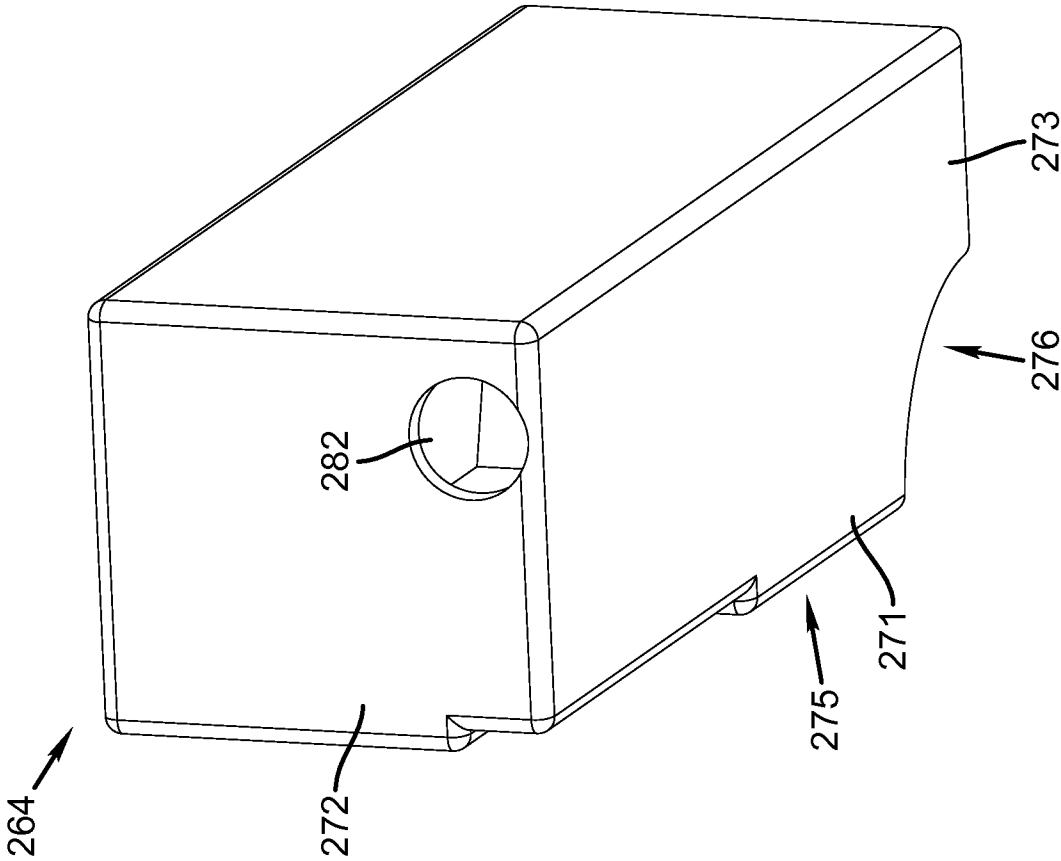


FIG. 13

14/22

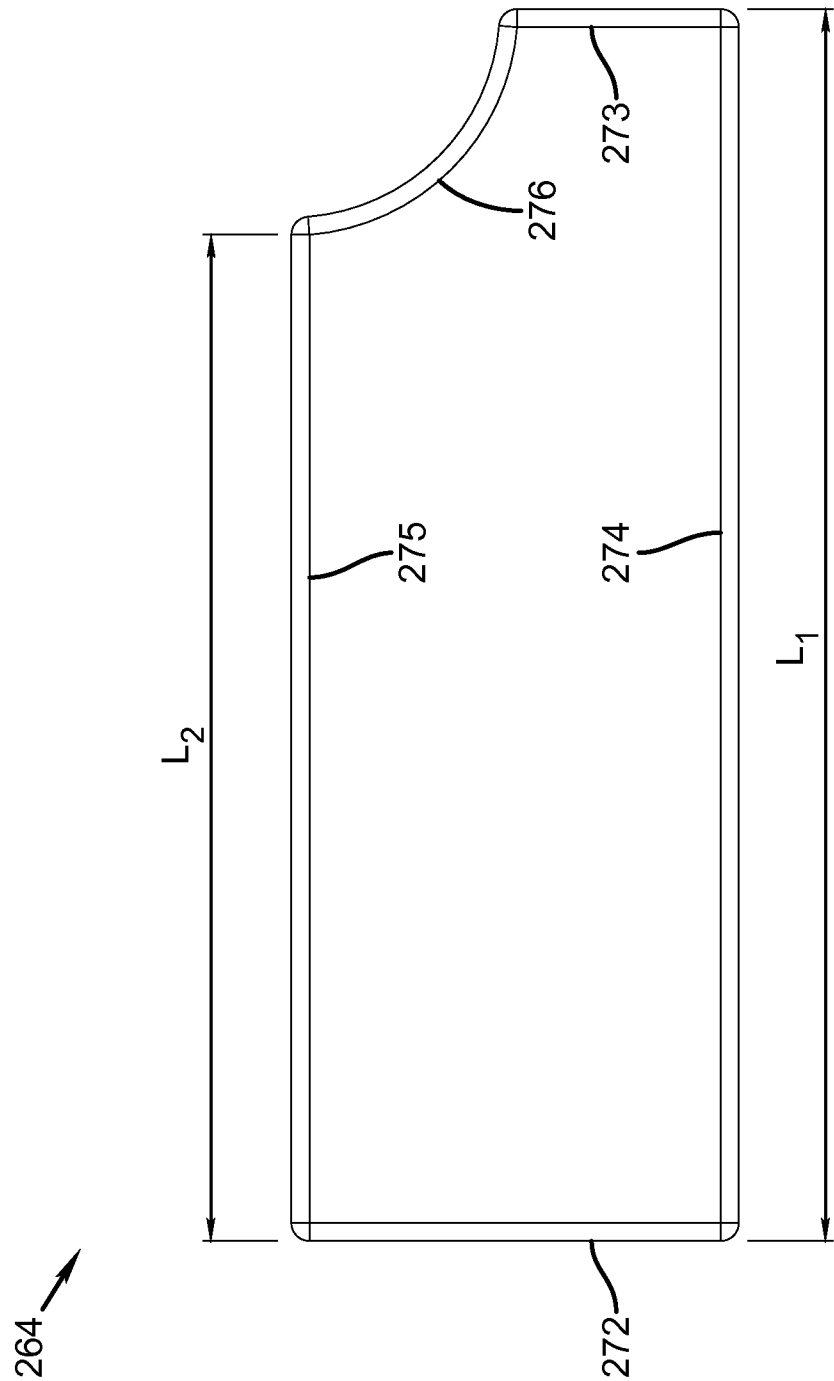


FIG. 14

15/22

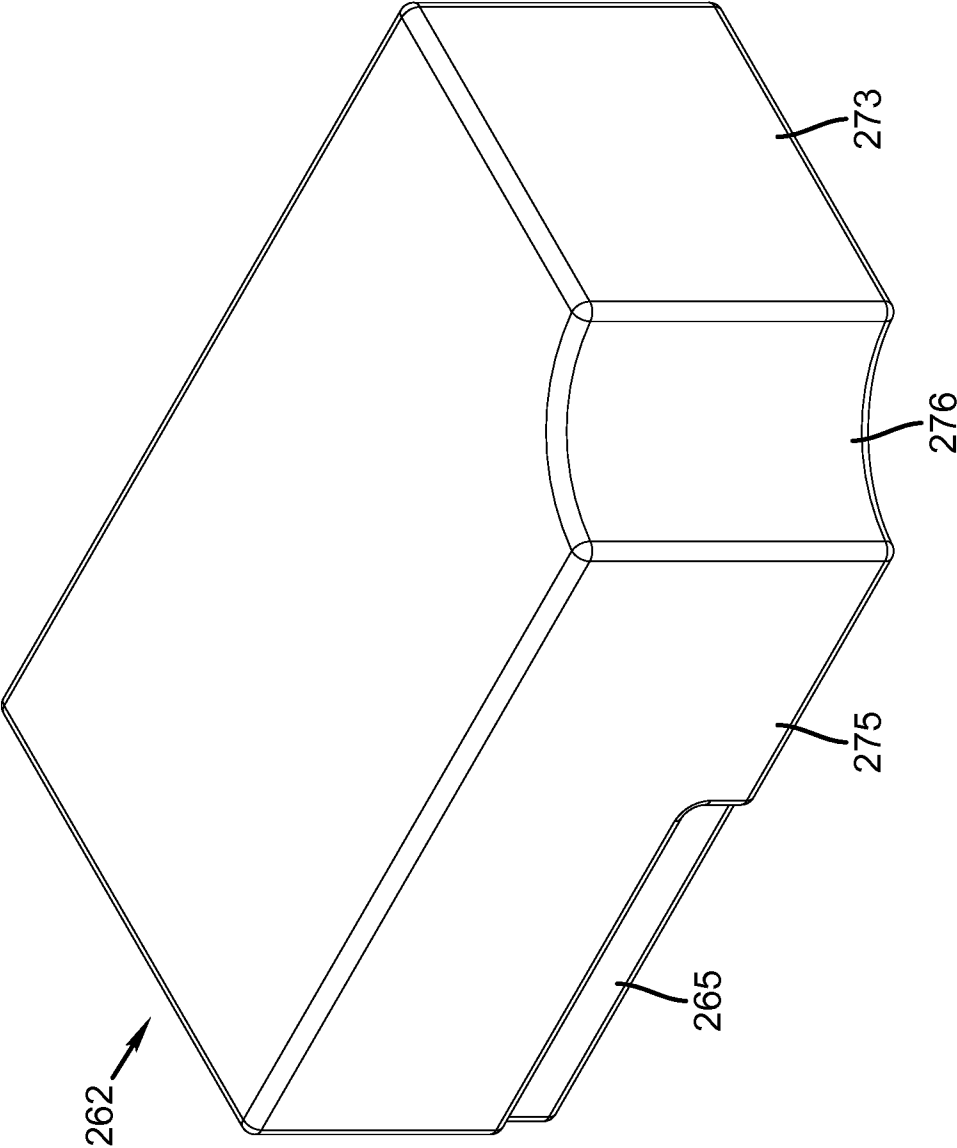


FIG. 15

16/22

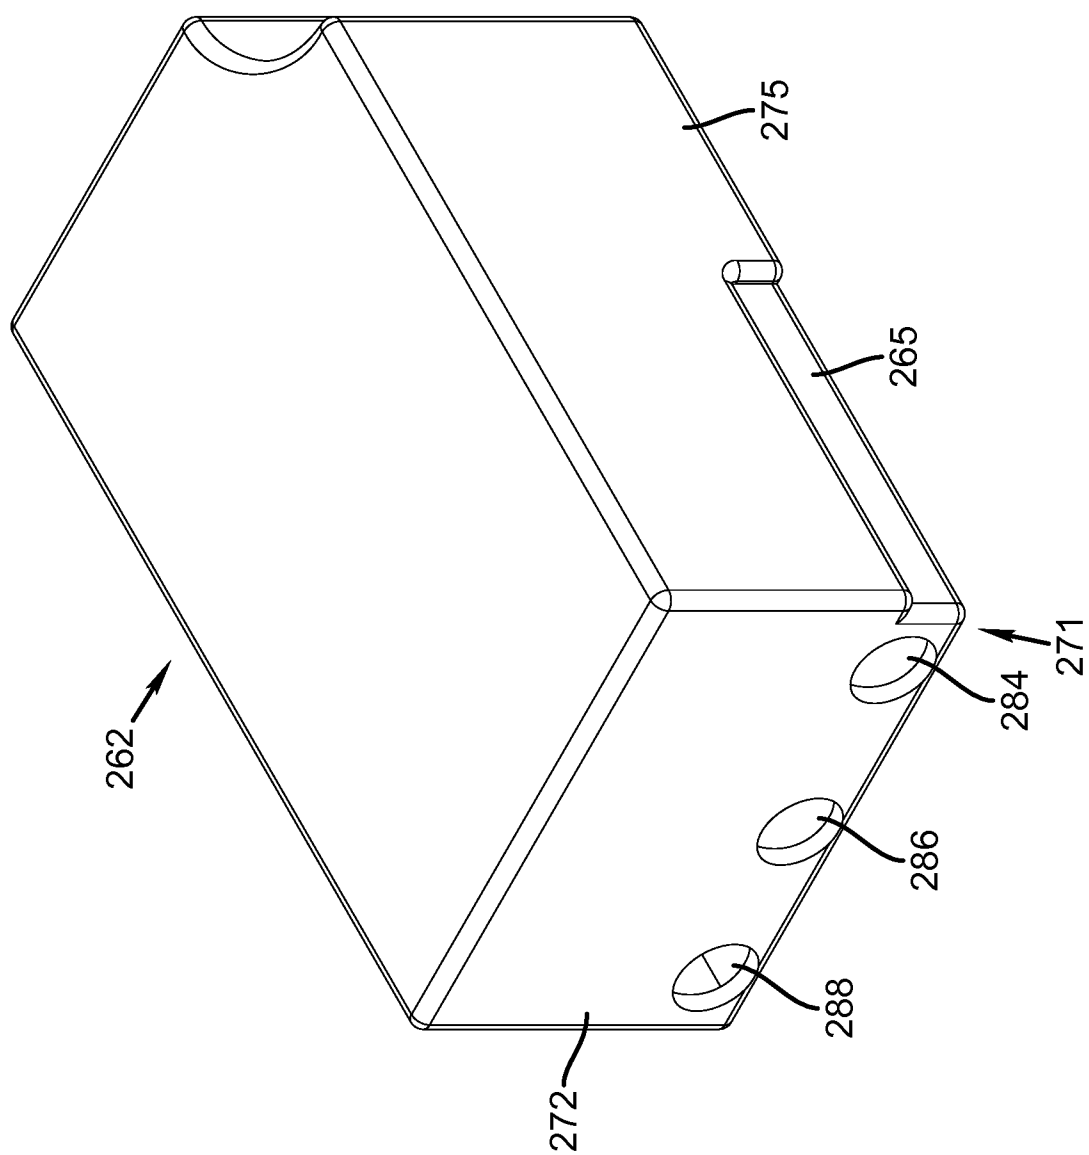


FIG. 16

17/22

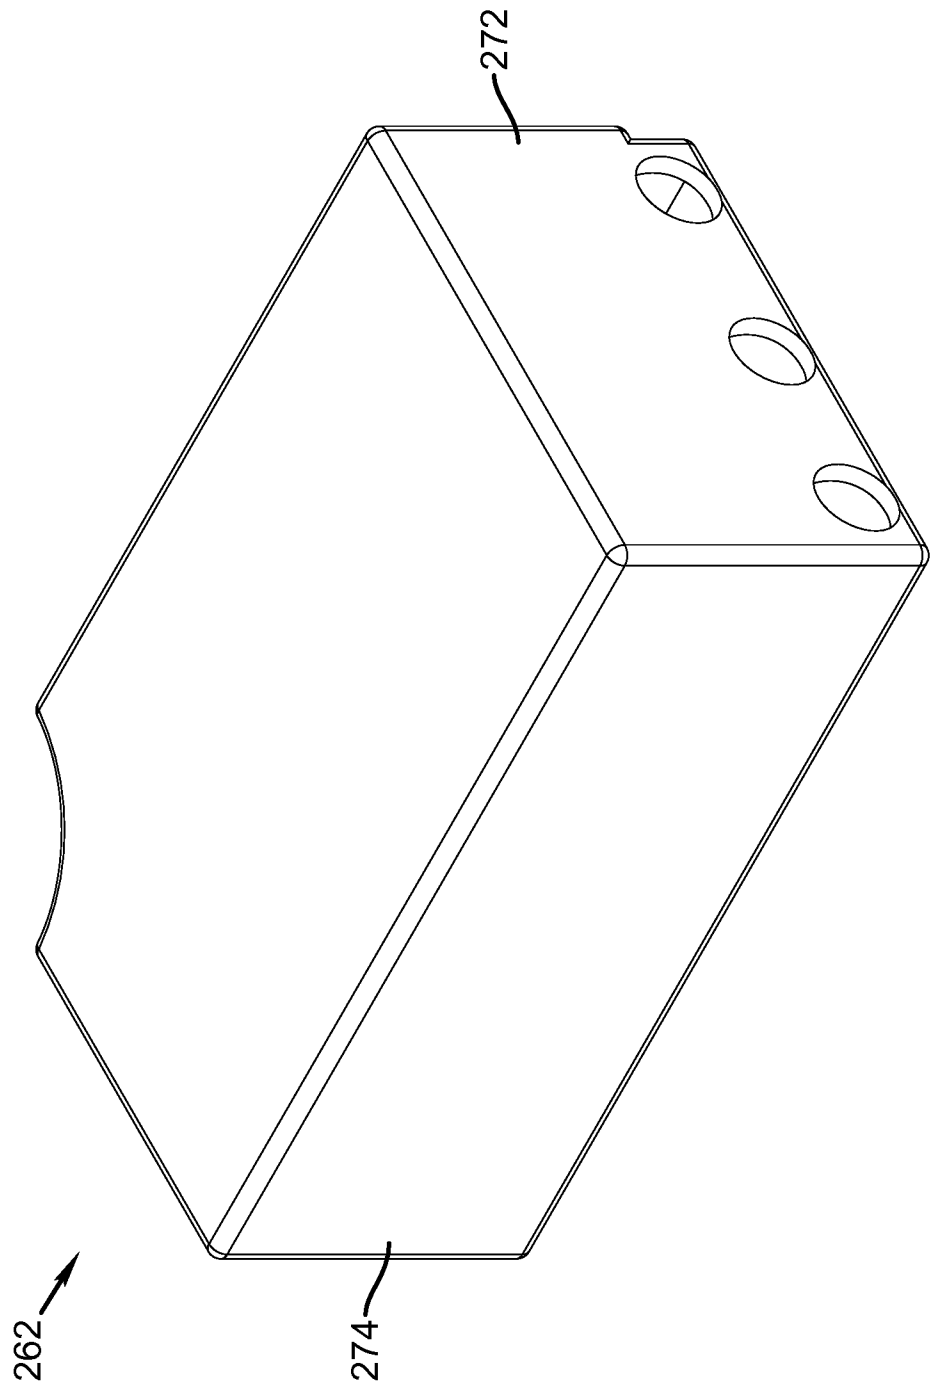


FIG. 17

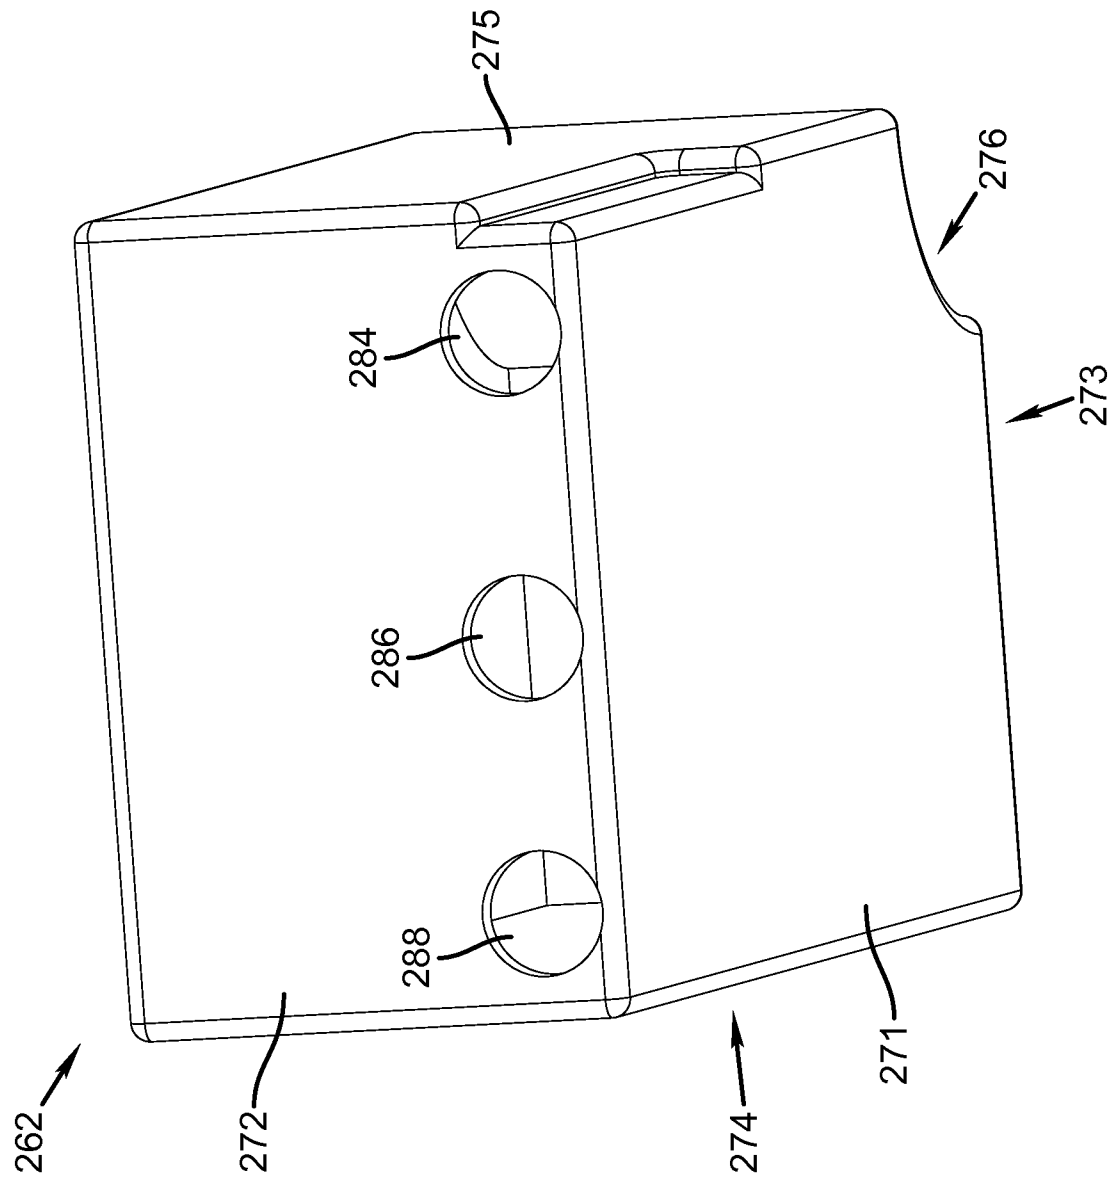


FIG. 18

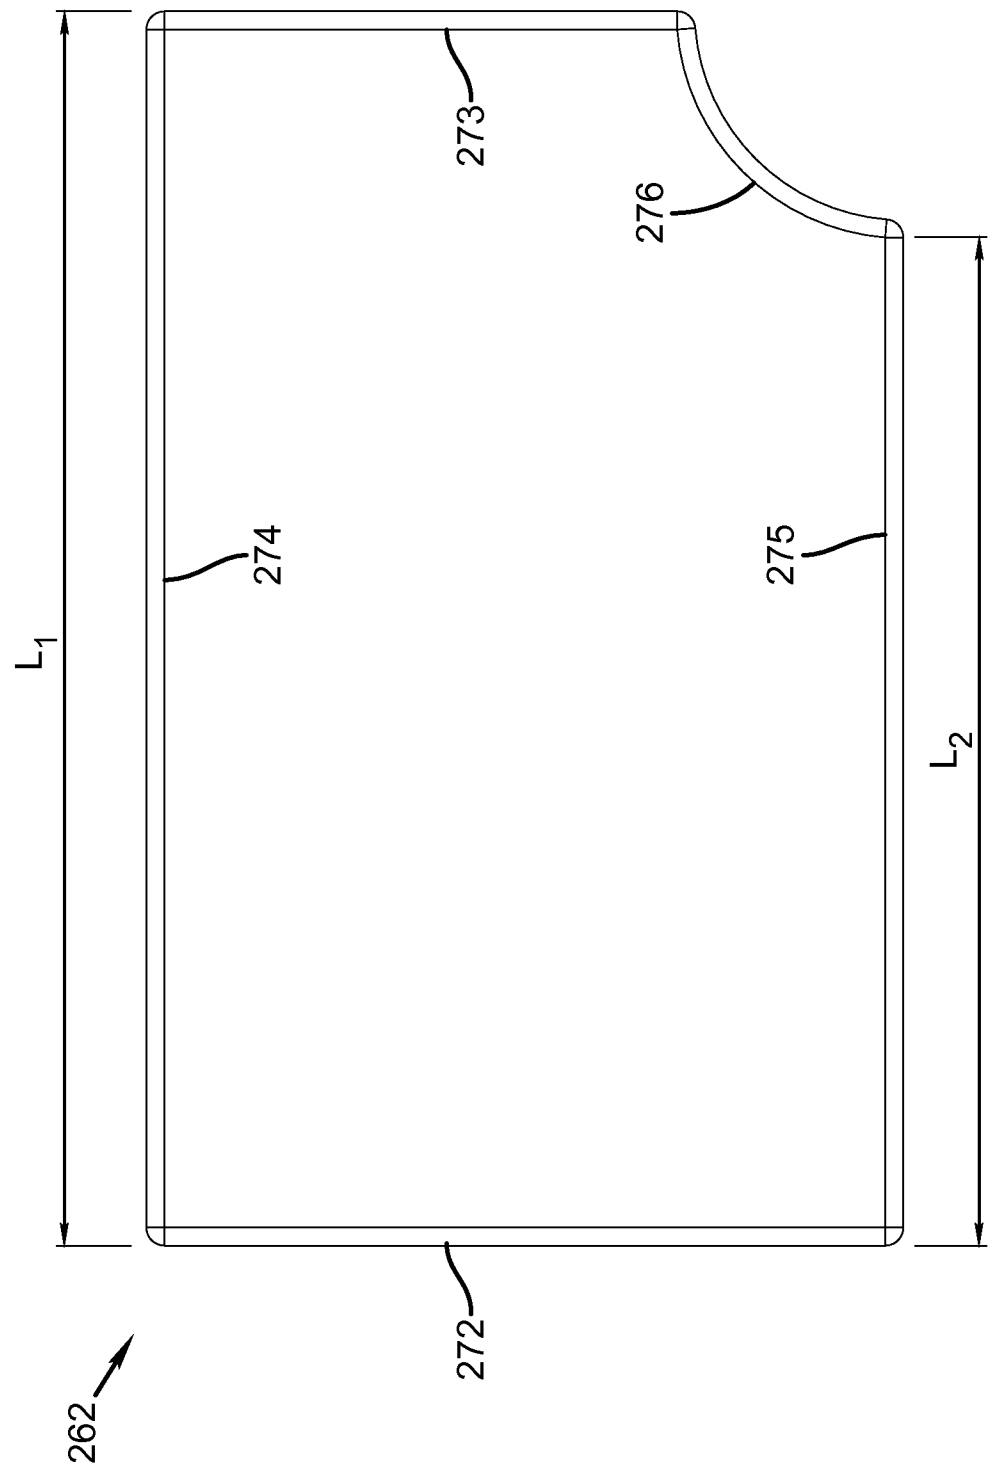


FIG. 19

20/22

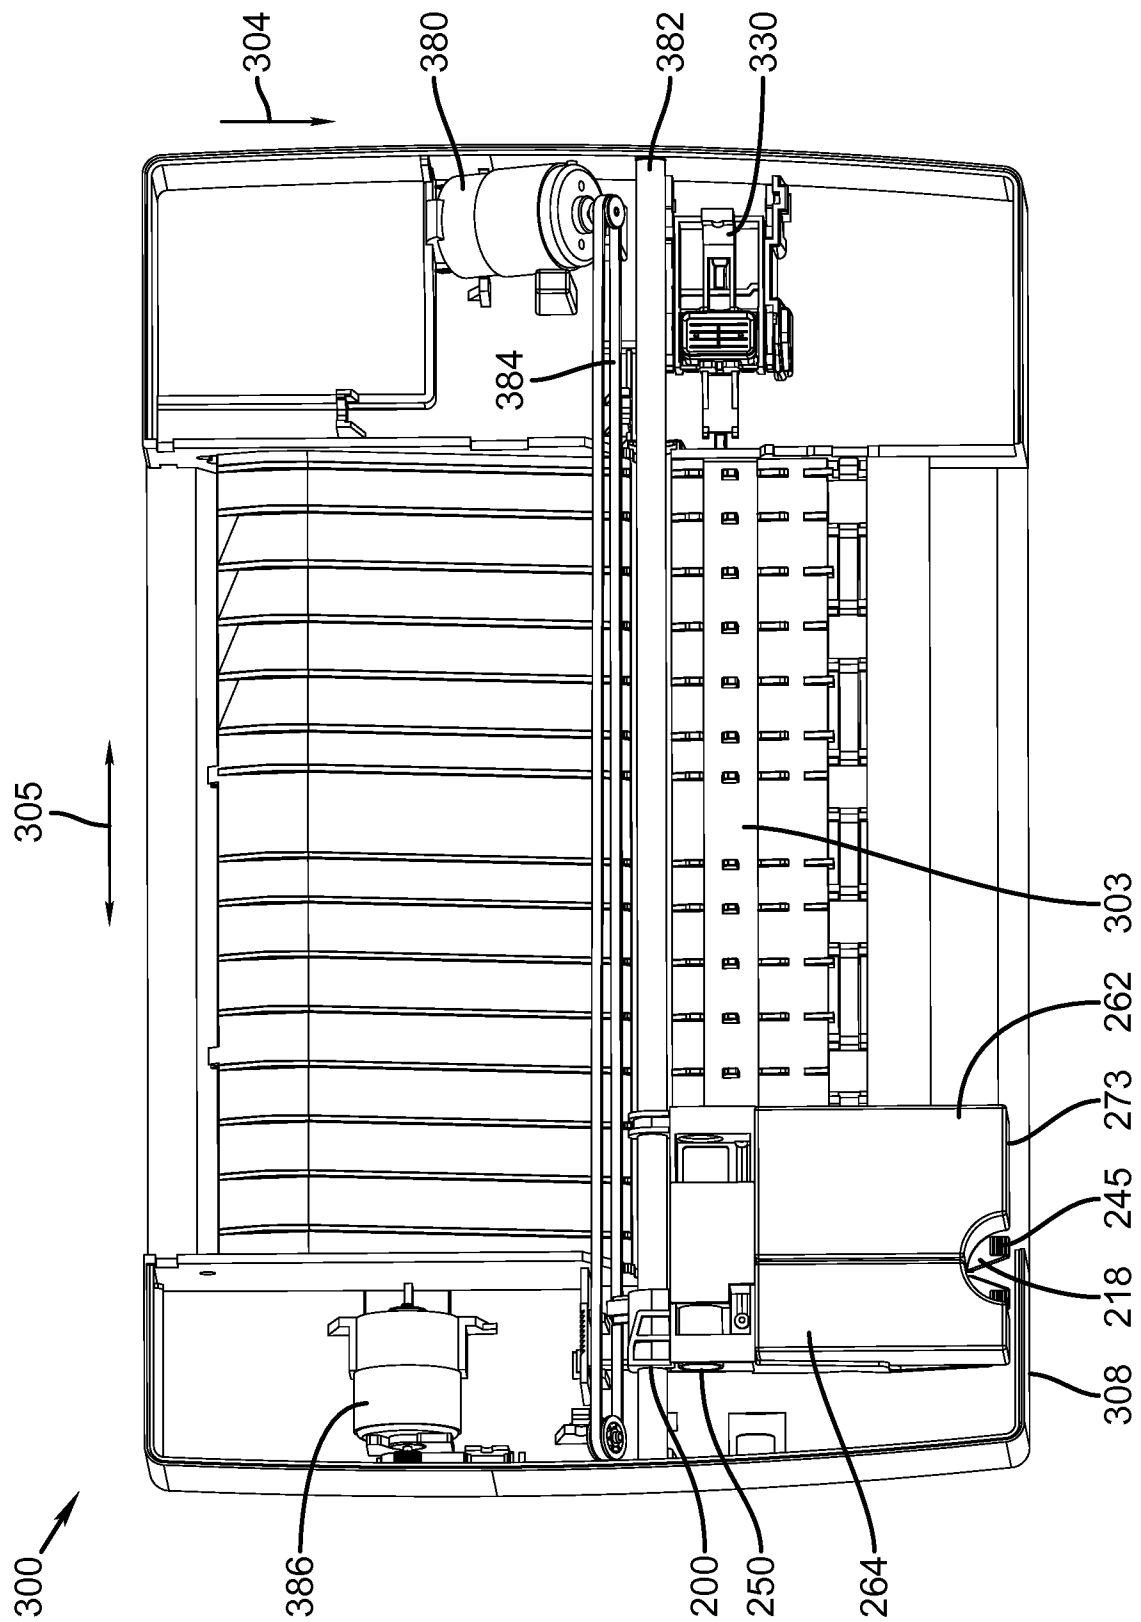


FIG. 20

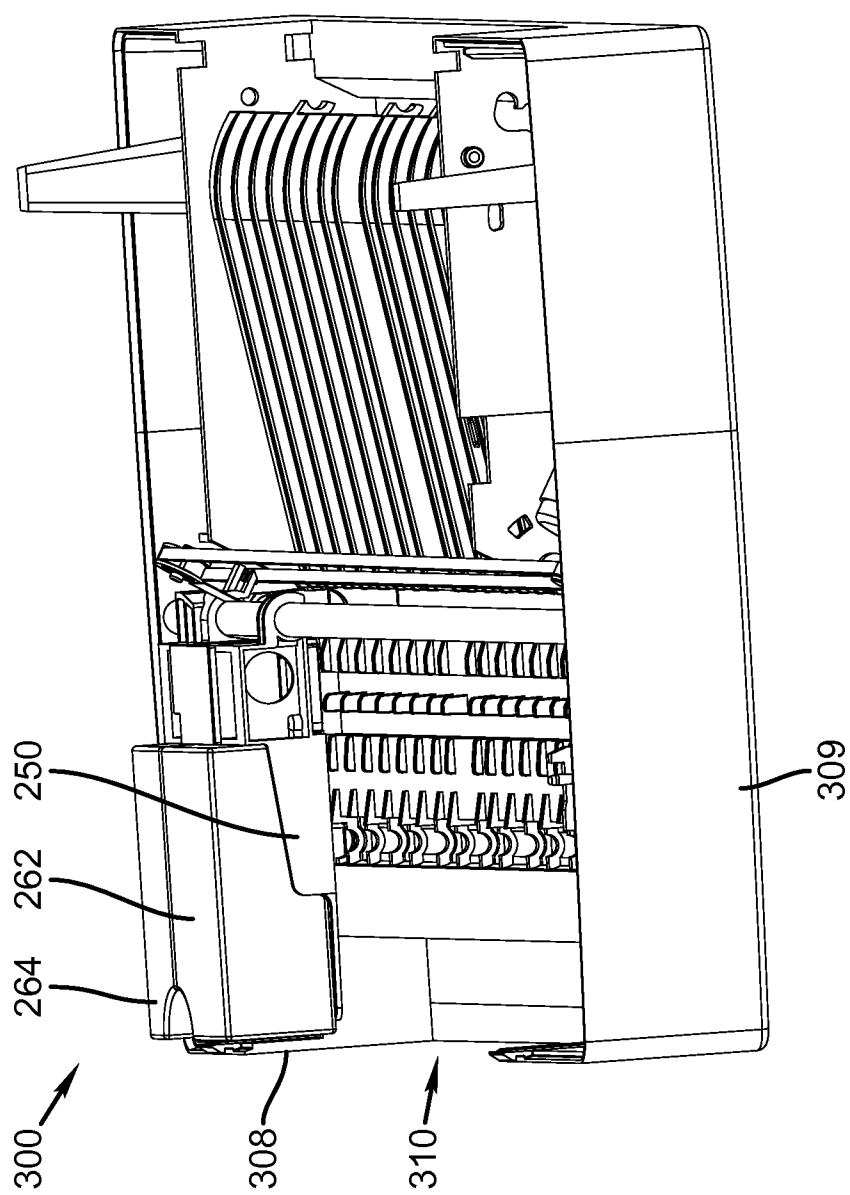


FIG. 21

22/22

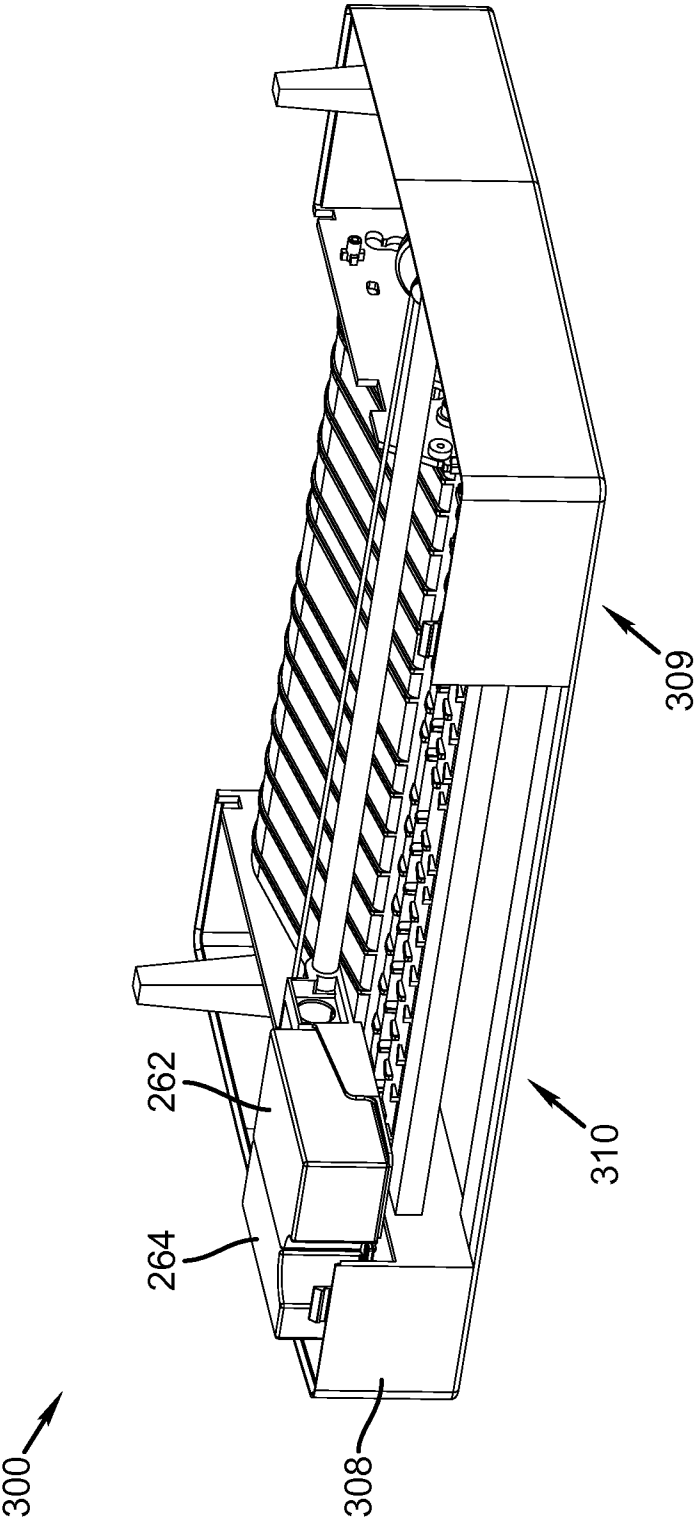


FIG. 22

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2011/029503

A. CLASSIFICATION OF SUBJECT MATTER

INV. B41J2/175

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B41J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 078 769 A2 (XEROX CORP [US]) 28 February 2001 (2001-02-28) paragraphs [0011], [0013], [0015]; figures 1,2,4	1-22
X	US 2008/252670 A1 (LABAR DANIEL ROBERT [US]) 16 October 2008 (2008-10-16) paragraphs [0002], [0003]	1-22
X	US 6 050 669 A (YANO KENTARO [JP] ET AL) 18 April 2000 (2000-04-18) column 6, line 48 - line 61; figure 1	1-22
X	US 6 250 750 B1 (MIYAZAWA HISASHI [JP] ET AL) 26 June 2001 (2001-06-26) column 7, line 51 - column 8, line 58; figures 11,13	1-22
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

28 April 2011

Date of mailing of the international search report

12/05/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Adam, Emmanuel

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2011/029503

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/183856 A1 (YANG YONG-SOK [KR]) 23 September 2004 (2004-09-23) paragraphs [0013], [0014], [0017]; figure 1 -----	1-22
X	EP 0 622 208 A2 (HEWLETT PACKARD CO [US]) 2 November 1994 (1994-11-02) column 7, line 55 - column 8, line 35; figures 6,7 -----	1-22
X	US 4 709 247 A (PIATT MICHAEL J [US] ET AL) 24 November 1987 (1987-11-24) abstract; figure 5 -----	1-22
X	US 6 161 920 A (SANTHANAM RAM [US] ET AL) 19 December 2000 (2000-12-19) abstract; figure 3 -----	1
X	US 2001/006393 A1 (KLINE DANIEL S [US] ET AL) 5 July 2001 (2001-07-05) paragraph [0063]; figures 15,16 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2011/029503

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1078769	A2	28-02-2001	DE 60038342 T2 12-03-2009
		JP 2001063032 A 13-03-2001	
		US 6655785 B1 02-12-2003	

US 2008252670	A1	16-10-2008	NONE

US 6050669	A	18-04-2000	US 6476926 B1 05-11-2002

US 6250750	B1	26-06-2001	CA 2209866 A1 05-01-1998
		CH 692082 A5 31-01-2002	
		CH 692083 A5 31-01-2002	
		CH 692189 A5 15-03-2002	
		CN 1179385 A 22-04-1998	
		CN 1526560 A 08-09-2004	
		CN 1526561 A 08-09-2004	
		DE 19728984 A1 08-01-1998	
		DE 29711899 U1 16-10-1997	
		ES 2147084 A1 16-08-2000	
		FR 2750642 A1 09-01-1998	
		FR 2753410 A1 20-03-1998	
		GB 2315045 A 21-01-1998	
		HK 1007873 A1 14-04-2000	
		HK 1012853 A1 12-05-2000	
		IT T0970585 A1 05-01-1998	

US 2004183856	A1	23-09-2004	CN 1517221 A 04-08-2004

EP 0622208	A2	02-11-1994	DE 69408194 D1 05-03-1998
		DE 69408194 T2 07-05-1998	
		JP 6340146 A 13-12-1994	
		SG 76449 A1 21-11-2000	
		US 5646665 A 08-07-1997	

US 4709247	A	24-11-1987	NONE

US 6161920	A	19-12-2000	AT 254540 T 15-12-2003
		AU 768894 B2 08-01-2004	
		AU 7117300 A 16-07-2001	
		BR 0016982 A 07-01-2003	
		CA 2395690 A1 12-07-2001	
		CN 1414909 A 30-04-2003	
		DE 60006721 D1 24-12-2003	
		DE 60006721 T2 23-09-2004	
		EP 1244555 A1 02-10-2002	
		ES 2209972 T3 01-07-2004	
		JP 4252243 B2 08-04-2009	

US 6161920	A		JP 2003532553 T 05-11-2003
		MX PA02006693 A 30-09-2002	
		PL 364163 A1 13-12-2004	
		TW 509631 B 11-11-2002	
		WO 0149496 A1 12-07-2001	

US 2001006393	A1	05-07-2001	AR 026803 A1 26-02-2003
		AU 760980 B2 29-05-2003	
		AU 2052001 A 16-07-2001	
		BR 0016994 A 31-12-2002	
		CA 2396358 A1 12-07-2001	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2011/029503

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 1420821 A	28-05-2003
		DE 60025947 T2	21-09-2006
		EP 1257418 A2	20-11-2002
		ES 2253277 T3	01-06-2006
		JP 3586449 B2	10-11-2004
		JP 2003519028 T	17-06-2003
		MX PA02006689 A	30-09-2002
		PL 356638 A1	28-06-2004
		RU 2243100 C2	27-12-2004
		TW 528683 B	21-04-2003
		WO 0149494 A2	12-07-2001
		US 6296345 B1	02-10-2001
		US 2002030718 A1	14-03-2002
