



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2654605 A1 2007/12/13

(21) **2 654 605**

(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2007/06/05
(87) Date publication PCT/PCT Publication Date: 2007/12/13
(85) Entrée phase nationale/National Entry: 2008/12/05
(86) N° demande PCT/PCT Application No.: US 2007/070387
(87) N° publication PCT/PCT Publication No.: 2007/143640
(30) Priorités/Priorities: 2006/06/05 (US60/810,942);
2006/08/17 (US60/822,675); 2007/06/04 (US11/757,658)

(51) Cl.Int./Int.Cl. *H01M 4/58* (2006.01),
C01G 23/00 (2006.01), *H01M 4/48* (2006.01)

(71) Demandeur/Applicant:
T/J TECHNOLOGIES, INC., US

(72) Inventeurs/Inventors:
ZHANG, PU, US;
MANI, SURESH, US;
WIXOM, MICHAEL R., US

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : TITANATES DE METAUX ALCALINS ET LEURS METHODES DE SYNTHESE

(54) Title: ALKALI METAL TITANATES AND METHODS FOR THEIR SYNTHESIS

(57) Abrégé/Abstract:

Disclosed is a doped lithium titanate and its use as an electrode in a battery. Further disclosed is a method for making an alkali metal titanate, which method includes mixing an alkali metal compound and a titanium compound, impact milling the mixture, and heating the milled mixture for a time, and at a temperature, sufficient to convert the mixture to the alkali metal titanate. The alkali metal compound can be in the form of Li_2CO_3 and the titanium compound can be in the form of TiO_2 . A dopant may be included in the mixture.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
13 December 2007 (13.12.2007)

PCT

(10) International Publication Number
WO 2007/143640 A3

(51) International Patent Classification:

H01M 4/58 (2006.01) **C01G 23/00** (2006.01)
H01M 4/48 (2006.01)

(21) International Application Number:

PCT/US2007/070387

(22) International Filing Date:

5 June 2007 (05.06.2007)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/810,942	5 June 2006 (05.06.2006)	US
60/822,675	17 August 2006 (17.08.2006)	US
11/757,658	4 June 2007 (04.06.2007)	US

(71) **Applicant** (for all designated States except US): **T/J TECHNOLOGIES, INC.** [US/US]; 3850 Research Park Drive, Suite A, Ann Arbor, MI 48108 (US).

(72) Inventors; and

(75) **Inventors/Applicants** (for US only): **ZHANG, Pu** [CN/US]; 2786 S. Knightsbridge Circle, Ann Arbor, MI 48105 (US). **MANI, Suresh** [US/US]; 2751 Georgetown Boulevard, Ann Arbor, MI 48105 (US). **WIXOM, Michael, R.** [US/US]; 215 S. Ravenna, Ann Arbor, MI 48103 (US).

(74) **Agent:** **CITKOWSKI, Ronald, W.**; Gifford, Krass, Sprinkle, Anderson & Citkowski, P.C., 2701 Troy Center Drive, Suite 330, P.O. Box 7021, Troy, MI 48007-7021 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:

9 October 2008

WO 2007/143640 A3

(54) Title: ALKALI METAL TITANATES AND METHODS FOR THEIR SYNTHESIS

(57) **Abstract:** Disclosed is a doped lithium titanate and its use as an electrode in a battery. Further disclosed is a method for making an alkali metal titanate, which method includes mixing an alkali metal compound and a titanium compound, impact milling the mixture, and heating the milled mixture for a time, and at a temperature, sufficient to convert the mixture to the alkali metal titanate. The alkali metal compound can be in the form of Li_2CO_3 and the titanium compound can be in the form of TiO_2 . A dopant may be included in the mixture.

ALKALI METAL TITANATES AND METHODS FOR THEIR SYNTHESIS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority of United States Provisional Patent Application Serial No. 60/810,942 filed June 5, 2006, entitled "Alkali Metal Titanates and Methods for Their Synthesis"; and United States Provisional Patent Application Serial No. 60/822,675 filed August 17, 2006, entitled "Doped Lithium Titanate Material and Methods for Its Manufacture", both of which are incorporated herein by reference.

FIELD OF THE INVENTION

[0002] This invention relates generally to alkali metal titanates, and more particularly to lithium titanates. More specifically, the invention relates to doped lithium titanates and to a method for manufacturing lithium titanate materials which exhibit superior electrochemical properties when incorporated into lithium batteries.

BACKGROUND OF THE INVENTION

[0003] Alkali metal titanates have electrochemical properties which make them desirable as electrode materials for a variety of devices. Lithium titanate ($\text{Li}_4\text{Ti}_5\text{O}_{12}$) has been found to have particular utility as an electrode material for lithium batteries. It is a relatively low-cost material, and exhibits high performance characteristics in lithium batteries; consequently, it is anticipated to have significant utility as an electrode material for high performance, high power batteries such as those utilized in hybrid electric vehicles and other high power applications.

[0004] One important characteristic of high power, high performance batteries is rate capacity. That is, the rate at which the batteries can take up and deliver an electrical charge. This parameter is particularly important under high charge/discharge rates as are encountered in electric vehicles and other high power applications.

[0005] First cycle reversibility is another very important parameter for rechargeable lithium batteries. This parameter measures the decline in storage

capacity when a freshly manufactured lithium battery is initially cycled. Manufacturers compensate for this initial loss by building extra capacity into batteries. However, this approach increases the size and cost of batteries, and industry has always sought to limit magnitude of first cycle reversibility.

[0006] Various lithium titanate materials are commercially available and are utilized in the manufacture of lithium batteries. However, heretofore available commercial materials produce lithium batteries having first cycle reversibilities of approximately 80%, which represents a significant inefficiency. Furthermore, there is a need to improve the rate capacities of prior art batteries to make them practical for use in high power applications. Clearly, there is a need for improved lithium titanate electrode materials.

SUMMARY OF THE INVENTION

[0007] Disclosed is a doped lithium titanate material. In particular instances, the dopant may comprise a transition metal, and this metal may be one or more of V, Zr, Nb, Mo, Mn, Fe, Cu, and Co. The dopant may be present in amounts up to 20 atomic percent, and in specific instances in the range of 0.1-5 atomic percent. In a particular instance, the dopant comprises Zr.

[0008] Further disclosed is a method for preparing alkali metal titanates such as doped and/or undoped lithium titanate. The method involves preparing a mixture of an alkali metal compound such as lithium carbonate together with a titanium compound such as titanium dioxide or some other oxide of titanium, including suboxides. This mixture is impact milled by ball milling, attritor milling or the like, and the resultant mixture is heated for a time and at a temperature sufficient to bring about a reaction which forms the alkali metal titanate. A dopant material or dopant precursor may be added to the mixture before or after the milling step.

[0009] Further disclosed are electrodes which include alkali metal titanates in accord with the foregoing, as well as batteries in which these electrodes comprise the anodes.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Figure 1 is a flowchart illustrating a process for synthesizing alkali metal titanates;

[0011] Figure 2 is a time versus temperature plot illustrating a temperature programmed reaction schedule which may be utilized to fabricate the titanate materials;

[0012] Figure 3 is another time versus temperature plot illustrating another temperature programmed reaction which may be utilized to fabricate the materials;

[0013] Figure 4 is a graph showing the capacity retention of a cell which incorporates a lithium titanate anode;

[0014] Figure 5 is a graph showing the cycle life of the cell of Figure 4; and

[0015] Figure 6 is a graph illustrating the first cycle capacity loss of a prior art cell and a cell which incorporates the present lithium titanate material.

DETAILED DESCRIPTION OF THE INVENTION

[0016] In accord with one aspect of the invention there is provided a doped lithium titanate material. Generally, lithium titanate is recognized as having the formula $\text{Li}_4\text{Ti}_5\text{O}_{12}$; however, as is recognized in the art, the stoichiometry of this material may, in some instances, vary without significantly altering the fundamental nature of the material. Such variations may be resultant from a slight oxidation or reduction of the material, minor variations of the Li/Ti ratio and the presence of dopant species. Accordingly, within the context of this disclosure, all of such stoichiometric and non-stoichiometric materials are encompassed within the definition of lithium titanate.

[0017] In a specific group of embodiments, the lithium titanate is doped with a transition metal in an amount up to approximately 20 atomic percent, and some such transition metals include one or more of V, Zr, Nb, Mo, Mn, Fe, Cu, and Co. In one particular instance, as is discussed herein, the dopant comprises Zr, and in particular instances is present in an amount of 0.1-5 atomic percent of the material.

[0018] In one group of experiments, undoped lithium titanate of the prior art, and lithium titanate doped with approximately 1% zirconium in accord with the

teaching presented herein, were incorporated into anodes of half cells, and the performance of these anodes was evaluated with regard to charge capacity as a function of various charge rates (C), in accord with standard procedures. Data from the experimental series is summarized in Table 1 hereinbelow with regard to both the doped and undoped lithium titanate materials.

Table 1

Sample		Capacity under different rates (mAh/g)						Reversibility (%)
		C/10	1C	3C	6C	10C	20C	
A: PZ-J28A	Standard LTO	174	170	160	149	129	91	95
B: PZ-J28B	LTO with 1% Zr dopant	174	170	166	161	157	140	95
(B-A)/A	Value Change	0%	0%	4%	8%	22%	54%	0%

[0019] As will be seen from the table, the doped materials provide for cells which manifest a high charge capacity under high charge and discharge rates. These improvements are greatest at very high (10-20C) rates, and as a result, cells made utilizing the doped lithium titanate material have particular advantages for use in high rate, high power applications such as electric vehicles and backup power systems. Results similar to the foregoing are anticipated utilizing other transition metals as dopant agents. Dopant concentrations generally range up to 20 atomic percent of the material.

[0020] There is a fairly large body of prior art directed to the synthesis of lithium titanate materials, and various processes known in the art may be utilized to prepare the doped lithium titanate materials described above. While such prior art processes may be utilized, it has further been found in accord with the present invention that very high quality alkali metal titanates, both doped and undoped, can be prepared by a process which involves impact milling of the starting materials to produce an intimate mixture. This mixture is then reacted at elevated temperatures to produce the alkali metal titanate.

[0021] Figure 1 depicts a flowchart of a process which may be utilized to synthesize both doped and undoped lithium metal titanates. As shown in Figure 1, lithium titanate is prepared from a mixture of Li_2CO_3 and TiO_2 with a molar ratio of 2:5 at step 10. These precursor materials are mixed together in a solvent at step 20, such as isopropanol. Other solvents, including organic liquids, aqueous liquids and the like may be utilized to the extent they do not interfere with the process. The mixture is then subjected to a ball milling process at step 30. A typical milling process is carried out in ceramic jars utilizing zirconia milling media for approximately 48 hours, although milling times can typically range from 10 minutes to 240 hours. In a specific instance, milling takes place for at least 12 hours. While step 30 illustrates a ball milling process, any impact milling process, such as attritor milling, vibratory milling and the like, may be employed. Following the milling, the precursor mixture is dried to remove the solvent at step 40, and ground in air to produce a fine powder at step 50. The mixed precursors are then subjected to a temperature programmed reaction (TPR) under air or oxygen, or an inert gas, in a furnace at step 60.

[0022] The material is typically heated to a temperature of no more than 1000°C. In one typical procedure, the material is taken from room temperature to a temperature of 400°C over a period of 0.5 hour; held at 400°C for 2.5 hours; raised to 800°C over a period of 3 hours; maintained at 800°C for 12 hours and then cooled to room temperature as illustrated by the time versus temperature graph shown in Figure 2. In another representative process, the material is taken from room temperature to a temperature of 800°C over a period of an hour, held at 800°C for two hours, then cooled to room temperature as shown in Figure 3.

[0023] In those instances where a dopant is incorporated into the lithium titanate material, that dopant may be added to the starting material mixture prior to the impact milling step. In one representative synthetic procedure, doped lithium titanate is prepared from starting materials which include Li_2CO_3 and TiO_2 , together with a dopant precursor compound, which for purposes of illustration will be a zirconium dopant. The precursor may comprise a carbonate, acetate, chloride, alkoxide, or

other compound of the dopant metal. In the instance of zirconium, the molar ratio of Li:(Ti+Zr) is 4:5 with the concentration of Zr being 0.1-5 mole percent of Ti+Zr. The precursors are mixed in an appropriate solvent, milled, and further processed as described above to produce the doped material.

[0024] It has been found that titanate materials, both doped and undoped, produced by the foregoing method in which precursor materials are milled together, provide titanate products having superior properties which are manifest in cells in which they are incorporated. As such, the methods and materials of the present invention are distinguished from those of the prior art, which prior art is acknowledged to include the use of impact milling steps implemented on the titanate material after it has been synthesized.

[0025] Table 2 below summarizes some physical parameters measured for prior art lithium titanate materials, referred to in the table as prior art LTO, and materials made in accord with the foregoing, referred to in the table as T/J LTO.

Table 2

Parameter	Prior Art LTO	T/J LTO
Particle size (μm)	<1	~5
Surface area (m^2/g)	60	4
Ionic conductivity (S/cm)	1.14×10^{-5}	1.35×10^{-4}
Reversibility	80%	95%

As will be seen from the table, material made in accord with the present procedure has a particle size greater than that of the prior art material. Likewise, the surface area of the materials of present invention is correspondingly smaller, which implies that the materials of present invention can be more stable or safer than the prior art material, in an electrochemical environment. Ionic conductivity of the material of present invention is higher than that of the prior art material by approximately an order of magnitude. Most significantly, the first cycle reversibility of cells which incorporate the material of the present invention is approximately 95%, while that of the prior art is only 80%.

[0026] Cells which include lithium titanate anodes prepared in accord with the foregoing, and conventional lithium iron phosphate cathodes were prepared and

evaluated. Figure 4 shows the rate capability of cells prepared utilizing the present lithium titanate materials. As will be seen, the cell of Figure 4 shows an excellent rate capability with 98% capacity retention at a 20C discharge rate, and 91% capacity retention at a 50C rate. Cells of this type have excellent utility in high power, high performance applications.

[0027] Figure 5 shows the cycle life of a cell of the type illustrated with reference to Figure 4 and depicts discharge capacity retention as a function of charge/discharge cycles carried out at 3C/-3C. As will be seen, this cell retains over 90% of its capacity after 6000 cycles.

[0028] Further tests were carried out to measure the first cycle capacity loss of the foregoing batteries, and the results thereof are shown in Figure 6. As will be seen, these batteries demonstrated a first cycle capacity loss of approximately 5%, as compared to typical losses of approximately 20% in similar cells prepared utilizing commercially available lithium titanate anode materials. In addition to the foregoing, the anode materials of the present invention delivered approximately 160-175 mAh/g through repeated cyclings and retained capacities of at least 120 mAh/g at 20C rate cyclings. The performance of the materials of the present invention greatly exceeds that of prior art anode materials, both titanate and graphite based.

[0029] As will be seen, the present invention provides high quality lithium titanate materials and methods for their synthesis. The materials of the present invention have properties which allow for the fabrication of lithium batteries which are stable, efficient, and capable of reliably delivering very high levels of power. These properties, together with the low costs achieved through the use of the disclosed methods, make this technology particularly advantageous for the manufacture of high power battery systems such as those used in electric vehicles, large power tools, power backup systems, and the like.

[0030] While the invention has been described with reference to particular lithium titanate materials, it is to be understood that it may be utilized for the preparation of other alkali metal titanates. Also, while specific lithium titanate materials doped with transition metals have been described, it is to be understood

that the present invention is broadly applicable to doped and undoped materials, and in those instances where doped materials are utilized, dopants other than transition metals may be utilized.

[0031] In view of the teaching presented herein, further modifications and variations will be apparent to those of skill in the art. Accordingly, the foregoing is understood to be an illustration, but not a limitation, upon the practice of the invention. It is the claims, including all equivalents, which define the scope of the invention.

CLAIMS

1. A material comprising doped lithium titanate.
2. The material of claim 1, wherein said lithium titanate is doped with a transition metal.
3. The material of claim 2, wherein said transition metal is selected from the group consisting of V, Zr, Nb, Mo, Mn, Fe, Cu, Co, and combinations thereof.
4. The composition of claim 1, wherein said dopant comprises Zr.
5. The material of claim 1, wherein said dopant comprises up to 20 atomic percent of said material.
6. The material of claim 1, wherein said dopant comprises 0.1-5 atomic percent of said material.
7. A method of making an alkali metal titanate, said method comprising the steps of:
 - providing an alkali metal compound;
 - providing a titanium compound;
 - preparing a mixture of said alkali metal compound and said titanium compound by impact milling said alkali metal compound and said titanium compound; and
 - heating said mixture for a time, and at a temperature, sufficient to convert said mixture to said alkali metal titanate.
8. The method of claim 7, wherein said alkali metal compound comprises Li_2CO_3 , said titanium compound comprises an oxide of titanium, and said alkali metal titanate comprises lithium titanate.

9. The method of claim 7 wherein said step of preparing a mixture comprises mixing approximately 2 moles of Li_2CO_3 and approximately 5 moles of TiO_2 .

10. The method of claim 7, comprising the further steps of:
providing a dopant precursor; and
adding said dopant precursor to said mixture of an alkali metal carbonate and titanium dioxide.

11. The method of claim 10, wherein said dopant precursor is added to said mixture prior to the step of impact milling.

12. The method of claim 10, wherein said dopant precursor includes one or more transition metals.

13. The method of claim 12, wherein said transition metal is selected from the group consisting of: V, Zr, Nb, Mo, Mn, Fe, Cu, Co, and combinations thereof.

14. The method of claim 7, wherein said impact milling process comprises ball milling or attritor milling.

15. The method of claim 7, wherein said step of heating said mixture comprises heating said mixture to a temperature of no more than 1000°C.

16. The method of claim 15, wherein said step of heating said mixture comprises maintaining said mixture at a temperature of 800°C.

17. The method of claim 7, wherein said reaction mixture is maintained at said temperature for at least one minute.
18. The method of claim 7, wherein said reaction mixture is maintained at said temperature for at least two hours.
19. The method of claim 7, wherein said step of heating is carried out under an atmosphere which is an inert atmosphere or an oxidizing atmosphere.
20. An electrode which includes a doped lithium titanate.
21. A battery which includes the electrode of claim 20.

1/3

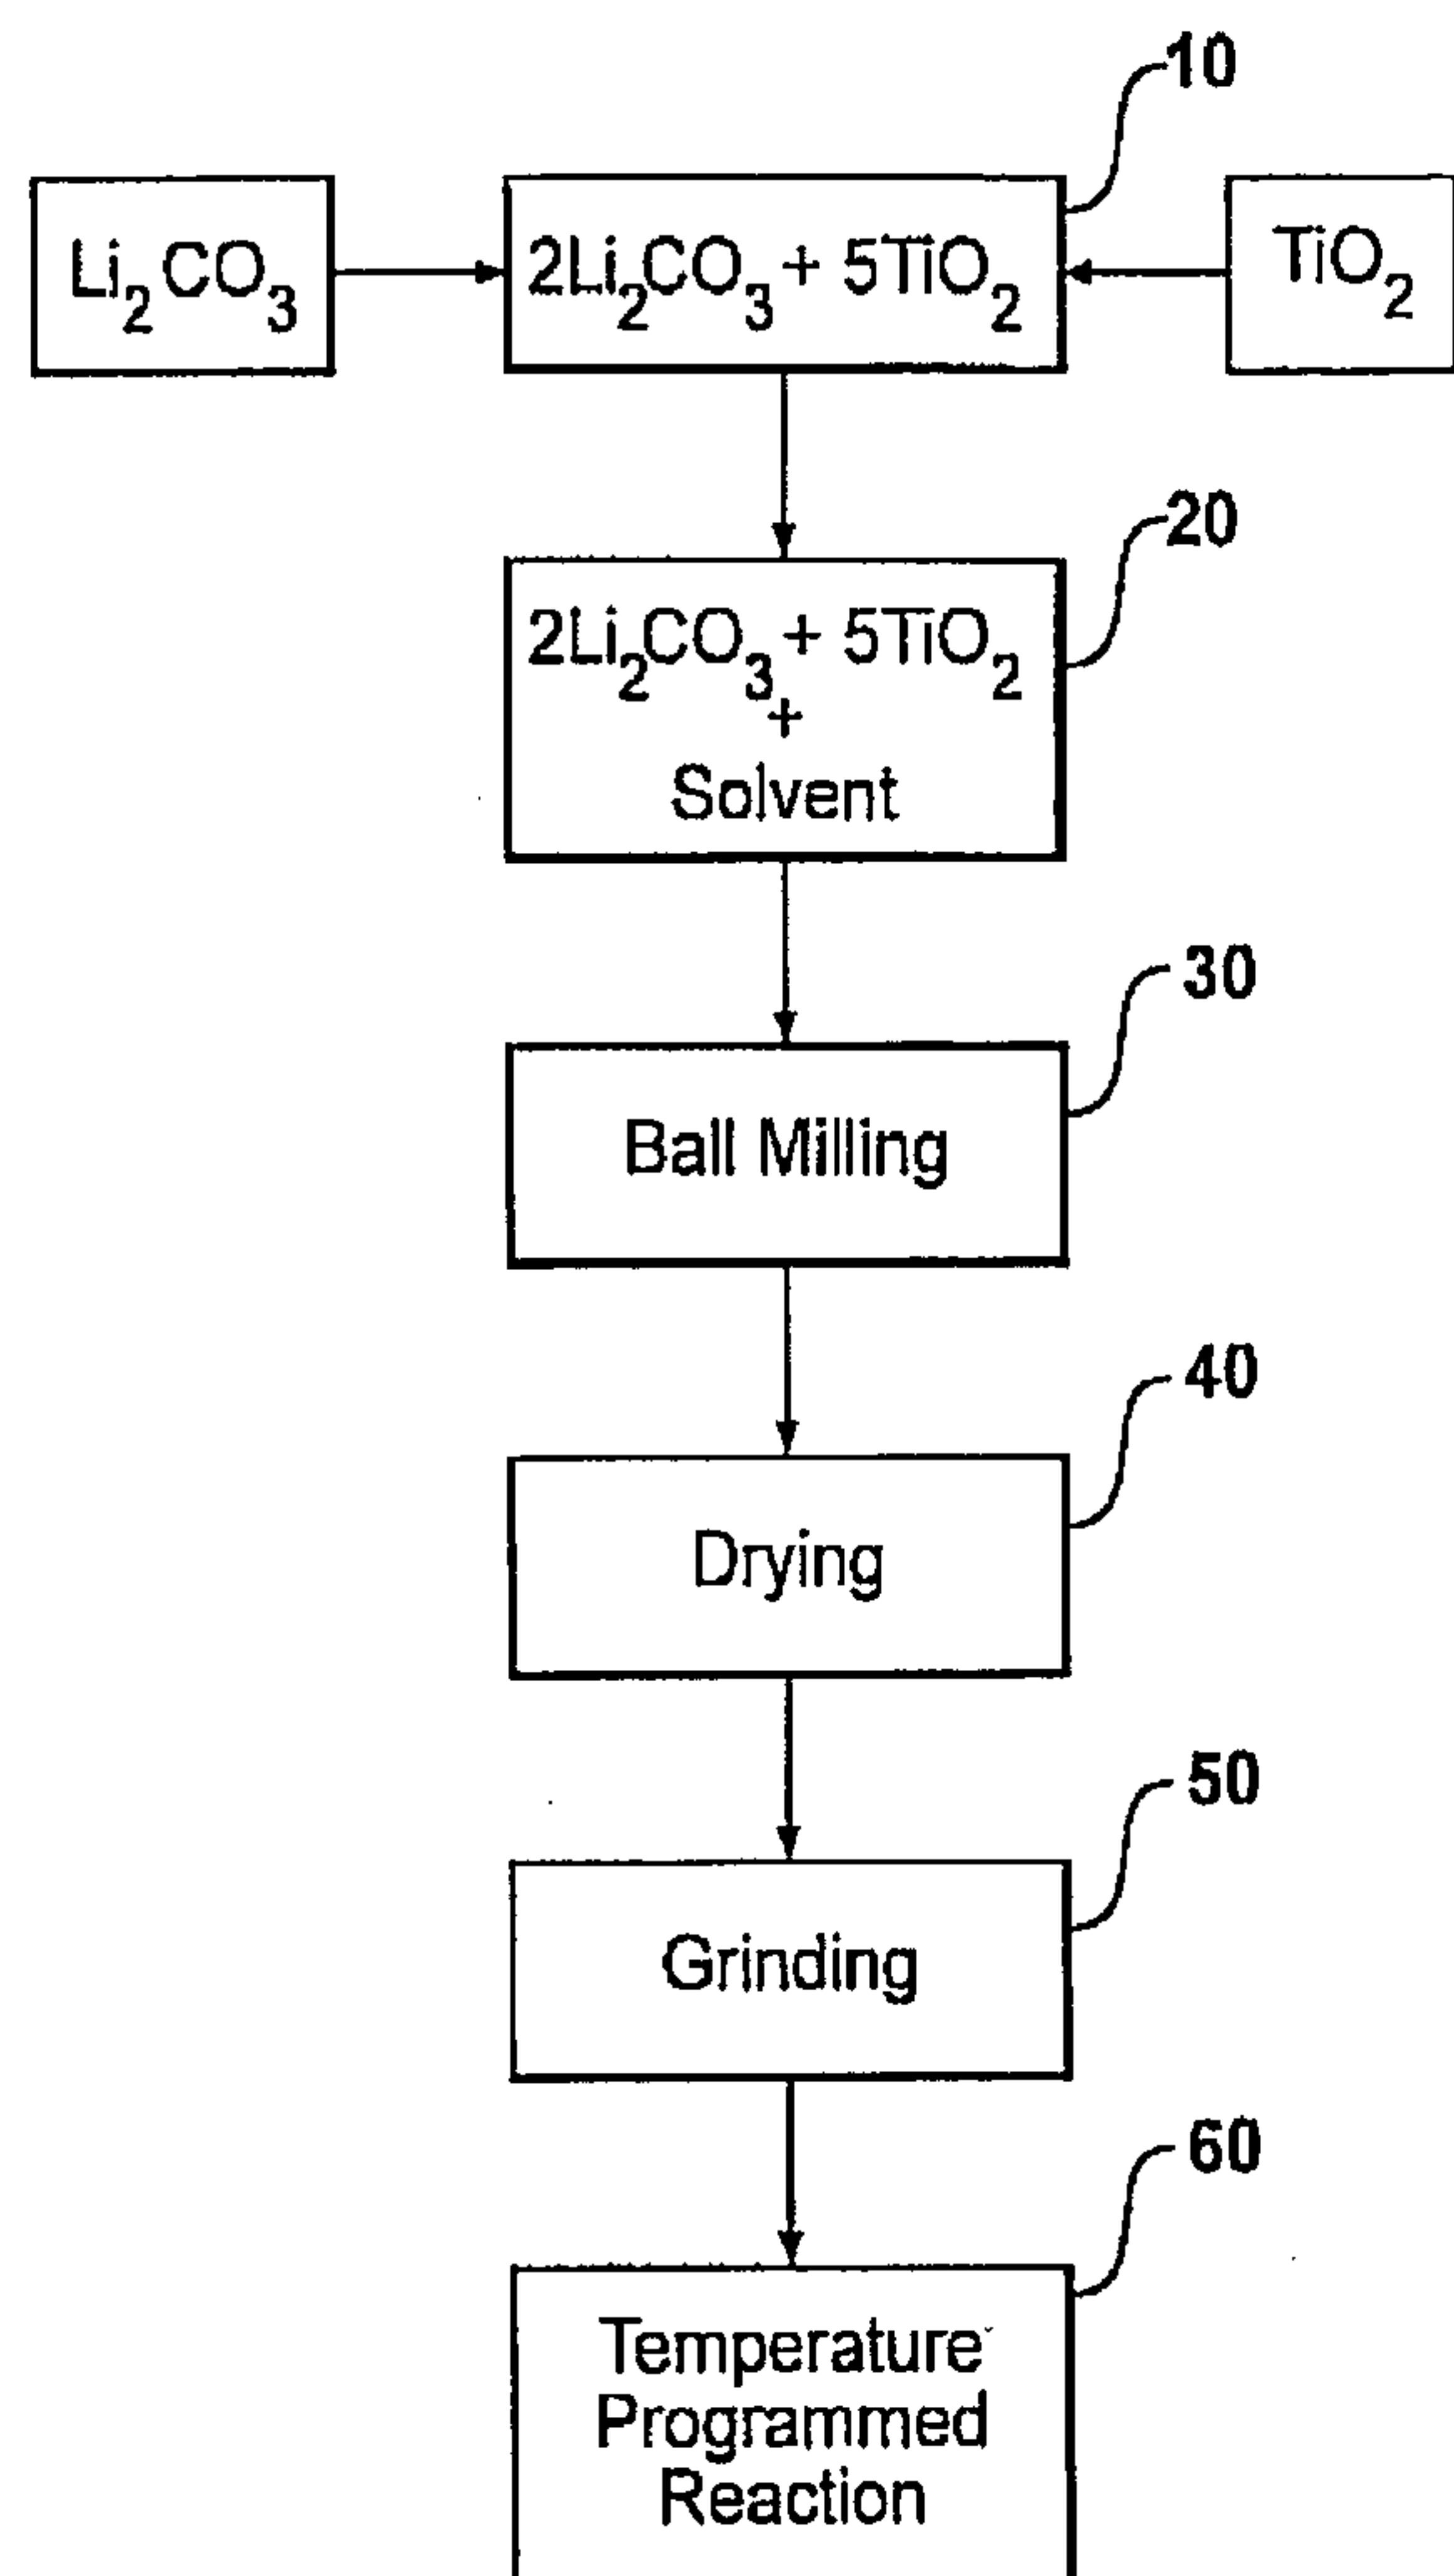
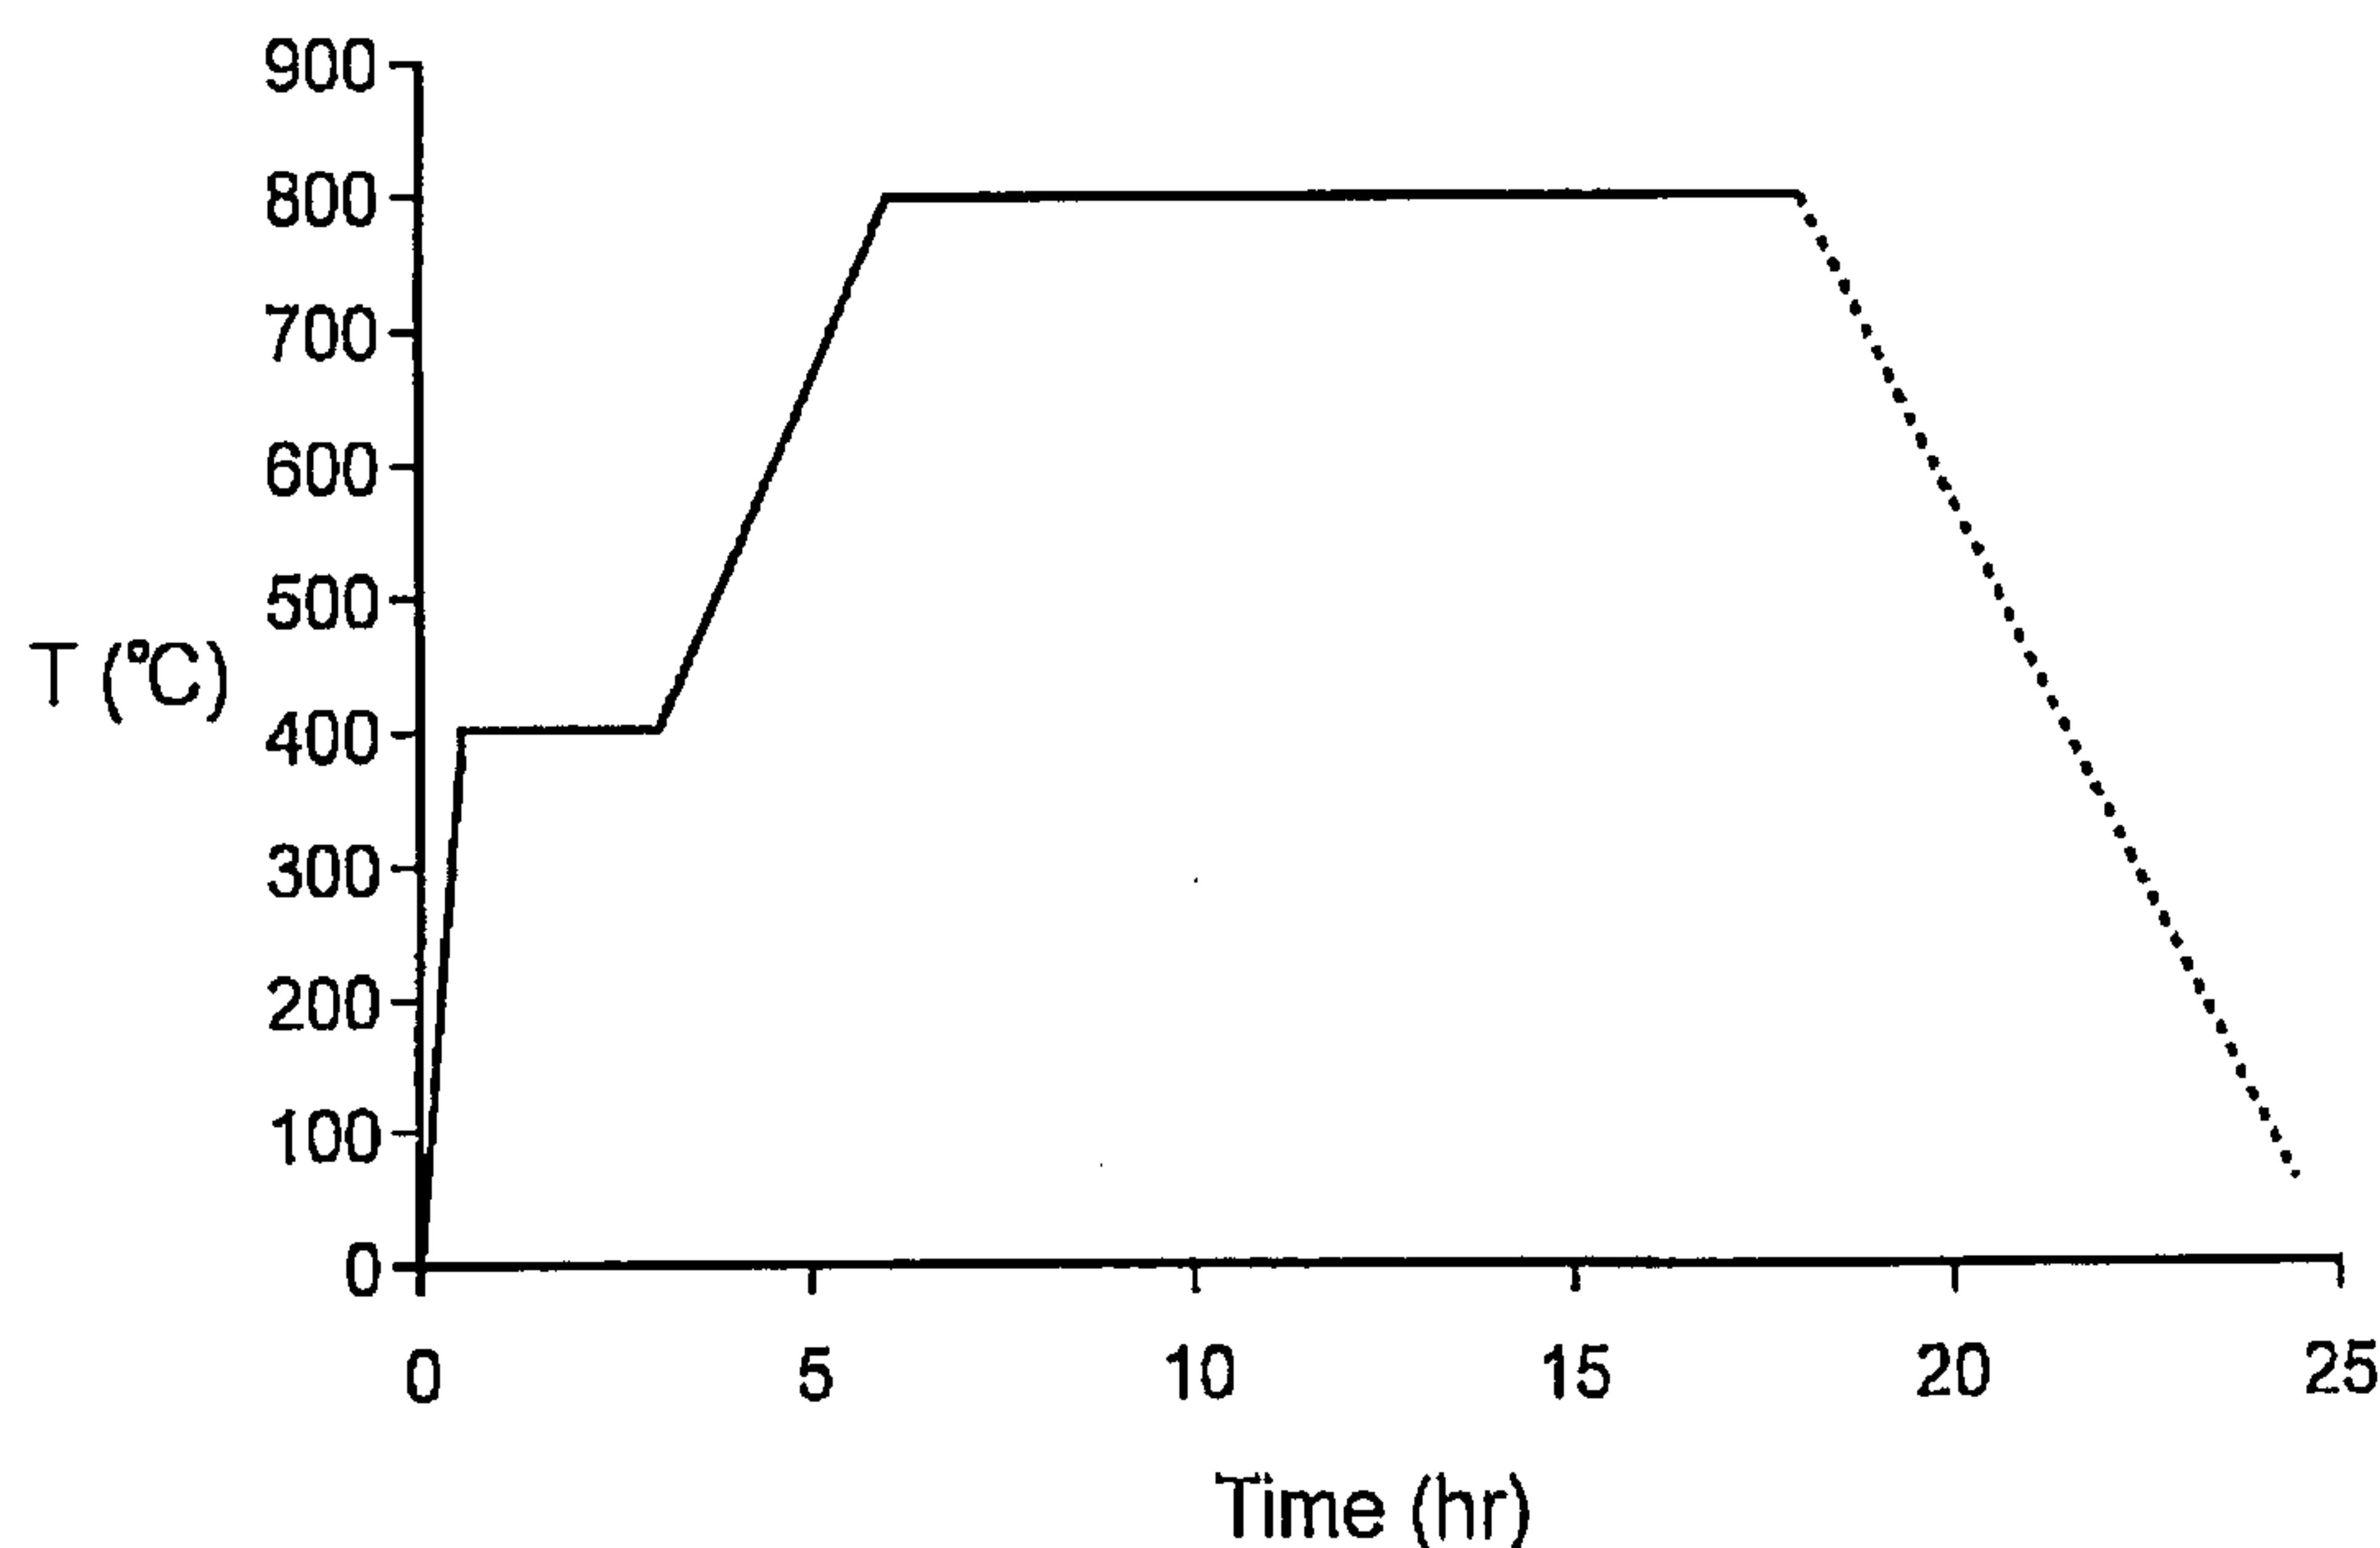
**FIG - 1****FIG - 2**

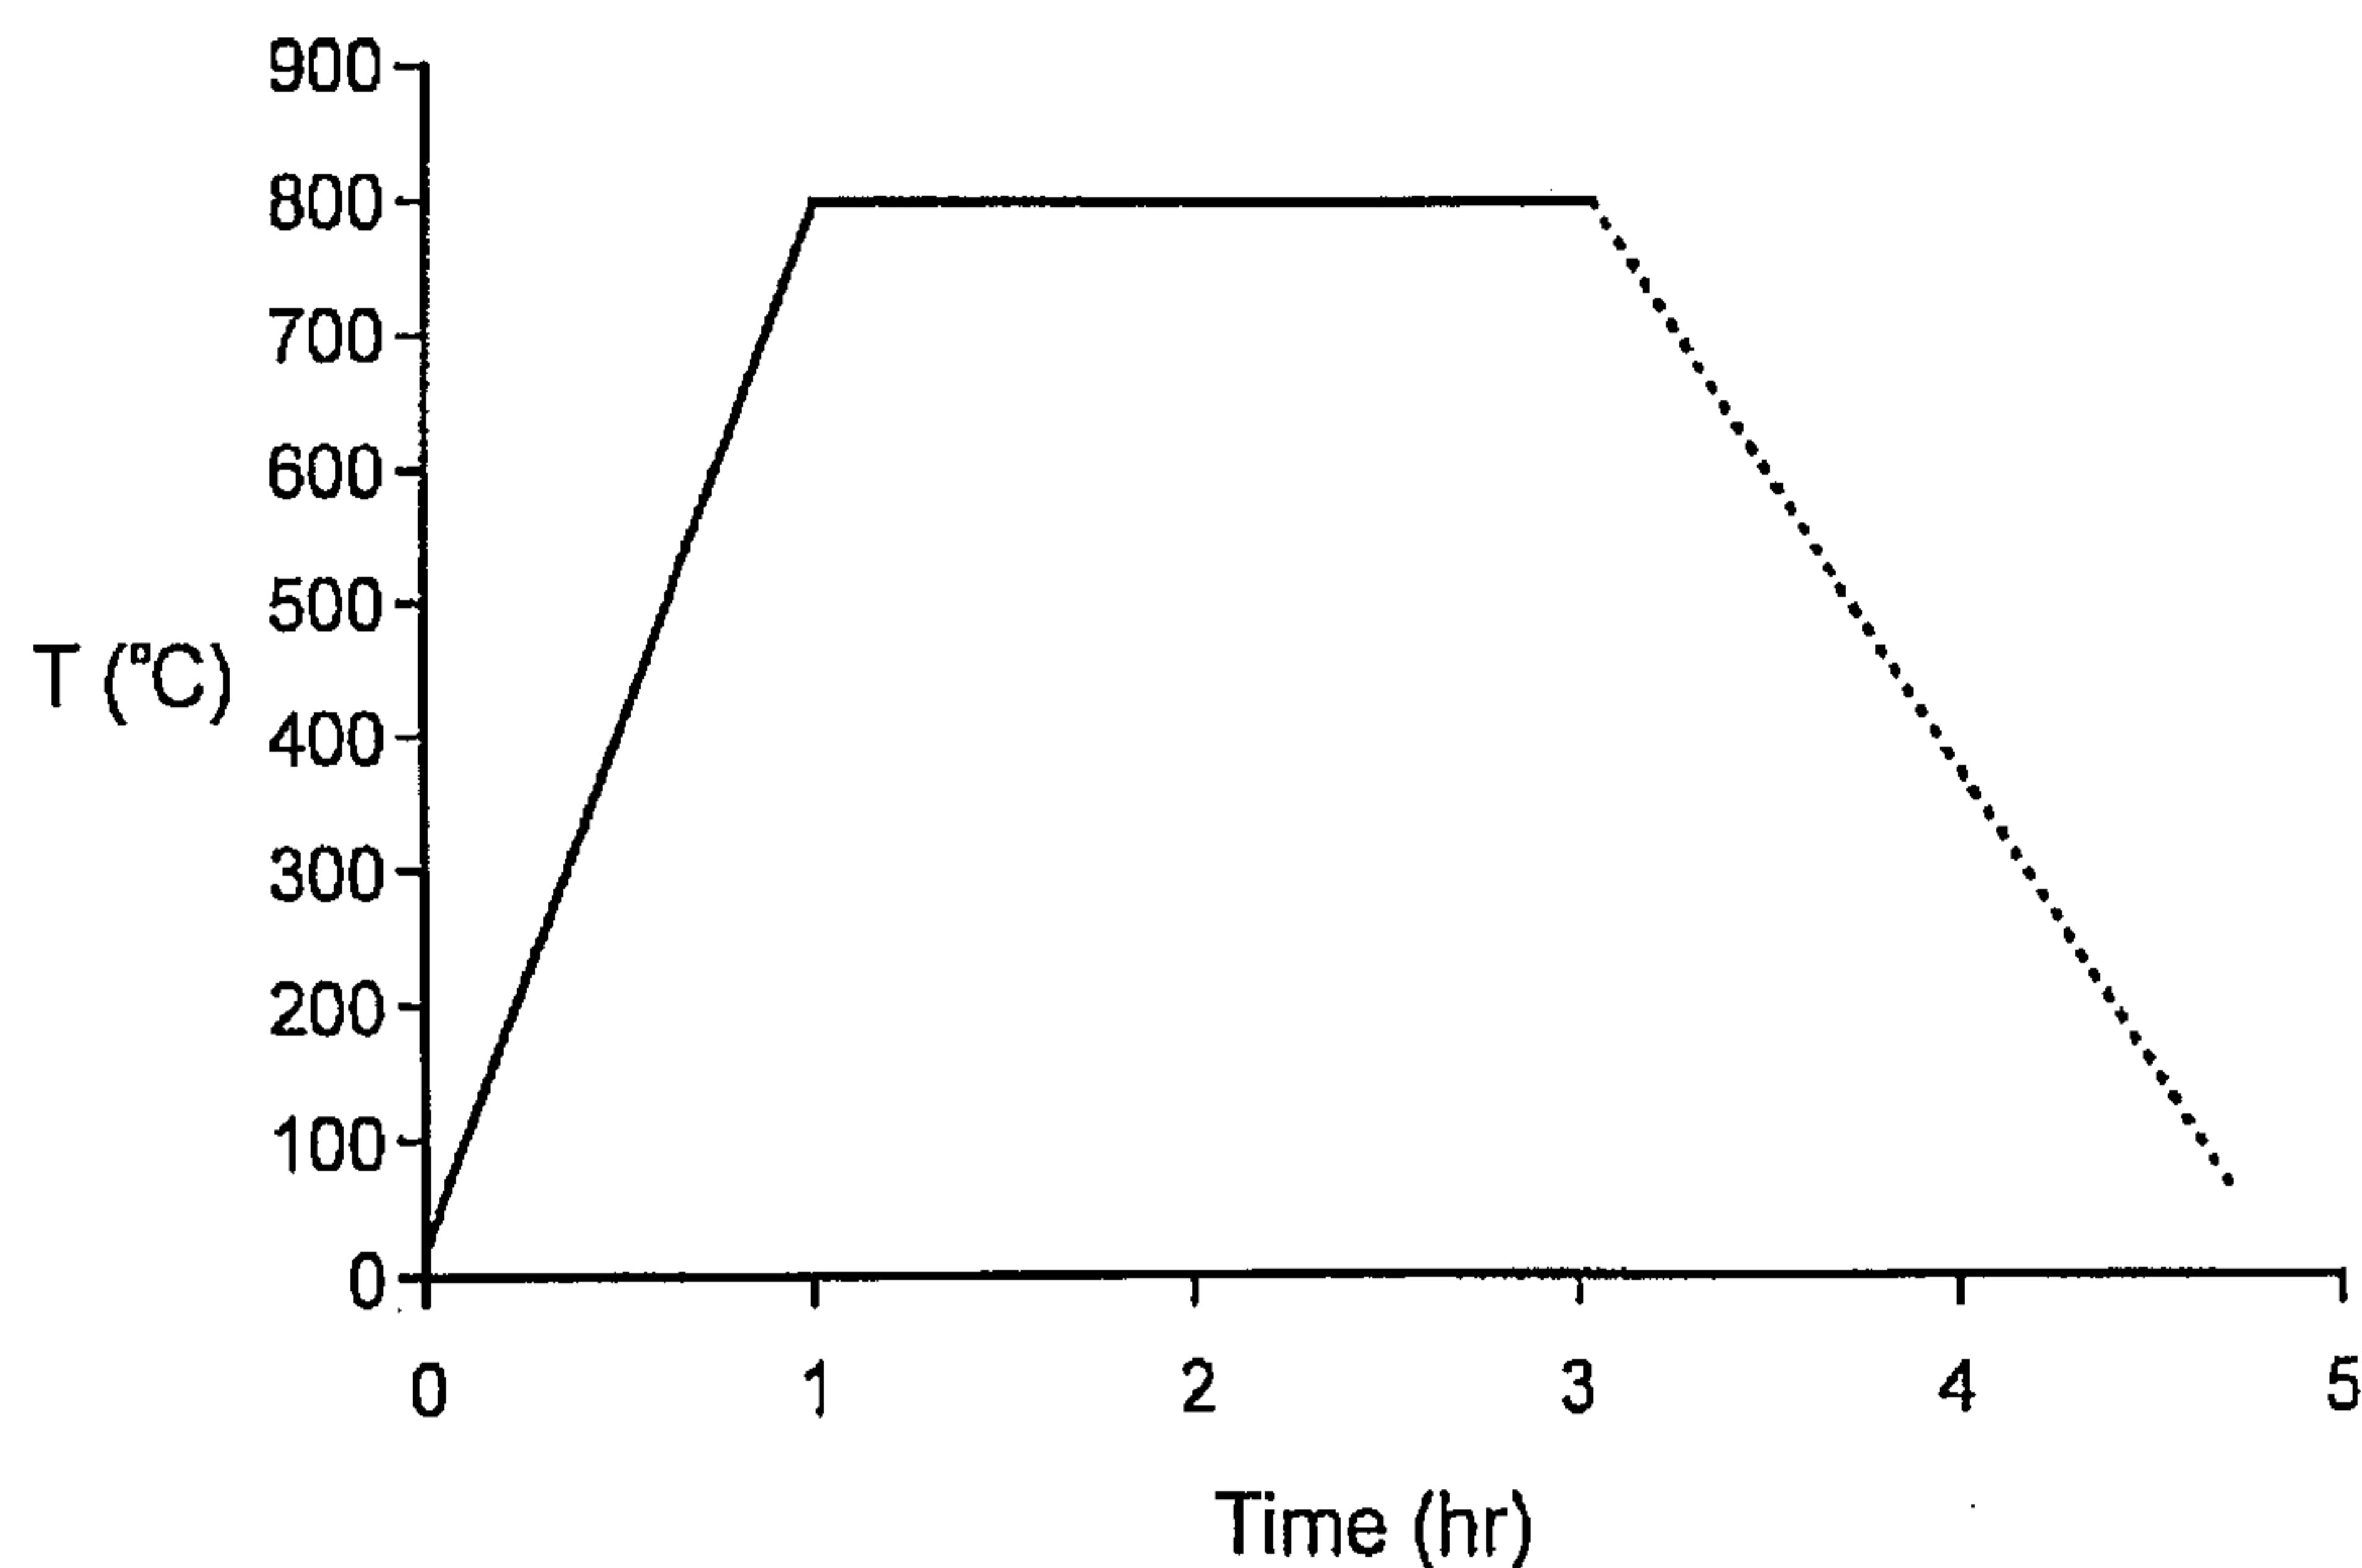
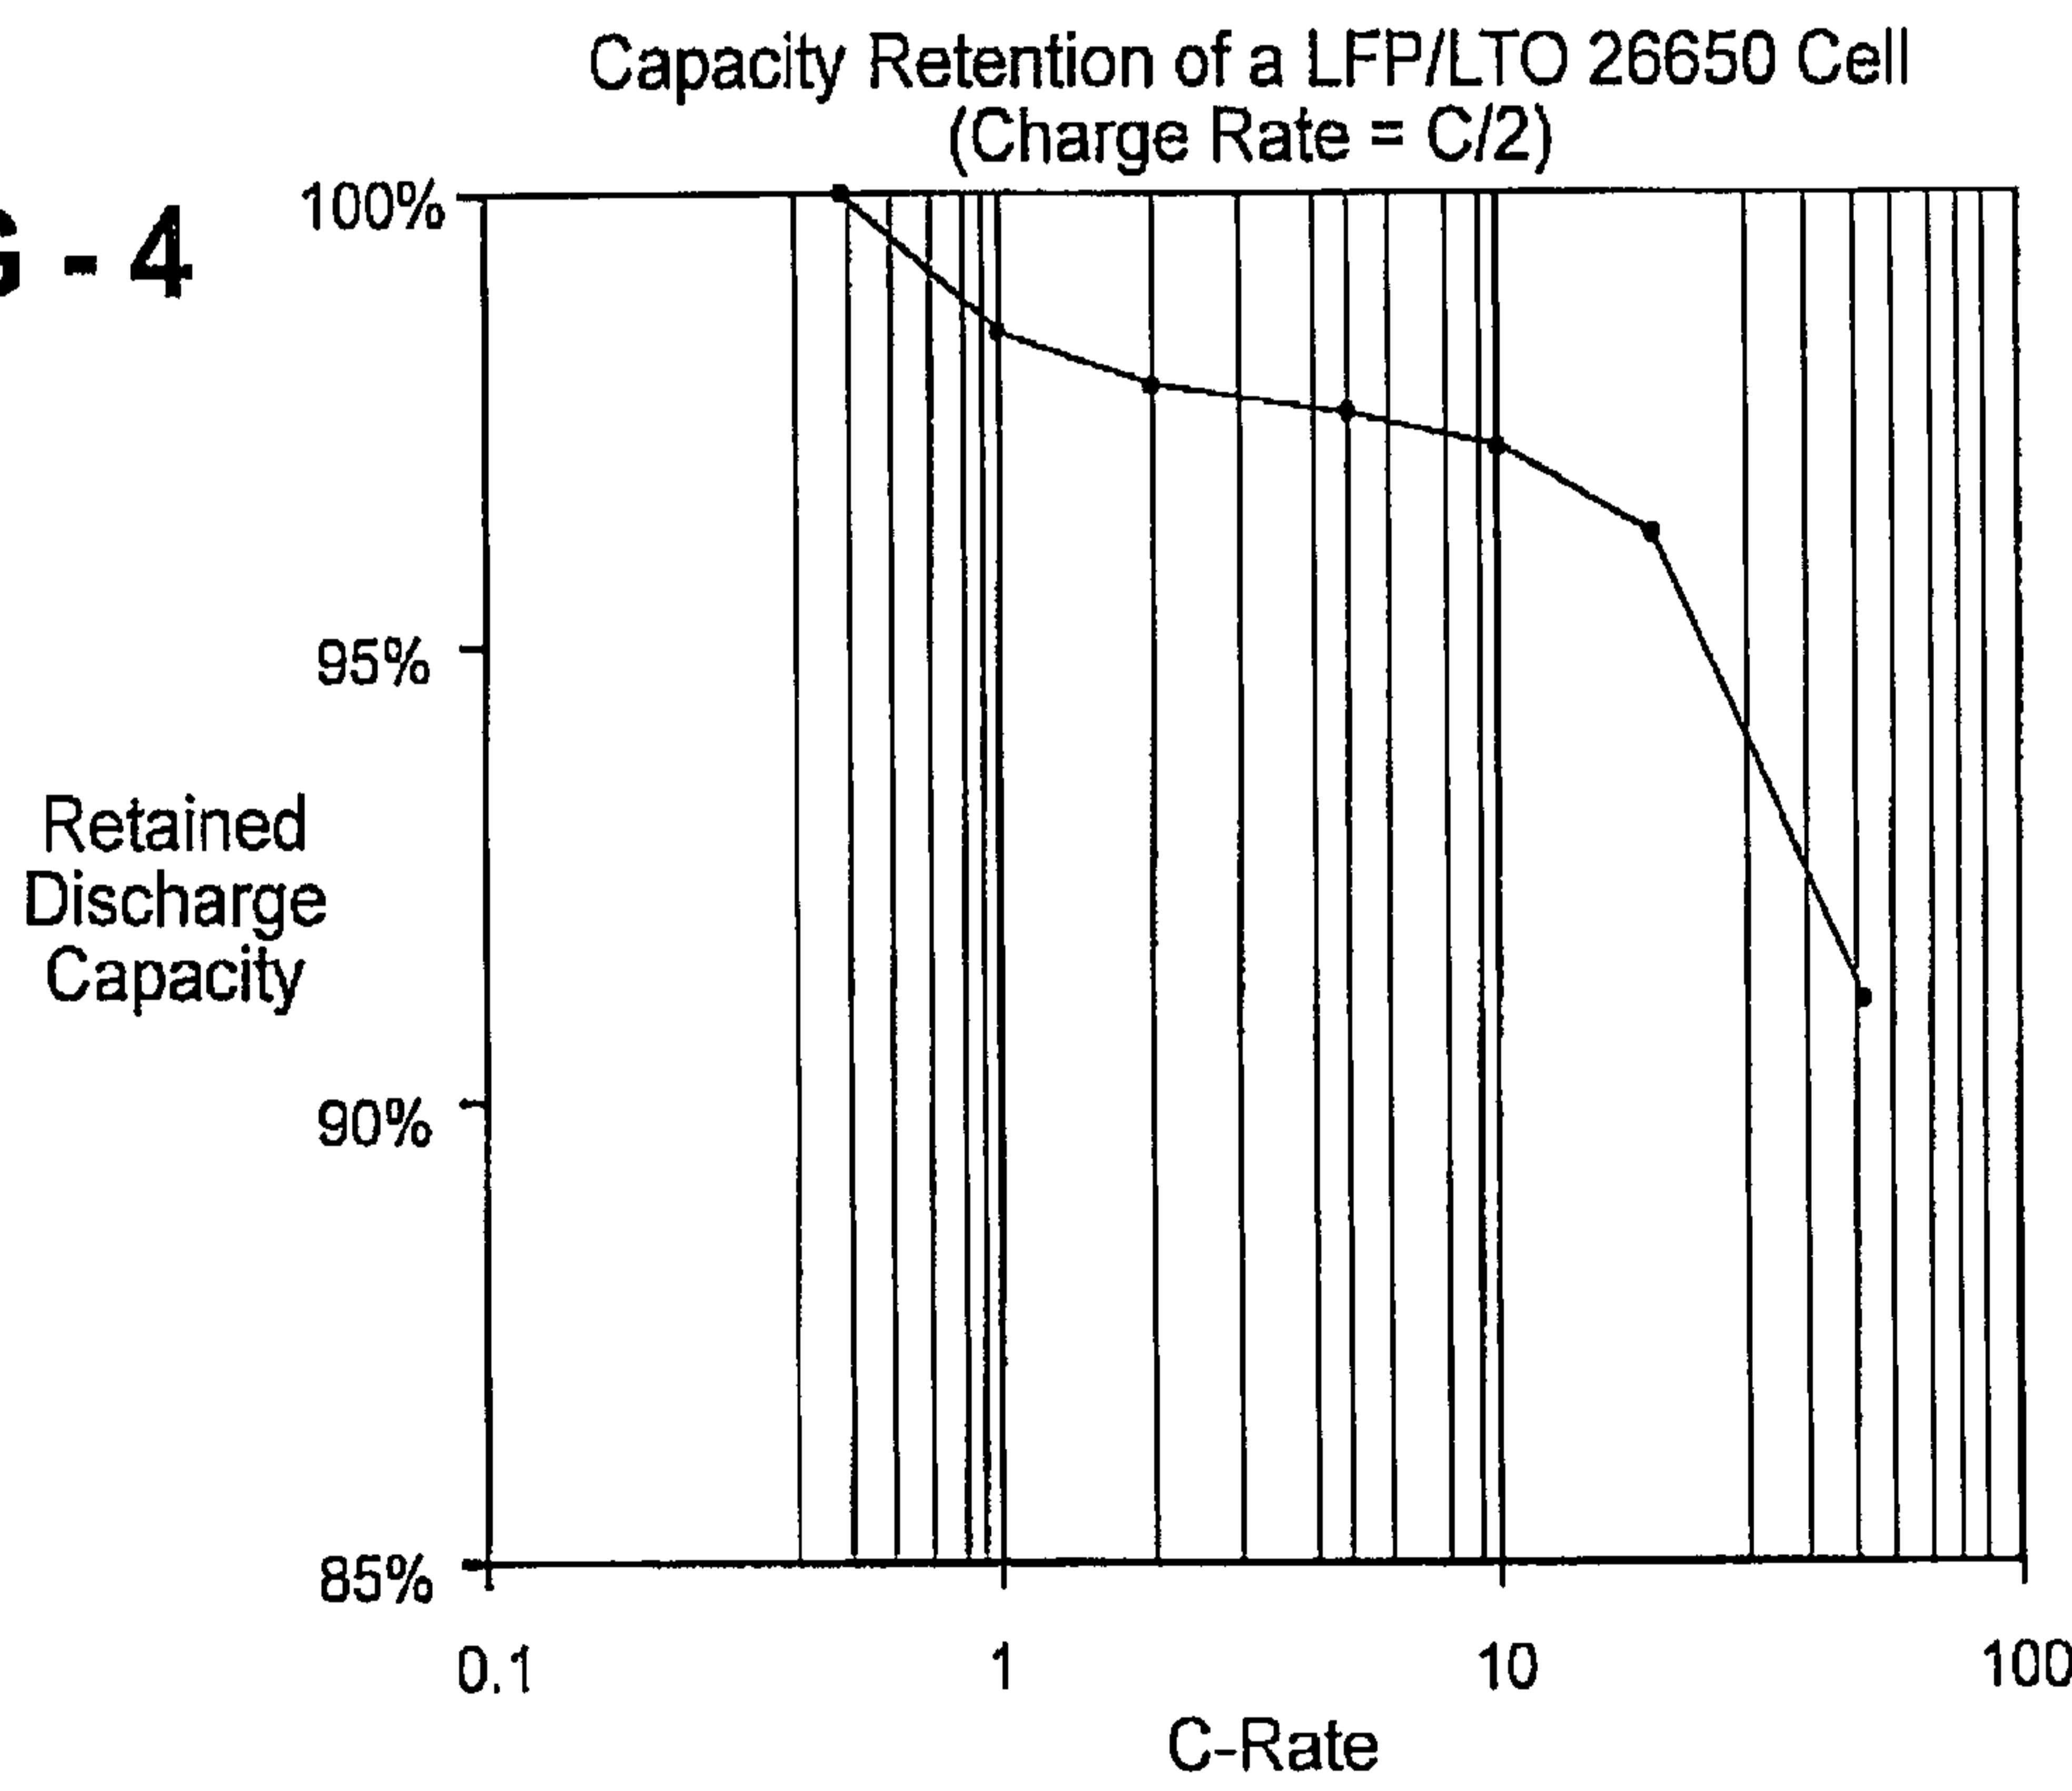
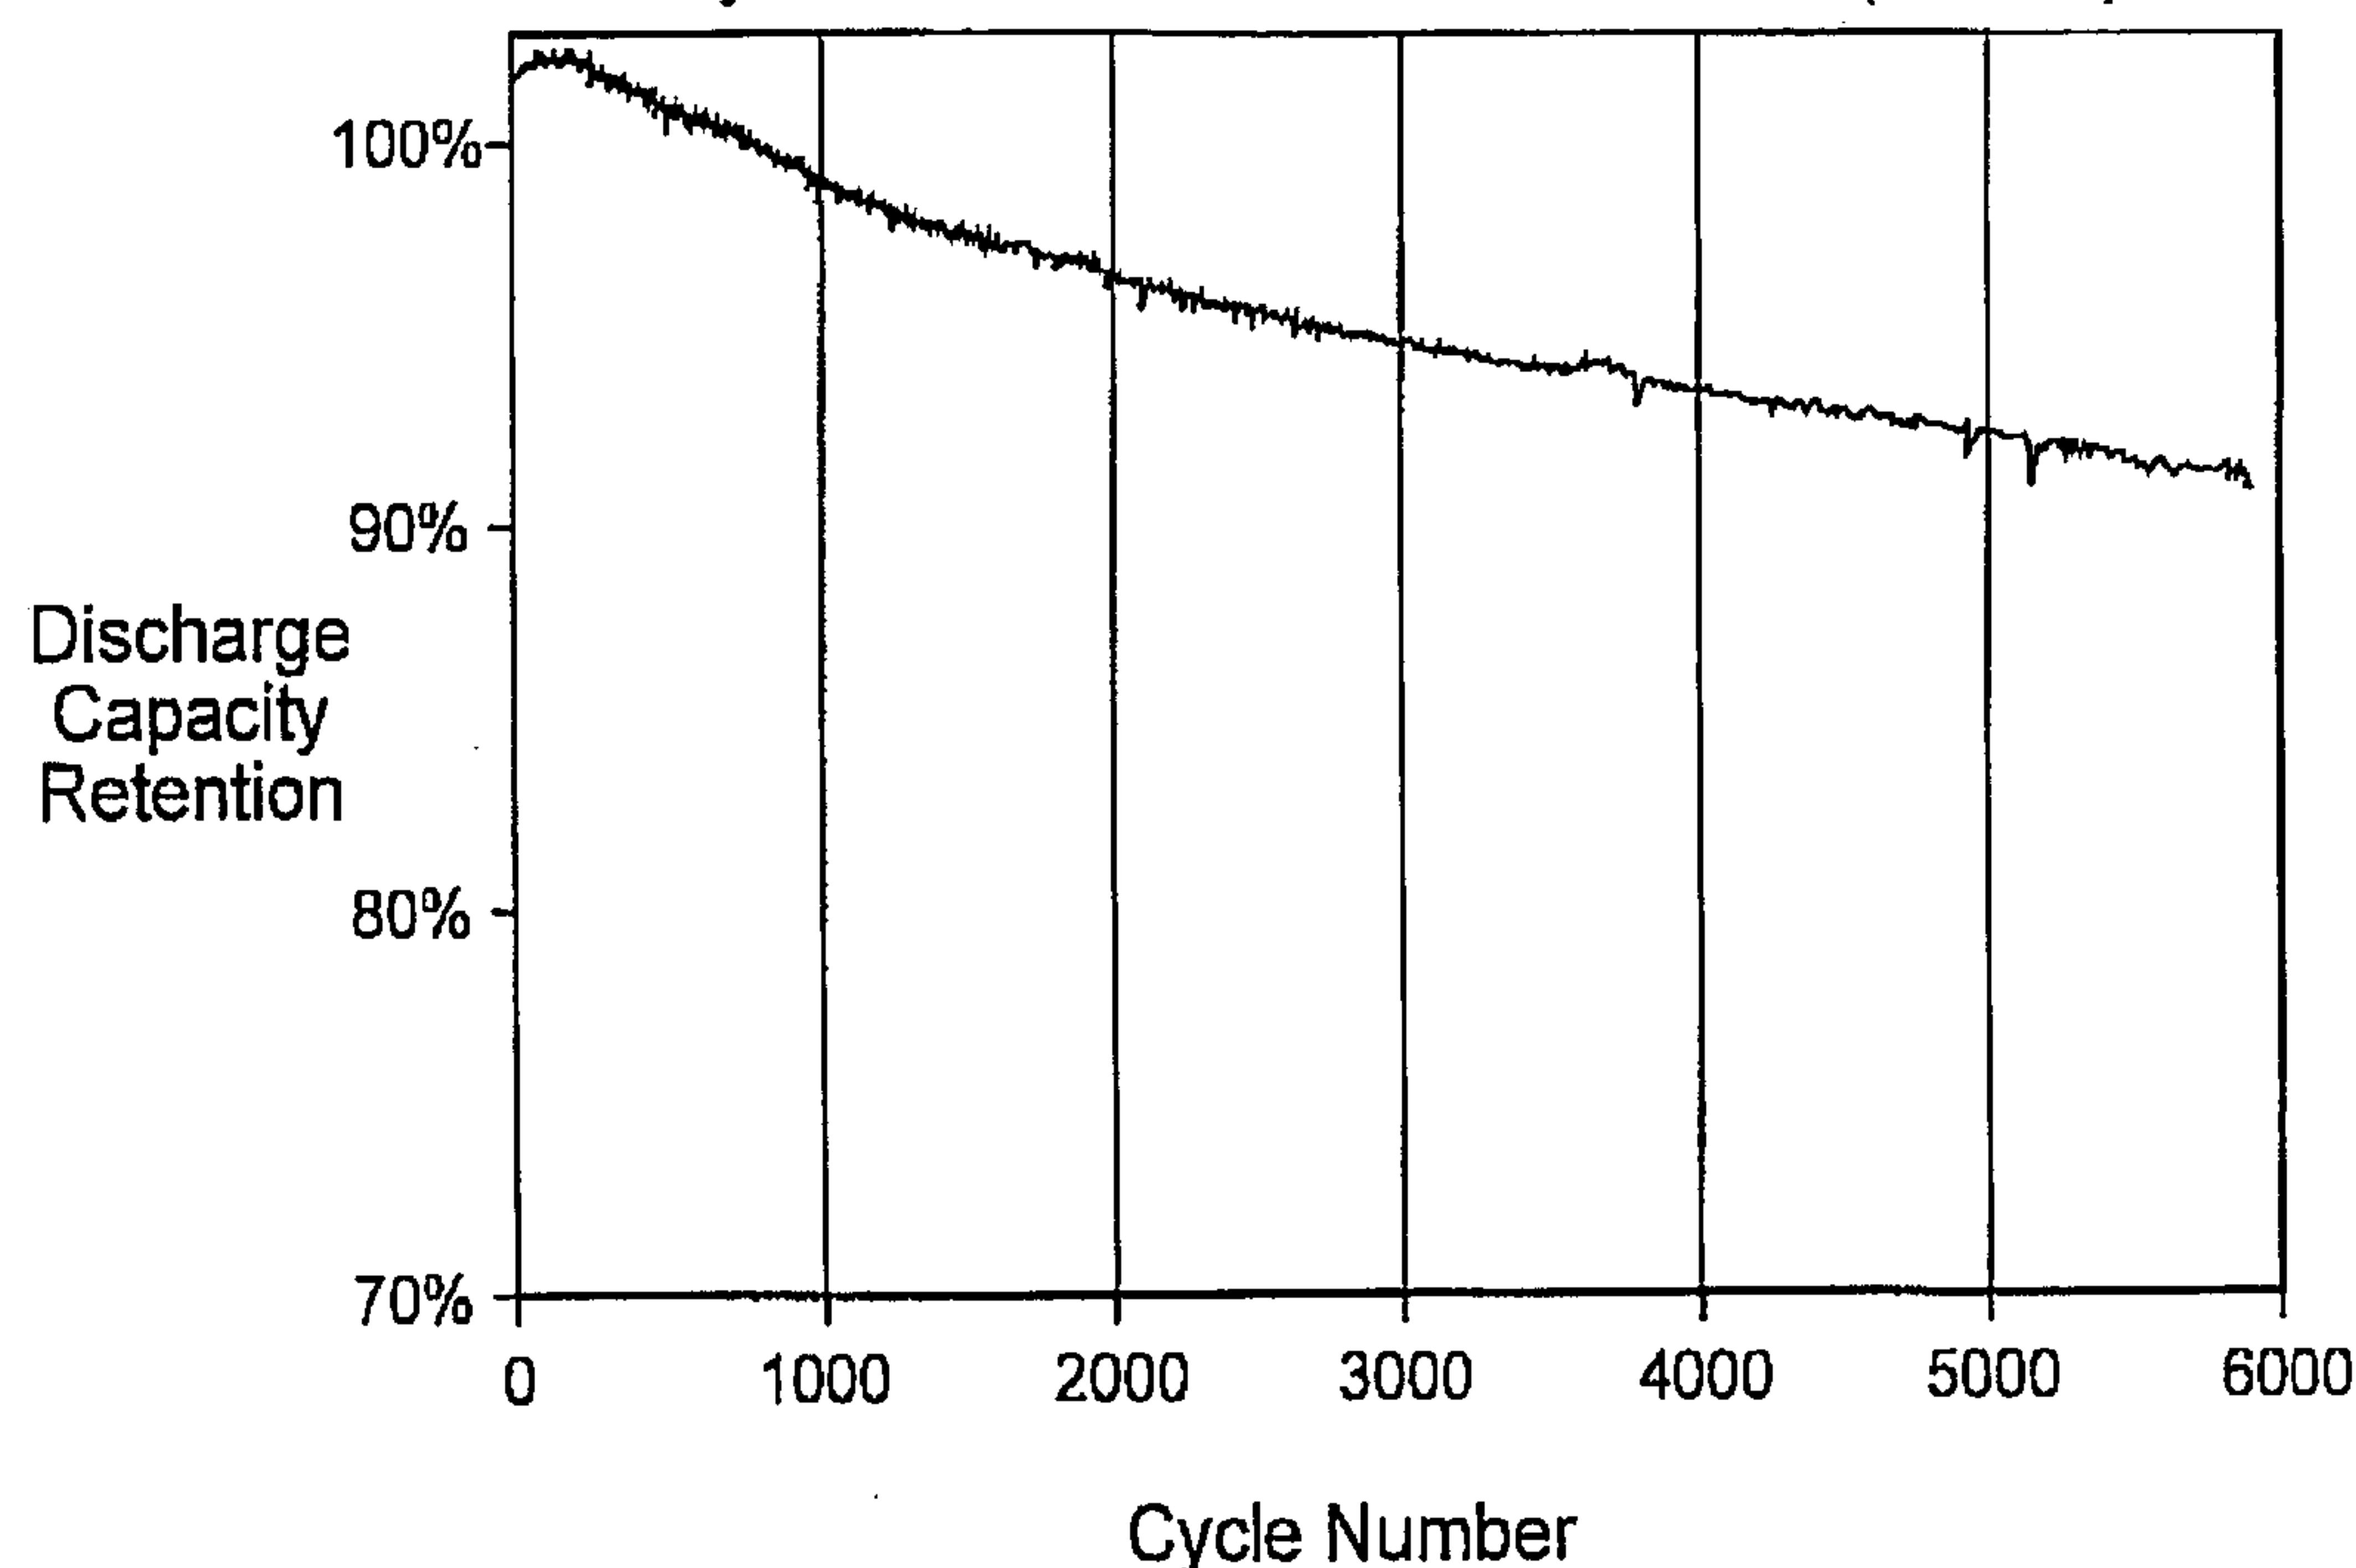
FIG - 3**FIG - 4**

FIG - 5

Cycle Life of a LFP/LTO 26650 Cells (3C/-3C)

**FIG - 6**