

(19)



(11)

EP 3 846 663 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
21.05.2025 Bulletin 2025/21

(51) International Patent Classification (IPC):
A47C 17/86 ^(2006.01) **A47C 19/02** ^(2006.01)
A61G 7/002 ^(2006.01) **A61G 7/015** ^(2006.01)
A61G 7/018 ^(2006.01)

(21) Application number: **19857763.7**

(52) Cooperative Patent Classification (CPC):
A61G 7/053; A61G 7/002; A61G 7/015;
A61G 7/018

(22) Date of filing: **05.09.2019**

(86) International application number:
PCT/US2019/049723

(87) International publication number:
WO 2020/051315 (12.03.2020 Gazette 2020/11)

(54) ADJUSTABLE BED SYSTEMS WITH ROTATING ARTICULATING BED FRAME

VERSTELLBARE BETTSYSTEME MIT ROTIERENDEM GELENKIGEM BETTGESTELL
SYSTÈMES DE LIT RÉGLABLES À CADRE DE LIT ARTICULÉ ROTATIF

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

- **MCCARTY, Philip Woods**
Natick, Massachusetts 01760 (US)
- **SHIH, Chuan-Hang**
Changhua County, 505 (TW)

(30) Priority: **06.09.2018 US 201816123560**

(74) Representative: **Whitfield, Gillian Janette**
Astrum ElementOne Limited
Merlin House
Langstone
Newport NP18 2HJ (GB)

(43) Date of publication of application:
14.07.2021 Bulletin 2021/28

(73) Proprietor: **PPJ, LLC**
Natick, MA 01760 (US)

(56) References cited:
WO-A1-95/08315 **CN-A- 107 198 617**
DE-U1- 202013 001 182 **US-A- 4 635 894**
US-A1- 2009 045 311 **US-A1- 2018 028 385**
US-A1- 2019 000 238

(72) Inventors:
• **ESKRIDGE, Horace Robert**
Lexington, Kentucky 40502 (US)
• **SHERMAN, Philip Reid**
Melville, New York 11747 (US)

EP 3 846 663 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD**

[0001] The subject matter disclosed herein relates to adjustable, articulating bedding systems.

BACKGROUND

[0002] Adjustable or articulating beds provide selectable adjustment of the lower or foot portion and upper or head portion of a mattress from a traditional flat or horizontal position. Therefore, the head or foot of a user can be elevated as desired, for example, for comfort, to provide relief from snoring or to facilitate reading. The upper and lower portions are adjustable independent of each other. Adjustment is provided by an articulating foundation mounted on a frame and supporting a mattress.

[0003] The support members, hydraulic and pneumatic lifts and actuators associated with the adjustable bed are positioned underneath the sleeping surface of the adjustable bed, extending downward toward the floor. The adjustable bed sits on a frame having side rails that hide the support members, lifts and actuators. These side rails typically extend to the floor and define a distance to the floor or height of the sleeping surface that is fixed. This fixed height is at least a minimum height required to accommodate placement of all the support members, hydraulic and pneumatic lifts, actuators and other electronics that provide the desired articulation in the adjustable bed. DE 20 2013 001182 U1, dated 22 February 2013, is allegedly directed to 'improving a rotary seat bed of the generic type in such a way that a stable, structurally simple rotary bearing of the intermediate frame and the lying frame arranged thereon is created.

[0004] While living room furniture and bathroom fixtures such as showers and tubs have been created to accommodate individuals with limited mobility, adjustable beds, while providing improved comfort and customization while in bed, do not provide accommodations for individuals that may have difficulty getting into and out of bed. The mattress does not rotate or tilt to assist with positioning a body in proper alignment within the adjustable bed. In addition, the location of the support members, lifts and actuators under the adjustable bed in combination with the bed frame can result in an adjustable bed that has a sleeping surface located higher above the floor, which can further inhibit the ability of an individual with limited mobility to get into and out of bed. Therefore, an adjustable bed system is desired that overcomes these limitations of conventional adjustable beds.

SUMMARY

[0005] The invention is disclosed in the claims. Exemplary embodiments are directed to adjustable bed systems

and methods for making and using the adjustable bed systems that accommodate individuals with limited mobility by including a rotating and pivoting mechanism that rotates the sleeping and articulating surfaces of the adjustable bed around a vertical axis passing through the adjustable bed foundation. In one embodiment, this rotating and pivoting mechanism can be adjusted to rotate in either a clockwise or counterclockwise motion. Rotation by the rotating and pivoting mechanism is accomplished in combination with the articulation of the head and foot portions of the adjustable bed foundation. Therefore, the adjustable bed foundation can be rotated while positioned in either a flat, horizontal position or in a position with one or more of the head and foot portions in a raised position. In addition to rotation about the vertical axis, the rotating and pivoting mechanism can also tilt the adjustable bed foundation with respect to a horizontal plane and move the adjustable bed foundation laterally.

[0006] Exemplary embodiments are directed to a rotating and articulating bed having a fixed bed frame with a horizontal support surface and an articulating bed member. The articulating bed member includes an articulating head portion, an articulating foot portion separate from the articulating foot portion and a rotating and pivoting frame mounted on the horizontal support surface and in communication with the articulating head portion and the articulating foot portion. The rotating and pivoting frame is rotatable with respect to the horizontal support surface around a vertical axis passing through the horizontal support surface. In addition, the rotating and pivoting frame provides pivoting movement of the articulating bed member with respect to the horizontal support surface to tilt the articulating bed member toward at least one of the articulating head portion and the articulating foot portion.

[0007] In one embodiment, the articulating head portion and articulating foot portion each articulate with respect to each other downward toward the horizontal support surface and upward away from the horizontal support surface. Articulation occurs independent of rotation of the rotating and pivoting frame and of pivoting movement of the articulating bed member with respect to the horizontal support surface. In one embodiment, the articulating foot portion articulates downward past a plane containing the horizontal support surface.

[0008] In one embodiment, the articulating bed member also includes an articulating center portion disposed between the articulating head portion and the articulating foot portion. The articulating head portion, the articulating center portion and the articulating foot portion articulate with respect to each other independent of rotation of the rotating and pivoting frame and of pivoting movement of the articulating bed member with respect to the horizontal support surface. In one embodiment, the rotating and pivoting frame is pivotally connected to the articulating center to achieve pivoting movement of the articulating bed member with respect to the horizontal support sur-

face.

[0009] In one embodiment, the rotating and pivoting frame provides pivoting movement of the articulating bed member with respect to the horizontal support surface to tilt the articulating bed member toward the articulating foot portion from a first position with the articulating foot portion located above the horizontal support surface to a second position with the articulating foot portion extending below the horizontal support surface. In one embodiment, the horizontal support surface is located at a given height, and the articulating foot portion extends below the horizontal support surface a distance greater than or equal to the given height when the articulating bed member is in the second position.

[0010] In one embodiment, the rotating and pivoting frame is rotatable around the vertical axis through an angle up to about 90°. In one embodiment, the rotating and pivoting frame is rotatable around the vertical axis in a first direction of rotation through an angle up to about 90° and in a second direction of rotation through an angle up to about 90°. The first direction of rotation is opposite the second direction of rotation. In one embodiment, the rotating and pivoting frame is rotatable around the vertical axis through an angle up to about 360°.

[0011] In one embodiment, the articulating bed member includes an articulating center portion disposed between the articulating head portion and the articulating foot portion and a pair of opposing sides extending from the articulating head portion, through the articulating center portion to the articulating foot portion. The articulating center portion has a top surface and a bottom surface opposite the top surface. The rotating and articulating bed further includes a pair of arm assemblies. Each arm assembly is attached to one of the opposing sides and includes an attachment frame connected to the bottom surface of the articulating center portion and an arm connected to the attachment frame at a pivot point and rotatable with respect to the attachment frame around the pivot point. In one embodiment, each arm assembly includes a locking mechanism disposed between the arm and the attachment frame to prevent rotation of the arm with respect to the attachment frame. In one embodiment, the attachment frame is removably connected to the bottom surface of the articulating center portion or the arm is removably connected to the attachment frame.

[0012] In one embodiment, the articulating bed member includes an articulating head portion frame, an articulating foot portion frame, an articulating center portion disposed between the articulating head portion the articulating foot portion and containing an articulating center portion frame and at least one mattress removably attached to the articulating head portion frame, articulating center portion frame and articulating foot portion frame. In one embodiment, the articulating bed member includes a plurality of mattresses. Each mattress is removably attached to one of the articulating head portion frame, articulating center portion frame and articulating

foot portion frame. In one embodiment, the mattress includes at least one first part of a two-part mechanical fastener and at least one of the articulating head portion frame, articulating center portion frame and articulating foot portion frame includes at least one second part of the two-part mechanical fastener. In one embodiment, the two-part mechanical fastener is a zipper, a hook and loop type fastener, a snap, a pin type fastener, a hook and eye type fastener, a button, a magnetic fastener, a buckle and strap, a clamp, a clasp or combinations thereof.

[0013] In one embodiment, the articulating bed member includes a mattress disposed on at least one of the articulating head portion and the articulating foot portion and a mattress topper removably attached to the mattress. In one embodiment, the rotating and pivoting frame further provides lateral movement of the articulating bed member along a plane parallel to and spaced from the horizontal support surface to move the articulating bed member toward the articulating head portion or the articulating foot portion.

[0014] Exemplary embodiments are also directed to a rotating and articulating bed having a fixed bed frame with a horizontal support surface and an articulating bed member. The articulating bed member includes an articulating head portion with an articulating head portion frame, an articulating foot portion separate from the articulating foot portion and containing an articulating foot portion frame and an articulating center portion disposed between the articulating head portion and the articulating foot portion and containing an articulating center portion frame. The articulating head portion and articulating foot portion each articulate or pivot with respect to the articulating center portion downward toward the horizontal support surface and upward away from the horizontal support surface. A rotating and pivoting frame is mounted on the horizontal support surface and pivotally connected to the articulating center. The rotating and pivoting frame is rotatable with respect to the horizontal support surface around a vertical axis passing through the horizontal support surface. In addition, the rotating and pivoting frame provides pivoting movement of the articulating center portion with respect to the horizontal support surface to tilt the articulating bed member toward at least one of the articulating head portion and the articulating foot portion. At least one mattress is removably attached to the articulating head portion frame, articulating center portion frame and articulating foot portion frame.

[0015] Exemplary embodiments are also directed to a rotating and articulating bed having a fixed bed frame with a horizontal support surface. In one embodiment, the horizontal support surface includes a support plate. The rotating and articulating bed also includes an articulating bed member. In one embodiment, the articulating bed member includes an articulating head portion, an articulating foot portion separate from the articulating head portion and an articulating center portion disposed between the articulating head portion and the articulating

foot portion. The articulating head portion, the articulating center portion and the articulating foot portion articulate with respect to each other independent of rotation of the rotating and pivoting frame and of pivoting movement of the articulating bed member with respect to the horizontal support surface. In addition, the rotating and pivoting frame is pivotally connected to the articulating center to achieve pivoting movement of the articulating bed member with respect to the horizontal support surface.

[0016] The rotating and articulating bed includes a rotating and pivoting frame mounted on the horizontal support surface. The rotating and pivoting frame is in communication with the articulating bed member. The rotating and pivoting frame includes a bearing plate and a plurality of discrete bearings disposed between the bearing plate and the horizontal support surface. The rotating and pivoting frame is rotatable with respect to the horizontal support surface on the plurality of discrete bearings around a vertical axis passing through the horizontal support surface.

[0017] In one embodiment, each discrete bearing includes a housing mounted to the bearing plate, a cover attached to the housing and having a circular opening and a main ball disposed between the housing and the cover. The main ball extends through the circular opening toward the horizontal support surface. In one embodiment, the plurality of discrete bearings is disposed between the bearing plate and the support plate. In one embodiment, each discrete bearing contains a main ball, and each main ball is in contact with the support plate.

[0018] In one embodiment, each one of the plurality of discrete bearings is spaced along the bearing plate an equal distance from the vertical axis. In one embodiment, the plurality of discrete bearings includes five discrete bearings. In one embodiment, the five discrete bearings are spaced equally around a circle centered on the vertical axis.

[0019] In one embodiment, the rotating and pivoting frame includes a rotating drive shaft extending through the support plate and centered on the vertical axis. The rotating drive shaft has a mounting flange disposed on a first end of the rotating drive shaft, and the mounting flange is in contact with the bearing plate. In one embodiment, the rotating and pivoting frame includes an upper bearing assembly having an upper bearing housing disposed between the mounting flange and the support plate and a thrust ball bearing disposed within the housing. The rotating drive shaft passes through the thrust ball bearing. In one embodiment, the thrust ball bearing includes an upper bearing ring in contact with the mounting flange, a lower bearing ring in contact with the housing and a plurality of ball bearings disposed between the upper bearing ring and the lower bearing ring. The rotating drive shaft is in contact with the plurality of ball bearings.

[0020] In one embodiment, the rotating and pivoting frame includes a rotating drive shaft extending through the support plate and centered on the vertical axis. The

rotating drive shaft includes a mounting flange disposed on a first end of the rotating drive shaft. The mounting flange is in contact with the bearing plate. The rotating drive shaft includes a second end opposite the first end.

5 The support plate is disposed between the first end and the second end. The rotating and pivoting frame includes a lower bearing assembly with a lower bearing housing disposed between the support plate and the second end of the rotating drive shaft and a thrust ball bearing disposed within the lower bearing housing. The rotating drive shaft passes through the thrust ball bearing. In one embodiment, the thrust ball bearing includes an upper bearing ring in contact with the housing, a lower bearing ring and a plurality of ball bearings disposed between the upper bearing ring and the lower bearing ring. The rotating drive shaft is in contact with the plurality of ball bearings.

[0021] In one embodiment, the rotating and pivoting frame includes a threaded locking ring threaded onto the rotating drive shaft between the second end of the rotating drive shaft and the lower bearing assembly. The threaded locking ring is in contact with the lower bearing ring.

[0022] In one embodiment, the rotating and pivoting frame includes a rotating drive shaft extending through the support plate and centered on the vertical axis. The rotating drive shaft includes a mounting flange disposed on a first end of the rotating drive shaft. The mounting flange is in contact with the bearing plate. The rotating drive shaft includes a second end opposite the first end, and the support plate is disposed between the first end and the second end. A removable drive collar is disposed over the rotating drive shaft adjacent the second end such that rotation of the drive collar rotates the rotating drive shaft. The drive collar has a pair of arm assemblies extending out from the drive collar. In one embodiment, the rotating and pivoting frame includes a rotation actuator in contact with the fixed frame and one of the arm assemblies. In one embodiment, the rotating and pivoting frame includes a threaded locking ring threaded onto the rotating drive shaft at the second end of the rotating drive shaft. The threaded locking ring is in contact with drive collar.

[0023] Exemplary embodiments are also directed to a rotating and articulating bed having a fixed bed frame with a horizontal support surface containing a support plate, an articulating bed member and a rotating and pivoting frame mounted on the horizontal support surface, in communication with the articulating bed member and rotatable with respect to the horizontal support surface around a vertical axis passing through the horizontal support surface. The rotating and pivoting frame includes a bearing plate and a plurality of discrete bearings attached to the bearing plate. Each one of the plurality of discrete bearings is spaced along the bearing plate an equal distance from the vertical axis and the support plate and includes a main ball. Each main ball is in contact with the support plate. In one embodiment, the rotating and

pivoting frame further also includes a rotating drive shaft extending through the support plate and centered on the vertical axis. The rotating drive shaft includes a mounting flange disposed on a first end of the rotating drive shaft and a second end opposite the first end. The mounting flange is in contact with the bearing plate, and the support plate is disposed between the first end and the second end.

[0024] The rotating and pivoting frame includes an upper bearing assembly with an upper bearing housing disposed between the mounting flange and the support plate and a thrust ball bearing disposed within the housing. The rotating drive shaft passes through the thrust ball bearing. The rotating and pivoting frame includes a lower bearing assembly with a lower bearing housing disposed between the support plate and the second end of the rotating drive shaft and a thrust ball bearing disposed within the lower bearing housing. The rotating drive shaft passes through the thrust ball bearing.

[0025] In one embodiment, the rotating and pivoting frame also includes a removable drive collar disposed over the rotating drive shaft adjacent the second end such that rotation of the drive collar rotates the rotating drive shaft. The drive collar includes a pair of arm assemblies extending out from the drive collar. The rotating and pivoting frame includes a rotation actuator in contact with the fixed frame and one of the arm assemblies. In one embodiment, the rotating and pivoting frame includes a lower bearing assembly threaded locking ring threaded onto the rotating drive shaft between the second end of the rotating drive shaft and the lower bearing assembly and a drive collar threaded locking ring threaded onto the rotating drive shaft at the second end of the rotating drive shaft. The drive collar threaded locking ring is in contact with drive collar.

[0026] Exemplary embodiments are directed to a rotating and articulating bed having a fixed bed frame, an articulating bed frame and a rotating and pivoting frame mounted on the fixed bed frame and in communication with the articulating bed frame. The rotating and pivoting frame includes a plurality of discrete bearings, and the rotating and pivoting frame and articulating bed frame are rotatable with respect to the fixed bed frame on the plurality of discrete bearings around a vertical axis passing through the fixed bed frame, articulating bed frame and rotating and pivoting frame. In one embodiment, each discrete bearing is a bearing wheel. In one embodiment, each bearing wheel rotates about an axis perpendicular to the vertical axis.

[0027] In one embodiment, each one of the plurality of discrete bearings is spaced an equal distance from the vertical axis. In one embodiment, the plurality of discrete bearings contains eight discrete bearings. In one embodiment, the eight discrete bearings are spaced equally around a circle centered on the vertical axis.

[0028] In one embodiment, the rotating and pivoting frame has a pivot assembly in communication with the articulating bed frame to tilt the articulating bed frame with

respect to a horizontal plane that is perpendicular to the vertical axis and a rotation assembly mounted on the fixed bed frame. The pivot assembly is secured to the rotation assembly, and the rotation assembly provides rotation between the pivot assembly and the fixed bed frame independent of movement of the articulating bed frame by the pivot assembly. The plurality of discrete bearings is disposed in the rotation assembly.

[0029] In one embodiment, the rotation assembly includes a support plate mounted on the fixed bed frame, a bearing plate spaced from the support plate and a rotating drive shaft extending through the support plate and centered on the vertical axis. The rotating drive shaft is secured to the support plate such that rotation of the rotating drive shaft rotates the bearing plate. The plurality of discrete bearings is disposed between and in contact with the support plate and the bearing plate. In one embodiment, the rotation assembly also includes a mounting flange attached to the bearing plate. The rotating drive shaft is attached to the mounting flange. The rotation assembly includes a bearing housing disposed between the flange and the support plate and a thrust bearing disposed in the bearing housing. The rotating drive shaft passes through the thrust bearing.

[0030] In one embodiment, the rotation assembly also includes a mounting flange attached to the bearing plate. The rotating drive shaft is attached to the mounting flange at a first end of the rotating drive shaft. A removable drive collar is disposed over the rotating drive shaft adjacent a second end of the rotating drive shaft opposite the first end. Rotation of the drive collar rotates the rotating drive shaft, and the support plate is disposed between the first end and the second end. In one embodiment, the removable drive collar includes a pair of arm assemblies extending out from the drive collar, and the rotation assembly further includes a rotation actuator attached to one of the arm assemblies and the fixed bed frame.

[0031] In one embodiment, wherein each wheel bearing has a mount attached to the support plate and a bearing wheel rotatably disposed in the mount. Each bearing wheel is in contact with the bearing plate. In one embodiment, the pivot assembly includes a base frame fixedly attached to the bearing plate and at least one pivot arm pivotally attached to the base frame and connected to the articulating bed frame. In one embodiment, the base frame includes a pair of parallel beam members in contact with the bearing plate. At least one beam member is secured to the bearing plate with a plurality of fasteners. In one embodiment, the articulating bed frame includes a center portion, an articulating head portion pivotally attached to the center portion, an articulating foot portion pivotally attached to the center portion, a first linear actuator connected between the center portion and the articulating head portion and a second linear actuator connected between the center portion and the articulating foot portion. The pivot arm is attached to the center portion, and the pivot assembly also includes a pivot actuator connected to the base frame and the center

portion. In one embodiment, the pivot frame includes two pivot arms. Each pivot arm has a pivot end pivotally attached to the base frame and a fixed end attached to the center portion.

[0032] Exemplary embodiments are also directed to a rotating and articulating bed having a fixed bed frame, a rotation assembly mounted on the fixed bed frame, a pivot assembly mounted on the rotation assembly and an articulating bed frame mounted on the pivot assembly. The articulating bed frame includes a plurality of pivotally connected distinct portions. The rotation assembly rotates the pivot assembly and the articulating bed frame with respect to the fixed bed frame around a vertical axis passing through the rotating and articulating bed, and the articulating bed frame articulates the distinct portions and the pivot assembly tilts the articulating bed frame with respect to a horizontal plane that is perpendicular to the vertical axis independent of rotation by the rotation assembly and articulation by the articulating bed frame.

[0033] In one embodiment, the rotation assembly includes a support plate mounted on the fixed bed frame, and a bearing plate spaced from the support plate. The pivot assembly is mounted on the bearing plate. A plurality of discrete wheel bearings is disposed between the support plate and the bearing plate. Each discrete wheel bearing includes a mount attached to the support plate and a bearing wheel rotatably disposed in the mount. The bearing wheel is in contact with the bearing plate. In one embodiment, each bearing wheel rotates about an axis perpendicular to the vertical axis, and the rotation assembly includes eight discrete wheel bearings spaced equally around a circle centered on the vertical axis.

[0034] Exemplary embodiments are also directed to a rotating and pivoting frame for a bed. The rotating and pivoting frame includes a rotation assembly with a support plate, a bearing plate spaced from the support plate and a plurality of discrete wheel bearings disposed between the support plate and the bearing plate. The bearing plate is rotatable with respect to the support plate on the plurality of discrete wheel bearings around a vertical axis passing through the support plate and bearing plate. The rotating and pivoting frame also includes a pivot assembly mounted on the bearing plate opposite the plurality of discrete wheel bearings. The pivot assembly includes a base frame fixedly attached to the bearing plate, at least one pivot arm pivotally attached to the base frame, and a pivot actuator connected to the base frame. The at least one pivot arm tilts with respect to a horizontal plane that is perpendicular to the vertical axis.

BRIEF DESCRIPTION OF THE DRAWINGS

[0035] The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate one or more embodiments and, together with the description, explain these embodiments. In the drawings:

Figure 1 is a top perspective view of an embodiment of a rotating and articulating bed in a flat position; Figure 2 is a top perspective view of an embodiment of a rotating and articulating bed in a flat position with an arm assembly raised;

Figure 3 is a top perspective view of an embodiment of a rotating and articulating bed with the articulating head portion raised;

Figure 4 is a top perspective view of an embodiment of a rotating and articulating bed with the articulating head portion raised and an arm assembly raised;

Figure 5 is a top perspective view of an embodiment of a rotating and articulating bed with the articulating head portion raised and the articulating foot portion raised;

Figure 6 is a top perspective view of an embodiment of a rotating and articulating bed with the articulating head portion raised, the articulating foot portion raised, and the articulating bed member rotated 90°;

Figure 7 is a top perspective view of an embodiment of a rotating and articulating bed with the articulating head portion raised, the articulating bed member rotated 90° and the articulating foot portion lowered past the plane of the horizontal support surface;

Figure 8 is a top perspective view from a head end of an embodiment of a rotating and articulating bed with the articulating head portion raised, the articulating bed member rotated 90°, the articulating foot portion lowered past the plane of the horizontal support surface and the articulating bed member pivoted toward the articulating foot portion;

Figure 9 is a top perspective view from a side of an embodiment of a rotating and articulating bed with the articulating head portion raised, the articulating bed member rotated 90°, the articulating foot portion lowered past the plane of the horizontal support surface and the articulating bed member pivoted toward the articulating foot portion until the articulating foot portion contacts the floor;

Figure 10 is a schematic elevational representation of an embodiment of a rotating and articulating bed; Figure 11 is a perspective view of an embodiment of an arm assembly;

Figure 12 is a partial view of an embodiment of an arm assembly attached to a bottom surface of an articulating center portion of the rotating and articulating bed;

Figure 13 is a schematic representation of a rotation actuator for rotating the shaft and bearing plate;

Figure 14 is a schematic representation of a pivot actuator attached to the articulating center portion frame and with the articulating center portion frame in an initial flat position;

Figure 15 is a schematic representation of a pivot actuator attached to the articulating center portion frame and with the articulating center portion frame pivoted toward the articulating foot portion;

Figure 16 is a top perspective view of another em-

bodiment of a rotating and articulating bed with the articulating head portion raised and the articulating foot portion raised;

Figure 17 is a bottom perspective view of an embodiment of a rotating and articulating bed with the articulating bed member rotated, the articulating head portion raised, and the articulating foot portion articulated downward;

Figure 18 is a side view of an embodiment of a portion of the rotating and pivoting frame and support plate; Figure 19 is a bottom perspective view of a portion of the rotating and pivoting frame;

Figure 20 is a top perspective view of an embodiment of a portion of the rotating and pivoting frame and support plate;

Figure 21 is a top perspective view of a portion of the rotating and pivoting frame;

Figure 22 is a side hidden line view of a portion of the rotating and pivoting frame;

Figure 23 is a bottom view of a portion of the rotating and articulating bed with the articulating bed member rotated, the articulating head portion raised, and the articulating foot portion articulated downward; and Figure 24 is a bottom perspective view of a portion of the rotating and articulating bed with the articulating bed member rotated, the articulating head portion raised, and the articulating foot portion articulated downward

Figure 25 is a perspective view of an embodiment of a rotating and articulating bed with the articulating head portion raised and the articulating foot portion raised;

Figure 26 is a side view of the rotating and articulating bed in a flat position;

Figure 27 is an exploded perspective view from the bottom of the rotating and articulating bed;

Figure 28 is an exploded side view of the rotating and articulating bed;

Figure 29 is a perspective view of an embodiment of the rotation assembly of the rotating and articulating bed;

Figure 30 is a side view of the rotation assembly without the rotation actuator;

Figure 31 is an exploded side view of the rotation assembly without the rotation actuator;

Figure 32 is an exploded perspective view from the top of the rotation assembly without the rotation actuator;

Figure 33 is a hidden line side view of the rotation assembly without the rotation actuator;

Figure 34 is a perspective view of an embodiment of a wheel bearing;

Figure 35 is an exploded perspective view of the wheel bearing;

Figure 36 is top view of an embodiment of a pivot assembly for the rotating and articulating bed; and

Figure 37 is an exploded perspective view of the pivot assembly.

DETAILED DESCRIPTION

[0036] The following description of the embodiments refers to the accompanying drawings. The same reference numbers in different drawings identify the same or similar elements. The following detailed description does not limit the invention. Instead, the scope of the invention is defined by the appended claims.

[0037] Reference throughout the specification to "one embodiment" or "an embodiment" means that a given feature, structure or characteristic described in connection with an embodiment is included in at least one embodiment of the subject matter disclosed. Thus, the appearance of the phrases "in one embodiment" or "in an embodiment" in various places throughout the specification is not necessarily referring to the same embodiment. Further, the features, structures or characteristics may be combined in any suitable manner in one or more embodiments.

[0038] Exemplary embodiments are directed to a rotating and articulating bed. The rotating and articulating bed includes a first, outer, fixed bed frame having a horizontal support surface spaced from the floor and extending between the head end and the foot end of the fixed bed frame. In one embodiment, the rotating and articulating bed includes a head board attached to the head end of the fixed bed frame and a foot board attached to the foot end of the fixed bed frame opposite the head end. In one embodiment, at least one of the head board and foot board extends above the horizontal support surface. The horizontal support surface extends from the head end to the foot end of the fixed bed frame. In addition, the horizontal support surface extends from side to side of the fixed bed frame.

[0039] In one embodiment, the fixed bed frame has a base surface opposite the horizontal support surface. The fixed bed frame has a thickness between the base surface and the horizontal support surface. In one embodiment, the base surface is configured to rest directly on the floor. The thickness of the fixed bed frame defines a given height of the horizontal support surface from the floor when the base surface is in contact with the floor. In another embodiment, the fixed bed frame includes a plurality of legs extending down from the base surface. The legs are in contact with the floor and space the base surface from the floor. In another embodiment, the fixed bed frame is attached to and supported by a wheeled, elevating frame having a plurality of wheels. The wheeled elevating frame extends past the base surface and contains the framing members, motors, electronics and controls to selectively position the fixed bed frame in either an elevated position or a lowered position. The base surface of fixed bed frame in the lowered position is located at a height above the floor of about the height of the wheels.

[0040] The rotating and articulating bed also includes an articulating bed member disposed on top of or above the horizontal support surface. The articulating bed member includes the framing members, supports, motors,

actuators, power sources, control electronics, switches and remotes to provide the desired rotation, articulating, pivoting and sliding of the articulating bed member with respect to the horizontal support surface. The articulating bed member includes an articulating head portion and an articulating foot portion separate from the articulating head portion. The articulating head portion articulates with respect to the articulating foot portion. The articulating bed member includes an articulating center or seat portion disposed between and in contact with the articulating head portion and the articulating foot portion. The articulating head portion and the articulating foot portion articulate with respect to the articulating center portion independent of each other. In addition, the head and foot portions also rest on the base frame member for positional stop in the flat position.

[0041] In one embodiment, the articulating bed member includes at least one mattress disposed on and covering the articulating head portion, the articulating center portion and the articulating foot portion. In one embodiment, the articulating head portion includes an articulating head portion frame, and the articulating foot portion includes an articulating foot portion frame. In addition, the articulating center portion includes an articulating center portion frame. The articulating head portion frame, the articulating center portion frame and the articulating foot portion frame articulate with respect to each other. The at least one mattress is attached to at least one of the articulating head portion frame, the articulating center portion frame and the articulating foot portion frame. In one embodiment, the articulating bed member includes three separate mattresses or mattress sections, each separate mattress is attached to one of the articulating head portion frame, the articulating center portion frame and the articulating foot portion frame. In one embodiment, the mattress is releasably attached to at least one of the articulating head portion frame, the articulating center portion frame and the articulating foot portion frame. In one embodiment, the articulating bed member includes at least one mattress topper or mattress pad releasably attached to the mattress.

[0042] In one embodiment, the articulating bed member includes a rotating and pivoting frame mounted on the horizontal support surface and in contact with at least one of the articulating head portion, the articulating foot portion and the articulating center portion. In one embodiment, the rotating and pivoting frame is mounted to the horizontal support surface. In one embodiment, framing members, supports, motors, actuators, control electronics, power sources and switches are disposed among the articulating head portion, the articulating foot portion, the articulating center portion and the rotating and pivoting frame to provide the desired articulation for the articulating head portion, the articulating foot portion and the articulating center portion. In one embodiment, the framing members, supports, motors, actuators, control electronics, power sources and switches are disposed between the rotating and pivoting frame and at least one of

the articulating head portion, the articulating foot portion and the articulating center portion.

[0043] The framing members, supports, motors, actuators, control electronics, power sources and switches also provide for the rotation, pivoting and sliding movement of the articulating bed member with respect to the fixed frame and the horizontal support surface. In one embodiment, the articulating bed member, and in particular the rotating and pivoting frame, rotates with respect to the horizontal support surface in a plane parallel to the horizontal support surface. The articulating bed member rotates around a vertical axis perpendicular to and passing through the horizontal support surface. The articulating bed member rotates around the vertical axis through an angle up to 360°.

[0044] In addition to rotation in a plane parallel to the horizontal support surface, the articulating bed member pivots with respect to the plane in which it rotates and, therefore, with respect to the horizontal support surface. Pivoting the articulating bed member tilts the articulating bed member forward, i.e., towards the articulating foot portion, or backwards, i.e., toward the articulating head portion. In one embodiment, pivoting motion is provided between the rotating and pivoting frame and the articulating center portion. In one embodiment, in addition to rotational and pivoting movement of the articulating bed member, sliding or lateral movement of the articulating bed member along the plane parallel to the horizontal support surface is provided. In one embodiment, the rotating and pivoting frame provides for lateral or sliding movement along the plane parallel to the horizontal support surface. Lateral or sliding movement occurs in at least one of a direction from side to side of the articulating head portion, the articulating foot portion and the articulating center portion and a direction along a line passing through the articulating bed member from the articulating head portion through the articulating center portion to the foot portion.

[0045] In one embodiment, the rotating and articulating bed includes a set or pair of arms. In one embodiment, each arm in the set of arms is located on a side of the articulating bed member and in particular on one side of the articulating head portion, the articulating foot portion or the articulating center portion. Preferably, each arm is located on one side of the articulating center section. In one embodiment, each arm is attached to the side of the articulating center section. Preferably, each arm is attached to the bottom surface of the articulating center section. Attachment to the bottom surface facilitates the use of a removable mattress and the attachment of mattress toppers and sheets to the mattress. In one embodiment, each arm is removable. In one embodiment, each arm is moveable from a first down position with the arm generally parallel to the top surface of the articulating center portion and a second up position with the arm at an angle with respect to the top surface of the articulating center portion. In one embodiment, each arm pivots to move between the first down position and the

second up position. In one embodiment, each arm is lockable in at least one of the first down position and the second up position.

[0046] The rotating, articulating, pivoting and sliding movement of the articulating bed member, and if included height adjustment of the fixed bed frame, provide access to and use of the rotating and articulating bed by persons with limited mobility. The articulating bed member can be selectively positioned in a variety of arrangements between a horizontal position and a rotated and pivoted position. In the horizontal position, the articulating head portion, the articulating foot portion and the articulating center portion are flat and parallel with the horizontal support surface, and the articulating head portion and the articulating foot portion are aligned with the head end and foot end respectively of the fixed bed frame. In the rotated and pivoted position, the articulating bed member is rotated 90° with respect to the fixed bed frame and articulated and pivoted such that the articulating head portion, the articulating foot portion and the articulating center portion are arranged as a seating position with the articulating foot portion extending over the side of the fixed bed frame and all the way to the surface on which the base surface of the fixed bed frame rests.

[0047] In one embodiment, the fixed bed frame includes a head end support and a foot end support to provide support to the articulating head portion and the articulating foot portion in the horizontal position. One or more notches can be provided in the articulating head portion and the articulating foot portion to engage the head end support and the foot end support. From the horizontal position, the articulating head portion, the articulating foot portion and the articulating center portion can be adjusted as in a typical adjustable bed.

[0048] In one embodiment, to facilitate a person with limited mobility getting out of the bed, the articulating center portion is rotated with respect to the horizontal support surface with the head portion, foot portion and center portion positioned in accordance with a sitting or reclining position. The articulating bed member continues to rotate while the articulating foot portion is lowered past the plane of the horizontal support surface. At the same time, the articulating bed member is pivoted forward and can also be moved laterally so that the foot portion extends off the side of the horizontal support surface and extends towards the floor. This movement continues, until the articulating bed member has rotated about 90° and the head portion, center portion and foot portion of the articulating bed member are articulated, pivoted and slid to form a chair reaching to the ground and facing the side of the bed. Reversing these steps provides for a person with limited mobility to get into the articulating bed.

[0049] Referring now to Figs. 1-10, an exemplary embodiment of a rotating and articulating bed 100 is illustrated. The rotating and articulating bed includes a fixed bed frame 102 and an articulating bed member 104 mounted on the fixed bed frame. The articulating bed

member is mounted on the fixed bed frame to provide rotating, articulating, pivoting and sliding movement of the articulating bed member with respect to the fixed bed frame. Suitable sizes for the rotating and articulating bed including the fixed bed frame and the articulating bed member including twin, full, queen, king and California king.

[0050] The fixed bed frame is constructed from framing materials that include wood, metal, composite and plastic framing materials. In addition, the fixed bed frame is covered with upholstery and padding. The fixed bed frame has a head end 108, a foot end 110 opposite the head end and a pair of opposing sides 112 extending from the head end to the foot end. The fixed bed frame has a fixed frame length 114 from the head end to the foot end and a fixed frame width 116 between the pair of opposing sides.

[0051] The fixed bed frame includes a horizontal support surface 106 and a base surface 118 opposite the horizontal support surface. In one embodiment, the horizontal support surface extends the entire fixed frame length and the entire fixed frame width. In one embodiment, the fixed bed frame includes a head end support 122 extending up from the horizontal support surface and in from the head end and a foot end support 120 extending up from the horizontal support surface and in from the foot end. In one embodiment, the head end support and the foot end support extend the entire fixed frame width. The horizontal support surface extends from the foot end support to the head end support. The head end support and the foot end support have a support height 124 up from the horizontal support surface. The support height is selected to be sufficient to accommodate framing and operational elements located between the fixed frame and the articulating bed member.

[0052] In one embodiment, the horizontal support surface is spaced from the base surface a given distance 126. This given distance is the height of the horizontal support surface from the floor when the base surface is placed in contact with the floor. The given distance and the support height define the overall thickness 128 of the fixed frame. In one embodiment, the fixed frame includes a plurality of support legs 132 (Figs. 1-9) extending down from the base surface. For example, the fixed frame includes four support legs, one support leg adjacent each corner of the fixed frame. In one embodiment, the legs are removable. In one embodiment, the legs are extensible. When the fixed frame includes legs, the height of the horizontal support surface is the overall thickness plus the length of the support legs. In one embodiment, the fixed frame includes a plurality of wheels or rollers at the base surface. Suitable arrangements for wheels and rollers are known and available in the art.

[0053] The articulating bed member 104 includes an articulating head portion 134 and a separate articulating foot portion 138. The articulating head portion and articulating foot portion articulate with respect to each other downward toward the horizontal support surface in the

direction of arrow B and upward away from the horizontal support surface in the direction of arrow A. Upward and downward articulation provides for movement and positioning of the articulating head portion and articulating foot portion from a flat position illustrated in Figs. 1, 2 and 10, and various articulated positions illustrated in Figs. 3-9. In one embodiment, the articulating foot portion articulates downward past a plane 130 (Fig. 10) containing the horizontal support surface (Fig. 7). Articulation of the articulating head portion and the articulating foot portion is conducted independent of other adjustments and movements of the articulating bed member including rotation, pivoting and sliding movement of the articulating bed member with respect to the fixed bed frame and the horizontal support surface.

[0054] In one embodiment, the articulating bed member includes an articulating center portion 136 disposed between and in communication with the articulating head portion and the articulating foot portion. The articulating head portion and the articulating foot portion articulate with respect articulating center portion. Articulation of the articulating head portion, the articulating center portion and the articulating foot portion with respect to each other occurs independent of rotational, pivoting and sliding movement of the articulating bed member with respect to the fixed frame. The articulating head portion, articulating center portion and articulating foot portion span the fixed frame length 114 from the head end to the foot end and the fixed frame width 116 between the pair of opposing sides.

[0055] In one embodiment, the articulating bed member includes at least one articulating head portion frame 150 disposed in the articulating head portion and at least one articulating foot portion frame disposed in the articulating foot portion. In one embodiment, the articulating bed member includes a first articulating foot portion frame 158 and a second articulating foot portion frame 160 pivotally attached to the first articulating foot portion frame. The first and second articulating foot portion frames provide for separate positioning of the upper leg and lower leg portions of the articulating foot portion. The articulating bed member includes at least one articulating center portion frame 154 disposed between the articulating head portion frame and the articulating foot portion frame, e.g., the first articulating foot portion frame 158.

[0056] The articulating center portion frame is pivotally connected to the articulating head portion frame and the articulating foot portion frame. A first actuator assembly 152, i.e., the head portion actuator, is provided between the articulating center portion frame and the articulating head portion frame. A second actuator assembly 156, i.e., the foot portion actuator, is provided between the articulating center portion frame and the articulating foot portion frame. The actuator assemblies include the actuators, motors, push rods and frame members to provide the desired articulation among the articulating head portion, the articulation center portion and the articulating

foot portion.

[0057] The articulating head portion, the articulating center portion and the articulating foot portion includes a top surface 140 and a bottom surface 142 opposite the top surface. The articulating head portion, the articulating center portion and the articulating foot portion can be set in a flat, i.e., unarticulated position, with the articulating head portion aligned with the head end of the fixed frame and the articulating foot portion aligned with the foot end of the fixed frame (Fig. 1). The bottom surface at the articulating head portion is aligned over the head end support 122, and the bottom surface at the articulating foot portion is aligned over the foot end support 120. In one embodiment, the bottom surface is in contact with at least one of the head end support and the foot end support. This arrangement defines a space or cavity 180 between the bottom surface and the horizontal support surface that extends from the head end support to the foot end support.

[0058] The articulating bed member 104 also includes at least one mattress 176 attached to the articulating head portion frame, articulating center portion frame and articulating foot portion frame. In another embodiment, the articulating bed member includes a plurality of mattresses or mattress sections. Each one of the plurality of mattresses is attached to one of the articulating head portion frame, articulating center portion frame and articulating foot portion frame. In one embodiment, the mattress is not removable from the articulating bed member. In one embodiment, one or more of the articulating head portion frame, articulating center portion frame and articulating foot portion frame is integrated into the mattress. Preferably, the mattress is removably attached to the articulating head portion frame, articulating center portion frame and articulating foot portion frame. Removeable attachment of the mattress is provided by at least one or a plurality of two-part mechanical fasteners 174 disposed between the mattress and each one of the articulating head portion frame, articulating center portion frame and articulating foot portion frame. Suitable two-part mechanical fasteners include, but are not limited to, a zipper, a hook and loop type fastener, a snap, a pin type fastener, a hook and eye type fastener, a button, a magnetic fastener, a buckle and strap, a clamp, a clasp and combinations thereof.

[0059] In one embodiment, the mattress, or each one of the plurality of mattresses, includes at least one first part of a two-part mechanical fastener. In addition, at least one of the articulating head portion frame, articulating center portion frame and articulating foot portion frame includes at least one second part of the two-part mechanical fastener. The first and second parts of the two-part mechanical fasteners can be located between the bottom surface of the mattress and the top surface of the articulating head portion frame, articulating center portion frame and articulating foot portion frame. Therefore, the two-part mechanical fastener can be hidden from view. In another embodiment, the two-part mechan-

ical fastener is located between a fabric skirt or side of the mattress and the sides of the articulating head portion frame, articulating center portion frame and articulating foot portion frame.

[0060] In one embodiment, a plurality of first parts of a mechanical fasteners, i.e., a plurality of first parts of snaps or hook and loop type fasteners, are attached along a bottom skirt area of the mattress or fabric border extending down from the bottom of the mattress, and a corresponding plurality of second parts of the mechanical fasteners are attached to the sides of one or more of the articulating head portion frame, articulating center portion frame and articulating foot portion frame. Therefore, the mattress is placed on top of the articulating head portion frame, articulating center portion frame and articulating foot portion frame with the fabric skirt extending over the sides, and the first and second parts of the two-part mechanical fasteners are aligned. Once aligned, the first and second parts of the two-part mechanical fasteners are connected, securing the mattress to the articulating head portion frame, articulating center portion frame and articulating foot portion frame. Releasing the first and second parts allows removal of the mattress.

[0061] In another embodiment, the first part of the two-part mechanical fastener is provided as a first part of a zipper running along the bottom of the mattress. The second part of the two-part mechanical fastener is a second part of the zipper running along one or more of the articulating head portion frame, articulating center portion frame and articulating foot portion frame. In one embodiment, the second part of the zipper is contained in a strip of fabric attached to one or more of the articulating head portion frame, articulating center portion frame and articulating foot portion frame. In another embodiment, the second part of the zipper is provided on a sheet of fabric that is placed under one or more of the articulating head portion frame, articulating center portion frame and articulating foot portion frame. Again, the mattress is placed on the top of the articulating head portion frame, articulating center portion frame and articulating foot portion frame, and the first and second parts of the zipper are aligned. The zipper is then closed, securing the mattress to the articulating head portion frame, articulating center portion frame and articulating foot portion frame.

[0062] In one embodiment, articulating bed member includes at least one mattress topper 178 attached to the top of the mattress and disposed on at least one of the articulating head portion, the articulating center portion and the articulating foot portion. In one embodiment, the articulating bed member includes a plurality of mattress toppers. Each mattress topper is attached to one of a plurality of mattresses. Suitable mattress toppers provide protection for the mattress or impart a soft cushion surface to the top of the surface. While the mattress topper can be fixed to the top of the mattress, for example using stitching, preferably the mattress topper is removably attached to the top of the mattress. In one embodiment,

the mattress topper includes the first part of a two-part mechanical fastener, and the mattress includes a second part of the two-part mechanical fastener. Suitable two-part mechanical fasteners include, but are not limited to, a zipper, a hook and loop type fastener, a snap, a pin type fastener, a hook and eye type fastener, a button, a magnetic fastener, a buckle and strap, a clamp, a clasp and combinations thereof. In one embodiment, the mattress topper is secured to the mattress using a plurality of elastic straps.

[0063] In one embodiment, the articulating bed frame includes a rotating and pivoting frame 144. The rotating and pivoting frame is disposed in the cavity 180 and is mounted on the horizontal support surface 106. In one embodiment, the rotating and pivoting frame is positioned on or above a support plate 146 mounted to the horizontal support surface. In one embodiment, the rotating and pivoting frame is in communication with and attached to at least one of the articulating head portion and the articulating foot portion. In another embodiment, the rotating and pivoting frame is in communication with and connected to the articulating center portion. In one embodiment, connection to the articulating head portion, the articulating center portion or the articulating foot portion is connection to the articulating head portion frame, the articulating center portion frame or the articulating foot portion frame.

[0064] The rotating and pivoting frame 144 is rotatable with respect to the horizontal support surface or the support plate around a vertical axis 148 passing through and perpendicular to the horizontal support surface and the support plate. The rotating and pivoting frame also provides pivoting movement of the articulating bed member with respect to the horizontal support surface to tilt the articulating bed member toward at least one of the articulating head portion as indicated by arrow C, and the articulating foot portion as indicated by arrow D. In one embodiment, the rotating and pivoting frame pivots the articulating center portion or the articulating center portion frame backwards towards the articulating head portion or forward towards the articulating foot portion. In one embodiment, the rotating and pivoting frame is pivotally connected to the articulating center portion or the articulating center portion frame. In one embodiment, the rotating and pivoting frame is pivotally connected to the articulating center portion or the articulating center portion frame at one or more pivot points 170.

[0065] In one embodiment, the rotating and articulating bed includes a shaft 166 passing from the fixed bed frame through the support plate and into the rotating and pivoting frame. The shaft is a cylindrical shaft that is concentric with vertical axis. In one embodiment, the rotating and pivoting frame is rotatable around the vertical axis through an angle up to about 90° in a single direction of rotation around the vertical axis. In another embodiment, the rotating and pivoting frame is rotatable around the vertical axis in a first direction of rotation through an angle up to about 90° and in a second direction of rotation

through an angle up to about 90°. The first direction of rotation is opposite the second direction of rotation. In one embodiment, the rotating and pivoting frame is rotatable around the vertical axis through an angle up to about 360°.

[0066] In one embodiment, the rotating and pivoting frame 144 includes a bearing plate 169 disposed on top of the support plate 146. A bearing surface is defined between the bearing plate and the support plate, and the bearing plate rotates with respect to the support plate on the bearing surface. In one embodiment, a plastic bearing member is included between the bearing plate and the support plate. In another embodiment, bearings, including ball bearing and roller bearings are provided between the bearing plate and the support plate, for example, in channels or grooves in the bearing surface, to improve rotation between the bearing plate and the support plate.

[0067] In one embodiment, the bearing plate is fixedly attached to the shaft 166 and does not rotate with respect to the shaft. Therefore, rotation of the shaft rotates the bearing plate. Referring now to Fig. 13, in one embodiment, the rotation actuator 252, i.e., the actuator that provides rotation of the bearing plate, is a linear actuator that is disposed within the fixed frame 222 and rotationally or pivotally connected to a frame member 224 within the fixed frame. The extensible rod 254 of the rotation actuator is connected to an arm 258 attached to and extending from the shaft 260 at a pivot point 256. The shaft is fixedly connected to the bearing plate. Therefore, when the rotation actuator is in a first position, e.g., retracted, the bearing plate is in a first non-rotated position 218. Extending the extensible rod moves the rotation actuator to a second position 262 and the arm to a second position 226. This also rotates the shaft and moves the bearing plates to a second rotated position 220, which represents 90° of rotation in a first direction. Rotation of the shaft and therefore the bearing plate through 90° degrees in a second direction opposite the first direction can be accomplished by having the arm in a reversed first position 264.

[0068] Returning to Figs. 1-10, in another embodiment, a motor is provided in communication with one end of the shaft disposed in the rotating and pivoting frame. The motor is fixedly attached to the shaft and to the rotating and pivoting frame, e.g., the bearing plate. Therefore, the motor rotates the bearing plate and therefore the rotating and pivoting frame around the shaft. In another embodiment, a motor 164 is disposed in the fixed frame and is in contact with a portion of the shaft disposed in the fixed frame. The motor is fixedly attached to the fixed frame and to the shaft. In addition, the portion of the shaft extending into the rotating and pivoting frame is fixedly secured to the rotating and pivoting frame, i.e., the bearing plate. Therefore, the motor rotates the shaft around the vertical axis, and the rotating shaft rotates the rotating and pivoting frame around the vertical axis.

[0069] In one embodiment, the rotating and pivoting

frame includes a pair of parallel frames members 182 spaced from each other and extending under the articulating center portion and articulating center portion frame. Each frame member includes a top 184, and the articulating center portion frame articulates with respect to each top from an initial position that is in contact with or adjacent and parallel to the tops to positions in which the articulating center portion frame is at an angle to each top. In one embodiment, each frame member is connected to the articulating center portion frame, for example at a pivot point. In one embodiment, the articulating center portion frame is attached to each frame member to provide both pivoting and sliding movement of the articulating center portion with respect to the rotating and pivoting frame.

[0070] In one embodiment, each parallel frame member is secured to the bearing plate, for example, by welds or using a plurality of fasteners such as bolts. In one embodiment, each frame member is attached to the bearing plate using three fasteners, one adjacent either end of the frame member and one in the middle of the frame member. Therefore, rotation of the bearing plate rotates the parallel frame members. The fasteners do not interfere with the rotation of the bearing plate with respect to the support plate. In one embodiment, a pivot actuator 168 is disposed on the bearing plate between the parallel frame members. Preferably, the pivot actuator is a linear actuator. The pivot actuator is disposed between and pivotally attached to the bearing plate and the articulating center portion frame. Movement of the pivot actuator, and in particular the push rod of the pivot actuator, produces pivoting movement of the articulating center portion. Therefore, the rotating and pivoting frame includes four actuators, a head portion actuator, a foot portion actuator, a rotation actuator and a pivot actuator. In one embodiment, all four actuators are linear actuators. In one embodiment, all four actuators are identical actuators.

[0071] Referring now to Figures 14 and 15, in one embodiment, the pivot actuator 308 is pivotally connected to the top of the bearing plate 306 between the parallel frame members 304. The end of extensible rod 310 of the pivot actuator is rotationally or pivotally connected to the articulating center portion frame 302. In one embodiment, the extensible rod is connected and spaced a distance 312 from the end 314 of the articulating center portion frame adjacent the articulating foot portions. In one embodiment, the distance is about 8 inches. When the pivot actuator is in a first retracted position, the articulating center portion frame 302 is substantially flat and located above and parallel to the top surfaces 318 of the parallel frame members (Fig. 14). Extending the extensible rod pivots the articulating center portion frame, and therefore, the articulating bed member, toward the foot end (Fig. 15). This lifts the articulating center portion frame off the top surfaces of the parallel frame members and defines an angle 316, i.e., the pivot angle, between the articulating center portion frame and the top surfaces. The pivot actuator also pivots down-

ward toward the bearing plate. In addition, the end 314 of the articulating center portion frame drops below the plane of the top surfaces 318 of the parallel frame members and toward the horizontal support surface or floor. Retracting the pivot actuator returns the articulating center portion frame, and therefore, the articulating bed member, to the position illustrated in Fig. 14.

[0072] Returning to Figs. 1-10, in one embodiment, the articulating center portion pivots independent of any sliding movement. For example, the rotating and pivoting frame member includes an actuator that pushes on the articulating center portion frame to pivot the articulating center portion around the pivot points. In addition, articulating bed member can slide with respect to the fixed bed frame either in a direction from side to side of the fixed bed frame as indicated by arrow E or in a direction from the head end to the foot end of the fixed bed frame as indicated by arrow F. The articulating bed member slides in a plane parallel to the plane of the horizontal support surface. In one embodiment, the rotating and pivoting frame member can slide with respect to the mounting plate and the articulating center portion frame. In another embodiment, the articulating center portion simultaneously slides and pivots with respect to the rotating and pivoting frame.

[0073] The rotating and articulating bed includes a control assembly 164. Preferably, the control assembly is located in the fixed bed frame. The control assembly is in communication with the motors and actuators of the rotating and articulating bed to provide for the desired adjustments and operation of the rotating and articulating bed. The control assembly includes, but is not limited to, control electronics, computers, programmable logic controllers, power supplies, batteries and wireless communication systems. In one embodiment, the rotating and articulating bed includes at least one remote control 190 in communication with the control assembly. Suitable remote controls include wireless and wired controllers. The remote control provides for articulating, pivoting and sliding movement of the rotating and articulating bed.

[0074] The rotating and articulating bed further includes a pair of arm assemblies 200. Each arm assembly is attached to one of the opposing sides of the articulating bed member. Preferably, each arm assembly is connected to an opposing side of the articulating center portion and in particular the articulating center portion frame. Each arm assembly can be positioned in a first lowered position with the one or more of the articulating head portion, articulating center portion and articulating foot portion in either a flat arrangement (Fig. 1) or an articulated arrangement (Fig. 3). Each arm assembly can be positioned in a second raised position with the one or more of the articulating head portion, articulating center portion and articulating foot portion in either a flat arrangement (Fig. 2) or an articulated arrangement (Fig. 4).

[0075] Referring now to Figs. 11 and 12, each arm assembly includes an arm assembly frame 204 having a plurality of parallel horizontal frame members 206.

Suitable materials for the assembly frame include tubular metals. A padded cover 202 is attached to the top horizontal frame member. An attachment frame 208 is connected to the arm assembly frame. The attachment frame includes a flange 210 attached or welded to the bottom horizontal frame member. A mounting plate 212 is pivotally connected to the flange 210. A mounting arm 214 extends from the mounting plate. The mounting arm includes a bend or extends downward from the mounting plate to connect the arm assembly to the bottom surface 142 (Fig. 10) of the articulating center portion and in particular the articulating center portion frame. In one embodiment, the mounting arm and therefore the attachment frame is removably attached to the articulating center portion. The mounting plate pivotally connected to the flange, providing a pivot point between the arm assembly frame and the attachment frame such that the arm assembly frame is rotatable respect to the attachment frame and in particular the mounting plate around the pivot point. In one embodiment, each arm assembly and in particular each attachment frame includes a locking mechanism 212 disposed between the flange of the arm assembly frame and the mounting plate of the attachment frame to prevent rotation of the arm assembly with respect to the attachment frame. Suitable locking mechanisms include set screws and spring-loaded pins. In one embodiment, the arm assembly is removably connected to the attachment frame.

[0076] In one embodiment, the different portions of the rotating and articulating bed can be disassembled for shipping and storage. Therefore, one or more of the fixed bed frame, legs, rotating and pivoting frame, articulating head portion frame, articulating center portion frame, articulating foot portion frame, mattress, mattress topper, arm assembly and control assembly are constructed as separate assemblies. These separate assemblies are then assembled into the rotating and articulating bed.

[0077] The rotating and pivoting frame of the rotating and articulating bed provides pivoting movement of the articulating bed member with respect to the horizontal support surface to tilt the articulating bed member toward the articulating foot portion from a first position with the articulating foot portion located above the horizontal support surface to a second position with the articulating foot portion extending below the horizontal support surface. The horizontal support surface is located at a given height above the floor, and the articulating foot portion extends below the horizontal support surface a distance greater than or equal to the given height when the articulating bed member is in the second position. Therefore, the articulating foot portion extends at the way to the floor. In one embodiment, rotating and pivoting frame provides lateral movement of the articulating bed member along a plane parallel to and spaced from the horizontal support surface to move the articulating bed member toward the articulating head portion or the articulating foot portion.

[0078] The articulating bed member can be positioned with the articulating head portion, the articulating center

portion and the articulating foot portion flat and parallel to the horizontal support surface (Fig. 1). The arm assemblies can be down to provide side support rails or raised (Fig. 2) to facilitate entry into the rotating and articulating bed frame. From this flat position, with the articulating head portion, the articulating center portion and the articulating foot portion aligned with the head end and foot end of the fixed bed frame, the rotating and articulating bed is operated as an articulating bed to raise and lower the articulating head portion (Fig. 3) or the articulating head portion, the articulating center portion and the articulating foot portion (Fig. 5). The arm assemblies can also be raised when one or more of the articulating head portion, the articulating center portion and the articulating foot portion are articulated (Fig. 4) to provide movement into and out of the rotating and articulating bed in the articulated position.

[0079] With the articulating head portion, the articulating center portion and the articulating foot portion in either a flat position or an articulated position, the articulating bed member is rotated with respect to the horizontal support surface (Fig. 6). The articulating bed member is rotated through an angle of 90°. The articulating head portion is raised, and the articulating foot portion, which may have been initially raised, is lowered. The articulating foot portion is lowered past the plane of the horizontal support surface (Fig. 7). The articulating bed member is then pivoted or tilted, and in one embodiment pivoted and slid, toward to articulating foot portion and over the side of the fixed bed frame (Fig. 8). In one embodiment, the articulating center portion is pivoted or pivoted and slid with respect to the rotating and pivoting frame. Pivoting and pivoting and sliding movement continues until the articulating foot portion contacts the floor (Fig. 9). As the articulating center portion pivots with respect to the rotating and pivoting frame, the articulating bed member not only positions the occupant toward the side of the rotating and articulating bed in a seated position, but also lifts the occupant to a standing position, as the back of the articulating center portion adjacent the articulating head portion lifts the hips and lower back of the occupant and the articulating head portion tilts forward. Therefore, a person of limited mobility can get out of bed. Reversing these steps allows the person with limited mobility to get into bed and to utilize the articulating features of the rotating and articulating bed.

[0080] Referring to Figs. 16-17, another exemplary embodiment of a rotating and articulating bed is illustrated. The framing and support elements of the rotating and articulating bed are illustrated without exterior elements such as padding, upholstery and mattresses. The rotating and articulating bed includes a fixed bed frame 402 and an articulating bed member 404 mounted on the fixed bed frame. Suitable sizes and materials for the rotating and articulating bed include twin, full, queen, king and California king.

[0081] The fixed bed frame is constructed from framing materials that include wood, metal, plastics, polymers,

composite materials and combinations thereof. In addition, the fixed bed frame is covered with skirting, panels, upholstery and padding. The fixed bed frame has a head end 408, a foot end 410 opposite the head end and a pair of opposing sides 412 extending from the head end to the foot end. The fixed bed frame includes a horizontal support surface 406. In one embodiment, the horizontal support surface includes a support plate 418. The horizontal support plate is supported by the framing members of the fixed bed frame and extends along at least a portion of the width and the length of the horizontal support surface. Suitable methods for attaching the support plate to the horizontal support surface include, but are not limited to, using fasteners and welds. In one embodiment, the support plate is disposed on top of the horizontal support surface. Alternatively, the support plate is integrated into and coplanar with the horizontal support surface. Suitable materials for the support plate include, but are not limited to, wood, metal, plastics, polymers, composite materials and combinations thereof.

[0082] In one embodiment, the horizontal support surface extends the entire fixed frame length and the entire fixed frame width. As discussed above, in one embodiment, the fixed frame includes a head end support and a foot end support at either end of the horizontal support surface. To provide for the head end support and the foot end support, the first bed frame includes one or more head end support frame members 422 attached to the framing of the fixed bed frame and extending up from the horizontal support surface and one or more foot end support frame members 420 attached to the framing of the fixed bed frame and extending up from the horizontal support surface. In one embodiment, the fixed bed frame includes a plurality of support legs 432 attached to the framing of the fixed bed frame and extending to the floor. For example, the fixed frame includes four support legs, one support leg adjacent each corner of the fixed frame. In one embodiment, the legs are removable. In one embodiment, the legs are extensible.

[0083] The articulating bed member 404 includes an articulating head portion 434 and a separate articulating foot portion 438. Suitable arrangements of the articulating head portion and the articulating foot portion and the relative motion, i.e., articulation, between the portions are described above. In general, articulation of the articulating head portion and the articulating foot portion is conducted independent of other adjustments and movements of the articulating bed member including rotation, pivoting and sliding movement of the articulating bed member with respect to the fixed bed frame and the horizontal support surface.

[0084] In one embodiment, the articulating bed member includes an articulating center portion 436 disposed between and in communication with the articulating head portion and the articulating foot portion. The articulating head portion and the articulating foot portion articulate with respect to the articulating center portion. Articulation

of the articulating head portion, the articulating center portion and the articulating foot portion with respect to each other occurs independent of rotational, pivoting and sliding movement of the articulating bed member with respect to the fixed frame. In one embodiment, the articulating head portion, articulating center portion and articulating foot portion span the fixed frame length from the head end to the foot end and the fixed frame width between the pair of opposing sides.

[0085] The articulating bed member includes at least one articulating head portion frame 450, a first articulating foot portion frame 458 and a second articulating foot portion frame 460 pivotally attached to the first articulating foot portion frame. The first and second articulating foot portion frames provide for separate positioning of the upper leg and lower leg portions of the articulating foot portion. The articulating bed member includes at least one articulating center portion frame 454 disposed between the articulating head portion frame and the articulating foot portion frame, e.g., the first articulating foot portion frame 458. All frames include multiple individual frame members.

[0086] The articulating center portion frame is pivotally connected to the articulating head portion frame and the articulating foot portion frame. A first actuator assembly 452, i.e., the head portion actuator, is provided between the articulating center portion frame and the articulating head portion frame. A second actuator assembly 456, i.e., the foot portion actuator, is provided between the articulating center portion frame and the articulating foot portion frame. The actuator assemblies include the actuators, motors, push rods and frame members, e.g., cross frame members, braces and mounting brackets, to provide the desired attachment of the actuators, pivoting of the actuators with respect to frame members, articulation among the articulating head portion, the articulation center portion and the articulating foot portion and translation of the linear motion of the actuator into the desired range of pivoting motion among of the articulating head portion, the articulation center portion and the articulating foot portion.

[0087] In one embodiment, the articulating bed frame includes a rotating and pivoting frame 444 or rotating and pivoting frame assembly. The rotating and pivoting frame is mounted on the horizontal support surface and is in communication with the articulating head portion and the articulating foot portion of the articulating bed member. In one embodiment, the rotating and pivoting frame is attached to or in contact with the articulating center portion of the articulating bed member either directly or through one or more additional frame elements or one or more of the actuator assemblies. In general, the rotating and pivoting frame is in contact with the frame members of at least one of the articulating head portion, the articulating foot portions and the articulating center portion. In one embodiment, the rotating and pivoting frame is positioned on or above the support plate 418 mounted to the horizontal support surface.

[0088] In one embodiment, the rotating and pivoting frame is in communication with and attached to at least one of the articulating head portion and the articulating foot portion. In another embodiment, the rotating and pivoting frame is in communication with and connected to the articulating center portion. In one embodiment, connection to the articulating head portion, the articulating center portion or the articulating foot portion is connection to the articulating head portion frame, the articulating center portion frame or the articulating foot portion frame.

[0089] The rotating and pivoting frame includes a plurality of individual frame members 482 that are connected together, for example to form square frames and a box frame. The individual frame members can also include "I" beams and gussets that provide the desired strength and rigidity to the rotating and pivoting frame. The individual frame members provide support for all components of the rotating and pivoting frame. In addition, the frame members are sufficient to support the articulating bed member. In one embodiment, one or more frame members in the plurality of frame members are connected to components of the second actuator assembly 456, i.e., the foot portion actuator. For example, one or more frame members are attached to a first connecting arm 424 that is in communication with the first articulating foot portion frame 458 and the extendable arm of the linear actuator 425 in the second actuator assembly. The motor or drive end of the linear actuator is pivotally attached to the articulating center portion frame.

[0090] In one embodiment, one or more frame members 482 of the rotating and pivoting frame are in communication with a second articulating foot portion frame support assembly 426 that is in communication with the second articulating foot portion frame 460 and the extendable arm of the linear actuator in the second actuator assembly. For example, one or more frame members 482 are pivotally attached to the second articulating foot portion frame support assembly 426. In addition, the second articulating foot portion frame support assembly 426 is pivotally or rotatably attached to the extendable arm of the linear actuator 425, for example, at a common point of attachment with the first connecting arm 424. In one embodiment, the first connecting arm is not attached to the frame members 482 but is connected to the linear actuator 425 and the second articulating foot portion frame support assembly 426. In one embodiment, the first connecting arm includes a slot 445 running along the length of the first connecting arm to provide for sliding movement of the first connecting arm with respect to the point of attachment with the second articulating foot portion frame support assembly 426 and the extendable arm of the linear actuator 425. In one embodiment, the slot allows the extendable arm of the linear actuator 425 to pivot the second articulating foot portion frame downward without moving or pivoting the first articulating foot portion frame 458.

[0091] The actuator or motor portion of the second

actuator assembly is preferably connected to the articulating center portion frame 454; however, this actuator could also be connected to the plurality of frame members of the rotating and pivoting frame. This arrangement provides operational support between the plurality of frame members of the rotating and pivoting frame and the articulating bed member as well as the relative articulation and positioning between the first articulating foot portion frame and the second articulating foot portion frame.

[0092] In one embodiment, the rotating and pivoting frame includes at least one bearing plate 469 attached to one or more of the plurality of frame member of the rotating and pivoting frame. In one embodiment, the frame members are secured to the bearing plate, for example, by welds or using a plurality of fasteners such as bolts or screws. Suitable materials for the bearing plate include, but are not limited to, wood, metal, plastics, polymers, composite materials and combinations thereof. Therefore, the bearing plate supports all rotating and pivoting frame members. The bearing plate is disposed between the frame member of the rotating and pivoting frame and the horizontal support surface. Preferably, the bearing plate is disposed between the frame member of the rotating and pivoting frame and the support plate. Therefore, the bearing plate and support plate face each other. The bearing plate and support plate are spaced from each other in the vertical direction to define a gap of up to about one inch (25.4 mm). In one embodiment, the bearing plate and support plate are the same size. As illustrated, the bearing plate is larger than the support plate. In one embodiment, the bearing plate and the support plate are constructed from the same material. Suitable thicknesses for the bearing plate and support plate are up to about 0.6 inches (15 mm). Rotation of the bearing plate with respect to the support plate rotates the plurality of frame members and the articulating bed member.

[0093] The rotating and pivoting frame 444 is rotatable with respect to the horizontal support surface or the support plate around a vertical axis 448 passing through and perpendicular to the horizontal support surface, the support plate and the bearing plate. The rotating and pivoting frame also provides pivoting movement of the articulating bed member with respect to the horizontal support surface to tilt the articulating bed member toward at least one of the articulating head portion and the articulating foot portion. In one embodiment, the rotating and pivoting frame pivots the articulating center portion or the articulating center portion frame backwards towards the articulating head portion or forward towards the articulating foot portion. In one embodiment, the rotating and pivoting frame is pivotally connected to the articulating center portion or the articulating center portion frame.

[0094] To provide for pivoting movement of the articulating bed member, the rotating and pivoting frame includes at least one pivot actuator 468. Preferably, the pivot actuator is a linear actuator. In one embodiment, the

pivot actuator is disposed between and pivotally attached to one or more of the plurality of frame members of the rotating and pivoting frame or mounting arms and mounting brackets attached to the frame members and the articulating center portion frame. Movement of the pivot actuator, and in particular the push rod or extendable arm of the pivot actuator, produces lifting and pivoting movement of the articulating center portion. In one embodiment, the rotating and pivoting frame only provides for rotational movement and not pivoting movement. In this embodiment, the pivot actuator and associated structural members are not included; however, the structures that provide for rotational movement are included.

[0095] Referring now to Figs. 18-22, the rotating and pivoting frame includes a rotating drive shaft 466 extending through the support plate 418 and centered on the vertical axis 448. In one embodiment, the rotating drive shaft is a cylindrical shaft that is concentric with the vertical axis. The rotating drive shaft includes a mounting flange 470 disposed on a first end 472 of the rotating drive shaft. The rotating drive shaft also includes a second end 474 opposite the first end. The support plate is disposed between the first end and the second end of the rotating drive shaft, i.e., the rotating drive shaft passes through the support plate. In addition, the rotating drive shaft including the mounting flange is located below the bearing plate 469. In one embodiment, the mounting flange is in contact with the bearing plate and, in particular, the bearing plate bottom surface 476. In one embodiment, the mounting flange is secured to the bottom surface of the bearing plate using a plurality of fasteners 478 passing through the bearing plate. Therefore, the fasteners in the plurality of fasteners are accessible from a top surface 480 of the bearing plate. As illustrated, the mounting flange is secured to the bearing plate using four fasteners. Suitable fasteners include, but are not limited to, threaded fasteners such as screws and bolts.

[0096] In one embodiment, the rotating drive shaft is hollow and includes a passage 482 extending completely through the rotating drive shaft from the first end and mounting flange to the second end. The passage at the first end of the rotating drive shaft is aligned with a hole 484 in the bearing plate. The passage and aligned hole in the bearing plate provide a conduit to route wiring including power cables and control wiring for the actuators and other components of the rotating and articulating bed from below or within the fixed bed frame into the rotating and pivoting frame and to the articulating bed member. By passing wiring through the passage in the rotating drive shaft, the wiring will not rotate or twist. In addition, the wiring does to contact or interfere with the motion of rotating components.

[0097] The rotating and pivoting frame includes a plurality of discrete bearings 486 disposed between the bearing plate and the horizontal support surface. The rotating and pivoting frame is rotatable with respect to the horizontal support surface on the plurality of discrete bearings around the vertical axis 448. Each discrete

bearing is separate from, spaced from and independent of the other discrete bearings. Therefore, each discrete bearing is positioned on the bearing plate, attached to the bearing plate and removed from the bearing plate independent of all other discrete bearings. In one embodiment, each discrete bearing includes a housing 488 mounted to the bearing plate. In one embodiment, the housing is configured as a flange mounted to the bottom surface of the bearing plate. Preferably, the housing includes a threaded stem 490 that is inserted through or threaded into one of a plurality of holes 492 in the bearing plate. In one embodiment, the number of holes and the location of the holes in the bearing plate provide for the attachment of additional discrete bearings or the relocation or reconfiguration of the discrete bearings.

[0098] Each discrete bearing also includes a cover 494 attached to the housing and having a circular opening 496. The cover can be removable or fixed. A main ball 498 is disposed between and rotatable within the housing and the cover. The main ball extends through the circular opening toward the horizontal support surface. In one embodiment, a plurality of additional smaller balls is provided between the main ball and at least one of the housing and the cover. The additional smaller balls facilitate smoother rotation of the main ball within the housing and the cover. In one embodiment, the discrete bearings in the plurality of discrete bearings are disposed between the bearing plate and the support plate, and each main ball is in contact with the support plate. Therefore, each main ball rotates as the discrete bearing, which is attached to the bearing plate, moves along the support plate. This provides for rotation between the bearing plate, i.e., the rotating and pivoting frame, and the support plate, i.e., the horizontal surface of the fixed frame.

[0099] The number and arrangement of discrete bearings between the bearing plate and the horizontal support surface are varied. Suitable numbers of discrete bearings include at least three discrete bearings, at least four discrete bearings, at least five discrete bearings and more than five discrete bearings. In one embodiment, the rotating and pivoting frame includes five discrete bearings. Each discrete bearing is spaced a given distance from the vertical axis of rotation and therefore the rotating drive shaft. In one embodiment, this given distance is sufficient to support the forces and loads applied to the bearing plate from the rotating and pivoting frame and the articulating frame member, which are cantilevered from the vertical axis of rotation and the rotating drive shaft. Therefore, placing discrete bearings between the bearing plate and support surface at the given distance prevents tilting between the bearing plate and the support surface.

[0100] In one embodiment, each one of the plurality of discrete bearings is spaced along the bearing plate an equal distance from the vertical axis. Alternatively, the discrete bearings in the plurality of discrete bearings are spaced at two or more different distances from the vertical axis. In one embodiment, the discrete bearings in the

plurality of bearings are each spaced a unique distance from the vertical axis. In one embodiment, the discrete bearings in the plurality of discrete bearings are disposed along a common arc or circle centered on the vertical axis. The discrete bearings can be spaced evenly or uniformly from each other along the arc or circle. For example, the plurality of discrete bearings can contain five discrete bearings spaced equally around a circle centered on the vertical axis. Alternatively, the plurality of discrete bearings includes four discrete bearings, each bearing located on the corner of a square centered on the vertical axis. In one embodiment, the plurality of discrete bearings includes three discrete bearings arranged in triangle, for example an equilateral triangle, centered around the vertical axis.

[0101] In one embodiment the discrete bearings in the plurality of discrete bearings are arranged in two or more concentric circles centered on the vertical axis. Each concentric circle can contain at least one or two or more discrete bearings. In addition to circles, the discrete bearings can be arranged along oblong shapes. The bearings in the discrete bearings can also be arranged in other shapes, for example, along radial lines extending from the vertical axis, including straight lines and curved lines.

[0102] As the mounting flange of the rotating drive shaft is attached to the bearing plate, loads placed on the bearing plate translate into axial loads along the rotating drive shaft. While the rotating and pivoting frame can include just the plurality of discrete bearings between the bearing plate and the support plate, in one embodiment one or more thrust bearings are included in the rotating and pivoting frame to accommodate the axial loads along the rotating drive shaft while providing for rotation of the rotating drive shaft. In one embodiment, the rotating and pivoting frame includes an upper bearing assembly 500. The upper bearing assembly includes an upper bearing housing 502 disposed between the mounting flange and the support plate. An upper bearing assembly thrust ball bearing 504 is disposed within the housing. The rotating drive shaft passes through the upper bearing assembly and the thrust ball bearing.

[0103] The thrust ball bearing includes an upper bearing ring 506 in contact with the mounting flange and a lower bearing ring 508 in contact with the housing. Therefore, the thrust ball bearing is spaced from the support plate by the housing. In one embodiment, the lower bearing ring is in contact with the support plate. A plurality of ball bearings 510 is disposed between the upper bearing ring and the lower bearing ring. The rotating drive shaft is in contact with the plurality of ball bearings, and the rotating drive shaft and the mounting flange rotate with respect to the upper bearing assembly. The support plate does not rotate with respect to the upper bearing assembly.

[0104] In another embodiment, the rotating and pivoting frame includes a lower bearing assembly 512. The rotating and pivoting frame can include only the upper

bearing assembly, only the lower bearing assembly or both the upper bearing assembly and the lower bearing assembly. In one embodiment, the upper bearing assembly is identical to the lower bearing assembly. The lower bearing assembly includes a lower bearing housing 514 disposed between the support plate and the second end of the rotating drive shaft. Therefore, the lower bearing assembly is located below the support plate and horizontal support surface and within the fixed frame.

[0105] The lower bearing assembly includes a lower bearing assembly thrust ball bearing 515 disposed within the lower bearing housing. The rotating drive shaft passes through the thrust ball bearing. The thrust ball bearing includes an upper bearing ring 516 in contact with the housing. In one embodiment, the upper bearing ring is in contact with bottom surface of the support plate. The thrust ball bearing also includes a lower bearing ring 518 and a plurality of ball bearings 520 disposed between the upper bearing ring and the lower bearing ring. The rotating drive shaft is in contact with the plurality of ball bearings.

[0106] In one embodiment, the rotating and pivoting frame further includes a first or upper threaded locking ring 522 threaded onto the rotating drive shaft between the second end of the rotating drive shaft and the lower bearing assembly. The upper threaded locking ring is threaded onto a first threaded portion 523 of the rotating drive shaft. The upper threaded locking ring is in contact with the lower bearing assembly. In one embodiment, the upper threaded locking ring is in contact with the lower bearing ring of the lower bearing assembly to provide for rotation of the rotating drive shaft within the thrust ball bearing. The upper threaded locking ring secures the rotating and pivoting frame to the support plate and holds the lower bearing assembly against the bottom surface of the support plate. Removal of the upper threaded locking ring provides access to the bearing assemblies and removal of the rotating and pivoting frame from the fixed frame.

[0107] In one embodiment, a wrench such as a spanner wrench is used to remove the upper threaded locking ring. The upper threaded locking ring includes a pair of exterior notches 524 engaged by tangs in the spanner wrench to facilitate turning and removal of the upper threaded locking ring. In one embodiment, the spanner wrench is configured specifically for the arrangement of the notches to provide for easy removal of the threaded locking ring while preventing removal of the threaded locking ring with conventional wrenches or tools.

[0108] In one embodiment, the rotating and pivoting frame includes a removable drive collar 526 disposed over the rotating drive shaft adjacent the second end. The drive collar is removable and can be slid onto the rotating drive shaft from the second end. While the drive collar can move axially along the rotating drive shaft, the drive collar and rotating drive shaft are configured to engage each other such that drive collar does not rotate relative to the rotating drive shaft. Therefore, rotation of the drive collar

rotates the rotating drive shaft. In one embodiment, a pin can be inserted through the drive collar and rotating drive shaft. Alternatively, the rotating drive shaft along a portion of its length adjacent the second end includes a shape, grooves or ridges that engage a mating shape, ridges or grooves on an interior surface of the drive collar. This engagement translates rotational motion of the drive collar to the rotating drive shaft.

[0109] The rotating and pivoting frame also includes a second lower threaded locking ring 540 threaded onto the rotating drive shaft at the second end of the rotating drive shaft. The lower threaded locking ring is threaded onto a second threaded portion 544 of the rotating drive shaft that extends along a portion of the length of the rotating drive shaft from the second end. The lower threaded locking ring is in contact with the drive collar. The lower threaded locking ring holds and secures the drive collar on the rotating drive shaft. Removal of the lower threaded locking ring provides removal of the drive collar. In one embodiment, a wrench such as a spanner wrench is used to remove the lower threaded locking ring. The lower threaded locking ring includes a pair of exterior notches 544 engaged by tangs in the spanner wrench to facilitate turning and removal of the lower threaded locking ring. In one embodiment, the spanner wrench is configured specifically for the arrangement of the notches to provide for easy removal of the threaded locking ring while preventing removal of the threaded locking ring with conventional wrenches or tools.

[0110] In one embodiment, the drive collar includes a pair of arm assemblies 528 extending out from the drive collar. In another embodiment, the drive collar includes a pair of opposing arms. Each arm assembly extends radially out from the drive collar and vertical axis. In one embodiment, the arm assemblies are diametrically opposed. Alternatively, the arm assemblies extend out from the drive collar along separate radiuses that define an included angle of from about 90° to about 180°. In one embodiment, each arm assembly includes to pair of spaced arms 530, i.e., separate arms spaced from each other axially along the length of the rotating drive shaft and drive collar. The spaced arms create or define a bracket. The rotating and pivoting frame includes a rotation actuator 532 in contact with the fixed frame and one of the arm assemblies. As illustrated, therefore, the rotating and pivoting bed includes four actuators, a head portion actuator, a foot portion actuator, a rotation actuator and a pivot actuator. In one embodiment, all four actuators are linear actuators. In one embodiment, all four actuators are identical actuators.

[0111] In one embodiment, the push rod or extensible end 534 of the rotation actuator, which is a linear actuator, is disposed between the spaced arms of one of the arm assemblies. A set pin 536 passes through holes in each one of spaced arms and, when the rotation actuator is attached to a given arm assembly, the end of the extensible rod to secure the extensible rod in the bracket formed by the spaced arms. The extensible arm can

rotate with respect to the set pin.

[0112] Referring now to Figs. 23 and 24, the fixed drive end 548 of the rotation actuator 532 is pivotally attached to one of two actuator mounting brackets 544 attached to vertical frame members 546 extending down from an internal cross frame member 542 of the fixed frame 402. In one embodiment, the actuator mounting bracket is a "U" shaped bracket, and the fixed drive or motor end of the rotation actuator is held in the bracket with a set pin. Therefore, the rotation actuator can rotate or pivot within the fixed frame mounting bracket to which it is attached. The use of set pins to secure the rotation actuator in the fixed frame mounting brackets and between the spaced arms of the drive collar provides for ease of attachment of the rotation actuator to the fixed frame and drive collar. This attachment can be made after the bed is assembled and set-up and can be easily changed. Selection of the fixed frame mounting bracket and spaced arms on which the rotation actuator is mounted determines the direction of rotation of the rotating and pivoting frame.

[0113] As illustrated in Fig. 23, attachment of the rotation actuator to the fixed frame mounting bracket and spaced arms generally to the left of the vertical axis and rotating drive shaft produces rotation as indicated by arrow G. Attachment of the rotation actuator to the other fixed frame mounting bracket and spaced arms generally to the right of the vertical axis and rotating drive shaft produces rotation as indicated by arrow H. Therefore, the rotating and pivoting frame is rotatable around the vertical axis in a first direction of rotation (Arrow G) through an angle up to about 90° and in a second direction of rotation (Arrow H) through an angle up to about 90°. The first direction of rotation is opposite the second direction of rotation.

[0114] In one embodiment, removal and attachment of the rotation actuator occurs when rotating drive shaft is in the unrotated position, i.e., the articulating bed member is aligned with the fixed frame. In this position, each set of spaced arms extends from an opposite side of the drive collar towards one of the sides of the fixed frame. However, both sets of spaced arms extend toward the same end of the bed. Therefore, the position of attachment, i.e., the location of the set pins, for both sets of spaced arms is between the vertical axis and rotating drive shaft and the actuator mounting brackets 544 attached to vertical frame members 546. In one embodiment, the rotations actuator is disposed between the vertical axis and the foot end of the rotating and articulating bed.

[0115] Referring now to Figs. 25-28, exemplary embodiments are directed to a rotating and articulating bed 600 arranged as a plurality of discrete and interconnected frames and assemblies. The rotating and articulating bed includes a fixed bed frame 604, an articulating bed frame 602 and a rotating and pivoting frame 606 disposed between the fixed bed frame and the articulating bed frame. The articulating bed frame contains a plurality of distinct portions, e.g., head portion, center portion and foot portion, that are pivotally connected together, and

the articulating bed frame articulates these distinct portions with respect to each other as described herein. The rotating and pivoting frame is mounted on the fixed bed frame and is in communication with the articulating bed frame such that the rotating and pivoting frame and articulating bed frame rotate with respect to the fixed bed frame around a vertical axis 612 passing through the rotating and articulating bed frame, i.e., the fixed bed frame, the articulating bed frame and the rotating and pivoting frame.

[0116] In one embodiment, the rotating and pivoting frame includes a rotation assembly 610 and a pivot assembly 608 mounted on the rotation assembly. The rotation assembly is mounted on the fixed bed frame. The rotation assembly rotates the pivot assembly and the articulating bed frame with respect to the fixed bed frame around the vertical axis. The pivot assembly tilts the articulating bed frame, with respect to a horizontal plane 614 that is perpendicular to the vertical axis. In one embodiment, the pivot assembly tilts the articulating bed frame independent of rotation by the rotation assembly and articulation by the articulating bed frame of the various articulating bed frame portions. Therefore, the rotation assembly, the pivot assembly and the articulating bed frame are separate and independent assemblies and frames that are interconnected. While interconnected, the rotation assembly, the pivot assembly and the articulating bed frame provide the desired adjustments in the rotating and articulating bed independent of each other.

[0117] The fixed bed frame 604 includes a head end 618, a foot end 620 opposite the head end and a pair of opposing sides 622 extending from the head end to the foot end. The head end, foot end and opposing sides define an outer fixed bed frame. The fixed bed frame has a fixed frame length 626 from the head end to the foot end and a fixed frame width 628 between the pair of opposing sides. The fixed bed frame includes a horizontal support surface 624. The horizontal support surface is spaced from the floor or surface on which the rotating and articulating bed is placed and extends between the head end and the foot end and the opposing sides of the fixed bed frame. In one embodiment, the horizontal support surface extends the entire fixed frame length and the entire fixed frame width.

[0118] The fixed bed frame is constructed from framing members including tubular framing, that form the outer fixed bed frame and a plurality of internal framing members extending along the length and width of the fixed bed frame. The framings members include a cylindrical collar 640 extending vertically down from the horizontal support surface and centered on the vertical axis. The cylindrical collar accommodates the passage of drive shafts, electrical cords and wiring for the rotating and articulating and the framing and assembly elements located above the fixed bed frame. In one embodiment, the cylindrical collar accommodates a rotating drive shaft associated with the rotation assembly. The framing members also include at

least one actuator mount 642 accessible below the horizontal support surface. In one embodiment, the actuator mount provides for attachment of a linear actuator, for example, the linear actuator associated with the rotation assembly. Suitable materials for the framing members include wood, metal, composite and plastic framing materials. In one embodiment, the fixed bed frame is covered with upholstery and padding. For example, the fixed bed frame can be covered with skirting, panels, upholstery and padding. The outer fixed frame can include a plurality of fasteners or fastener locations 630 to provide for attachment of the skirting, panels, upholstery and padding.

[0119] In another embodiment, the fixed bed frame includes a plurality of legs 632 extending down from the framing members. As illustrated, the fixed bed frame includes four legs, one at each corner of the fixed bed frame. The legs contact the floor to space the framing members from the floor. In one embodiment, the legs are fixedly attached to the framing members. Alternatively, the legs are removably attached to the framing members, for example, using a threaded fitting or threaded fasteners. In one embodiment, the legs have a fixed length. Alternatively, the legs have adjustable lengths or are extensible.

[0120] In one embodiment, the fixed bed frame includes a pair of head end supports 634 extending up from the horizontal support surface and spaced from the head end 618 and a pair of foot end supports 635 extending up from the horizontal support surface and spaced from the foot end 620. The head end supports and foot end supports are spaced in from the head and foot ends a given distance 636. In one embodiment, the horizontal support surface is disposed between the head end supports and the foot end supports. In one embodiment, the head end and foot ends supports are also spaced in from the opposing sides of the fixed bed frame. The head end support and the foot end support have a support height 638 up from the horizontal support surface. The support height is selected to be sufficient to accommodate framing and operational elements located between the fixed frame and the articulating bed frame including the rotation assembly and pivot assembly. In one embodiment, the head end supports and the foot end supports, are secured to internal frame members using threaded fasteners or threaded fittings. In one embodiment, the rotating and articulating bed includes a head board (not shown) attached to the head end of the fixed bed frame and a foot board (not shown) attached to the foot end of the fixed bed frame opposite the head end. In one embodiment, at least one of the head board and foot board extends above the horizontal support surface.

[0121] The articulating bed frame 602 is mounted on the rotating and pivoting frame 606 and in particular on the pivot assembly. The articulating bed frame includes a plurality of pivotally connected distinct portions that can move or articulate with respect to each other to provide the desired positioning or arrangement in the articulating

bed frame. In addition, the articulating bed frame includes the actuators and framing components to move the distinct portions relative to each other.

[0122] The articulating bed frame 602 includes an articulating head portion 644 and a separate articulating foot portion 646. In one embodiment, the articulating foot portion includes a first articulating foot portion 650, and a second articulating foot portion 652 pivotally attached to the first articulating foot portion. Suitable arrangements of the articulating head portion and the articulating foot portion, the relative motion, i.e., articulation, between the portions and the framings members contained in the articulating head portion and the articulating foot portion are described above. In general, articulation of the articulating head portion and the articulating foot portion is conducted independent of other adjustments and movements of the articulating bed member including rotation, tilting, pivoting and sliding movement of the articulating bed member with respect to the fixed bed frame, the horizontal support surface and the horizontal plane 614.

[0123] In one embodiment, the articulating bed member includes a center portion 648 disposed between and in communication with the articulating head portion and the articulating foot portion. The articulating head portion is pivotally attached to the center portion, and the articulating foot portion is pivotally attached to the center portion opposite the articulating head portion. In one embodiment, the first articulating foot portion is pivotally attached to the center portion. The articulating head portion and the articulating foot portion articulate with respect to the articulating center portion. In one embodiment, articulation of the articulating head portion, the articulating center portion and the articulating foot portion with respect to each other occurs independent of rotational, tilting, pivoting and sliding movement of the articulating bed member with respect to the fixed frame.

[0124] In one embodiment, the articulating bed member includes at least one articulating head portion frame 654, a first articulating foot portion frame 656 and a second articulating foot portion frame 658 pivotally attached to the first articulating foot portion frame. The first and second articulating foot portion frames provide for separate positioning of the upper leg and lower leg portions of the articulating foot portion. The articulating bed member includes at least one articulating center portion frame 660 disposed between and pivotally attached to the articulating head portion frame and the articulating foot portion frame, e.g., the first articulating foot portion frame 656. All frames include multiple individual frame members.

[0125] In one embodiment, the articulating head portion, articulating center portion and articulating foot portion in combination span the fixed frame length from the head end to the foot end and the fixed bed frame. Individually, each span the fixed bed frame width between the pair of opposing sides. In one embodiment, the articulating head portion, articulating center portion and articulating foot portion in combination do not span

the fixed bed frame length from the head end to the foot end of the fixed bed frame but span along the length of the fixed bed frame from the head end supports 634 to the foot end supports 635. When the articulating bed frame is in the flat or horizontal position, the articulating head portion frame rests on the head end supports, and the articulating foot portion frame, i.e., the second articulating foot portion frame, rests on the foot end supports. Therefore, the frame members of the articulating bed portion are spaced from the head end and the foot end of the rotating and articulating bed.

[0126] In one embodiment, an articulating head portion platform 660 is mounted to the articulating head portion frame (Fig. 1), and a center portion platform 662 is mounted to the center portion frame. A first articulating leg portion platform 664 is mounted to the first articulating leg portion frame, and a second articulating leg portion platform 666 is mounted to the second articulating leg portion frame. The platforms provide support and attachment surfaces for mattresses attached to the rotating and articulating bed. As the frame members are spaced from the head end and the foot end, the articulating head portion platform includes a head portion platform overhang 668 extending past the articulating head portion frame by the given distance 636, and the articulating foot portion platform include a foot portion platform overhang 670 extending past the articulating foot portion frame by the given distance 636. Therefore, the platforms, in combination, span the fixed bed frame length 626.

[0127] The articulating bed frame includes a first actuator assembly 672, i.e., the head portion actuator, disposed between the articulating center portion frame and the articulating head portion frame. In addition, the articulating bed frame includes a second actuator assembly 674, i.e., the foot portion actuator, disposed between the articulating center portion frame and the articulating foot portion frame. The actuator assemblies include the actuators, motors, push rods and frame members, e.g., cross frame members, braces and mounting brackets, to provide the desired attachment of the actuators, pivoting of the actuators with respect to frame members and articulation among the articulating head portion, the articulation center portion and the articulating foot portion.

[0128] In one embodiment, the articulating bed frame includes a pair of arm attachment members 676 extending laterally out from the center portion frame on either side of the center portion frame. Therefore, in one embodiment, the articulating bed frame includes four arm attachment members. Each attached member is arranged as a hollow tubular frame element sized to accept the mounting arm portion of the one of the arms that are attached to the rotating and articulating bed. In one embodiment, at least one fastener 678 is provided for each pair of arm attachment members to secure the mounting arm portion in the arm attachment member. Suitable fasteners include, but are not limited to, set screws including knurled knobs with threaded screws.

[0129] Referring now to Figs. 28 - 32, the rotation assembly 610 includes a support plate 680 mounted to the fixed bed frame and in particular the horizontal support surface of the fixed bed frame. In one embodiment, the support plate is rectangular or square; however, other shapes can be used, for example, circular. The support plate is supported by the framing members of the fixed bed frame and extends along at least a portion of the width and the length of the horizontal support surface. Suitable methods for attaching the support plate to the horizontal support surface include, but are not limited to, using fasteners and welds. The support plate can include a plurality of fasteners holes 681 to facilitate attachment to the fixed bed frame using fasteners. In one embodiment, the support plate is disposed on top of the horizontal support surface. Alternatively, the horizontal support surface is configured to integrate the support plate into the horizontal support surface. Suitable materials for the support plate include, but are not limited to, wood, metal, plastics, polymers, composite materials and combinations thereof.

[0130] The rotation assembly 610 also includes a bearing plate 682 spaced from and parallel to the support plate. In one embodiment, the bearing plate is identical to the support plate in size, shape, material and thickness. Alternatively, the bearing plate differs from the support plate in at least one of size, shape, material and thickness. In one embodiment, the bearing plate is rectangular or square; however, other shapes can be used, for example, circular. Suitable materials for the bearing plate include, but are not limited to, wood, metal, plastics, polymers, composite materials and combinations thereof.

[0131] The rotation assembly includes a plurality of distinct and discrete bearings 684. In one embodiment, the rotation assembly includes eight discrete bearings. In one embodiment, each discrete bearing is a discrete wheel bearing. In one embodiment, the plurality of discrete wheel bearings is disposed between the support plate and the bearing plate. Referring now to Figs. 34 and 35, in one embodiment, each discrete wheel bearing 684 includes a mount 686 and a bearing wheel 688. The mount is used to attach the wheel bearing to the rotation assembly and to hold the bearing wheel. In one embodiment, each wheel bearing is attached to the support plate. The bearing wheel is rotatably disposed in the mount. In one embodiment, the bearing wheel rotates around a shaft 690 or axle passing through the mount and bearing wheel. Alternatively, the bearing wheel is fixedly secured in the amount and the outer portion 692 of the bearing wheel rotates around the inner portion 694 of the wheel that is fixedly attached to the mount.

[0132] When the wheel bearing is attached to the support plate, each bearing wheel is in contact with the bearing plate. In one embodiment, the outer portion of the bearing wheel is in contact with the bearing plate. Therefore, the bearing rotates with respect to the support plate, which is secured to the fixed frame, on the wheel bear-

ings. Each bearing wheel rotates about an axis 696 passing through the mount and bearing wheel. In one embodiment, this axis is perpendicular to the vertical axis, i.e. parallel to the horizontal plane, with the wheel bearing mounted to the support plate. Alternatively, this axis intersects the vertical axis at an angle other than 90 degrees. In one embodiment, each one of the plurality of discrete bearings is spaced along the support plate an equal distance from the vertical axis. In one embodiment, the wheel bearings are arranged on the support plate in a circle centered on the vertical axis. In one embodiment, the discrete bearings are spaced equally around the circle centered on the vertical axis. By spacing the discrete bearings from the central axis, the bearings, in addition to providing for rotation of the bearing plate with respect to the support plate, provide support for any moments applied to the bearing plate.

[0133] Returning to Figs. 28-33, the rotation assembly 610 assembly includes a mounting flange 698 attached to the bearing plate. In one embodiment, the mounting flange is attached to the bearing plate using a plurality of fasteners, for example, threaded fasteners. In one embodiment, the mounting flange is attached to a bottom face of the bearing plate opposite the pivot assembly and between the bearing plate and the support plate. The rotation assembly includes a rotating drive shaft 700 centered on the vertical axis 612 and attached to the mounting flange. Therefore, rotation of the rotating drive shaft rotates the mounting flange and the bearing plate. Suitable methods for attaching the rotating drive shaft to the mounting flange include welds. In one embodiment, the rotating drive shaft is a hollow drive shaft. In one embodiment, the rotating drive shaft extends through the mounting flange and bearing plate such that a first end 702 of the rotating drive shaft is flush a top face of the bearing plate opposite the bottom face. This facilitates use of the rotating drive shaft as a conduit for electrical leads and other wires through the rotation assembly and into the pivot assembly and articulating bed frame.

[0134] The rotation assembly also includes a bearing housing 704 disposed between the bearing plate and the support plate. In particular, the bearing housing is disposed between the between the flange and the support plate. The bearing housing is in contact with the flange opposite the bearing plate. The bearing housing is cylindrical, having a circular cross section, and a thrust bearing 705 is disposed in the bearing housing. The thrust bearing includes a lower bearing ring 706 adjacent the support plate, an upper bearing ring 708 in contact with the bearing housing, and a plurality of ball bearings 710 disposed between the lower bearing ring and the upper bearing ring. The rotating drive shaft passes through the thrust bearing and the bearing housing and is in contact with the plurality of ball bearings.

[0135] The rotating drive shaft is attached to the mounting flange adjacent the first end 702 of the rotating drive shaft. The rotating drive shaft also includes a second end 712 opposite the first end. When assembled, the rotating

drive shaft passes through the support plate, and the support plate is located between the first end and the second end of the rotating drive shaft. A removable drive collar 714 is disposed over the rotating drive shaft adjacent the second end of the rotating drive. Rotation of the drive collar rotates the rotating drive shaft, and, therefore, the bearing plate.

[0136] In one embodiment, the drive collar includes a pair of arm assemblies 716 extending out from the drive collar. In another embodiment, the drive collar includes a pair of opposing arms. Each arm assembly extends radially out from the drive collar and vertical axis. In one embodiment, the arm assemblies are diametrically opposed. Alternatively, the arm assemblies extend out from the drive collar along separate radiuses that define an included angle of from about 90° to about 180°. In one embodiment, each arm assembly includes to pair of spaced arms 718, i.e., separate arms spaced from each other axially along the length of the rotating drive shaft and drive collar. The spaced arms create or define a bracket. The rotating and pivoting frame includes a rotation actuator 720 in contact with the actuator mount 642 on the fixed frame and one of the arm assemblies. In particular, the drive or motor portion of the rotation actuator is attached to one of two mounting brackets 643 attached of the actuator mount. The rotation actuator is attached using a set pin passing through the mounting bracket and the rotating actuator. As illustrated, therefore, the rotating and pivoting bed includes four actuators, a head portion actuator, a foot portion actuator, a rotation actuator and a pivot actuator. In one embodiment, all four actuators are linear actuators. In one embodiment, all four actuators are identical actuators.

[0137] In one embodiment, the push rod or extensible end 722 of the rotation actuator, which is a linear actuator, is disposed between the spaced arms of one of the arm assemblies. A set pin passes through holes in each one of spaced arms and, when the rotation actuator is attached to a given arm assembly, the end of the extensible rod to secure the extensible rod in the bracket formed by the spaced arms. The extensible arm can rotate with respect to the set pin.

[0138] To translate rotation of the drive collar into rotation of the rotatable drive shaft, the driver collar includes a drive collar passage 724 and the rotating drive shaft includes a corresponding drive shaft passage 726. Suitable passages include circular passages. The passages are aligned, and a set pin or shear pin (not shown) is inserted through the passages. This links the drive collar to the rotating drive shaft to translate rotation of the drive collar to rotation of the rotatable drive shaft. The passages and pin can also be used to attach the drive collar to the rotating drive shaft. In one embodiment, the drive collar is secured to the rotating drive shaft using a fastener 728 that passes through a washer 730 engaging the bottom of the drive collar. The fastener is attached to a fitting 732, for example, a threaded fitting, that is secured to the second end of the rotating drive shaft.

[0139] In addition to being secured to the fixed bed frame using the support plate attached to the fixed bed frame and the rotation actuator 720 in contact with the actuator mount 642, the rotating drive shaft passes through the cylindrical collar 640 that is attached to the fixed bed frame. The drive collar and rotation actuator as disposed below the cylindrical collar, and the other elements of the rotation assembly are located above the cylindrical collar. A bearing collar 734 is provided on either end of the cylindrical collar. The rotating drive shaft passes through the bearing collars, providing for rotation of the rotating drive shaft and a secure fit for the rotating drive shaft. The rotation actuator extends between one of the mounting brackets 643 of the actuator mount and one of the arm assemblies 716. Selection of the mounting bracket and arm assembly defines the direction of rotation, i.e., clockwise or counter clockwise, of the bearing plate and the pivot assembly and articulating bed frame mounted on the bearing plate.

[0140] Referring now to Figs. 28 and 36-37, the pivot includes a base frame 736 fixedly attached to the bearing plate. In one embodiment, the base frame is attached to the bearing plate using a plurality of fasteners 740. Suitable fasteners include threaded fasteners, for example, threaded screws including knurled knobs with threaded screws. In one embodiment, the base frame is attached to the bearing plate using two fasteners. In another embodiment, the base frame is attached to the bearing plate using four fasteners. The bearing plate includes a plurality of holes 741 (Fig. 29), including threaded holes, to provide for attachment of the base frame to the bearing plate. The base frame is attached to the bearing plate on a side opposite the plurality of discrete bearings.

[0141] The base frame includes a pair of parallel beam members 742 in contact with the bearing plate. At least one beam member is secured to the bearing plate with the plurality of fasteners. Preferably, both beam members are secured to the bearing plate using the plurality of fasteners, e.g., two fasteners. Each beam member includes a lower flanged portion 750 in contact with the bearing plate and an upper flanged portion 752 that contacts the articulating bed frame. The lower flanged portion is spaced from the upper flanged portion by a central vertical portion 754. The central vertical portion has a thickness sufficient to accommodate the structures, frame elements and actuators in the pivot assembly and the articulating bed frame. In one embodiment, each central vertical portion includes a pivot hole 756 to accept a pivot point 758 (Figs. 28 and 26) on an arm of the second actuator assembly in the articulating bed frame. This engagement connects the pivot assembly to the articulating bed frame and provides the desired pivoting motion to raise the foot portions of the articulating bed frame. Additional rigidity and structural strength are provided to each beam member by a first vertical support 760 and a separate second vertical support 762 extending between the lower flanged portion and the upper flanged portion. In one embodiment, the first and second vertical

supports are hollow square tubing.

[0142] The parallel beam members are connected by a first cross member 748 and a second cross member 746 connected to and passing between the central vertical portions. In one embodiment, the first cross member and the second cross member are parallel. In one embodiment, both the first cross member and the second cross member are hollow square metal tubing. Preferably, the cross-section of the first cross member square tubing is larger than the cross-section of the second cross member. A pivot actuator mounting bracket 764 is attached to the first cross member. The pivot actuator 766 is attached to the mounting bracket. In particular, the extensible arm 768 of the pivot actuator is attached to the mounting bracket using a mounting pin 770 passing through the mounting bracket and extensible arm. The mounting pin is secured in place with a cotter pin 772. The drive portion 774 of the pivot actuator is attached to the articulating bed frame and in particular the center portion of the articulating bed frame. Therefore, extension of the pivot actuator moves and tilts the center portion of the articulating bed frame, and therefore, the articulating bed frame, with respect to the fixed frame and the horizontal plane 614 (Fig. 26).

[0143] The pivot assembly also includes at least one pivot arm 738 pivotally attached to the base frame. Preferably, the pivot assembly includes two pivot arms. Each pivot arm is attached to one of the parallel beam members. Suitable materials for the pivot arms include hollow rectangular tubing. Each pivot arm is attached adjacent a first end 782 to one of the parallel beam members at the second vertical support 762, extending from the upper flange portion a distance less than or equal to a thickness 780 of the lower flanged portion. The pivot arm pivots around a pivot arm axis 776 extending through the pivot arm, the second vertical support and the beam member. Each pivot arm rotates on bearing collars 778 extending through the pivot arm and second vertical support. Each pivot arm, adjacent a second end 784 opposite the first end, is attached to the center portion frame of the articulating bed frame. As the pivot actuator is extended and push on the center portion of the articulating bed frame, the pivot arms rotate with respect to the fixed frame in the direction of arrow Z (Fig. 28). This lifts the second ends of the pivot arms up, defining an angle between the pivot arms and the upper flanged portions of the beam members. As the second ends of the pivot arms are attached to the center portion frame, the angle between the pivot arms and the upper flanged portion is the tilt of the center portion, and therefore, the articulating bed frame.

[0144] Exemplary embodiments provide a rotating and articulating bed configured as three separate and discrete frames, a fixed bed frame, an articulating bed frame and a rotating and pivoting frame, with the rotating and pivoting frame arranged as a rotation assembly 610 and a pivot assembly. The articulating bed frame, the pivoting assembly and the rotation assembly are interconnected. However, each one of these three components provide

distinct adjustments in the rotating and articulating bed, i.e., articulation of the bed surfaces in the articulating bed frame, tilting of the articulating bed frame and rotating of the articulating bed frame. Each one of these three adjustments is provided independent of the other two adjustments. In addition, the articulating bed frame, pivot assembly, rotation assembly and fixed bed frame can be assembled and disassembled, which facilitates shipping of the rotating and articulating bed frame. The rotation assembly provides for rotation of the articulating bed frame around a plurality of discrete roller bearings in either a first or a second direction of rotation. The discrete roller bearings, in addition to providing improved rotational motion, provide greater support and stability to the pivot assembly and the articulating bed frame in particular for forces and loads applied to the articulating bed frame away from a vertical axis around which the articulating bed frame rotates.

Claims

1. A rotating and articulating bed (600) comprising:

a fixed bed frame (604);
 an articulating bed frame (602); and
 a rotating and pivoting frame (606) mounted on the fixed bed frame (604) and in communication with the articulating bed frame (602), the rotating and pivoting frame (606) comprising a plurality of discrete bearings (684), the rotating and pivoting frame (606) and articulating bed frame (602) rotatable with respect to the fixed bed frame (604) on the plurality of discrete bearings (684) around a vertical axis (612) passing through the fixed bed frame (604), articulating bed frame (602) and rotating and pivoting frame (606), wherein each discrete bearing (684) comprises a bearing wheel (688);
 wherein:
 the rotating and pivoting frame (606) comprises:
 a pivot assembly (608) in communication with the articulating bed frame (602) to tilt the entire articulating bed frame (602) with respect to a horizontal plane (614) that is perpendicular to the vertical axis (612).

2. The rotating and articulating bed (600) of claim 1, wherein:

each bearing wheel (688) rotates about an axis perpendicular to the vertical axis.

3. The rotating and articulating bed (600) of claim 1, wherein:

each one of the plurality of discrete bearings (684) is spaced an equal distance from the vertical axis (612).

4. The rotating and articulating bed of claim 1, wherein: the plurality of discrete bearings (684) comprises eight discrete bearings (684); optionally the eight discrete bearings (684) being spaced equally around a circle centered on the vertical axis (612).

5. The rotating and articulating bed (600) of claim 1, wherein:

the rotating and pivoting frame (606) comprises:
 a rotation assembly (610) mounted on the fixed bed frame (604), the pivot assembly (608) secured to the rotation assembly (610) and the rotation assembly (610) providing rotation between the pivot assembly (608) and the fixed bed frame (604) independent of movement of the articulating bed frame (602) by the pivot assembly (608), the plurality of discrete bearings (684) disposed in the rotation assembly (610).

6. The rotating and articulating bed (600) of claim 5, wherein:

the rotation assembly (610) comprises:

a support plate (680) mounted on the fixed bed frame (604);
 a bearing plate (682) spaced from the support plate (680); and
 a rotating drive shaft (700) extending through the support plate (680) and centered on the vertical axis (612), the rotating drive shaft (700) secured to the support plate (680) such that rotation of the rotating drive shaft (700) rotates the bearing plate (682);

wherein the plurality of discrete bearings (684) are disposed between and in contact with the support plate (680) and the bearing plate (682).

7. The rotating and articulating bed (600) of claim 6, wherein:

the rotation assembly (610) further comprises:

a mounting flange attached to the bearing plate (682), the rotating drive shaft (700) attached to the mounting flange;
 a bearing housing (704) disposed between the flange and the support plate (680); and
 a thrust bearing (705) disposed in the bearing housing (704), the rotating drive shaft (700) passing through the thrust bearing (705).

8. The rotating and articulating bed (600) of claim 6, wherein:

the rotation assembly (610) further comprises:

a mounting flange (698) attached to the bearing plate (682), the rotating drive shaft (700) at-

tached to the mounting flange (698) at a first end (702) of the rotating drive shaft (700); and a removable drive collar (714) disposed over the rotating drive shaft (700) adjacent a second end (712) of the rotating drive shaft (700) opposite the first end (702);
 wherein rotation of the drive collar (714) rotates the rotating drive shaft (700) and the support plate (680) is disposed between the first end (702) and the second end (712), optionally, wherein:

the removable drive collar (714) comprises a pair of arm assemblies (716) extending out from the drive collar (714); and the rotation assembly (610) further comprises a rotation actuator (720) attached to one of the arm assemblies (716) and the fixed bed frame (604).

9. The rotating and articulating bed (600) of claim 6, wherein:

each discrete bearing (684) comprises:

a mount (686) attached to the support plate (680); and
 a bearing wheel (688) rotatably disposed in the mount, each bearing wheel (688) in contact with the bearing plate (682).

10. The rotating and articulating bed (600) of claim 6, wherein:

the pivot assembly (608) comprises:

a base frame (736) fixedly attached to the bearing plate (682); and
 at least one pivot arm (738) pivotally attached to the base frame (736) and connected to the articulating bed frame.

11. The rotating and articulating bed (600) of claim 10, wherein:

the base frame (736) includes a pair of parallel beam members (742) in contact with the bearing plate (682), at least one beam member (742) secured to the bearing plate (682) with a plurality of fasteners.

12. The rotating and articulating bed (600) of claim 10, wherein:

the articulating bed frame (602) comprises:

a center portion (648);
 an articulating head portion (644) pivotally attached to the center portion;
 an articulating foot portion (646) pivotally attached to the center portion (648);
 a first linear actuator (672) connected be-

tween the center portion (648) and the articulating head portion (644); and
 a second linear actuator (674) connected between the center portion (648) and the articulating foot portion (646);

the pivot arm (738) is attached to the center portion (648); and
 the pivot assembly (608) further comprises a pivot actuator connected to the base frame (736) and the center portion (648).

13. A rotating and articulating bed (600) as claimed in Claim 1, wherein:

the rotating and pivoting frame (606) comprises a rotation assembly (610) mounted on the fixed bed frame (604);

the pivot assembly (608) is mounted on the rotation assembly;

the articulating bed frame (602) is mounted on the pivot assembly (608), and comprises a plurality of pivotally connected distinct portions;

the rotation assembly (610) rotates the pivot assembly (608) and the articulating bed frame (602) with respect to the fixed bed frame (604) around a vertical axis passing through the rotating and articulating bed; and

the pivot assembly (608) tilts the entire articulating bed frame with respect to the horizontal plane (614) that is perpendicular to the vertical axis independent of rotation by the rotation assembly (610) and articulation of the distinct portions.

14. The rotating and articulating bed (600) of claim 13, wherein:

the rotation assembly (610) comprises:

a support plate (680) mounted on the fixed bed frame (604); and

a bearing plate (682) spaced from the support plate (680);

wherein:

the pivot assembly (608) is mounted on the bearing plate;

the plurality of discrete wheel bearings (684) is disposed between the support plate (680) and the bearing plate (682);

each discrete wheel bearing (684) comprises a mount attached to the support plate (680);

each bearing wheel is rotatably disposed in the mount; and

each bearing wheel is in contact with the bearing plate (682).

Patentansprüche

1. Rotierendes und gelenkiges Bett (600), umfassend:

ein festes Bettgestell (604);
 ein gelenkiges Bettgestell (602); und
 ein rotierendes und schwenkendes Gestell (606), das auf dem festen Bettgestell (604) montiert und in Kommunikation mit dem gelenkigen Bettgestell (602) ist, wobei das rotierende und schwenkende Gestell (606) eine Vielzahl von diskreten Lagern (684) umfasst, wobei das rotierende und schwenkende Gestell (606) und das gelenkige Bettgestell (602) in Bezug auf das feste Bettgestell (604) auf der Vielzahl von diskreten Lagern (684) um eine vertikale Achse (612) rotierbar sind, die durch das feste Bettgestell (604), das gelenkige Bettgestell (602) und das rotierende und schwenkende Gestell (606) verläuft, wobei jedes diskrete Lager (684) ein Lagerrad (688) umfasst; wobei:
 das rotierende und schwenkende Gestell (606) Folgendes umfasst:
 eine Schwenkbaugruppe (608) in Kommunikation mit dem gelenkigen Bettgestell (602), um das gesamte gelenkige Bettgestell (602) in Bezug auf eine horizontale Ebene (614), die senkrecht zu der vertikalen Achse (612) ist, zu kippen.

2. Rotierendes und gelenkiges Bett (600) nach Anspruch 1, wobei:

jedes Lagerrad (688) um eine Achse senkrecht zu der vertikalen Achse rotiert.

3. Rotierendes und gelenkiges Bett (600) nach Anspruch 1, wobei:

jedes aus der Vielzahl von diskreten Lagern (684) in einem gleichen Abstand von der vertikalen Achse (612) beabstandet ist.

4. Rotierendes und gelenkiges Bett nach Anspruch 1, wobei:

die Vielzahl von diskreten Lagern (684) acht diskrete Lager (684) umfasst; optional die acht diskreten Lager (684) gleichmäßig um einen Kreis beabstandet sind, der auf der vertikalen Achse (612) zentriert ist.

5. Rotierendes und gelenkiges Bett (600) nach Anspruch 1, wobei:

das rotierende und schwenkende Gestell (606) Folgendes umfasst:
 eine Rotationsbaugruppe (610), die auf dem festen Bettgestell (604) montiert ist, wobei die Schwenkbaugruppe (608) an der Rotationsbaugruppe (610) gesichert ist und die Rotationsbaugruppe (610) Ro-

tation zwischen der Schwenkbaugruppe (608) und dem festen Bettgestell (604) unabhängig von Bewegung des gelenkigen Bettgestells (602) durch die Schwenkbaugruppe (608) bereitstellt, wobei die Vielzahl von diskreten Lagern (684) in der Rotationsbaugruppe (610) angeordnet ist.

6. Rotierendes und gelenkiges Bett (600) nach Anspruch 5, wobei:

die Rotationsbaugruppe (610) Folgendes umfasst:
 eine Stützplatte (680), die an dem festen Bettgestell (604) montiert ist;
 eine Lagerplatte (682), die von der Stützplatte (680) beabstandet ist; und
 eine rotierende Antriebswelle (700), die sich durch die Stützplatte (680) erstreckt und auf der vertikalen Achse (612) zentriert ist, wobei die rotierende Antriebswelle (700) an der Stützplatte (680) gesichert ist, sodass Rotation der rotierenden Antriebswelle (700) die Lagerplatte (682) rotiert;
 wobei die Vielzahl von diskreten Lagern (684) zwischen und in Kontakt mit der Stützplatte (680) und der Lagerplatte (682) angeordnet ist.

7. Rotierendes und gelenkiges Bett (600) nach Anspruch 6, wobei:

die Rotationsbaugruppe (610) ferner Folgendes umfasst:
 einen Montageflansch, der an der Lagerplatte (682) angebracht ist, wobei die rotierende Antriebswelle (700) an dem Montageflansch angebracht ist;
 ein Lagergehäuse (704), das zwischen dem Flansch und der Stützplatte (680) angeordnet ist; und
 ein Drucklager (705), das in dem Lagergehäuse (704) angeordnet ist, wobei die rotierende Antriebswelle (700) durch das Drucklager (705) verläuft.

8. Rotierendes und gelenkiges Bett (600) nach Anspruch 6, wobei:

die Rotationsbaugruppe (610) ferner Folgendes umfasst:
 einen Montageflansch (698), der an der Lagerplatte (682) angebracht ist, wobei die rotierende Antriebswelle (700) an dem Montageflansch (698) an einem ersten Ende (702) der rotierenden Antriebswelle (700) angebracht ist; und
 einen entfernbaren Antriebskragen (714), der über der rotierenden Antriebswelle (700) benachbart zu einem zweiten Ende (712) der rotierenden Antriebswelle (700) gegenüber dem ersten Ende (702) angeordnet ist;

- wobei Rotation des Antriebskragens (714) die rotierende Antriebswelle (700) rotiert und die Stützplatte (680) zwischen dem ersten Ende (702) und dem zweiten Ende (712) angeordnet ist,
wobei optional:
- der entfernbare Antriebskragen (714) ein Paar Armbaugruppen (716) umfasst, die sich von dem Antriebskragen (714) nach außen erstrecken; und
die Rotationsbaugruppe (610) ferner einen Rotationsaktor (720) umfasst, der an einer von den Armbaugruppen (716) und dem festen Bettgestell (604) angebracht ist.
- 9.** Rotierendes und gelenkiges Bett (600) nach Anspruch 6, wobei:
jedes diskrete Lager (684) Folgendes umfasst:
- eine Halterung (686), die an der Stützplatte (680) angebracht ist; und
ein Lagerrad (688), das rotierbar in der Halterung angeordnet ist, wobei jedes Lagerrad (688) in Kontakt mit der Lagerplatte (682) ist.
- 10.** Rotierendes und gelenkiges Bett (600) nach Anspruch 6, wobei:
die Schwenkbaugruppe (608) Folgendes umfasst:
- ein Basisgestell (736), das fest an der Lagerplatte (682) angebracht ist; und
zumindest einen Schwenkarm (738), der schwenkbar an dem Basisgestell (736) angebracht und mit dem gelenkigen Bettgestell verbunden ist.
- 11.** Rotierendes und gelenkiges Bett (600) nach Anspruch 10, wobei:
das Basisgestell (736) ein Paar paralleler Träger-elemente (742) in Kontakt mit der Lagerplatte (682) beinhaltet, wobei zumindest ein Träger-element (742) an der Lagerplatte (682) mit einer Vielzahl von Befestigungen gesichert ist.
- 12.** Rotierendes und gelenkiges Bett (600) nach Anspruch 10, wobei:
das gelenkige Bettgestell (602) Folgendes umfasst:
- einen Mittelabschnitt (648);
einen gelenkigen Kopfabschnitt (644), der schwenkbar an dem Mittelabschnitt angebracht ist;
einen gelenkigen Fußabschnitt (646), der schwenkbar an dem Mittelabschnitt (648) angebracht ist;
einen ersten linearen Aktor (672), der zwischen dem Mittelabschnitt (648) und dem gelenkigen
- Kopfabschnitt (644) verbunden ist; und
einen zweiten linearen Aktor (674), der zwischen dem Mittelabschnitt (648) und dem gelenkigen Fußabschnitt (646) verbunden ist;
wobei der Schwenkarm (738) an dem Mittelabschnitt (648) angebracht ist; und
die Schwenkbaugruppe (608) ferner einen Schwenkaktor umfasst, der mit dem Basisgestell (736) und dem Mittelabschnitt (648) verbunden ist.
- 13.** Rotierendes und gelenkiges Bett (600) nach Anspruch 1, wobei:
- das rotierende und schwenkende Gestell (606) eine Rotationsbaugruppe (610) umfasst, die an dem festen Bettgestell (604) montiert ist;
die Schwenkbaugruppe (608) an der Rotationsbaugruppe montiert ist;
das gelenkige Bettgestell (602) an der Schwenkbaugruppe (608) montiert ist und eine Vielzahl von schwenkbar verbundenen unterschiedlichen Abschnitten umfasst;
die Rotationsbaugruppe (610) die Schwenkbaugruppe (608) und das gelenkige Bettgestell (602) in Bezug auf das feste Bettgestell (604) um eine vertikale Achse rotiert, die durch das rotierende und gelenkige Bett verläuft; und
die Schwenkbaugruppe (608) das gesamte gelenkige Bettgestell in Bezug auf die horizontale Ebene (614), die senkrecht zu der vertikalen Achse ist, unabhängig von Rotation durch die Rotationsbaugruppe (610) und Gelenk der unterschiedlichen Abschnitte kippt.
- 14.** Rotierendes und gelenkiges Bett (600) nach Anspruch 13, wobei:
die Rotationsbaugruppe (610) Folgendes umfasst:
- eine Stützplatte (680), die an dem festen Bettgestell (604) montiert ist; und
eine Lagerplatte (682), die von der Stützplatte (680) beabstandet ist;
wobei:
- die Schwenkbaugruppe (608) an der Lagerplatte montiert ist;
die Vielzahl von diskreten Radlagern (684) zwischen der Stützplatte (680) und der Lagerplatte (682) angeordnet ist;
jedes diskrete Radlager (684) eine Halterung umfasst, die an der Stützplatte (680) angebracht ist;
jedes Lagerrad rotierbar in der Halterung angeordnet ist; und
jedes Lagerrad in Kontakt mit der Lagerplatte (682) ist.

Revendications**1.** Lit rotatif et articulé (600) comprenant :

un cadre de lit fixe (604) ;
 un cadre de lit articulé (602) ; et
 un cadre rotatif et pivotant (606) monté sur le cadre de lit fixe (604) et en communication avec le cadre de lit articulé (602), le cadre rotatif et pivotant (606) comprenant une pluralité de roulements discrets (684), le cadre rotatif et pivotant (606) et le cadre de lit articulé (602) pouvant tourner par rapport au cadre de lit fixe (604) sur la pluralité de roulements discrets (684) autour d'un axe vertical (612) traversant le cadre de lit fixe (604), le cadre de lit articulé (602) et le cadre rotatif et pivotant (606), dans lequel chaque roulement discret (684) comprend une roue de roulement (688) ;
 dans lequel :
 le cadre rotatif et pivotant (606) comprend :
 un ensemble de pivot (608) en communication avec le cadre de lit articulé (602) pour incliner la totalité du cadre de lit articulé (602) par rapport à un plan horizontal (614) qui est perpendiculaire à l'axe vertical (612).

2. Lit rotatif et articulé (600) de la revendication 1, dans lequel :
 chaque roue de roulement (688) tourne autour d'un axe perpendiculaire à l'axe vertical.

3. Lit rotatif et articulé (600) de la revendication 1, dans lequel :
 chacun de la pluralité de roulements discrets (684) est espacé d'une distance égale de l'axe vertical (612).

4. Lit rotatif et articulé de la revendication 1, dans lequel :
 la pluralité de roulements discrets (684) comprend huit roulements discrets (684) ; éventuellement, les huit roulements discrets (684) sont espacés de manière égale autour d'un cercle centré sur l'axe vertical (612).

5. Lit rotatif et articulé (600) de la revendication 1, dans lequel :
 le cadre rotatif et pivotant (606) comprend :
 un ensemble de rotation (610) monté sur le cadre de lit fixe (604), l'ensemble de pivot (608) fixé solidement à l'ensemble de rotation (610) et l'ensemble de rotation (610) fournissant une rotation entre l'ensemble de pivot (608) et le cadre de lit fixe (604) indépendamment d'un mouvement du cadre de lit articulé (602) par l'ensemble de pivot (608), la pluralité de roulements discrets (684) disposés dans l'ensemble de rotation (610).

6. Lit rotatif et articulé (600) de la revendication 5, dans lequel :
 l'ensemble de rotation (610) comprend :

5 une plaque de support (680) montée sur le cadre de lit fixe (604) ;
 une plaque de roulement (682) espacée de la plaque de support (680) ; et
 10 un arbre d'entraînement rotatif (700) s'étendant à travers la plaque de support (680) et centré sur l'axe vertical (612), l'arbre d'entraînement rotatif (700) fixé solidement à la plaque de support (680) de sorte que la rotation de l'arbre d'entraînement rotatif (700) fait tourner la plaque de roulement (682) ;
 15 dans lequel la pluralité de roulements discrets (684) sont disposés entre la plaque de support (680) et la plaque de roulement (682) et en contact avec celles-ci.

7. Lit rotatif et articulé (600) de la revendication 6, dans lequel :
 l'ensemble de rotation (610) comprend en outre :

25 une bride de montage fixée à la plaque de roulement (682), l'arbre d'entraînement rotatif (700) fixé à la bride de montage ;
 un boîtier de roulement (704) disposé entre la bride et la plaque de support (680) ; et
 30 un roulement de butée (705) disposé dans le boîtier de roulement (704), l'arbre d'entraînement rotatif (700) traversant le roulement de butée (705).

8. Lit rotatif et articulé (600) de la revendication 6, dans lequel :
 l'ensemble de rotation (610) comprend en outre :

40 une bride de montage (698) fixée à la plaque de roulement (682), l'arbre d'entraînement rotatif (700) fixé à la bride de montage (698) au niveau d'une première extrémité (702) de l'arbre d'entraînement rotatif (700) ; et
 45 un collier d'entraînement amovible (714) disposé sur l'arbre d'entraînement rotatif (700) adjacent à une seconde extrémité (712) de l'arbre d'entraînement rotatif (700) opposée à la première extrémité (702) ;
 dans lequel la rotation du collier d'entraînement (714) fait tourner l'arbre d'entraînement rotatif (700) et la plaque de support (680) est disposée entre la première extrémité (702) et la seconde extrémité (712), éventuellement, dans lequel :

55 le collier d'entraînement amovible (714) comprend une paire d'ensembles de bras (716) s'étendant vers l'extérieur à partir du collier d'entraînement (714) ; et

- l'ensemble de rotation (610) comprend en outre un actionneur de rotation (720) fixé à l'un des ensembles de bras (716) et au cadre de lit fixe (604).
- 5
- 9.** Lit rotatif et articulé (600) de la revendication 6, dans lequel :
- chaque roulement discret (684) comprend :
- un support de montage (686) fixé à la plaque de support (680) ; et
- 10 une roue de roulement (688) disposée de manière rotative dans le support de montage, chaque roue de roulement (688) en contact avec la plaque de roulement (682).
- 15
- 10.** Lit rotatif et articulé (600) de la revendication 6, dans lequel :
- l'ensemble de pivot (608) comprend :
- 20 un cadre de base (736) fixé de manière fixe à la plaque de roulement (682) ; et au moins un bras de pivot (738) fixé de manière pivotante au cadre de base (736) et relié au cadre de lit articulé.
- 25
- 11.** Lit rotatif et articulé (600) de la revendication 10, dans lequel :
- le cadre de base (736) comprend une paire d'éléments de poutre parallèles (742) en contact avec la plaque de roulement (682), au moins un élément de poutre (742) fixé solidement à la plaque de roulement (682) par une pluralité d'attaches.
- 30
- 12.** Lit rotatif et articulé (600) de la revendication 10, dans lequel :
- le cadre de lit articulé (602) comprend :
- 35 une partie centrale (648) ; une partie de tête articulée (644) fixée de manière pivotante à la partie centrale ; une partie de pied articulée (646) fixée de manière pivotante à la partie centrale (648) ; un premier actionneur linéaire (672) relié entre la partie centrale (648) et la partie de tête articulée (644) ; et
- 40 un second actionneur linéaire (674) relié entre la partie centrale (648) et la partie de pied articulée (646) ; le bras de pivot (738) est fixé à la partie centrale (648) ; et
- 45 l'ensemble de pivot (608) comprend en outre un actionneur de pivot relié au cadre de base (736) et à la partie centrale (648).
- 50
- 55
- 13.** Lit rotatif et articulé (600) de la revendication 1, dans lequel :
- le cadre rotatif et pivotant (606) comprend un ensemble de rotation (610) monté sur le cadre de lit fixe (604) ; l'ensemble de pivot (608) est monté sur l'ensemble de rotation ; le cadre de lit articulé (602) est monté sur l'ensemble de pivot (608), et comprend une pluralité de parties distinctes reliées de manière pivotante ; l'ensemble de rotation (610) fait tourner l'ensemble de pivot (608) et le cadre de lit articulé (602) par rapport au cadre de lit fixe (604) autour d'un axe vertical traversant le lit rotatif et articulé ; et l'ensemble de pivot (608) incline la totalité du cadre de lit articulé par rapport au plan horizontal (614) qui est perpendiculaire à l'axe vertical indépendamment d'une rotation par l'ensemble de rotation (610) et d'une articulation des parties distinctes.
- 14.** Lit rotatif et articulé (600) de la revendication 13, dans lequel :
- l'ensemble de rotation (610) comprend :
- une plaque de support (680) montée sur le cadre de lit fixe (604) ; et une plaque de roulement (682) espacée de la plaque de support (680) ; dans lequel :
- l'ensemble de pivot (608) est monté sur la plaque de roulement ; la pluralité de roulements de roue discrets (684) est disposée entre la plaque de support (680) et la plaque de roulement (682) ; chaque roulement de roue discret (684) comprend un support de montage fixé à la plaque de support (680) ; chaque roue de roulement est disposée de manière rotative dans le support de montage ; et chaque roue de roulement est en contact avec la plaque de roulement (682).

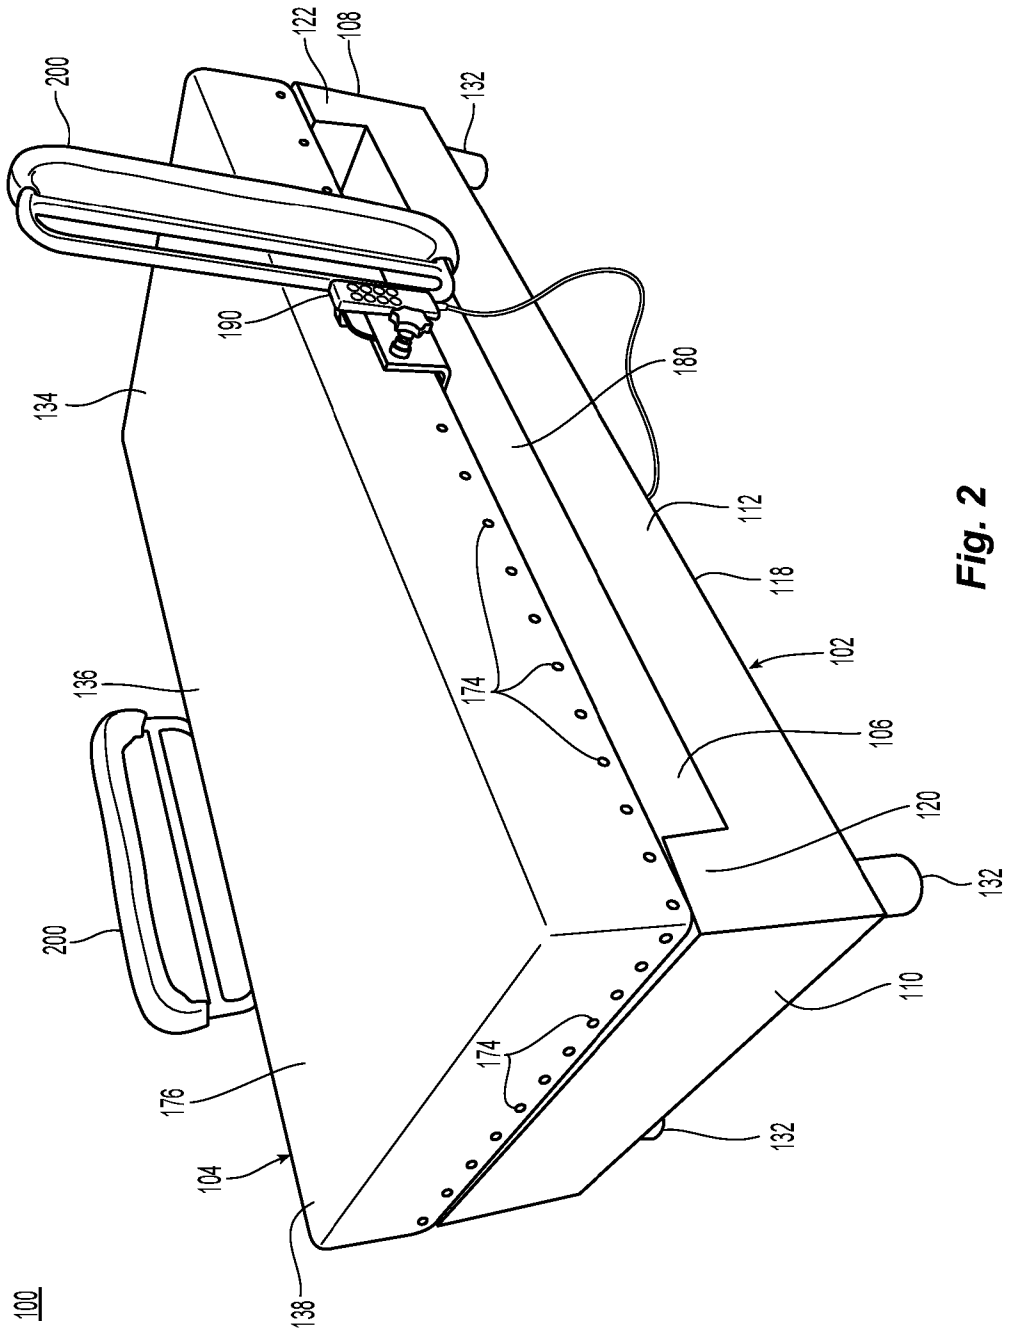


Fig. 2

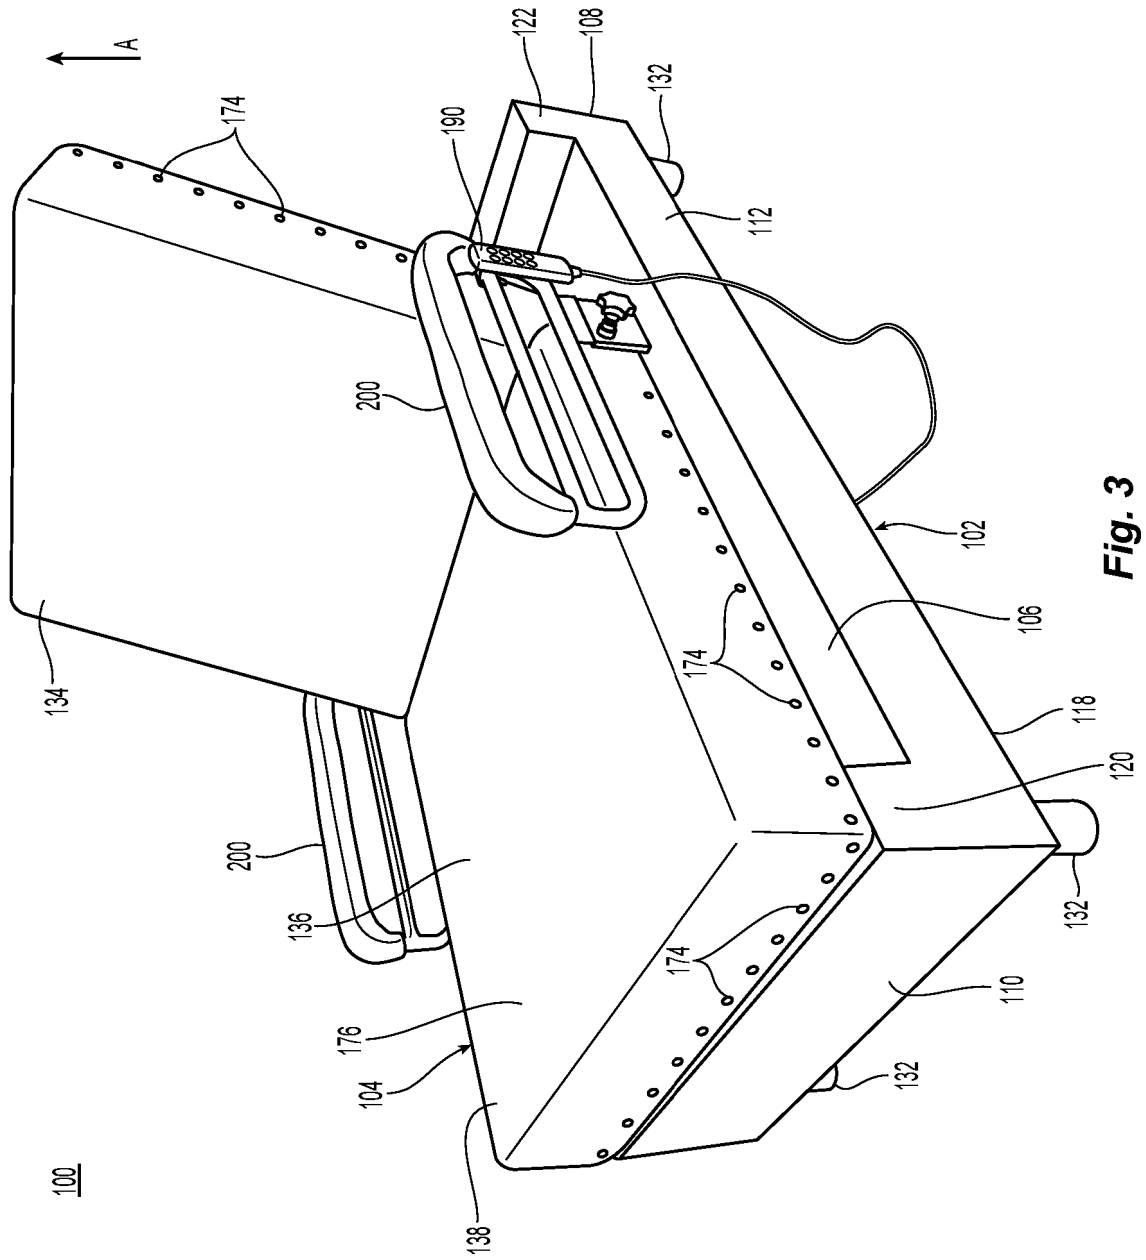


Fig. 3

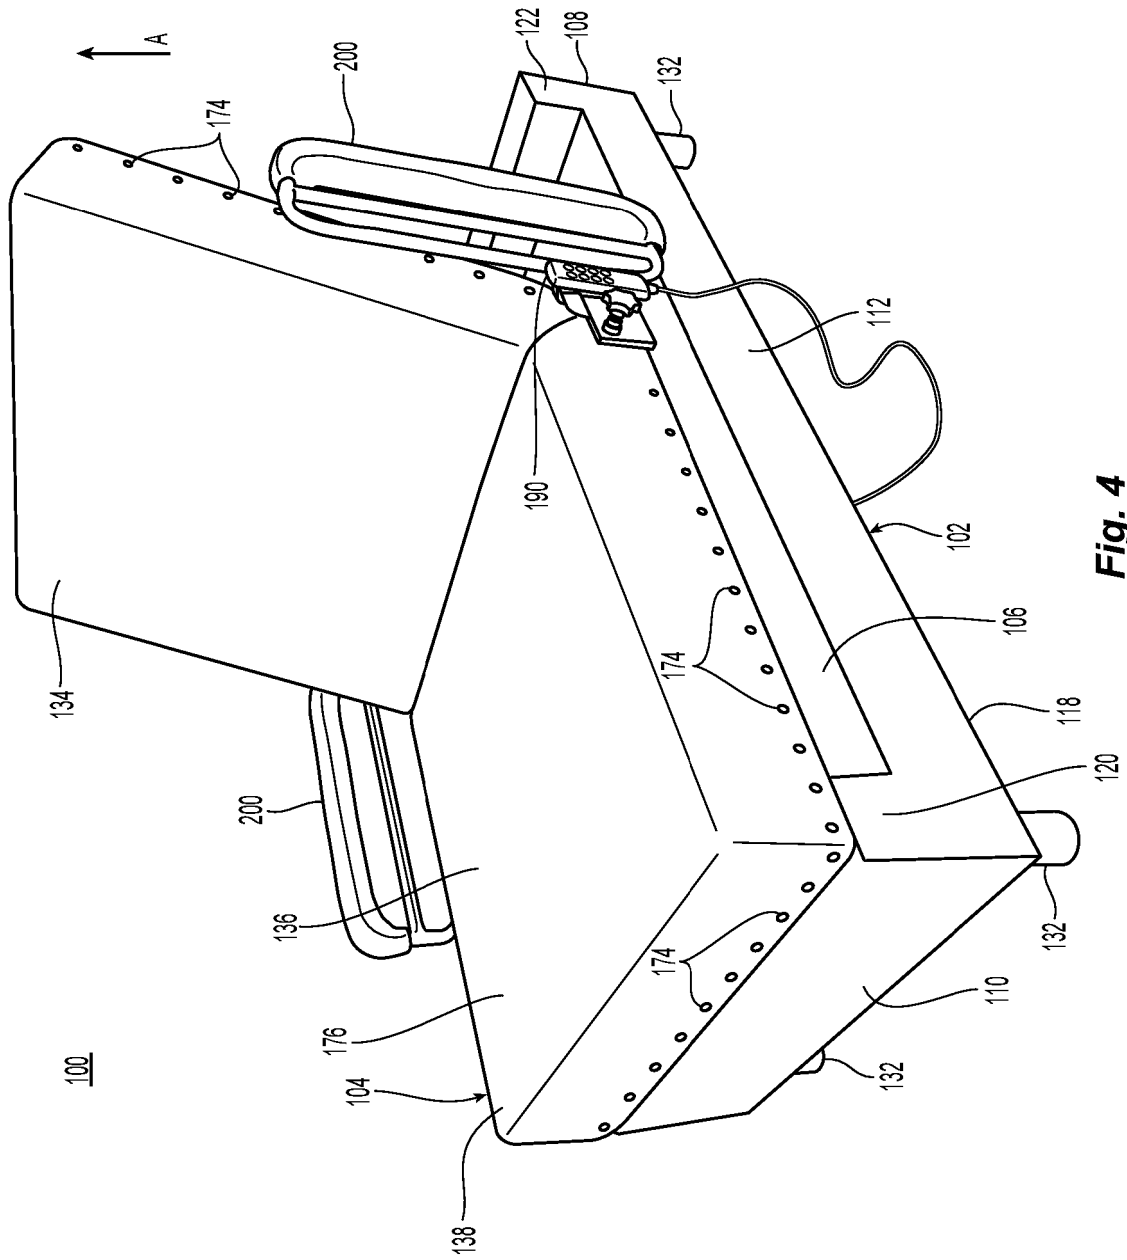


Fig. 4

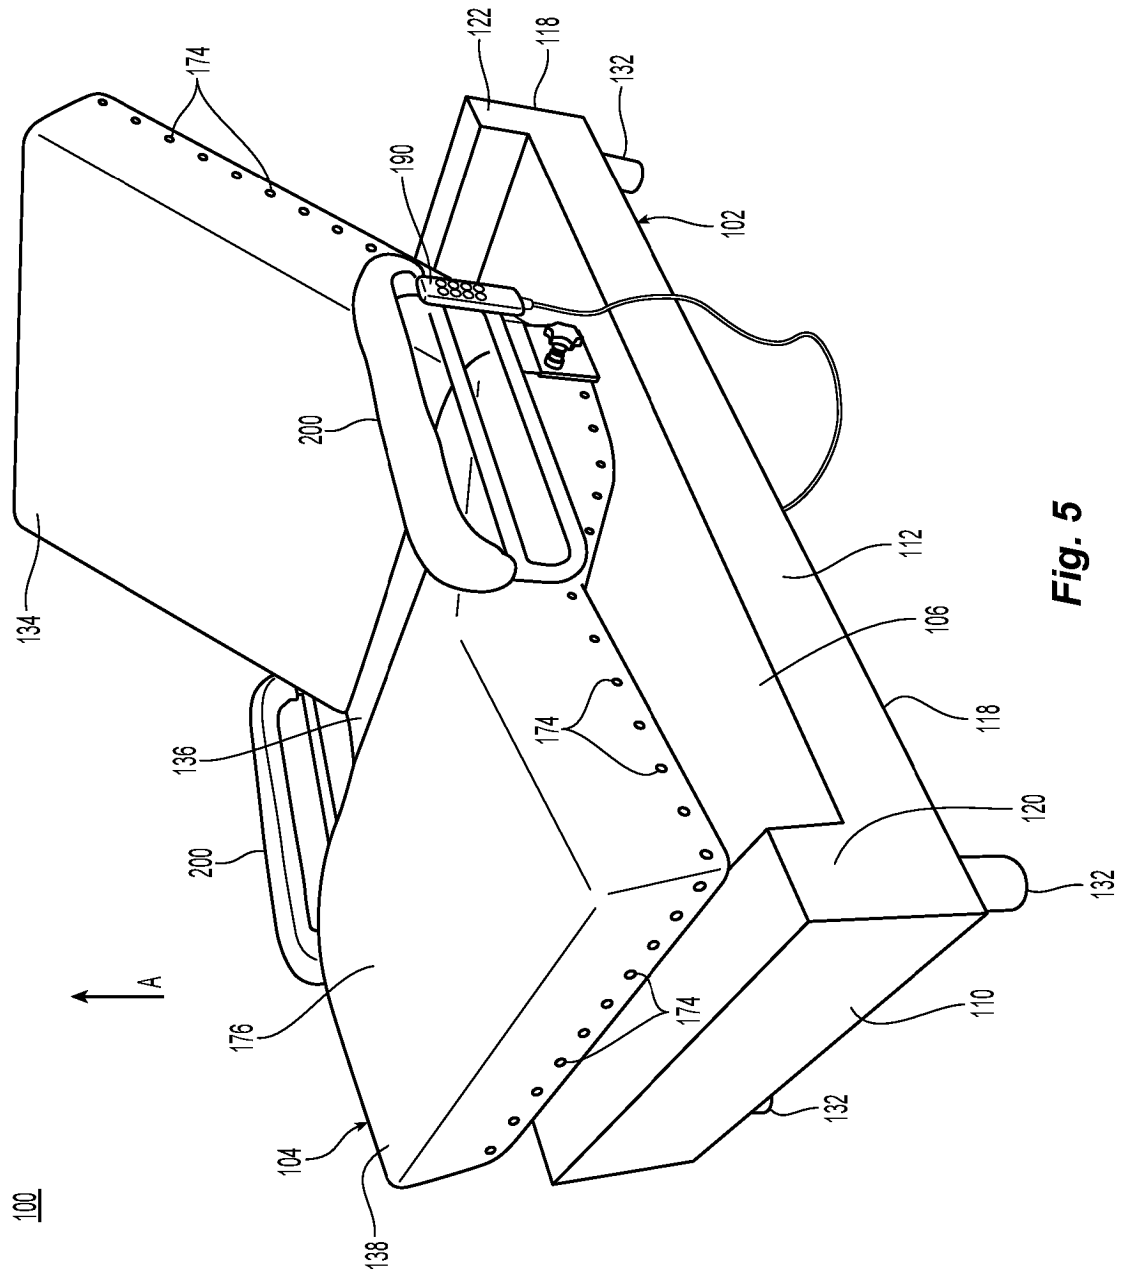


Fig. 5

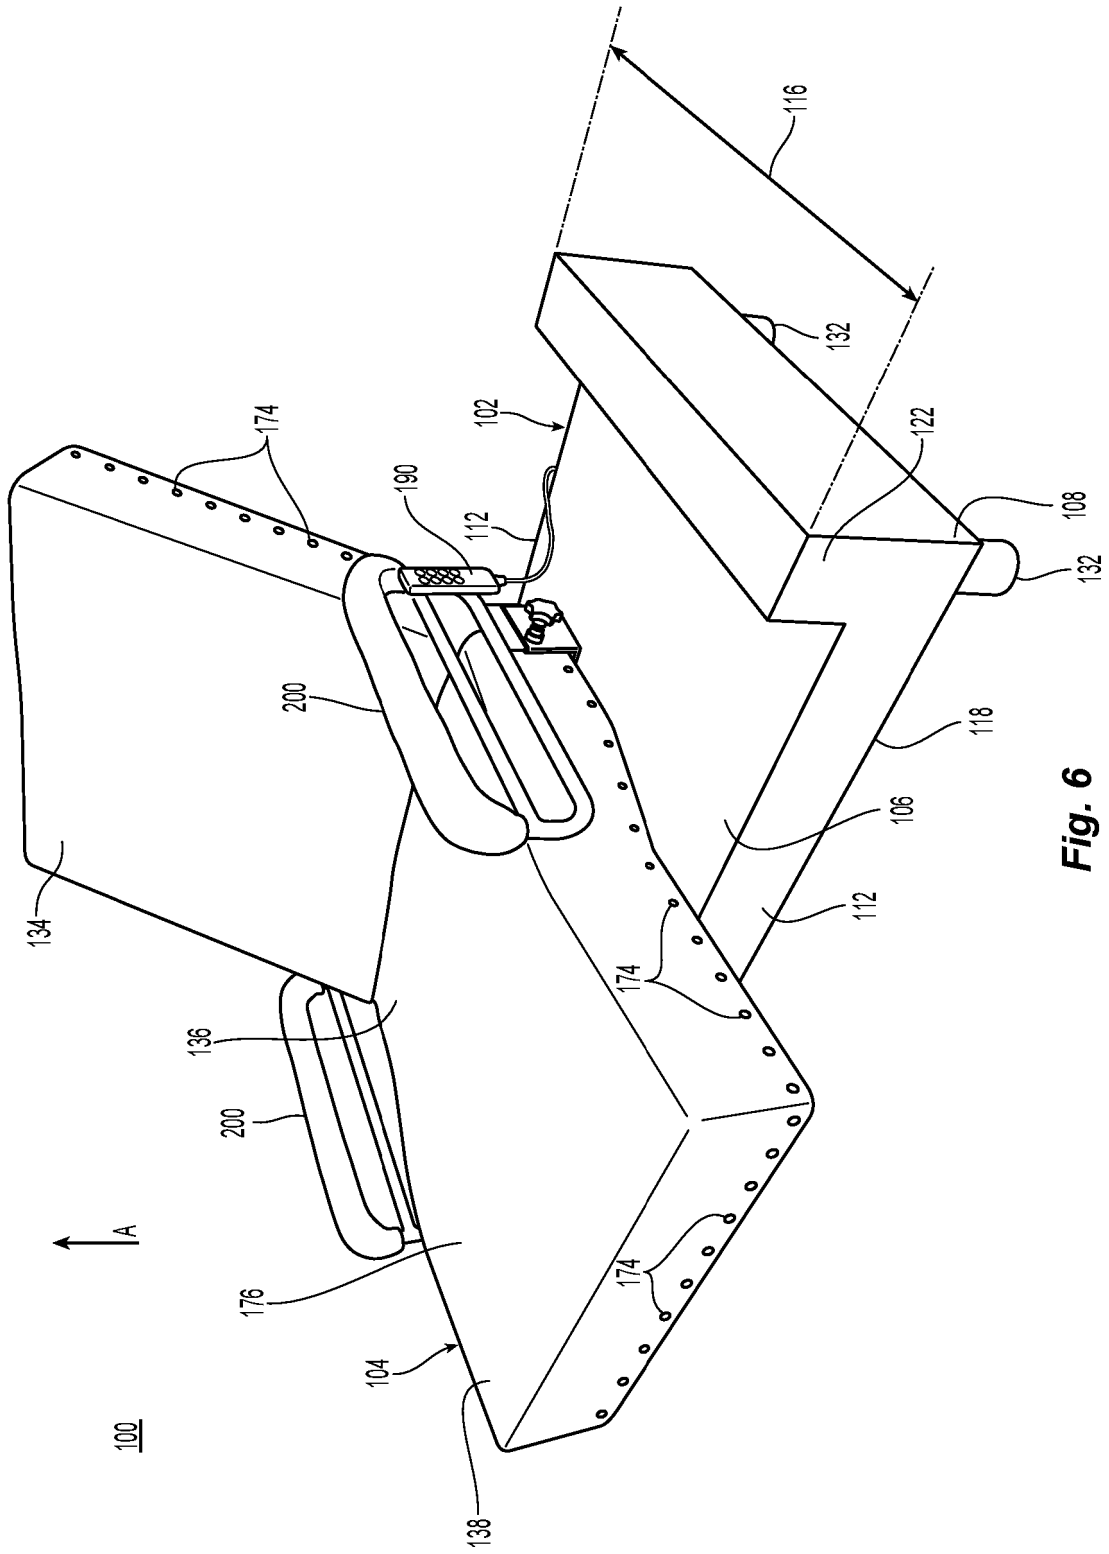


Fig. 6

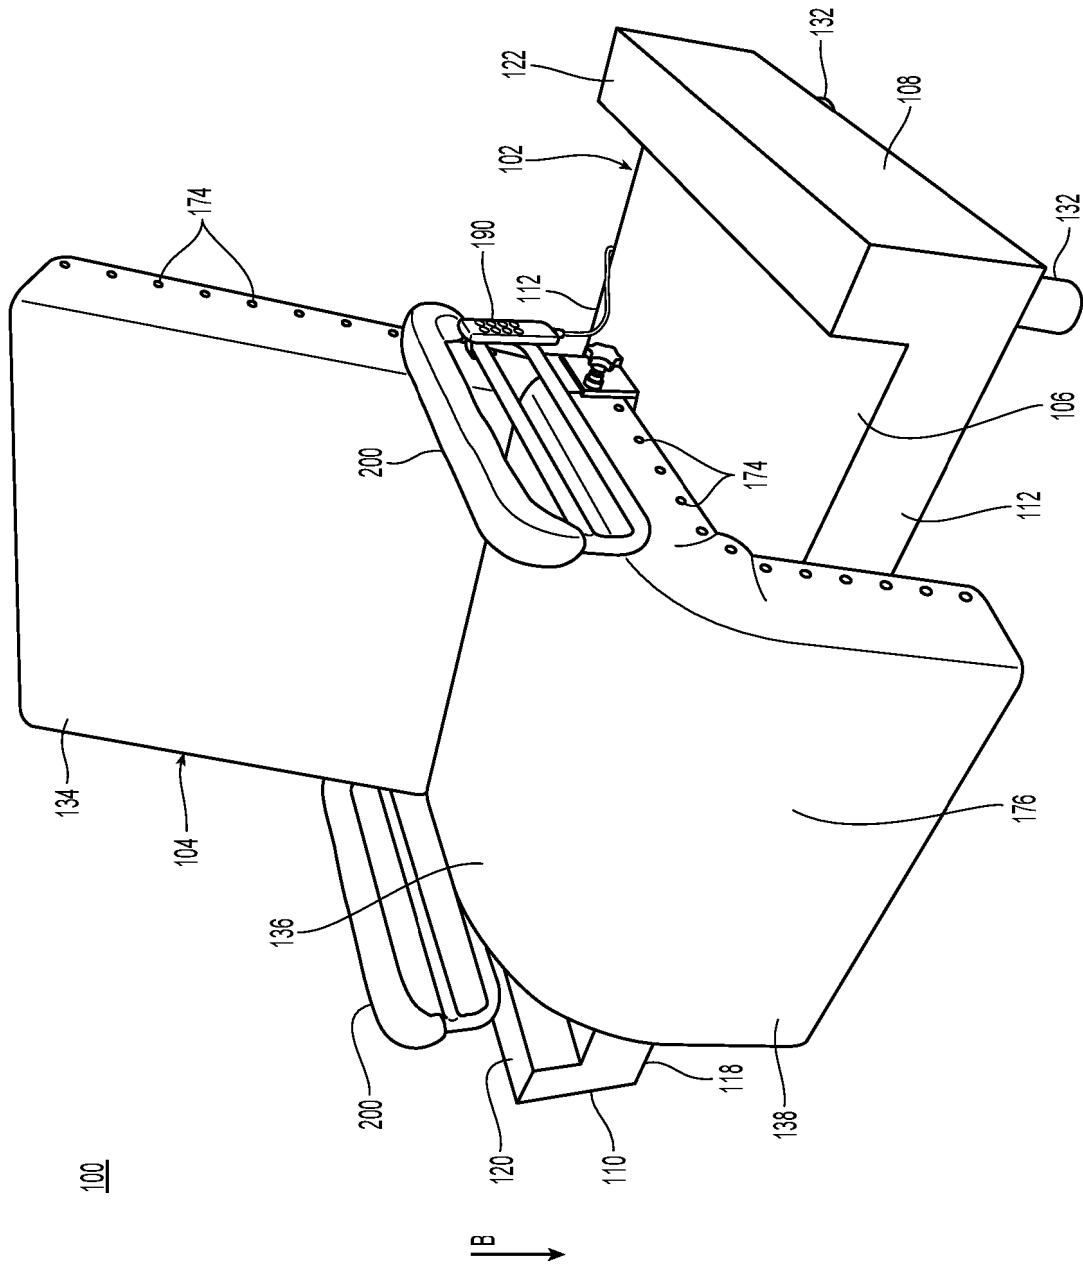


Fig. 7

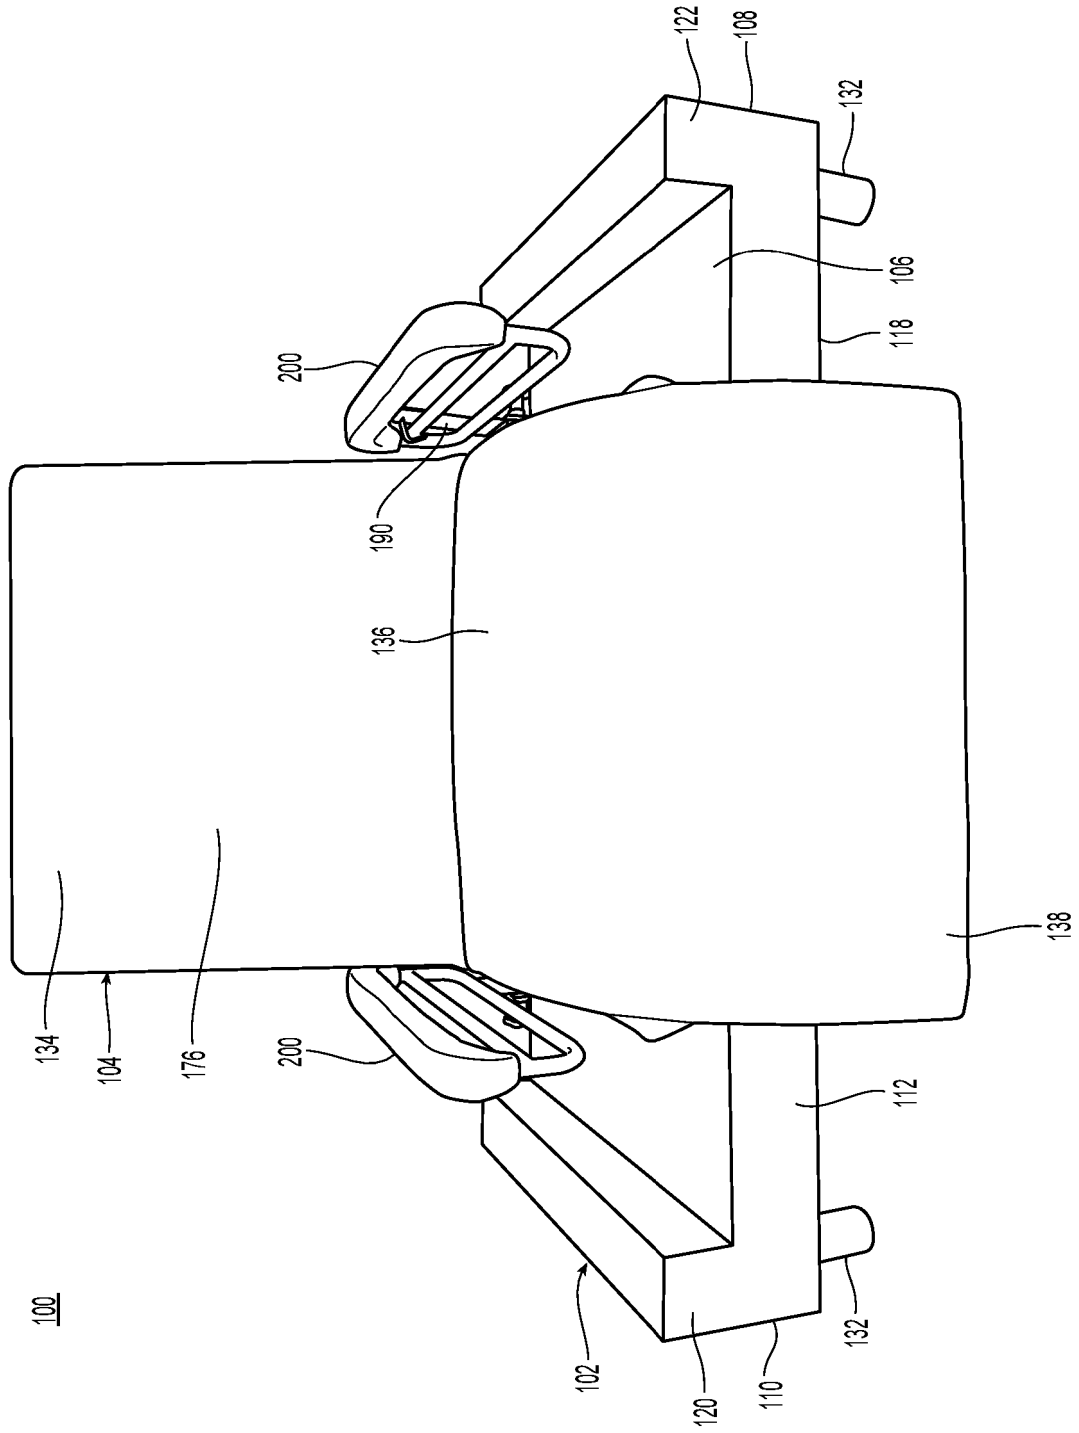


Fig. 9

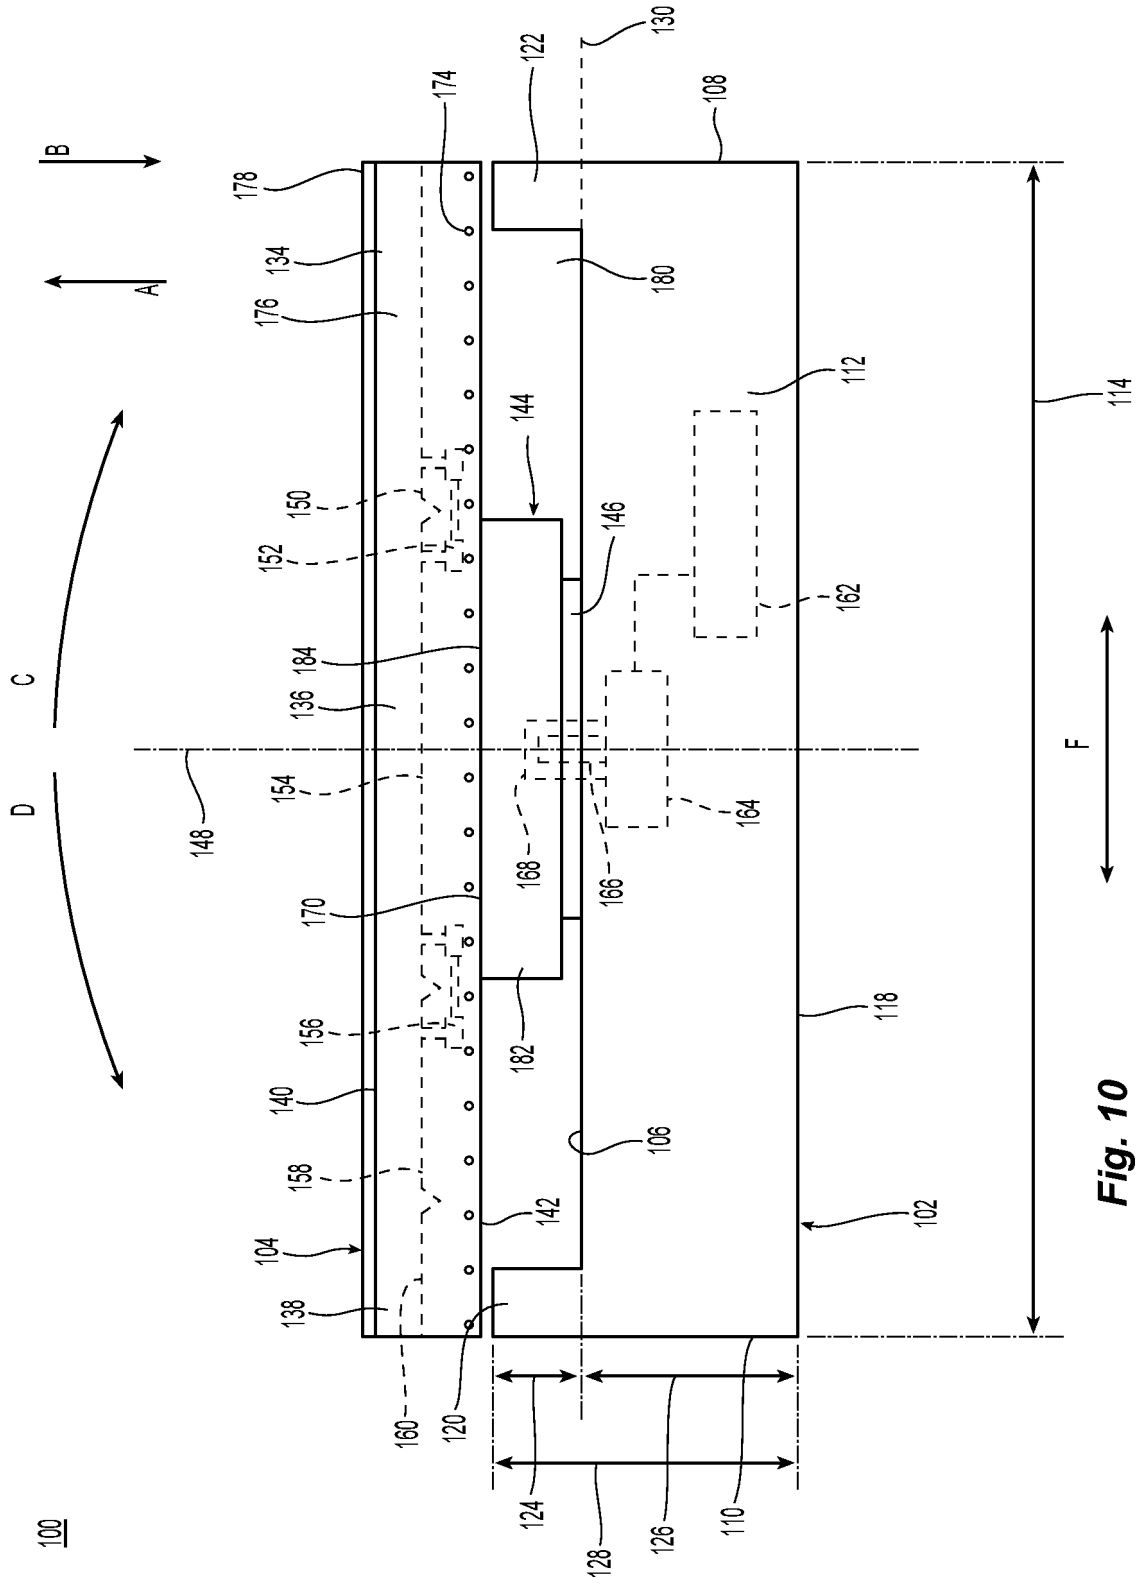


Fig. 10

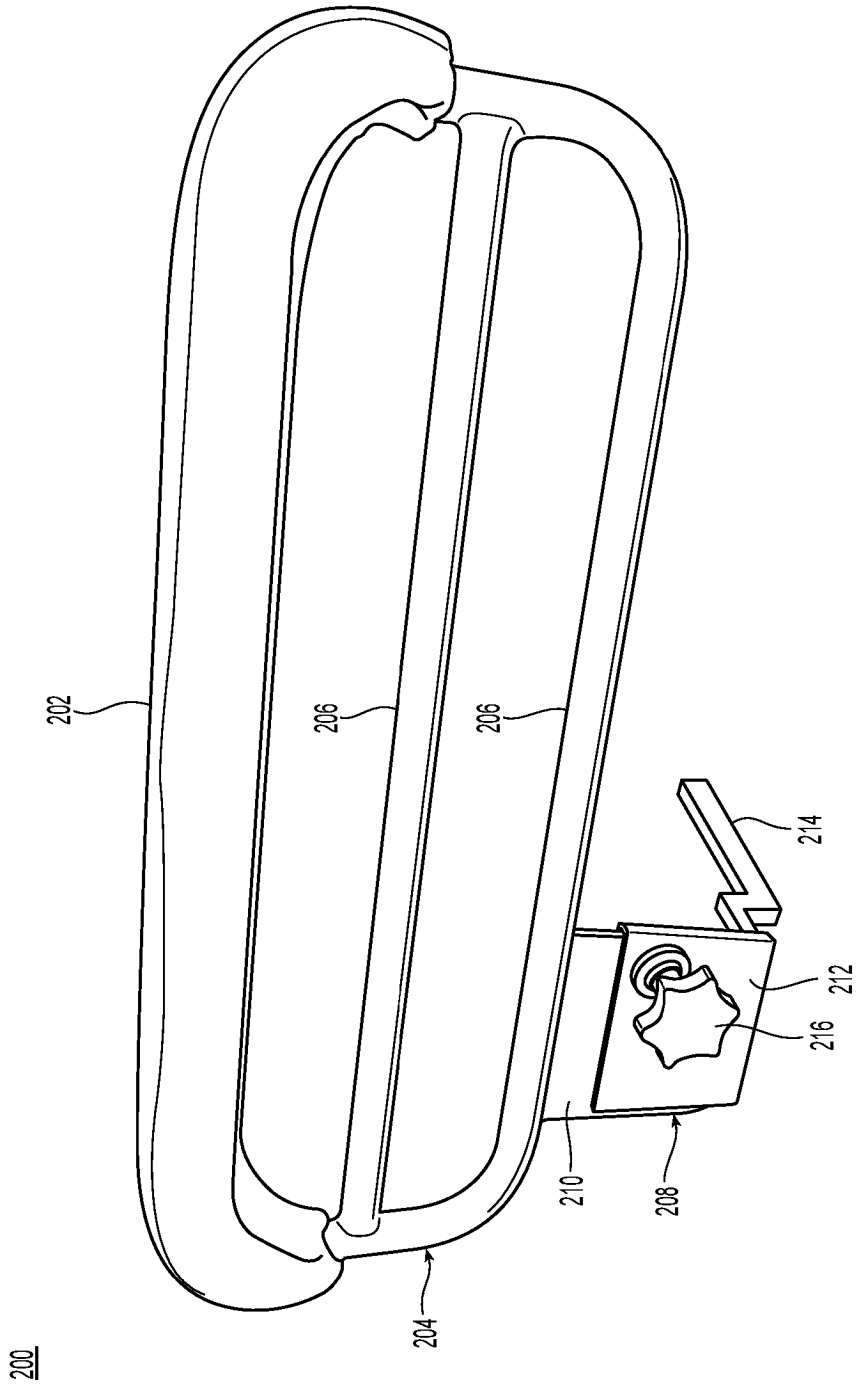


Fig. 11

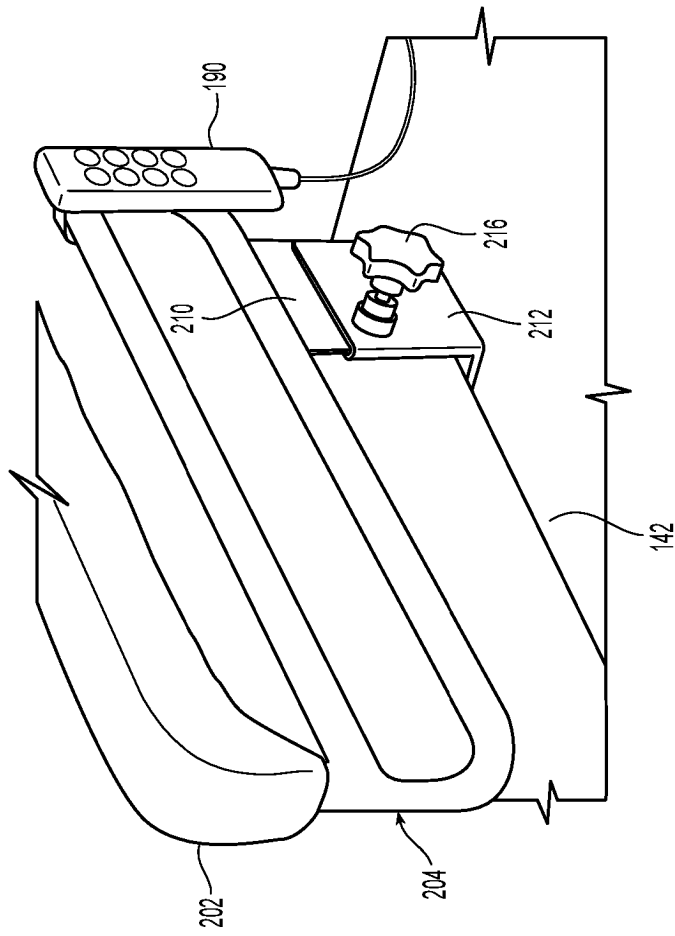


Fig. 12

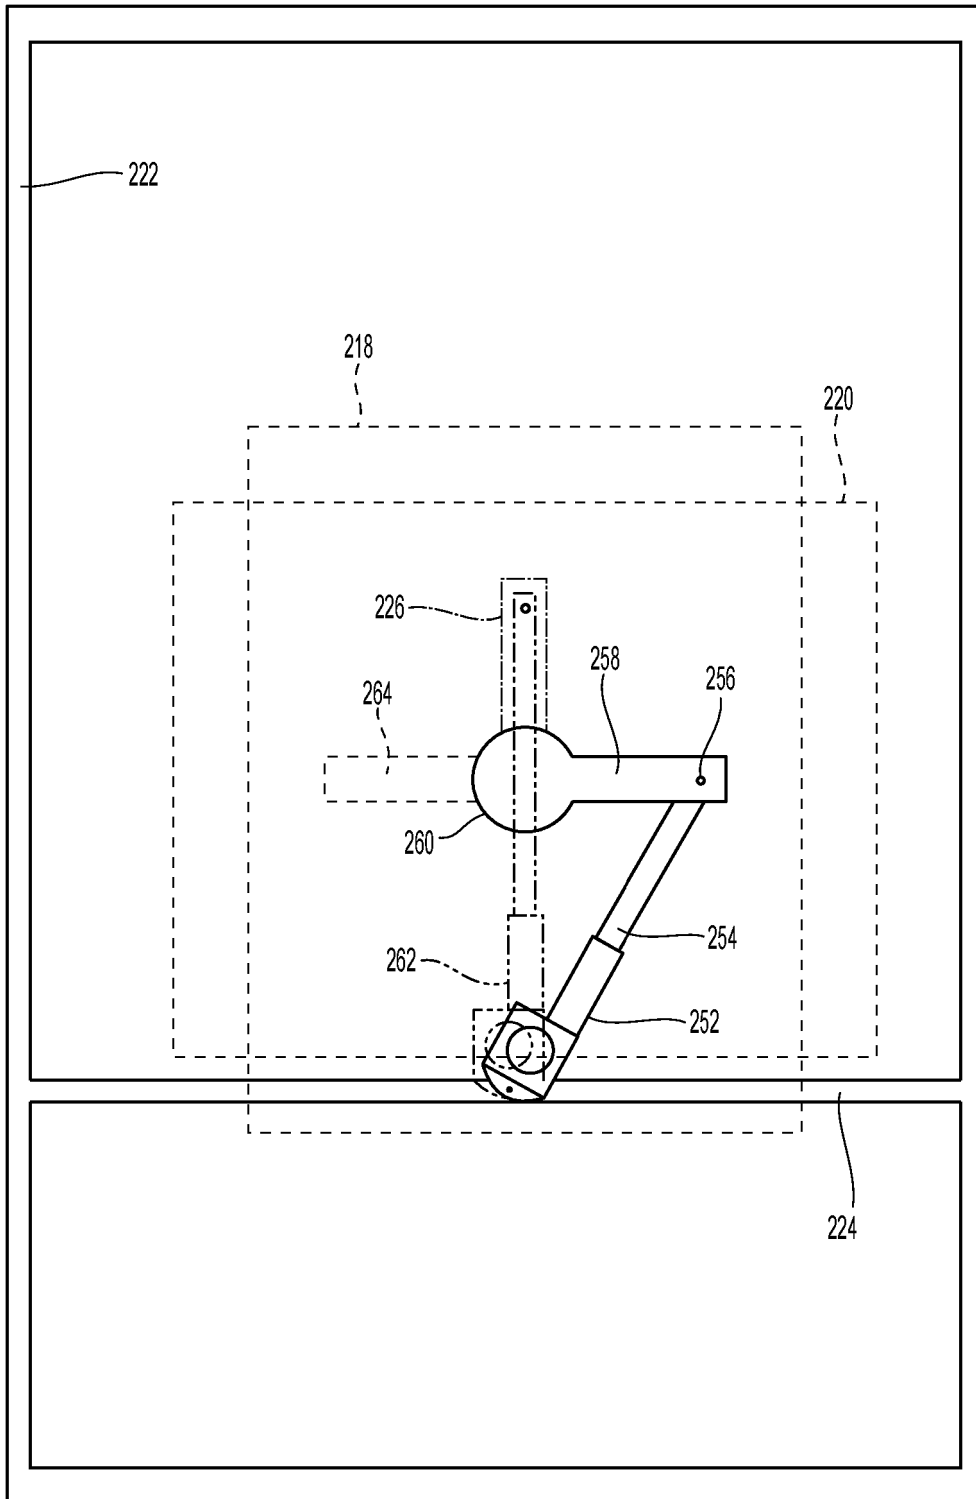


Fig. 13

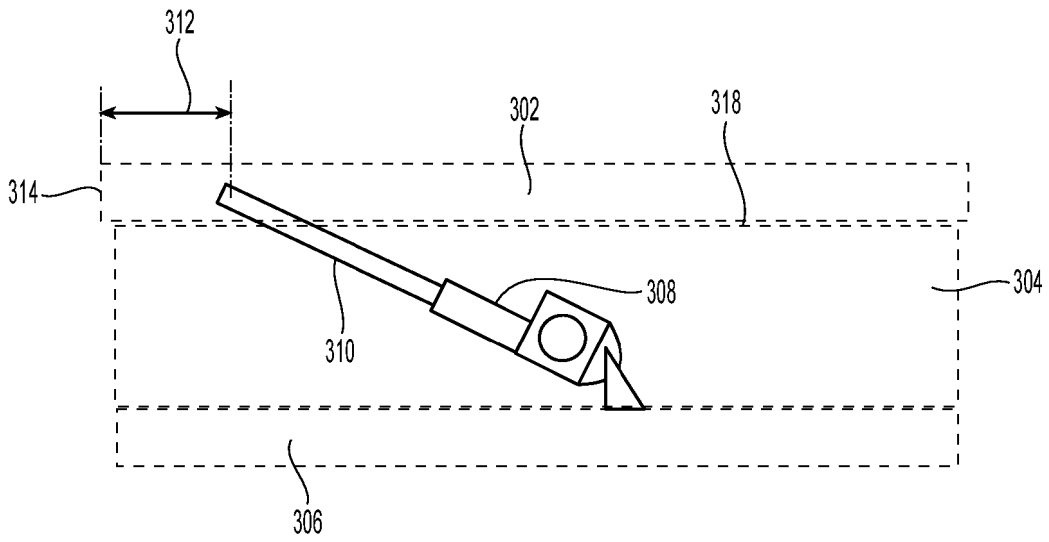


Fig. 14

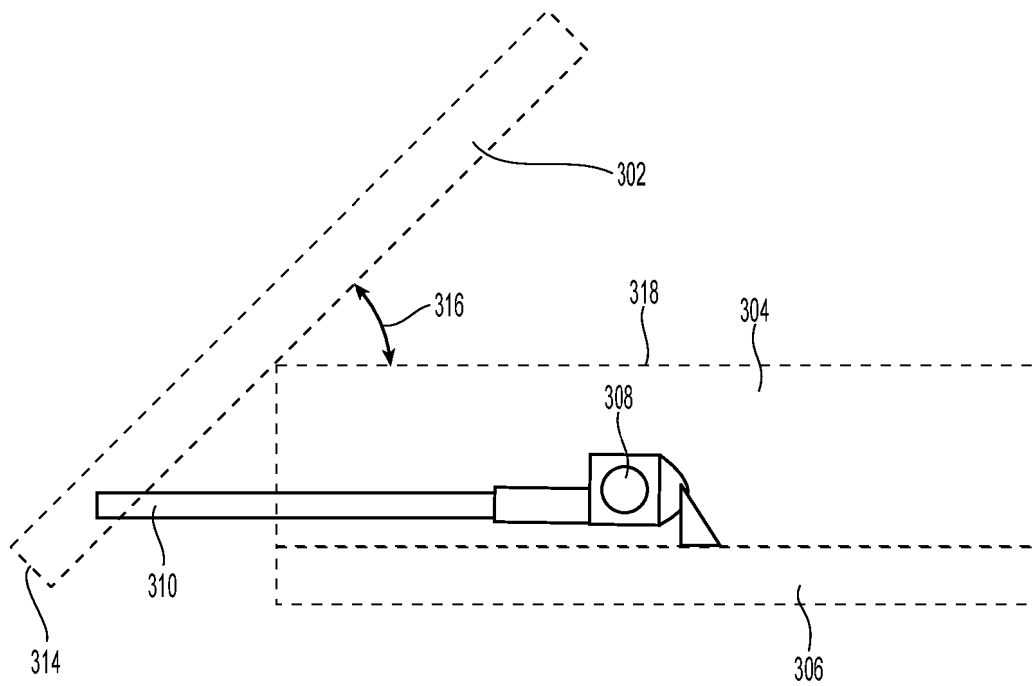


Fig. 15

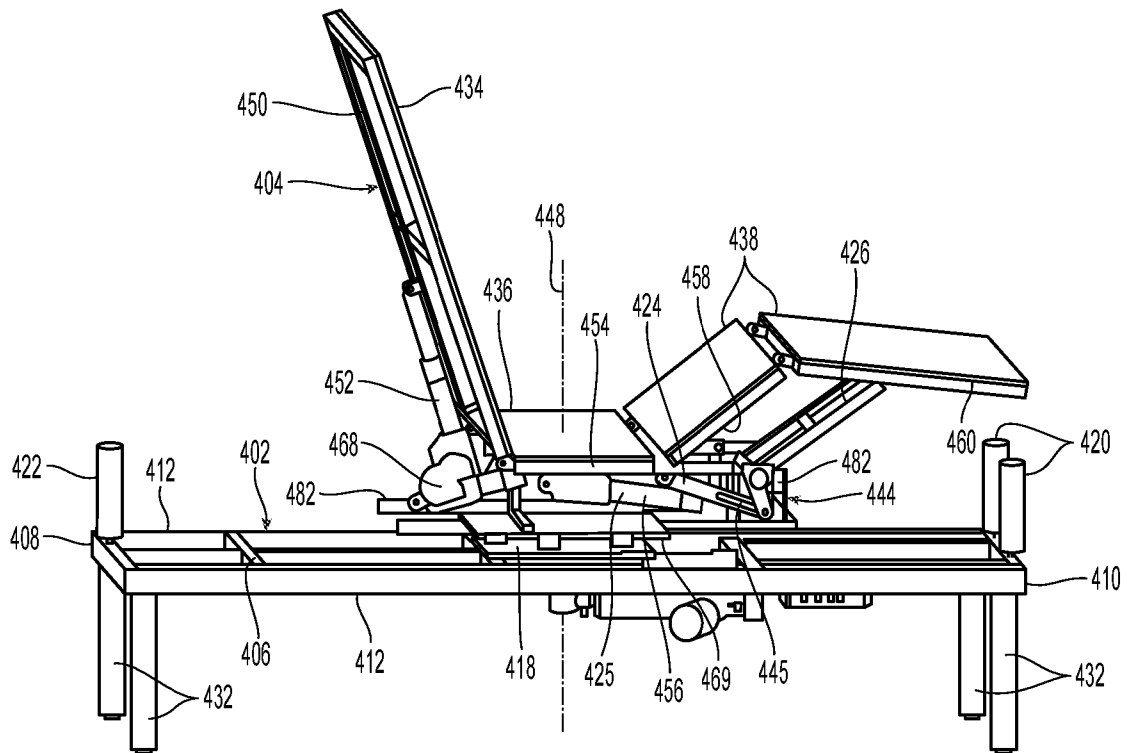


Fig. 16

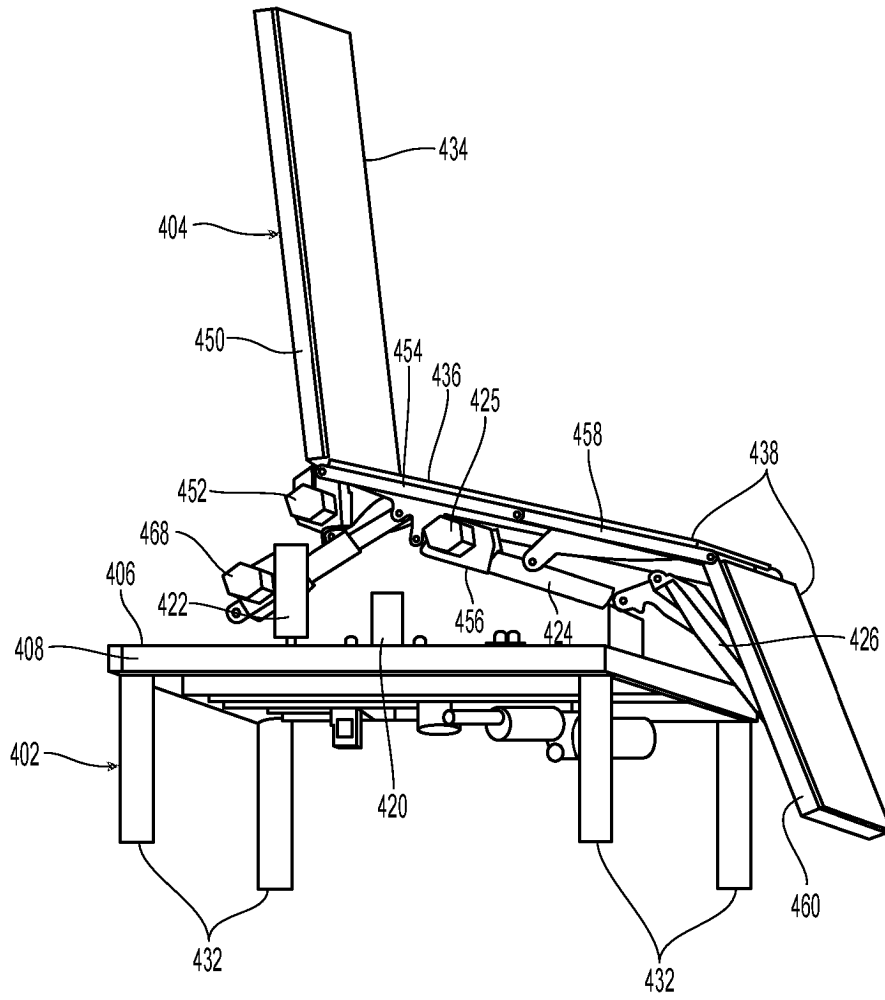


Fig. 17

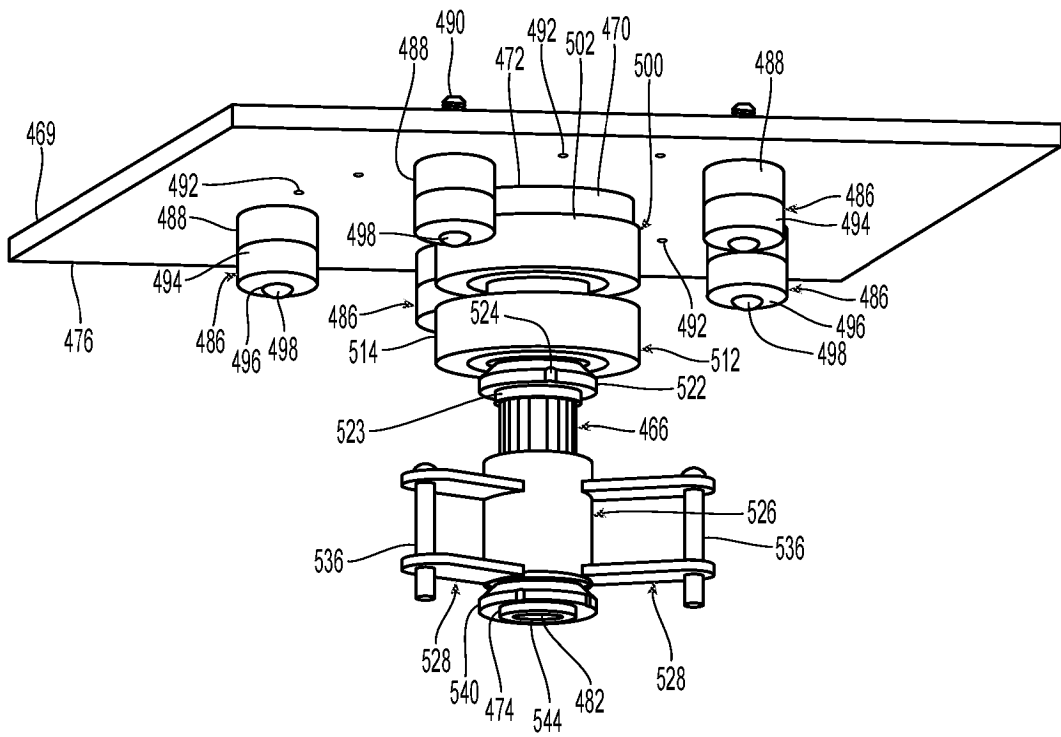


Fig. 19

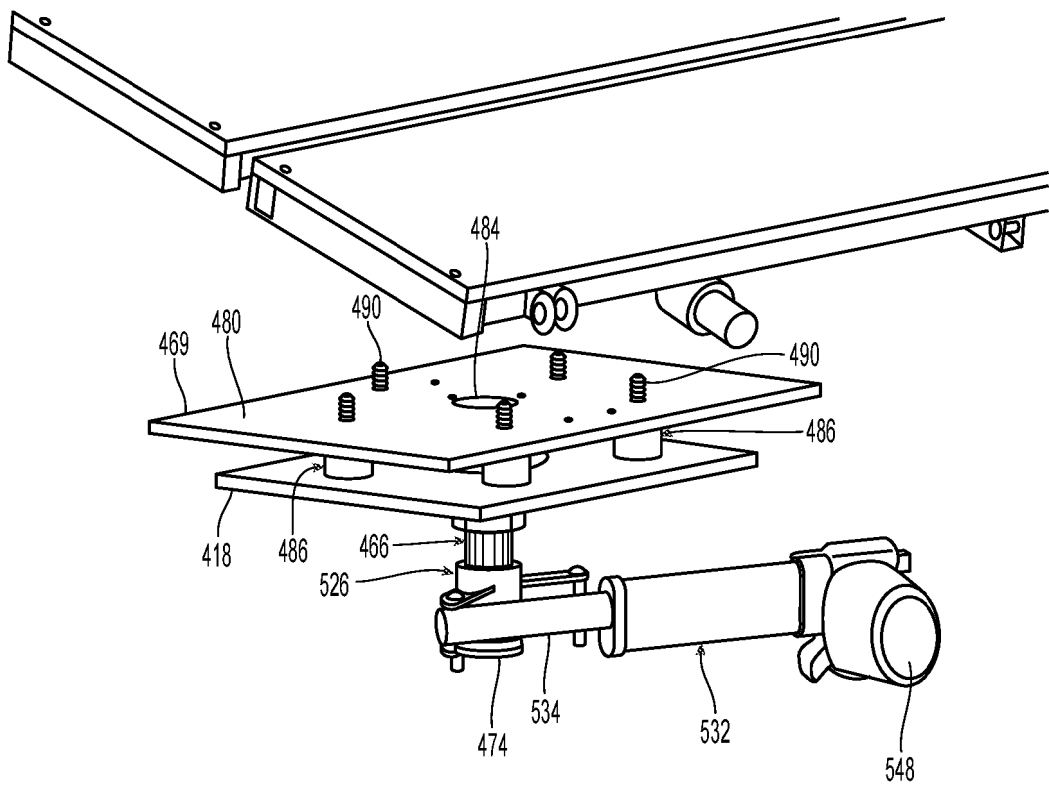


Fig. 20

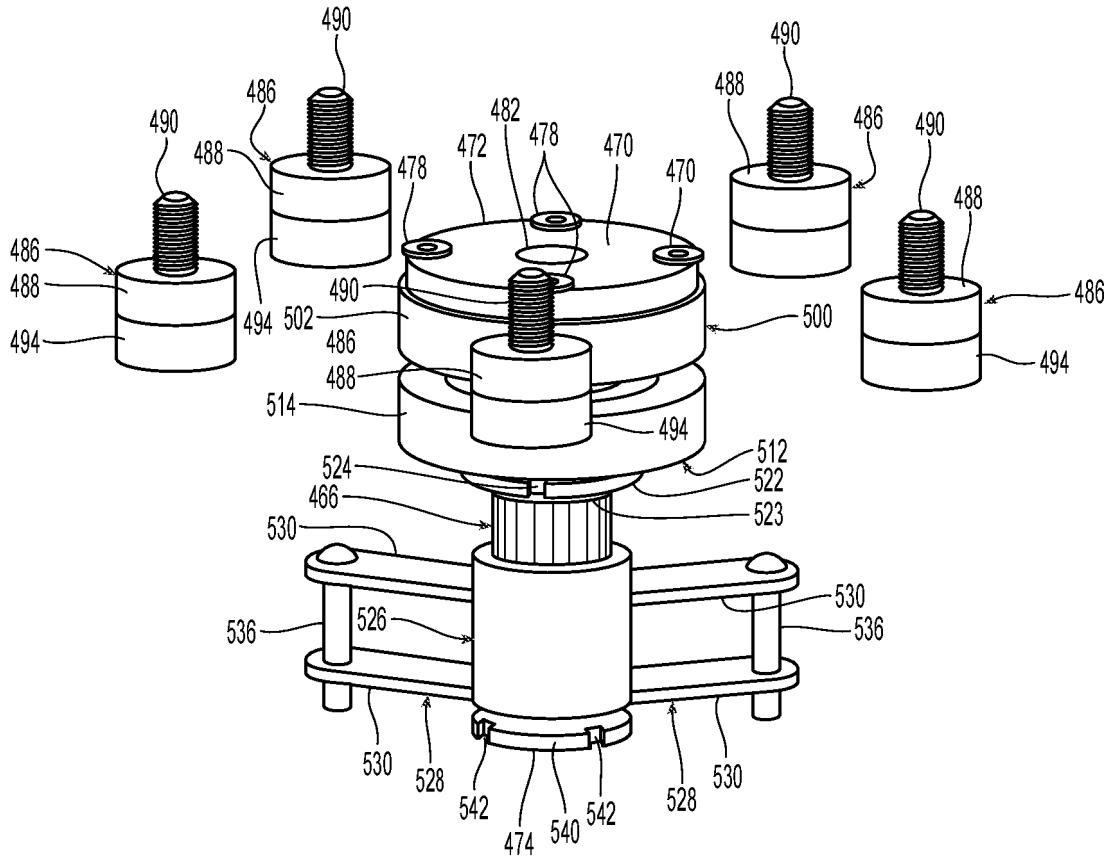


Fig. 21

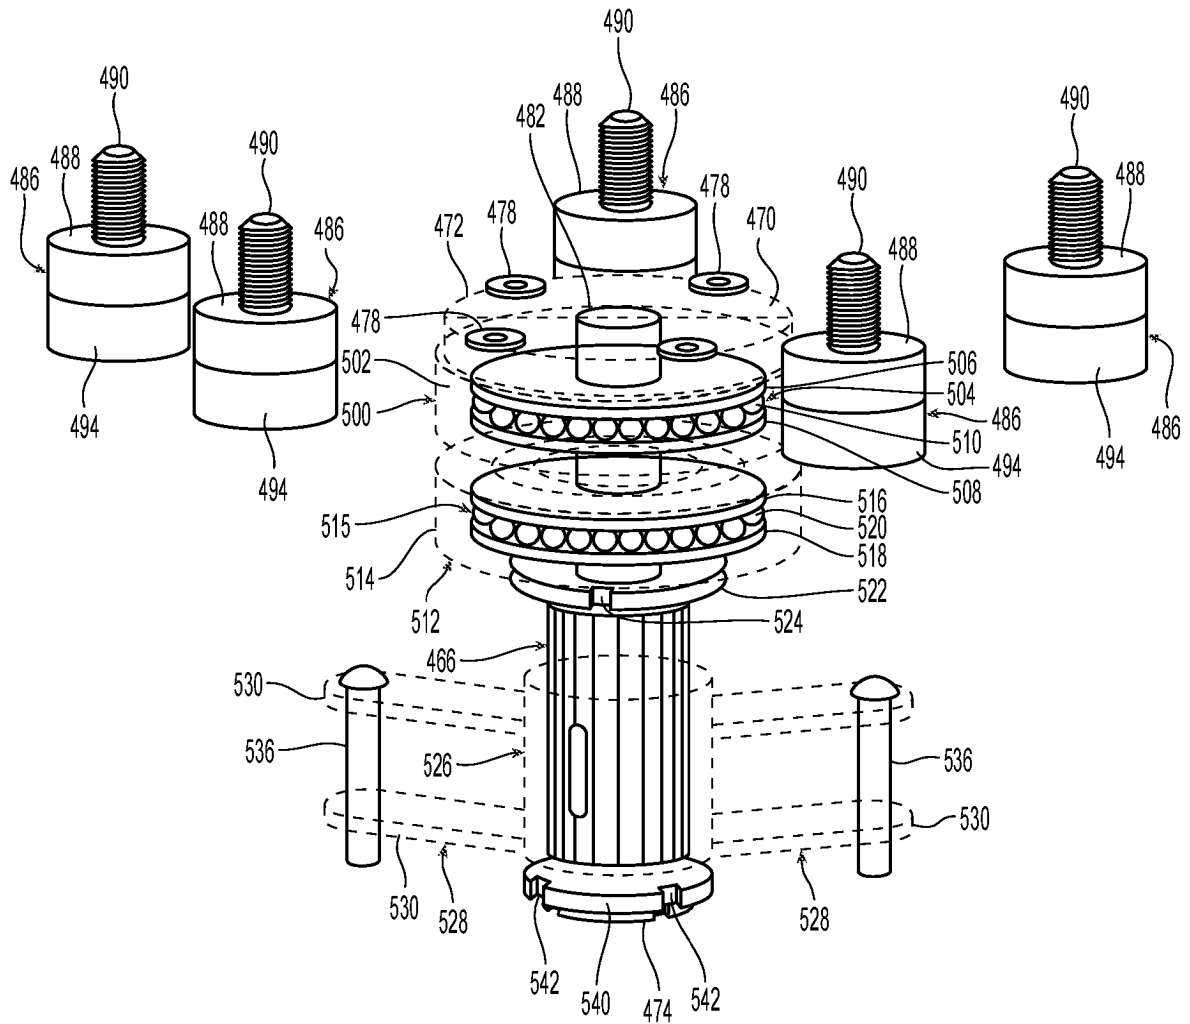


Fig. 22

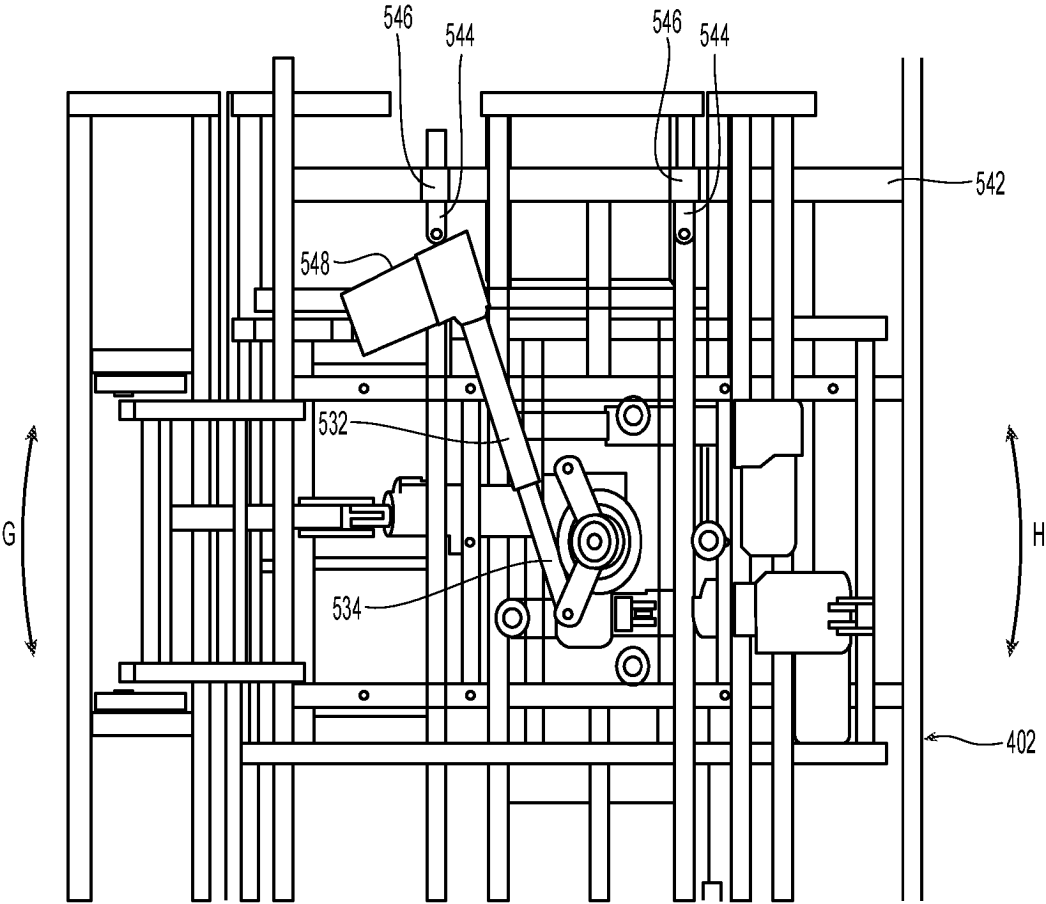


Fig. 23

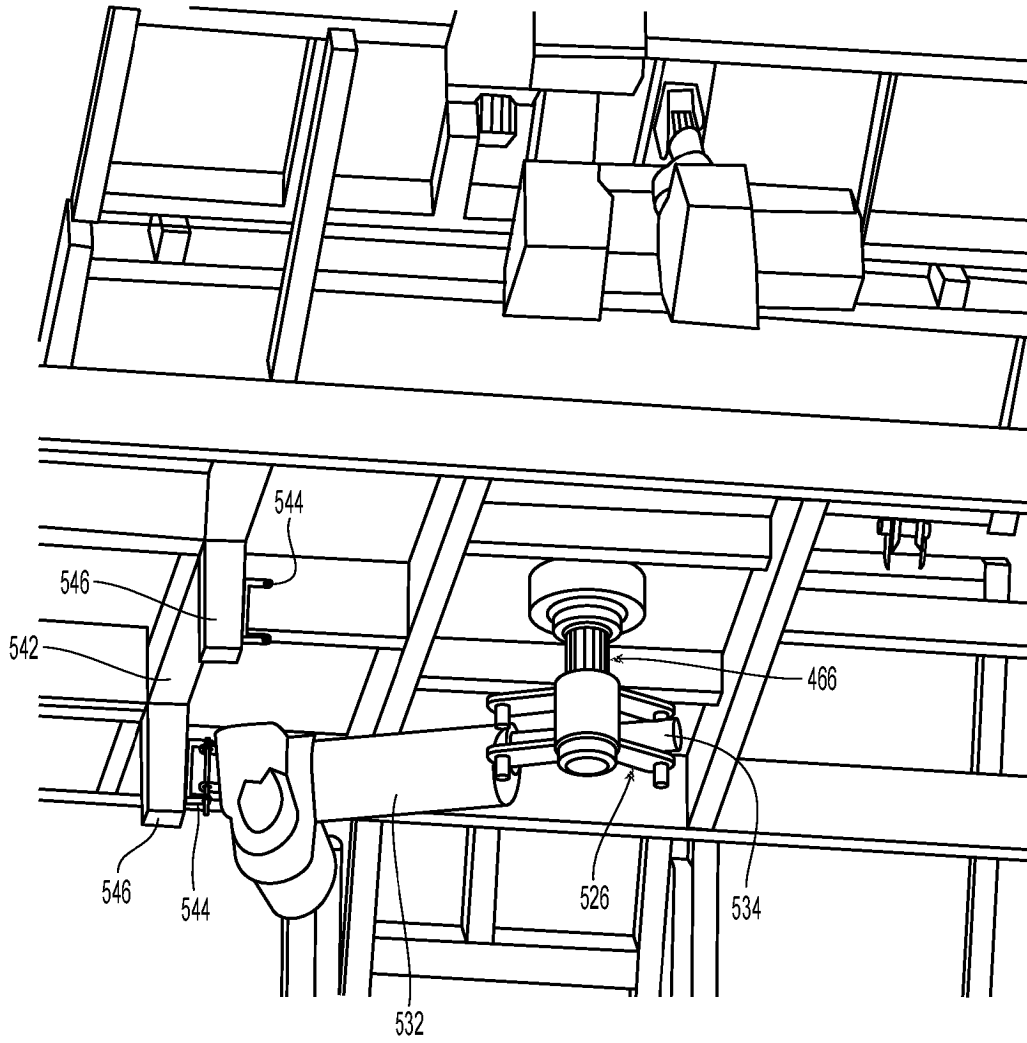


Fig. 24

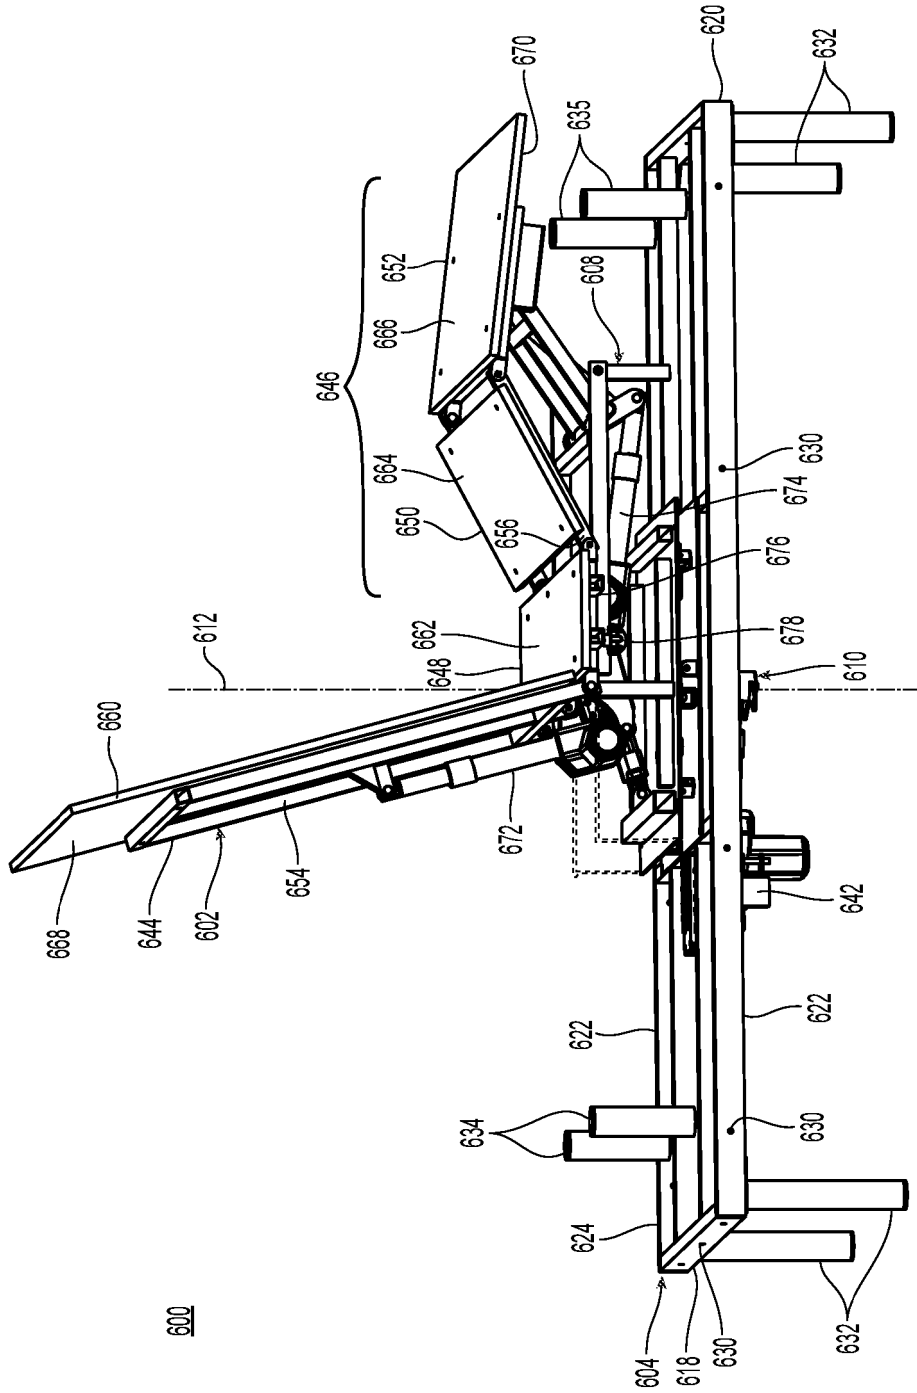


Fig. 25

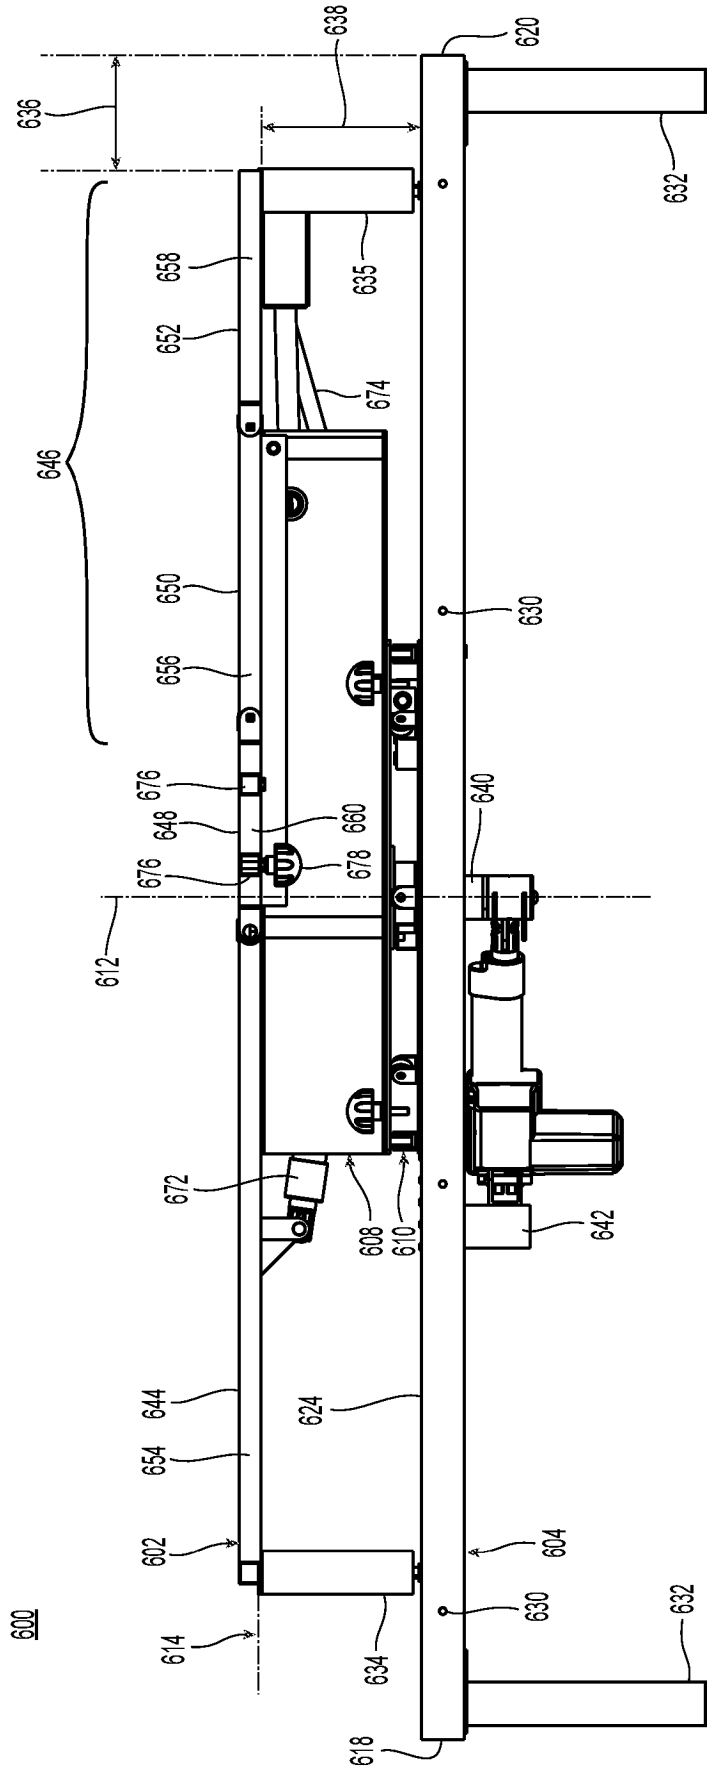


Fig. 26

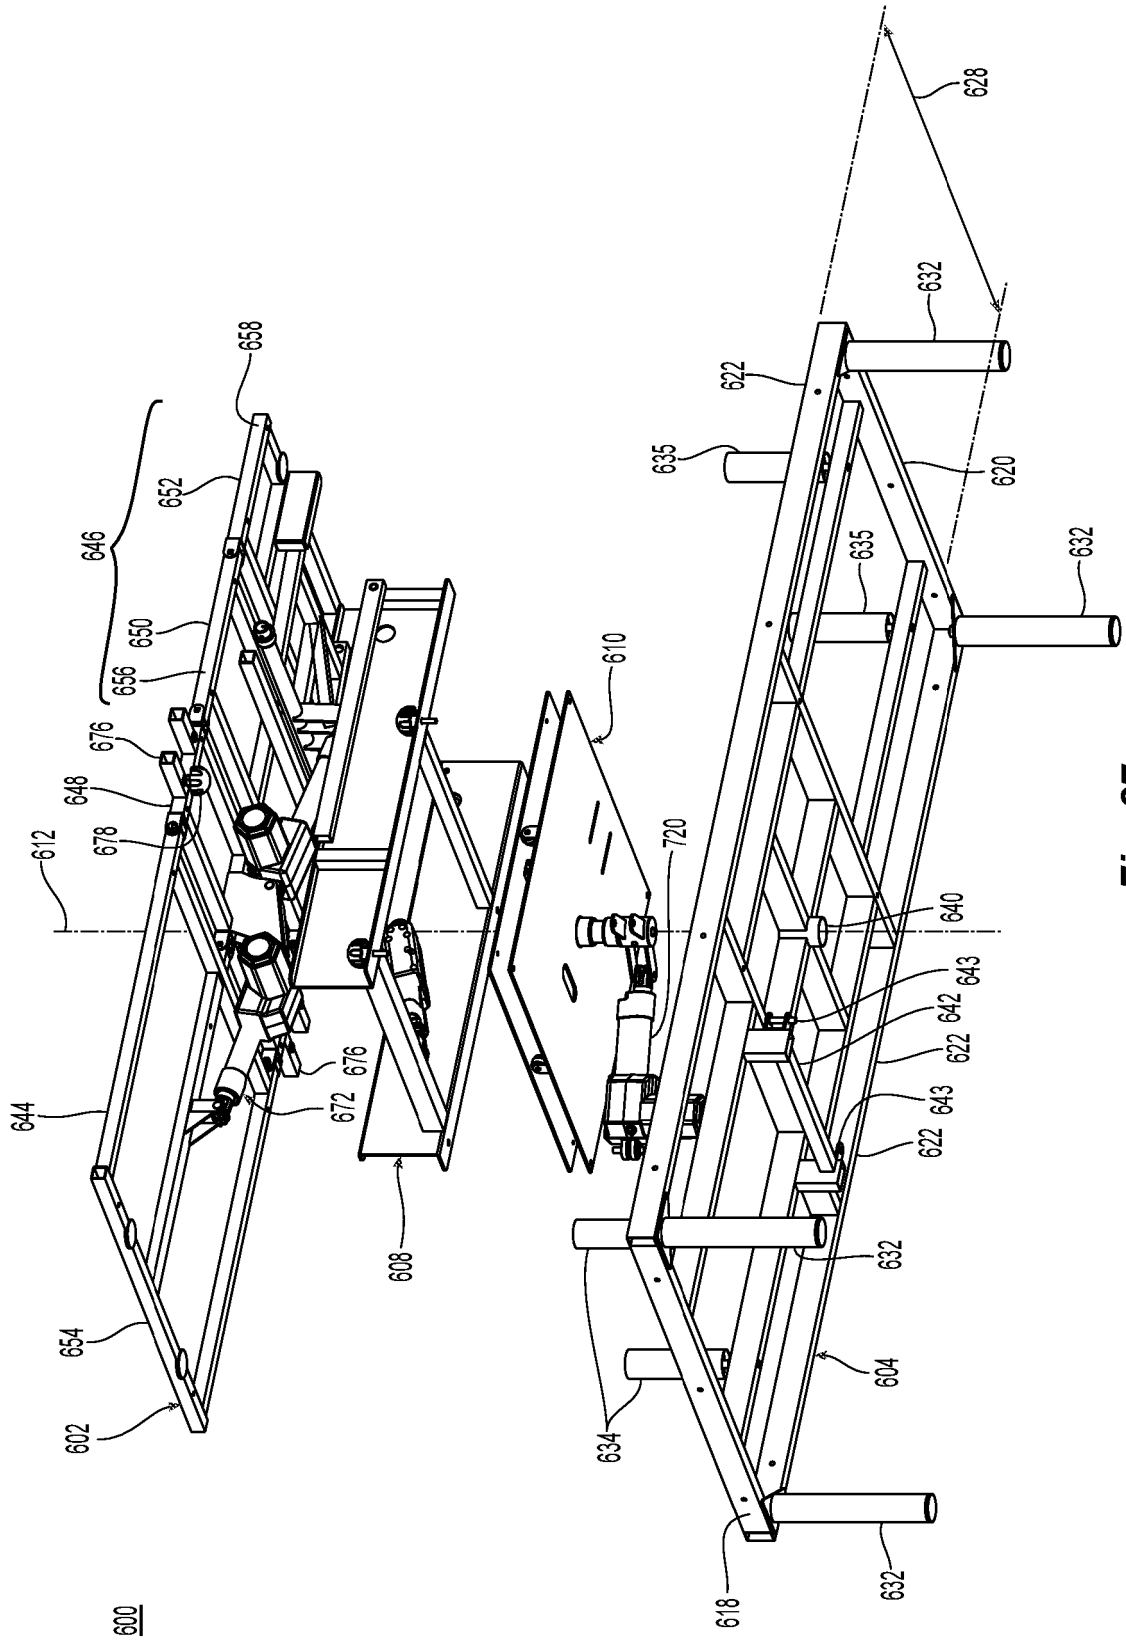


Fig. 27

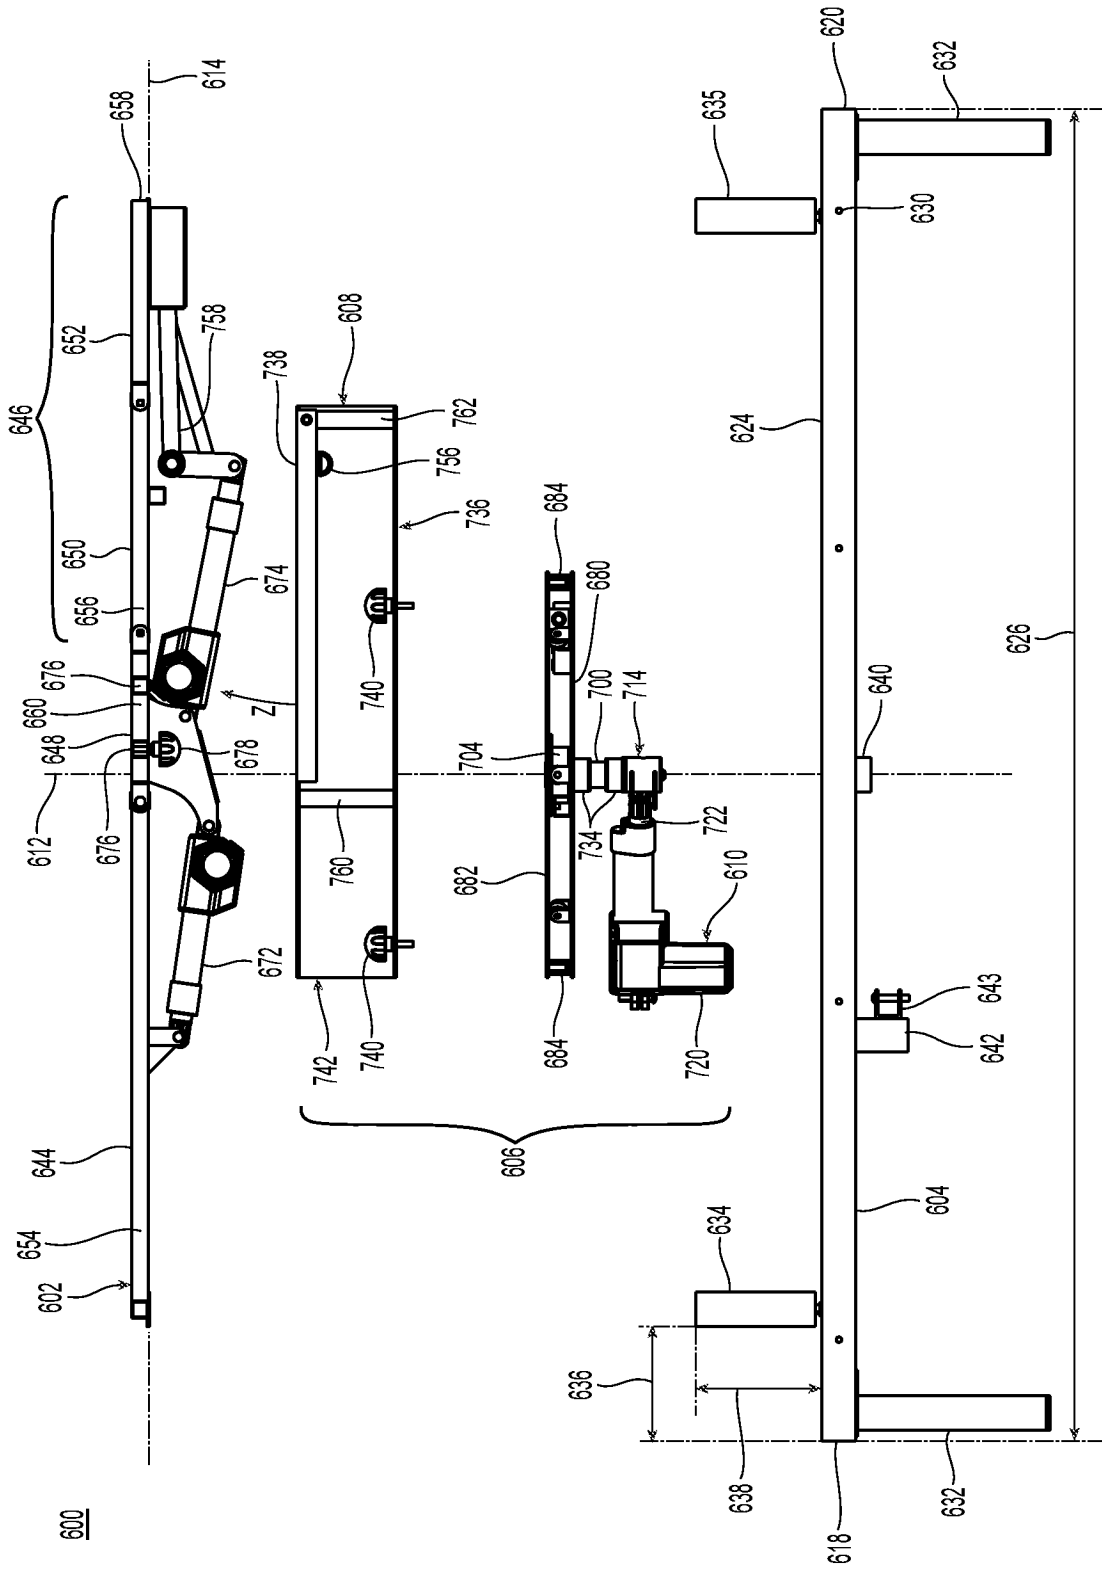


Fig. 28

610

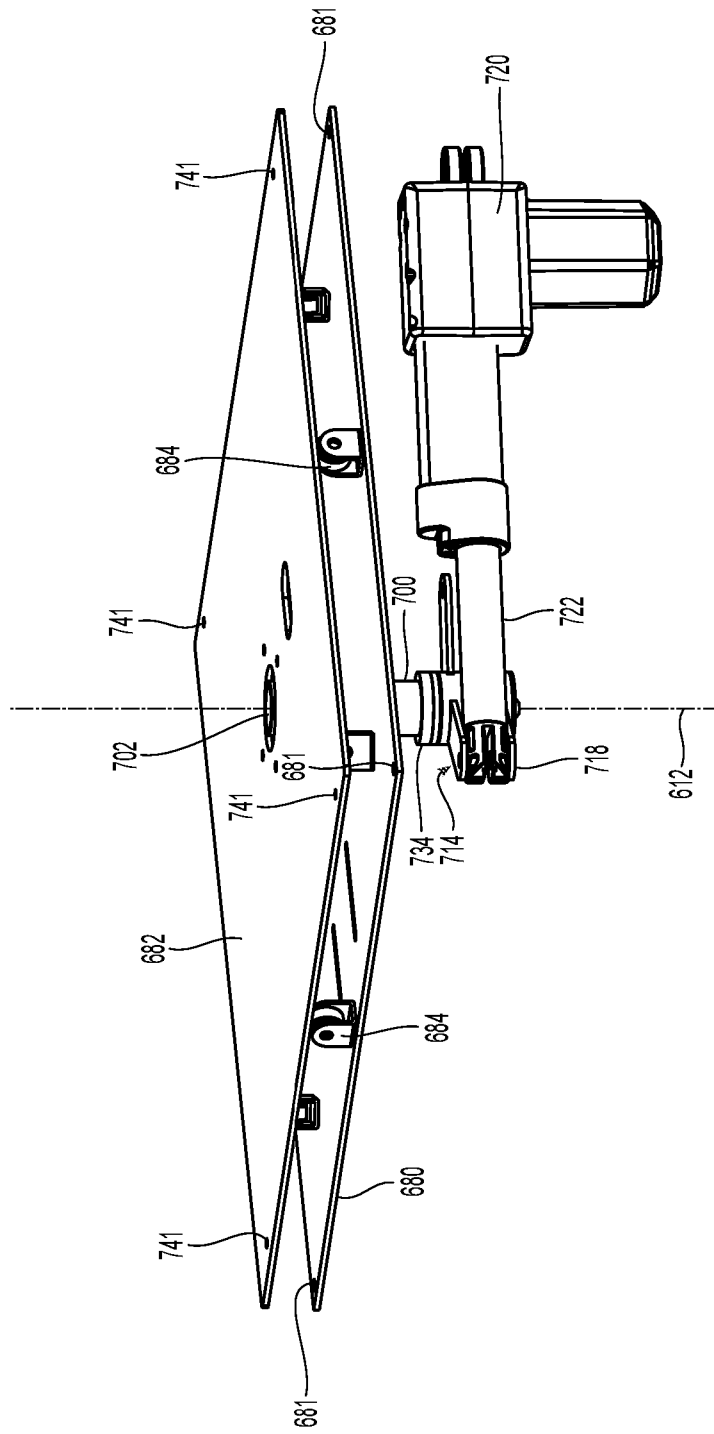


Fig. 29

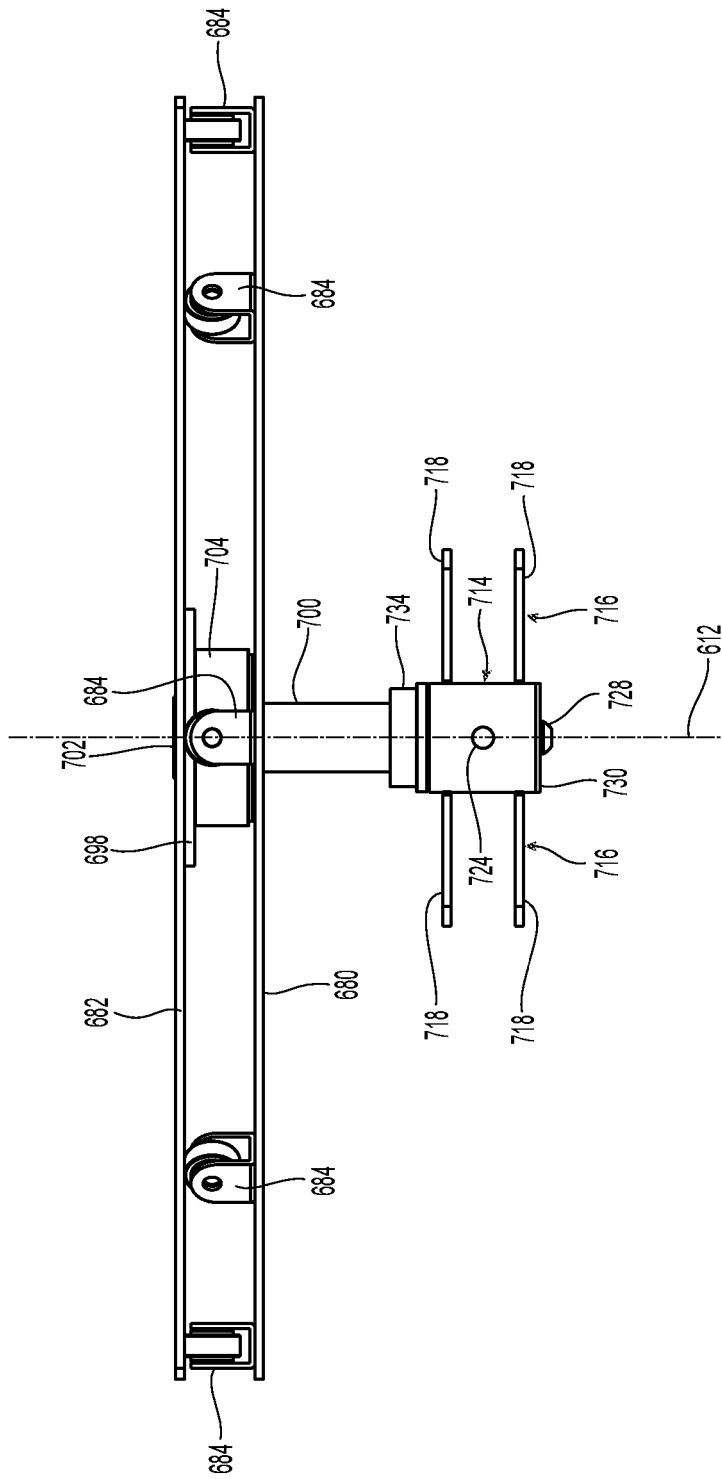


Fig. 30

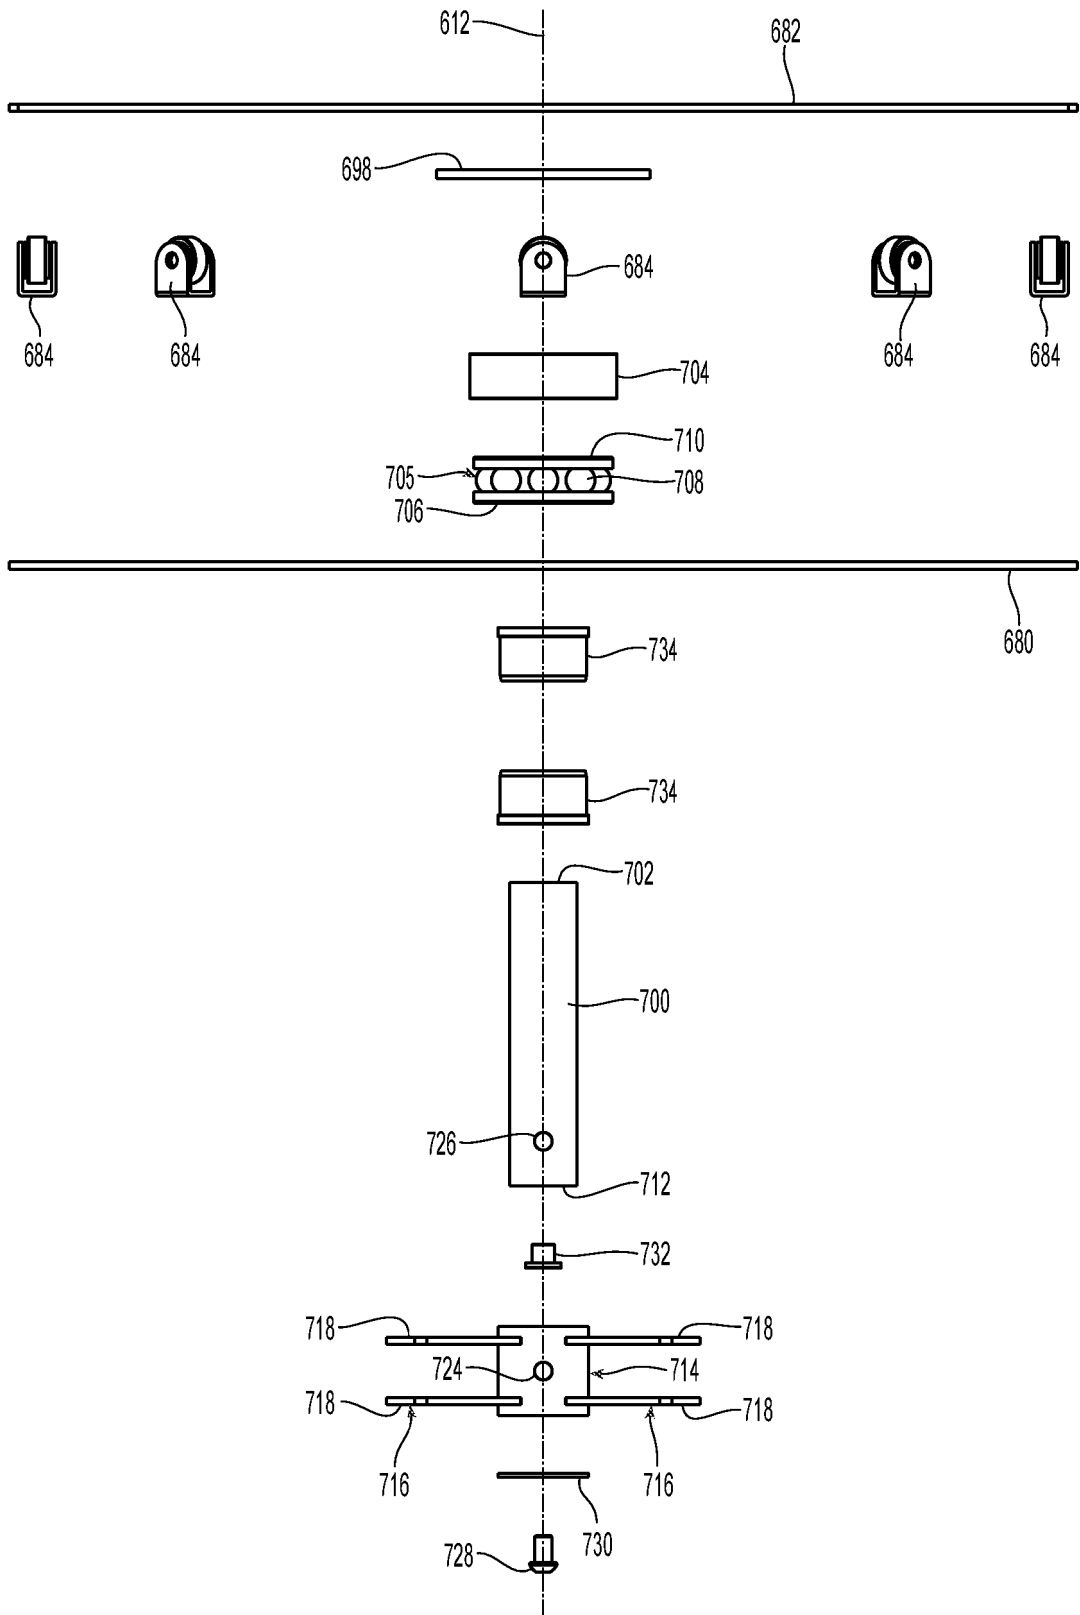


Fig. 31

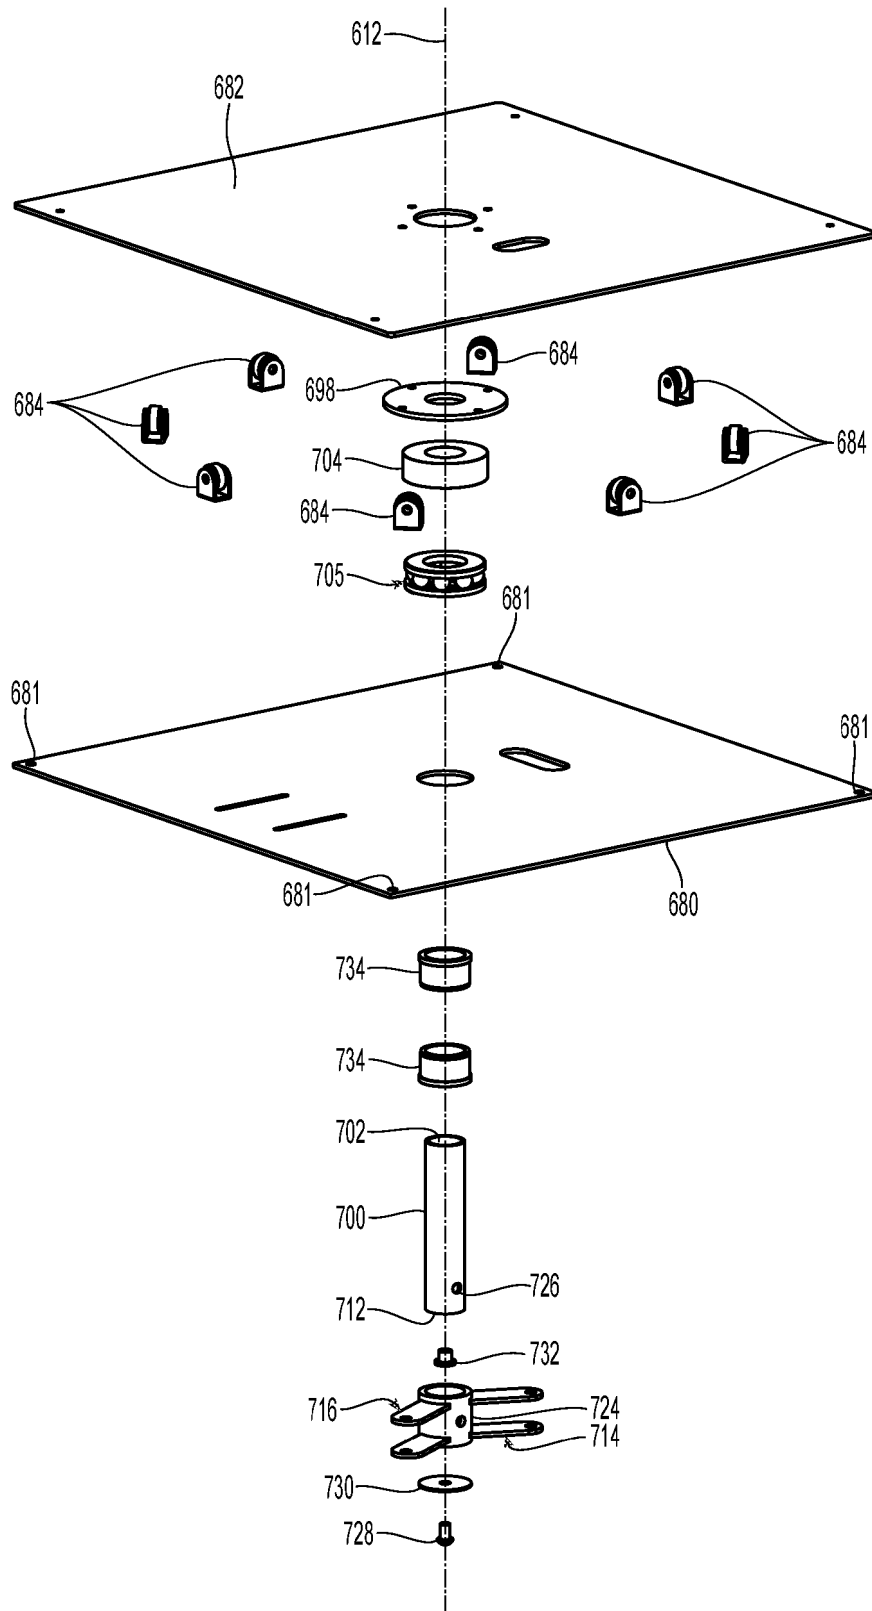


Fig. 32

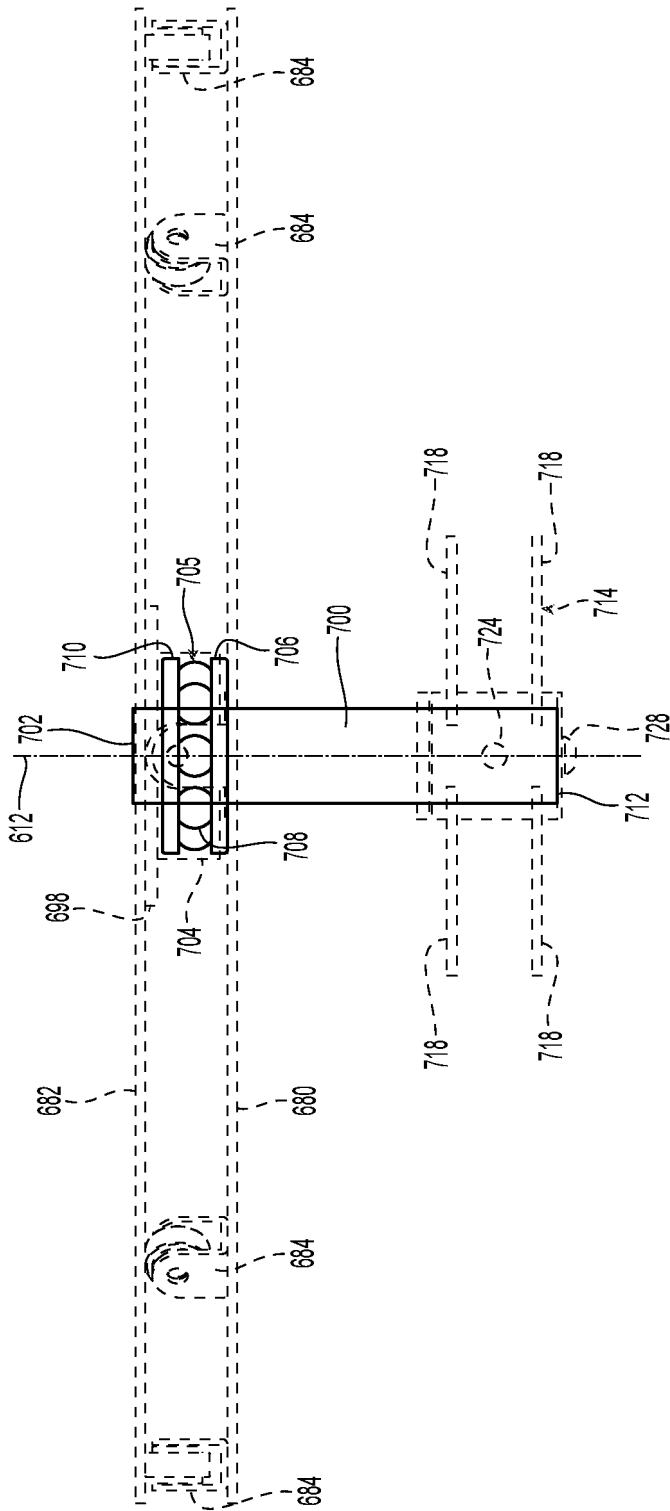


Fig. 33

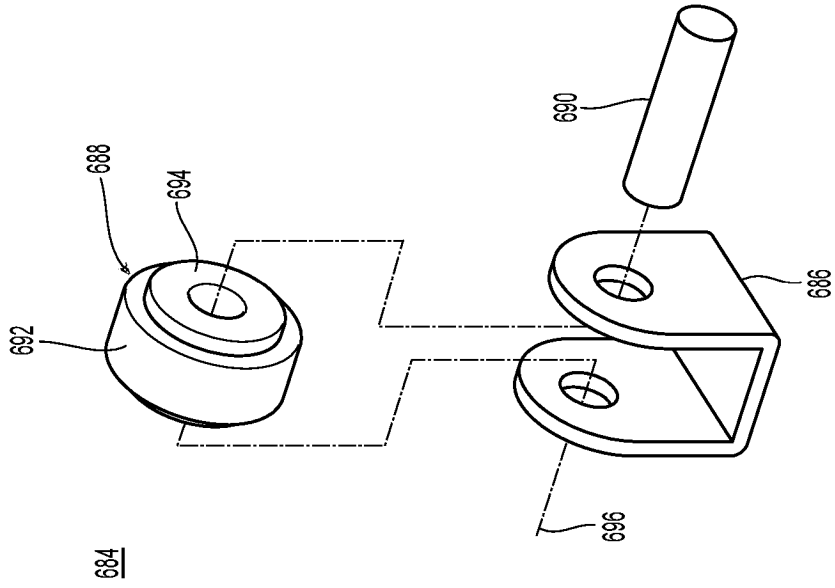


Fig. 34

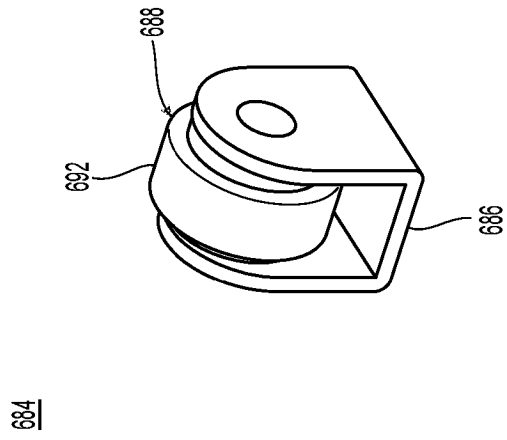


Fig. 35

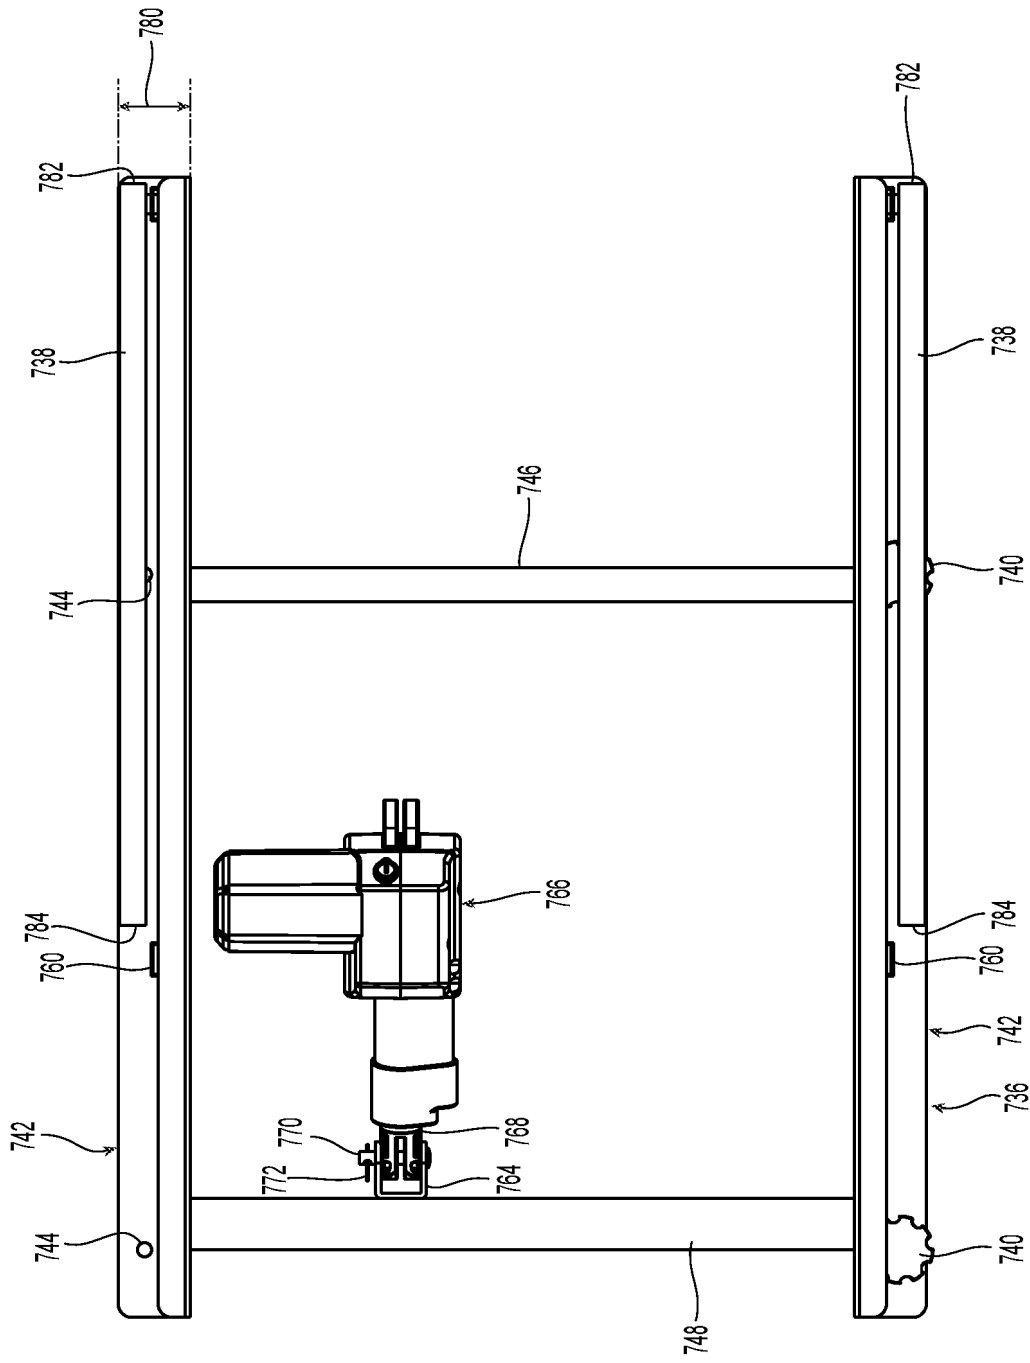


Fig. 36

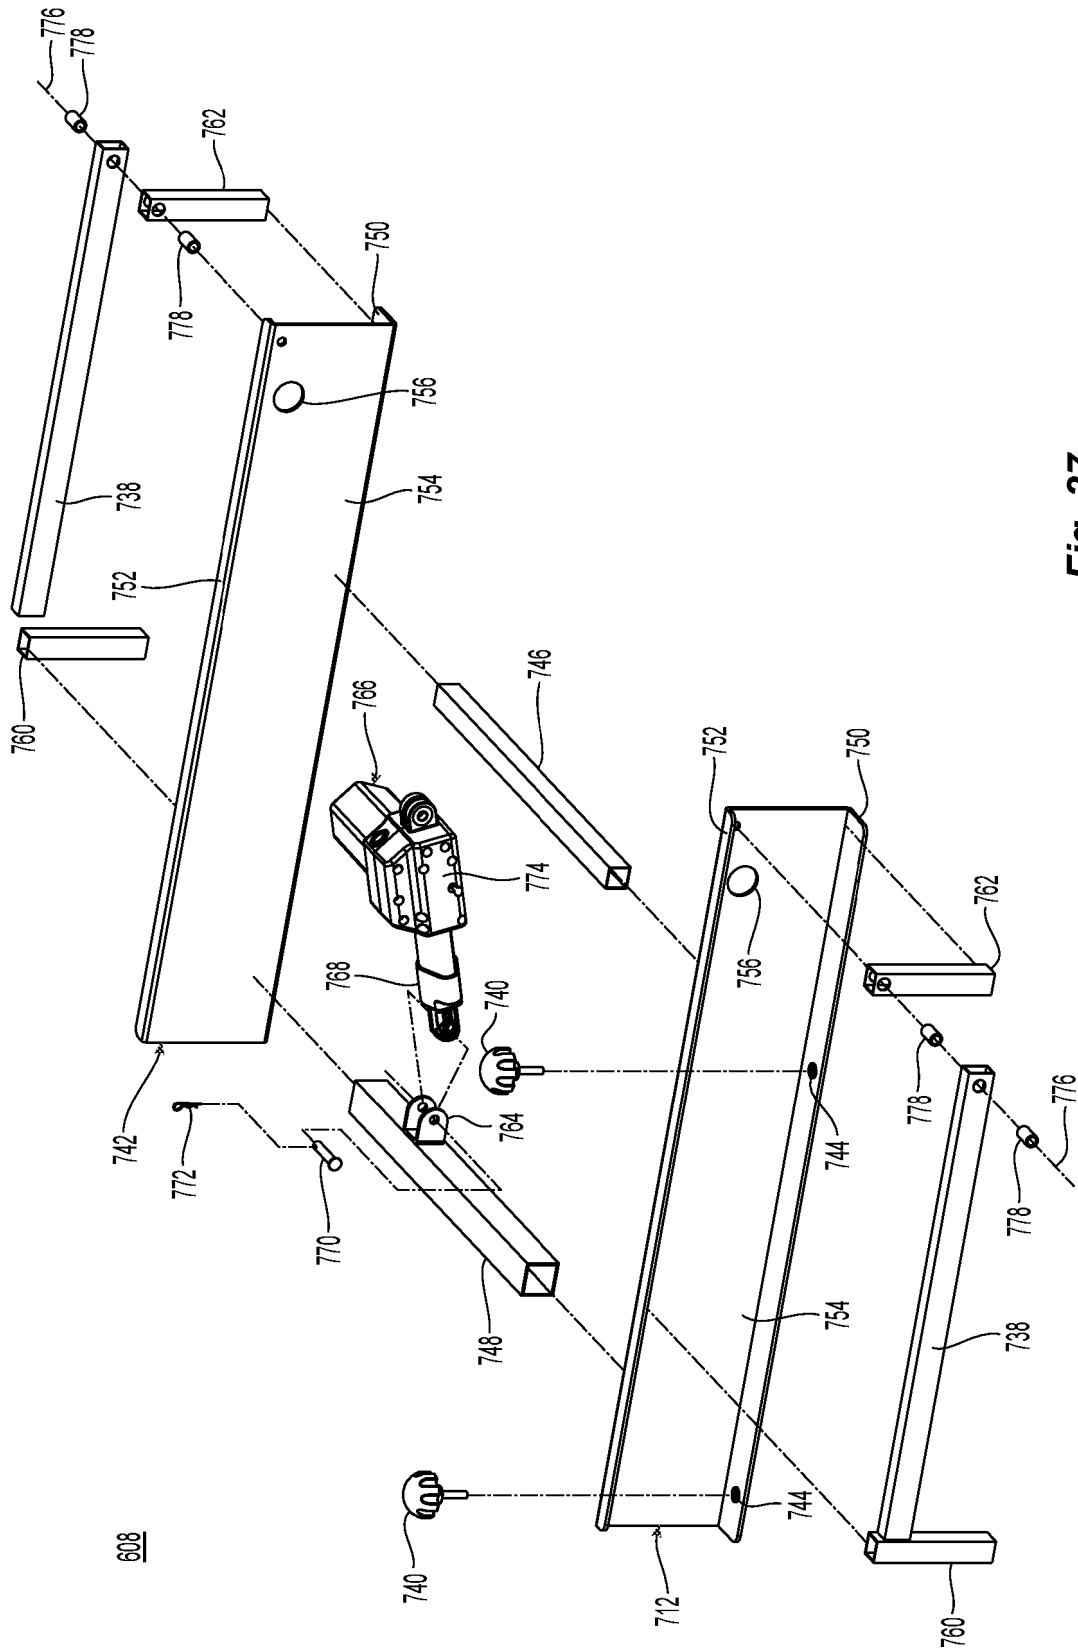


Fig. 37

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 202013001182 U1 [0003]