



(51) International Patent Classification:

*B01J 23/28* (2006.01)      *B01J 37/08* (2006.01)  
*B01J 23/04* (2006.01)      *C01B 32/40* (2017.01)  
*B01J 37/03* (2006.01)

(21) International Application Number:

PCT/US2017/036297

(22) International Filing Date:

07 June 2017 (07.06.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/362,716      15 July 2016 (15.07.2016)      US  
62/394,341      14 September 2016 (14.09.2016)      US

(71) Applicant: **THE GOVERNMENT OF THE UNITED STATES OF AMERICA, AS REPRESENTED BY THE SECRETARY OF THE NAVY** [US/US]; Naval Research Laboratory, 875 North Randolph Street, Suite 1425, Arlington, VA 22203 (US).

(72) Inventors: **POROSOFF, Marc**; 2130 P Street NW, Washington, DC 20037 (US). **WILLAUER, Heather D.**; 8306 Holy Haven Lane, Fairfax Station, VA 22039 (US).

(74) Agent: **BROOME, Kerry L.**; US Naval Research Laboratory, 4555 Overlook Ave, SW, Code 1008.2, Washington, DC 20375 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ALKALI METAL DOPED MOLYBDENUM CARBIDE SUPPORTED ON GAMMA-ALUMINA FOR SELECTIVE CO<sub>2</sub> HYDROGENATION INTO CO

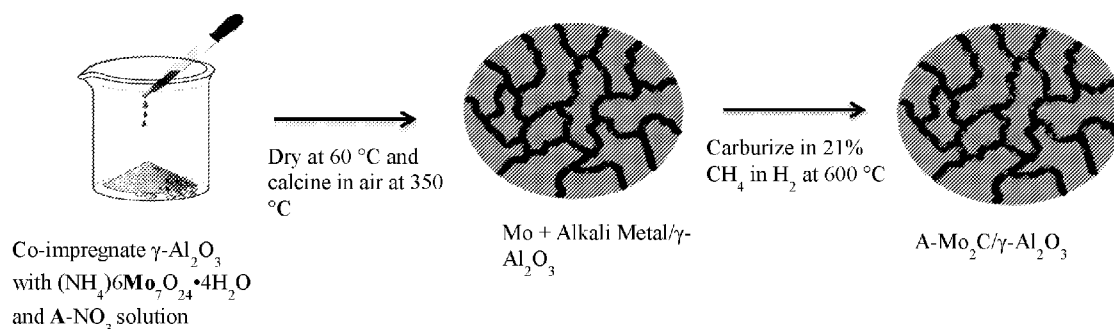


FIG. 1

(57) Abstract: A class of catalysts for CO<sub>2</sub> hydrogenation via the reverse water-gas shift (RWGS) reaction to selectively produce CO for down-stream hydrocarbon synthesis. Alkali metal-doped molybdenum carbide, supported on gamma alumina (A-Mo<sub>2</sub>C/ $\gamma\text{-Al}_2\text{O}_3$ , A = K, Na, Li), is synthesized by co-impregnation of molybdenum and alkali metal precursors onto a  $\gamma\text{-Al}_2\text{O}_3$  support. The A-Mo/ $\gamma\text{-Al}_2\text{O}_3$  catalyst is then carburized to form the A-Mo<sub>2</sub>C/ $\gamma\text{-Al}_2\text{O}_3$ . Also disclosed is the related method for CO<sub>2</sub> hydrogenation via the RWGS reaction using the A-Mo<sub>2</sub>C/ $\gamma\text{-Al}_2\text{O}_3$  catalyst.



## ALKALI METAL DOPED MOLYBDENUM CARBIDE SUPPORTED ON GAMMA-ALUMINA FOR SELECTIVE CO<sub>2</sub> HYDROGENATION INTO CO

### TECHNICAL FIELD

The present invention relates to catalysts for CO<sub>2</sub> hydrogenation reactions to selectively  
5 produce CO via the reverse water-gas shift (RWGS) reaction for down-stream hydrocarbon synthesis.

### BACKGROUND ART

The high concentration of CO<sub>2</sub> in seawater, ca. 100 mg L<sup>-1</sup>, represents a significant opportunity to extract and use this CO<sub>2</sub> as a C<sub>1</sub> feedstock for synthetic fuels. Through an  
10 existing process patented by the U.S. Navy (US Patent 9,303,323), CO<sub>2</sub> and H<sub>2</sub> can be concurrently extracted from seawater and used as reactants for direct Fischer-Tropsch from CO<sub>2</sub> (CO<sub>2</sub>-FT) to produce valuable oxygenates, specialty chemicals and intermediate hydrocarbons (C<sub>2</sub>-C<sub>6</sub>) for synthetic fuel. (Wang et al., Chem. Soc. Rev. 40, 3703-3727 (2011) and Centi et al., Today, 148, 191-205 (2009)). If the energy input is nuclear or renewable, the entire process can  
15 be considered CO<sub>2</sub>-neutral. (Willauer et al., J. Renew. and Sustain. Energ., 4, 033111 (2012)).

The most commonly used catalysts for CO<sub>2</sub>-FT are slight variations of Fe and Co-based Fischer-Tropsch (FT) catalysts, which show promise, but are not specifically designed for the CO<sub>2</sub> reactant. (Kaiser et al., Chem-Ing-Tech, 85, 489-499 (2013), Chakrabarti et al., Ind. Eng. Chem. Res., 54, 1189-1196 (2015), and Dorner et al., Energ. Environ. Sci., 3, 884-890 (2010)).  
20 The current optimal catalyst, K-Mn-Fe/Al<sub>2</sub>O<sub>3</sub>, achieves a CO<sub>2</sub> conversion of 41.4% and a selectivity towards C<sub>2</sub>-C<sub>5</sub>+ hydrocarbons of 62.4% at a gas hourly space velocity (GHSV) of 0.0015 L g<sup>-1</sup> s<sup>-1</sup>, but the mechanism is poorly understood, making catalyst improvements challenging. (Dorner et al., Appl. Catal. A-Gen., 373, 112-121 (2010)). There is some consensus that an Fe carbide formed during the reaction is the catalytically active phase (Lee et al., J. Mol. Catal. A-Chem., 301, 98-105 (2009)); however, reports also state that Fe catalysts are  
25 poisoned by water, an unavoidable byproduct, negatively influencing catalytic activity and product selectivity. (Riedel et al., Appl. Catal. A-Gen., 186, 201-213 (1999) and Willauer et al., J. CO<sub>2</sub> Util., 3-4, 56-64 (2013)). Conversely, Co-based catalysts are water tolerant (Schulz et al., in Studies in Surface Science and Catalysis, Vol. 107 (Eds.: dePontes et al.), Elsevier, pp.  
30 193-200 (1997)) and modifying an Fe catalyst with Co improves catalytic performance and selectivity towards C<sub>2</sub>+ hydrocarbon products. (Sathawong et al., Catal. Today, 251, 34-40 (2015) and Sathawong et al., Top. Catal., 57, 588-594 (2014)). Improvements have also been

made to Fe-based catalysts by adding Cu, which enhances CO<sub>2</sub>-FT activity and selectivity. (Sathawong et al., *Top. Catal.*, 57, 588-594 (2014)).

Although there are promising catalysts for CO<sub>2</sub>-FT, the structure-property relationships that control activity and selectivity to intermediate hydrocarbons are not well studied. (Porosoff et al., *Energ. Environ. Sci.*, 9, 62-73 (2016)). Furthermore, because of the complexity of CO<sub>2</sub>-FT, the alternative route of feeding CO produced from reverse water-gas shift (RWGS) into a FT reactor must also be considered. For industrial RWGS, operating temperatures are very high, typically at or above 600 °C at 2.8 MPa, over ZnO/Al<sub>2</sub>O<sub>3</sub> and ZnO/Cr<sub>2</sub>O<sub>3</sub> catalysts. Because methane (CH<sub>4</sub>) is thermodynamically favored below 600 °C, these catalysts require high temperatures to selectively produce CO, which also results in substantial deactivation. (Joo et al., *Ind. Eng. Chem. Res.*, 38, 1808-1812 (1999) and Park et al., *Journal of Chemical Engineering*, 17, 719-722 (2000)). To make fuel synthesis from CO<sub>2</sub> viable, a low-cost and stable RWGS catalyst is first required, which can achieve high selectivity to CO over a wide range of conversion and operating temperatures.

Recently, Pt-based catalysts have been investigated for RWGS (Kattel et al., *Angew. Chem. Int. Edit.*, 128, 8100-8105 (2016) and Porosoff et al., *J. Catal.*, 301, 30-37 (2013)), but they are expensive, and thus, unviable for an industrial scale CO<sub>2</sub> conversion process. As an alternative, transition metal carbides (TMCs) are low-cost, with similar electronic properties to precious metals. (Levy et al., *Science*, 181, 547-549 (1973) and Porosoff et al., *Chem. Comm.*, 51, 6988-6991 (2015)). Density functional theory (DFT) calculations over the TMC, molybdenum carbide (Mo<sub>2</sub>C) demonstrate that Mo-terminated Mo<sub>2</sub>C has many properties similar to transition metals including Ru, Fe, Co and Ni catalysts, all of which are active for CO<sub>2</sub> conversion. (Medford et al., *J. Catal.*, 290, 108-117 (2012)). DFT calculations by Shi et al. further illustrate that CO<sub>2</sub> dissociation (CO<sub>2</sub> → CO + O) is more favorable than CO<sub>2</sub> hydrogenation (CO<sub>2</sub> + H → HCOO or COOH) over Mo<sub>2</sub>C, suggesting high CO selectivity. (Shi et al., *Appl. Catal. A-Gen.*, 524, 223-236 (2016)). Reactor experiments over unsupported-Mo<sub>2</sub>C powder catalysts for RWGS at 300 °C and 0.1 MPa show 8.7% conversion and 93.9% selectivity towards CO (Porosoff et al., *Angew. Chem. Int. Edit.*, 53, 6705-6709 (2014)), confirming the DFT calculations. Another study over Mo<sub>2</sub>C nanowires also reports high activity and CO selectivity at 600 °C. (Gao et al., *Catal. Comm.*, 84, 147-150 (2016)). The high intrinsic activity of Mo<sub>2</sub>C originates from CO<sub>2</sub> binding in a bent configuration, leading to spontaneous breakage of a C=O bond, leaving CO and O bound to the surface. (Posada-Perez et al., *Phys. Chem. Chem. Phys.*, 16, 14912-14921 (2014)). The CO can desorb from the surface,

while the oxy-carbide (O-Mo<sub>2</sub>C) is restored to the active carbide through hydrogenation. (Porosoff et al., *Angew. Chem. Int. Edit.*, 53, 6705-6709 (2014)).

Mo<sub>2</sub>C can also be modified with metal nanoparticles (Cu, Co, Ni), which influence the product selectivity, leading to MeOH with Cu (Posada-Perez et al., *Catal. Sci. Technol.*, 6, 6766-6777 (2016)), C<sub>2</sub>+ hydrocarbons with Co and CH<sub>4</sub> with Ni. (Griboval-Constant et al., *Appl. Catal. A-Gen.*, 260, 35-45 (2004) and Xu et al., *Catal. Lett.*, 145, 1365-1373 (2015)). Because modifying Mo<sub>2</sub>C with a metal promoter can further tune the selectivity between MeOH, C<sub>2</sub>+ hydrocarbons or CH<sub>4</sub>, it may be possible to modify Mo<sub>2</sub>C to selectively produce even more CO across a wide range of conversions and temperatures. Experimental and theoretical studies suggest that potassium (K) promoters increase the binding energy, and therefore, reactivity of CO<sub>2</sub>, thereby promoting C=O bond scission and formation of CO. (Solymosi et al., *Catal. Lett.*, 66, 227-230 (2000) and Pistonesi et al., *Catal. Today*, 181, 102-107 (2012)).

Molybdenum carbide has been employed as a catalyst for CO<sub>2</sub> hydrogenation as a pure material, supported on  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> and when modified with various metals (Co, Ni, Fe). It has been used as an alternative to precious metals for many catalytic reactions, and more recently has been applied to CO<sub>2</sub> hydrogenation. CO<sub>2</sub> hydrogenation over these previous catalysts is comparable to the current invention; however, the selectivity and yield to CO is significantly lower.

#### DISCLOSURE OF INVENTION

The present invention provides a class of catalysts for CO<sub>2</sub> hydrogenation via the RWGS reaction to selectively produce CO for down-stream hydrocarbon synthesis. Alkali metal-doped molybdenum carbide, supported on gamma alumina (A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, A = K, Na, Li), is synthesized by co-impregnation of (NH<sub>4</sub>)<sub>6</sub>Mo<sub>7</sub>O<sub>24</sub>•4H<sub>2</sub>O and A-NO<sub>3</sub> precursors (A = K, Na, Li) onto a  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support. The A-Mo/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> catalyst is then carburized to form the A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>.

Alkali metal-promoted molybdenum carbide supported on gamma alumina is a low-cost, stable and highly selective catalyst for RWGS over a wide range of conversion. These findings are supported by X-ray diffraction (XRD), scanning electron microscopy (SEM) with energy dispersive X-ray spectroscopy (EDS), X-ray photoelectron spectroscopy (XPS) and density functional theory (DFT) calculations.

These and other features and advantages of the invention, as well as the invention itself, will become better understood by reference to the following detailed description, appended claims, and accompanying drawings.

## BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 shows the synthesis procedure for alkali metal doped molybdenum carbide supported on gamma alumina.

FIG. 2A is a low magnification scanning electron microscopy (SEM) image of K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>. FIG. 2B is a high magnification SEM image of K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>.

FIG. 3 is a schematic of a reactor set-up for CO<sub>2</sub> hydrogenation.

FIG. 4A is a plot of CO<sub>2</sub> conversion versus time for the Mo<sub>2</sub>C and A-Mo<sub>2</sub>C (A = K, Na, Li) supported on  $\gamma$ -Al<sub>2</sub>O<sub>3</sub>. FIG. 4B is a plot of production of CO and CH<sub>4</sub> versus time for Na-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, Li-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> and Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>.

10

## MODES FOR CARRYING OUT THE INVENTION

The present invention provides for a supported heterogeneous catalyst material for catalyzing the RWGS reaction for the selective formation of CO. The catalyst has a support material of  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> and an active material of alkali-metal doped molybdenum carbide. The alkali-metal component of the active material may comprise one or more alkali-metal precursors in elemental form or in the form of oxides, with the metals being K, Na, Li, or any combination thereof. The molybdenum component of the active material may comprise one or more molybdenum precursors in the form of carbides, oxycarbides, oxides, elemental molybdenum, or any combination thereof.

FIG. 1 shows the synthesis procedure for alkali metal doped molybdenum carbide supported on gamma alumina. Alkali metal-doped molybdenum carbide, supported on gamma alumina (A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, A = K, Na, Li) was synthesized by co-impregnation of (NH<sub>4</sub>)<sub>6</sub>Mo<sub>7</sub>O<sub>24</sub>•4H<sub>2</sub>O and A-NO<sub>3</sub> precursors (A = K, Na, Li) onto a  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support by the evaporation deposition method. In brief, the precursors were dissolved in deionized water at the concentrations required to obtain molar ratios of 1/4/15 A/Mo/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, which translates to 2% potassium (K), 1.2% sodium (Na), 0.4% lithium (Li) and 20.8% Mo loading on the  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support. Aqueous solutions of the metal precursors were added to a beaker of  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> and dried overnight under stirring at 60 °C, then calcined in air overnight at 350 °C.

The A-Mo/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> catalyst was then carburized in a 21% CH<sub>4</sub> in H<sub>2</sub> mixture at 600 °C for 2.5 hours to form the A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>. After the first 1.5 hour, the CH<sub>4</sub> was shut off and the carbide was cooled to room temperature in H<sub>2</sub>. At room temperature, the catalyst was passivated in 1% O<sub>2</sub> in N<sub>2</sub> for several hours. FIG. 2A shows a low magnification scanning electron

microscopy (SEM) image of K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, and FIG. 2B shows a high magnification SEM image of K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>.

CO<sub>2</sub> hydrogenation via the RWGS reaction is performed while flowing carbon dioxide, hydrogen gas, or any combination thereof over the A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> catalyst material. FIG. 3 shows a schematic of a reactor set-up for CO<sub>2</sub> hydrogenation. In the CO<sub>2</sub> hydrogenation experiment, 500 mg of A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> was loaded into a ¼ in stainless steel reactor and reduced under 50 sccm H<sub>2</sub> at 50 psig for 2.5 h at 300 °C. After reduction, the reactor was isolated and the bypass pressurized to 290 psig with 6.3 sccm CO<sub>2</sub>, 18.9 sccm H<sub>2</sub> and 5.0 sccm N<sub>2</sub>, for a H<sub>2</sub>:CO<sub>2</sub> ratio of 3:1. At 290 psig, concentration of the reactants in the bypass was recorded as a baseline and gases were flowed into the reactor. Reactions were run for 22 h at 300 °C and concentrations of reactants and products were measured by an inline gas chromatograph.

Table 1 shows a summary of performance of Mo<sub>2</sub>C and A-Mo<sub>2</sub>C (A = K, Na, Li) supported on  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> for CO<sub>2</sub> hydrogenation. FIG. 4A shows a plot of CO<sub>2</sub> conversion versus time for the Mo<sub>2</sub>C and A-Mo<sub>2</sub>C (A = K, Na, Li) supported on  $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, and FIG. 4B shows a plot of production of CO and CH<sub>4</sub> versus time for Na-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, Li-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> and Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>. The CO<sub>2</sub> hydrogenation via the RWGS reaction can achieve a CO yield of 12% or greater and a CO selectivity of 90% or greater.

**Table 1**

Catalyst	Conversion / %	CO Selectivity / %	CO Yield / %
Mo <sub>2</sub> C/ $\gamma$ -Al <sub>2</sub> O <sub>3</sub>	19.9	73.5	14.6
K-Mo <sub>2</sub> C/ $\gamma$ -Al <sub>2</sub> O <sub>3</sub>	17.2	95.9	16.5
Na-Mo <sub>2</sub> C/ $\gamma$ -Al <sub>2</sub> O <sub>3</sub>	19.6	86.3	16.9
Li-Mo <sub>2</sub> C/ $\gamma$ -Al <sub>2</sub> O <sub>3</sub>	19.8	62.1	12.3

20

The increased CO yield from doping a Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> catalyst with alkali metals offers an improved route for CO production from CO<sub>2</sub>. The best currently available catalysts can only achieve a CO yield and selectivity of 14.6% and 75% at 300 °C, respectively, while K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> reaches a CO yield and selectivity of 16.5% and 96%, respectively. Selectively producing CO from CO<sub>2</sub> enables a facile route to synthesize synthetic hydrocarbons from CO<sub>2</sub> through down-stream Fischer-Tropsch.

Na-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> reaches a similar CO yield to K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, while Li-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> shows a lower selectivity to CO than Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>. Maintaining the same A:Mo weight ratio in Li-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> results in a significantly lower weight fraction of Li because of the lower atomic weight of Li relative to Na and K. It is possible this lower amount of dopant

30

results in the lower CO selectivity for Li-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>. The Li:Mo and Na:Mo ratios can be further optimized.

The addition of K to catalysts as a promoter has not yet been recorded with a Mo<sub>2</sub>C-based catalyst for CO<sub>2</sub> hydrogenation. Furthermore, doping Mo<sub>2</sub>C-based catalysts with Li and Na has not been attempted in literature for CO<sub>2</sub> hydrogenation. By doping Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> with alkali metals, CO selectivity substantially increases for K and Na, which is likely caused by attenuation of the electronic properties of the Mo<sub>2</sub>C phase. These electronic effects are only present when Mo<sub>2</sub>C is doped with a small amount of alkali metal, thereby attenuating the CO binding energy and preventing further hydrogenation into CH<sub>4</sub> or other hydrocarbons.

A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> (A = K, Na, Li) was also tested at other temperatures (250 – 1000 °C), other alkali metal loadings (0.1 – 15%), other Mo loadings (1 – 70%), carburization temperatures (400 – 1000 °C) on other supports (SiO<sub>2</sub>, TiO<sub>2</sub>, ZrO<sub>2</sub>), gas compositions (CO<sub>2</sub>:H<sub>2</sub> = 1:1, 1:2, 1:3) and pressures (0 – 350 psig). Higher temperature improves conversion for K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> to 28.6%, without the expense of CO selectivity (94.8%). Increasing K loading to 5% increases CO selectivity to 99.4% at the expense of conversion (3.8%). Higher Mo loading lowers conversion to 6.6% and raises selectivity slightly to 97.8%.

The exact optimal metal loading and A:Mo (A = K, Na, Li) ratio on the  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support can be further optimized based on this finding of such high CO selectivity, especially over Na-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> and K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>.

## Example

In this example, kinetic experiments and characterization tools were combined with DFT calculations to probe the catalytic properties of K-promoted Mo<sub>2</sub>C and understand the reaction mechanisms of CO<sub>2</sub> dissociation. Flow reactor results indicate that K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> is a highly active and stable RWGS catalyst exhibiting high selectivity towards CO over a range of operating conditions, with the presence of K promoting CO<sub>2</sub> dissociation to CO. These findings were supported by X-ray diffraction (XRD), scanning electron microscopy (SEM) with energy dispersive X-ray spectroscopy (EDS), X-ray photoelectron spectroscopy (XPS) measurements and DFT calculations.

To experimentally determine the effect of K addition on Mo<sub>2</sub>C-based supported catalysts, K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> and the corresponding Mo<sub>2</sub>C, Mo and K-Mo control catalysts, all supported on  $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, were synthesized through an evaporation-deposition procedure. XRD measurements over the reduced catalysts indicate that each of the synthesized catalysts contain a combination of MoO<sub>2</sub>,  $\beta$ -Mo<sub>2</sub>C and metallic Mo. Each of these phases was assigned to the

synthesized catalysts by comparing the XRD spectra with the standard database for specific bulk Mo phases. XRD measurements of the Mo-based catalysts indicated that Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> and 2 wt% K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> contained a mixture of  $\beta$ -Mo<sub>2</sub>C and MoO<sub>2</sub> supported on  $\gamma$ -Al<sub>2</sub>O<sub>3</sub>. All supported Mo-based catalysts exhibited large peaks at 45.8° and 66.6°, from the  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support, and no identifiable peaks for MoO<sub>3</sub> were present in any of the samples. Closer inspection of the XRD spectra revealed the presence of a phase assigned to metallic Mo at 40.5°, 58.7° and 73.7° on the K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> and K-Mo/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> catalysts. These peaks were not present in Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, suggesting that the addition of K promotes the formation of a metallic Mo phase.

SEM images with EDS mapping of the reduced catalysts were used to better identify the structure of K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>. Overall, the morphology and particle size of the catalysts appeared to be similar, with the SEM image of Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> found in the SI. The EDS maps, however, showed that the distribution of Mo over each catalyst was notably different. The EDS map of the Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> catalyst, found in the SI, indicated that molybdenum was evenly distributed over the  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support. On K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, there was both (1) a large degree of segregation between Mo and Al-rich areas and (2) K being preferentially found in the Mo-rich areas, which suggests K directly affects the electronic properties of the active Mo<sub>2</sub>C phase.

Regardless of the differences in catalyst particle size and morphology, there was no significant difference in catalytic activity between the two samples. The conversion of Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> and K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> was similar. Although the activity of the two catalysts was comparable, the addition of 2 wt% K to Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> significantly improved the selectivity towards CO. There was a strong promotional effect from the addition of K, which led to high CO selectivity (~95%) from 6 to 23% conversion, the thermodynamic maximum for RWGS at 300 °C with a 3:1 H<sub>2</sub>:CO<sub>2</sub> mixture. Furthermore, the addition of the K promoter decreased the deactivation percentage from 11.7% to 7.3% after 68 h on stream, an improvement in catalytic stability.

The K loading was varied from 1 – 3 wt% to determine the effect of K on catalytic performance. The 1 wt% K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> had a slightly higher CO yield than 2 wt% K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, but with increased methane production, which wastes valuable H<sub>2</sub> and requires a separation step before FT. Furthermore, as K loading increased, there was a drop in catalytic activity, likely from the blocking of active sites. This relationship between K loading and CO yield was not linearly dependant on temperature. At the higher temperature, the 3 wt% K-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> achieved 40.5% conversion and 98.2% CO selectivity, which outperformed the 2

wt% K-Mo<sub>2</sub>C/γ-Al<sub>2</sub>O<sub>3</sub> and industrial ZnO/Al<sub>2</sub>O<sub>3</sub> and ZnO/Cr<sub>2</sub>O<sub>3</sub> catalysts. (Joo et al., Ind. Eng. Chem. Res., 38, 1808-1812 (1999)).

Uncarburized Mo/γ-Al<sub>2</sub>O<sub>3</sub> and 2 wt% K-Mo/γ-Al<sub>2</sub>O<sub>3</sub> catalysts were tested to clarify the role of metallic Mo identified in K-Mo<sub>2</sub>C/γ-Al<sub>2</sub>O<sub>3</sub> in the XRD measurements. The Mo/γ-Al<sub>2</sub>O<sub>3</sub> and K-Mo/γ-Al<sub>2</sub>O<sub>3</sub> control catalysts were reduced *ex situ* in pure H<sub>2</sub> at 600 °C prior to reaction to form metallic Mo. The pre-reduction step ensured the high activity and CO selectivity of the Mo<sub>2</sub>C-based catalysts originated from the Mo carbide phase, and not metallic Mo. The Mo carbides, synthesized with CH<sub>4</sub>, were more active than the corresponding uncarburized catalysts, indicating that the carburization step was necessary for high catalytic activity and that the metallic Mo phase in K-Mo<sub>2</sub>C/γ-Al<sub>2</sub>O<sub>3</sub> was not solely responsible for the high performance.

By modifying Mo<sub>2</sub>C/γ-Al<sub>2</sub>O<sub>3</sub> with a K promoter, the CO selectivity and yield increased significantly, and approached the maximum thermodynamic yield for RWGS, under the appropriate reaction conditions. Addition of K also improved the catalyst stability, with only 7.3% deactivation after 68 h on stream. Catalyst characterization by SEM with EDS clearly showed that K is preferably found in Mo-rich regions, while Mo is more evenly distributed in Mo<sub>2</sub>C/γ-Al<sub>2</sub>O<sub>3</sub>. Furthermore, K-Mo<sub>2</sub>C/γ-Al<sub>2</sub>O<sub>3</sub> maintained the Mo in a reduced and active state as evidenced by XPS measurements. These experimental results are supported by DFT calculations, which showed enhanced CO<sub>2</sub> adsorption and reduced CO<sub>2</sub> dissociation barriers on the K-promoted, compared to the pristine, Mo-terminated β-Mo<sub>2</sub>C(001) surfaces. Notably, the DFT calculations predicted a 2.8 kcal mol<sup>-1</sup> lower activation barrier for CO formation upon K addition, which is in excellent agreement with the experimentally measured difference of 2.6 kcal mol<sup>-1</sup>. These findings show that K-Mo<sub>2</sub>C/γ-Al<sub>2</sub>O<sub>3</sub> is a highly selective catalyst for producing CO from CO<sub>2</sub> and has the potential to be used as a commercial RWGS catalyst.

The above descriptions are those of the preferred embodiments of the invention. Various modifications and variations are possible in light of the above teachings without departing from the spirit and broader aspects of the invention. It is therefore to be understood that the claimed invention may be practiced otherwise than as specifically described. Any references to claim elements in the singular, for example, using the articles “a,” “an,” “the,” or “said,” is not to be construed as limiting the element to the singular.

30

## CLAIMS

What is claimed as new and desired to be protected by Letters Patent of the United States is:

1. A supported heterogeneous catalyst material for catalyzing the reverse water-gas shift (RWGS) reaction for the selective formation of CO, comprising:  
5 a support material comprising  $\gamma$ -Al<sub>2</sub>O<sub>3</sub>; and  
an active material comprising alkali-metal doped molybdenum carbide.
2. The catalyst material of claim 1, wherein the alkali-metal component of the active material comprises one or more alkali-metal precursors in elemental form or in the form  
10 of oxides, said metals being selected from the group consisting of K, Na, Li, or any combination thereof.
3. The catalyst material of claim 1, wherein the molybdenum component of the active material comprises one or more molybdenum precursors in the form of carbides, oxycarbides, oxides, elemental molybdenum, or any combination thereof.
- 15 4. A method for making a catalyst for use in carbon dioxide hydrogenation via the reverse water-gas shift (RWGS) reaction for the selective formation of CO, comprising:  
co-impregnating molybdenum and alkali-metal precursors onto a  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support, wherein the alkali metal is K, Na, or Li;  
drying and calcining impregnated  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support; and  
20 carburizing the dried and calcined  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support to form A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>,  
where A is K, Na, or Li.
5. The method of claim 4, wherein the loading of Mo is in the range of 1 to 70%.
6. The method of claim 4, wherein the loading of the alkali metal is in the range of 0.1 to 15%.
- 25 7. The method of claim 4, wherein the carburization is performed at a temperature in the range of 400 to 1000 °C.
8. A method for CO<sub>2</sub> hydrogenation via the reverse water-gas shift (RWGS) reaction for the selective formation of CO, comprising:

co-impregnating molybdenum and alkali-metal precursors onto a  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support,  
wherein the alkali metal is K, Na, or Li;

drying and calcining impregnated  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support;

carburizing the dried and calcined  $\gamma$ -Al<sub>2</sub>O<sub>3</sub> support to form A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>,

5 wherein A is K, Na, or Li; and

reacting the A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> with CO<sub>2</sub> and H<sub>2</sub> to form CO.

9. The method of claim 8, wherein the loading of Mo is in the range of 1 to 70%.

10. The method of claim 8, wherein the loading of the alkali metal is in the range of  
0.1 to 15%.

10 11. The method of claim 8, wherein the carburization is performed at a temperature  
in the range of 400 to 1000 °C.

12. The method of claim 8, wherein the reaction is performed while applying  
external heat.

15 13. The method of claim 8, wherein the reaction is performed at a temperature in the  
range of 250 to 1000 °C


14. The method of claim 8, wherein the reaction is performed at a pressure between  
0 and 350 psig.

15. The method of claim 8, wherein the reaction is performed while flowing carbon  
dioxide, hydrogen gas, or any combination thereof, over the A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> catalyst material.

20 16. The method of claim 8, wherein the reaction is performed while applying  
external heat and flowing carbon dioxide, hydrogen gas, or any combination thereof, over the  
A-Mo<sub>2</sub>C/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> catalyst material.

17. The method of claim 8, wherein the CO<sub>2</sub> hydrogenation via the RWGS reaction  
achieves a CO yield of 12% or greater.

25 18. The method of claim 8, wherein the CO<sub>2</sub> hydrogenation via the RWGS reaction  
achieves a CO selectivity of 90% or greater.

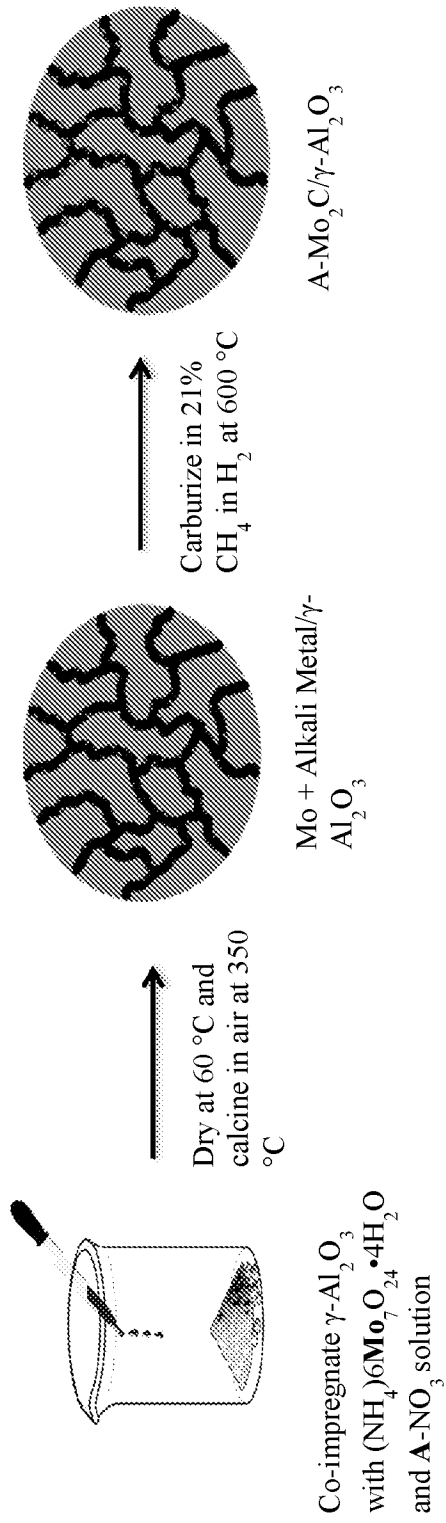

**FIG. 1**



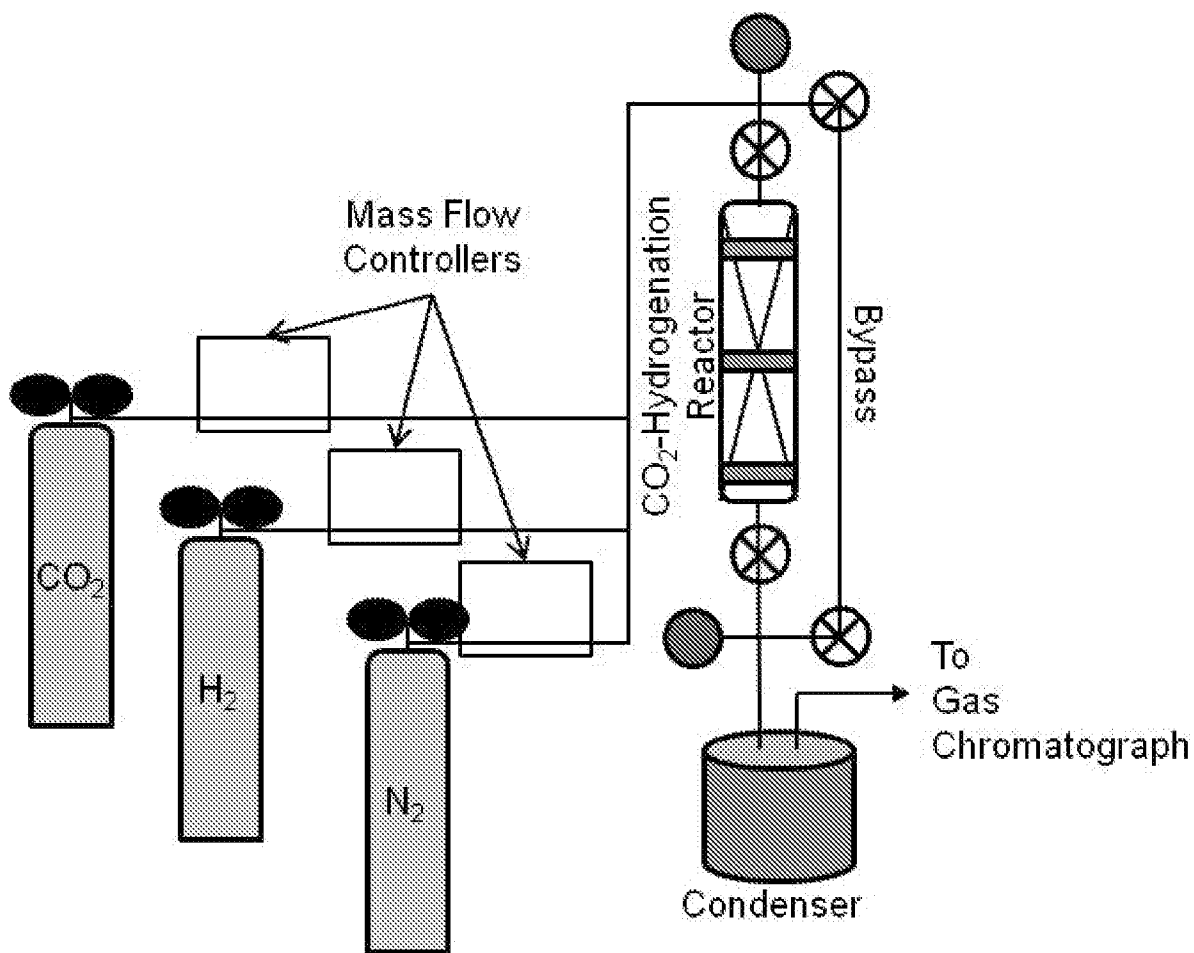


FIG. 3

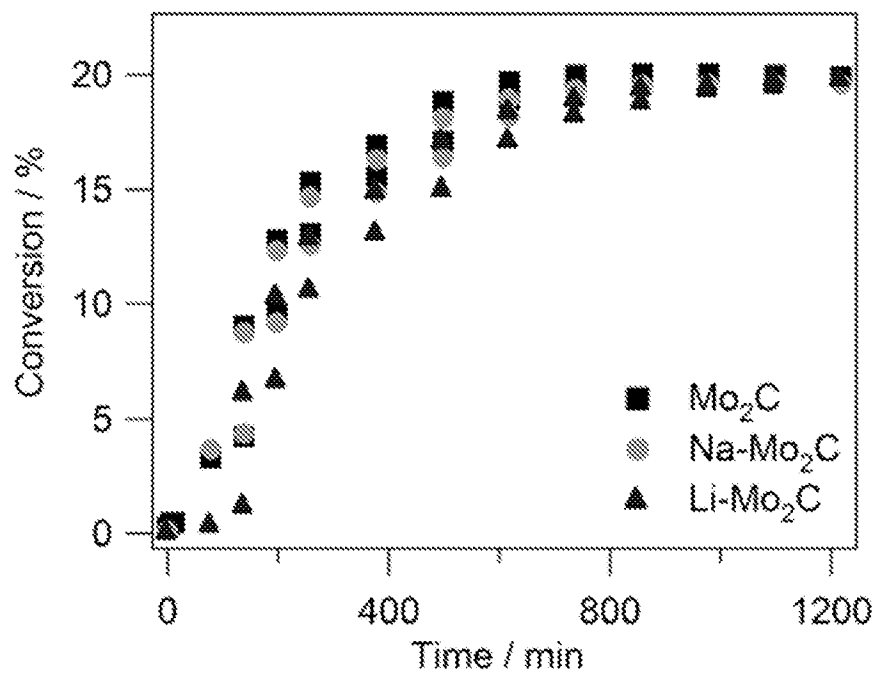


FIG. 4A

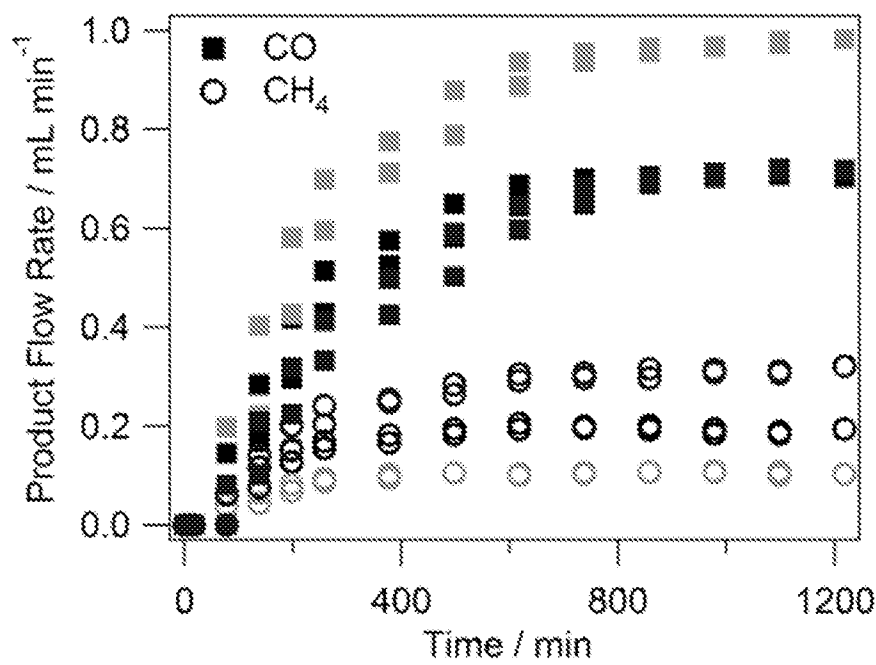


FIG. 4B

**A. CLASSIFICATION OF SUBJECT MATTER****B01J 23/28(2006.01)i, B01J 23/04(2006.01)i, B01J 37/03(2006.01)i, B01J 37/08(2006.01)i, C01B 32/40(2017.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**Minimum documentation searched (classification system followed by classification symbols)  
B01J 23/28; B01J 8/06; B01J 23/04; B01J 37/03; B01J 37/08; C01B 32/40Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Korean utility models and applications for utility models  
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
eKOMPASS(KIPO internal) & Keywords: supported heterogeneous catalyst, reverse water-gas shift, RWGS, support material,  $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, active material, alkali metal, K, Na, Li, doped, molybdenum carbide, Mo<sub>2</sub>C, co-impregnating, drying, carburizing, CO<sub>2</sub>, hydrogenation**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	VO, DAI-VIET N. et al., "A potassium-promoted Mo carbide catalyst system for hydrocarbon synthesis," Catalysis Science & Technology, 2012, vol. 2, no. 10, pages 2066-2076 See abstract; page 2066, right column, lines 5-25; and page 2070, right column, lines 36-45.	1-18
Y	POROSOFF, MARC D. et al., "Catalytic reduction of CO <sub>2</sub> by H <sub>2</sub> for synthesis of CO, methanol and hydrocarbons: challenges and opportunities," Energy & Environmental Science, 22 October 2015 (e-pub), vol. 9, no. 1, pages 62-73 See abstract; page 64, right column, line 17 - page 65, left column, line 16; and table 1.	1-18
Y	ZHU, QUANLI et al., "The effect of secondary metal on Mo <sub>2</sub> C/Al <sub>2</sub> O <sub>3</sub> catalyst for the partial oxidation of methane to syngas," Journal of Molecular Catalysis A: Chemical, 2004, vol. 213, no. 2, pages 199-205 See abstract; and page 199, right column, line 19 - page 200, left column, line 28.	1-18

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

28 August 2017 (28.08.2017)

Date of mailing of the international search report

**28 August 2017 (28.08.2017)**

Name and mailing address of the ISA/KR

International Application Division  
Korean Intellectual Property Office  
189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

NAM, EUI HO

Telephone No. +82-42-481-5580



## INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/US2017/036297**

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KOOS, AKOS et al., "Reforming of methanol on a K-promoted Mo <sub>2</sub> C/norit catalyst," The Journal of Physical Chemistry C, 2008, vol. 112, no. 7, pages 2607-2612 See pages 2607, 2608.	1-18
A	US 2013-0034478 A1 (DOTY SCIENTIFIC, INC.) 07 February 2013 See paragraphs [0040], [0041].	1-18
PX	POROSOFF, MARC D. et al., "Potassium-promoted molybdenum carbide as a highly active and selective catalyst for CO <sub>2</sub> conversion to CO," ChemSusChem, 10 May 2017 (e-pub), vol. 10, no. 11, pages 2408-2415 See pages 2413, 2414.	1-18

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2017/036297**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013-0034478 A1	07/02/2013	CA 2696818 A1 US 2010-0280135 A1 US 2011-0305623 A1 WO 2008-115933 A1	25/09/2008 04/11/2010 15/12/2011 25/09/2008