



(51) International Patent Classification:

A61F 13/15 (2006.01) B32B 27/12 (2006.01)
A61F 13/49 (2006.01) B32B 37/12 (2006.01)
B32B 5/26 (2006.01) B32B 37/20 (2006.01)
B32B 7/14 (2006.01) B32B 37/22 (2006.01)

(21) International Application Number:

PCT/US2016/040268

(22) International Filing Date:

30 June 2016 (30.06.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/755,090 30 June 2015 (30.06.2015) US

(71) Applicant: **THE PROCTER & GAMBLE COMPANY**
[US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio
45202 (US).

(72) Inventors: **WADE, Sarah, Marie**; One Procter & Gamble
Plaza, Cincinnati, Ohio 45202 (US). **PHILLIPS, LeAnn,
Nichole**; One Procter & Gamble Plaza, Cincinnati, Ohio
45202 (US). **LAVON, Gary, Dean**; One Procter & Gamble
Plaza, Cincinnati, Ohio 45202 (US). **KLINE,**

Mark, James; One Procter & Gamble Plaza, Cincinnati,
Ohio 45202 (US).

(74) Agent: **KREBS, Jay A.**; c/o The Procter & Gamble Com-
pany, Global Patent Services, One Procter & Gamble
Plaza, C8-229, Cincinnati, Ohio 45202 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: STRETCH LAMINATE WITH INCREMENTALLY STRETCHED OR SELFED LAYER, METHOD FOR MANU-
FACTURING, AND DISPOSABLE ABSORBENT ARTICLE INCLUDING THE SAME

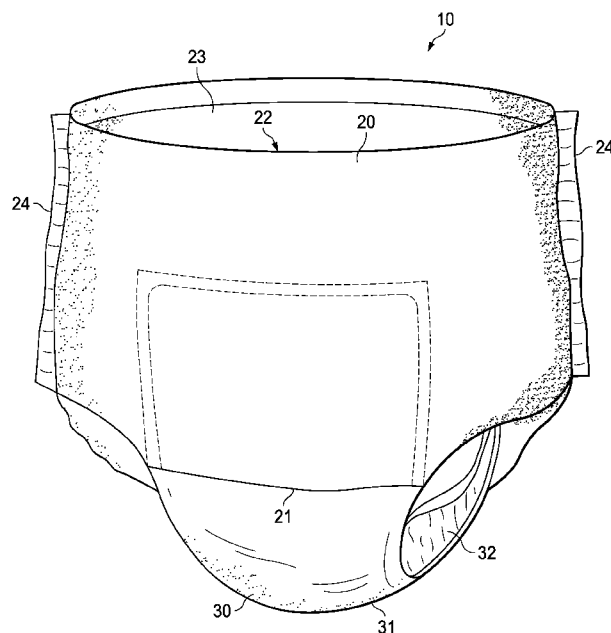


FIG. 1A

(57) Abstract: A stretch laminate having enhanced tex-
ture, and method for its manufacture is disclosed. The
stretch laminate may include two nonwoven layers sand-
wiching an elastic member, the elastic member having
been incorporated into the laminate in a pre-strained
condition such that z-direction ruffles in the nonwoven ma-
terials are imparted to the laminate when it is in a relaxed
condition. At least one of the nonwoven layers may be in-
crementally stretched or SELFed, adding a pattern of
ridges and valleys to the material that combines with the
ruffles, further enhancing loft and texture of the laminate.

WO 2017/004309 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

STRETCH LAMINATE WITH INCREMENTALLY STRETCHED OR SELFED LAYER,
METHOD FOR MANUFACTURING, AND DISPOSABLE ABSORBENT ARTICLE
INCLUDING THE SAME

5

BACKGROUND OF THE INVENTION

In order to maintain or grow their market share, manufacturers of disposable absorbent articles such as disposable diapers and absorbent pants must continue to discover and develop improvements to materials, components and features that affect aspects such as containment,
10 absorbency, comfort, fit and appearance. Absorbent pants are manufactured in smaller sizes to be used as, *e.g.*, pull-on diapers and toilet training pants for young children, and in larger sizes to be used as, *e.g.*, undergarments for persons suffering from incontinence.

A particular type of absorbent pant design currently marketed is sometimes called the “balloon” pant. The balloon pant design usually includes a central absorbent chassis and an
15 elastic belt. The elastic belt is usually relatively wide (in the longitudinal direction) and elastically stretchable in the lateral direction. It entirely encircles the wearer’s waist, and thereby covers a relatively large amount of the wearer’s skin, and also makes up a relatively large portion of the visible outside surfaces of the pant. The central chassis portion is typically joined to the inside of the belt in the front, wraps under the wearer’s lower torso between the legs, and is
20 joined to the inside of the belt in the rear. The belt is often formed of two layers of nonwoven web sandwiching one or more elastic members such as a plurality of laterally-oriented strands or strips of elastomeric material, or a section of elastomeric film or elastomeric nonwoven. It is common among such designs that, in manufacture, the elastic member(s) are sandwiched between the nonwoven web layers in a strained condition. Upon completion of manufacture and
25 allowance of the belt with sandwiched elastic member(s) to assume a relaxed condition, the elastic member(s) contract laterally toward their unstrained lengths. This causes the nonwoven web layers to form gathers that take the form of visible ruffles in the belt. It is believed that some consumers find the ruffles attractive because they present a textured, plush, frilly and/or soft appearance and feel, and also provide a visible indication of stretchability and
30 comfortableness.

The balloon pant design provides for certain efficiencies in manufacture, and it is believed that the design may gain popularity. Consequently, any improvement in components such as the belt that enhance its appearance and functionality may give the manufacturer thereof an advantage.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1A is a perspective view of one example of a balloon pant.

Fig. 1B is a perspective view of another example of a balloon pant.

Fig. 2 is a schematic plan view of a balloon pant precursor structure, prior to joining of the front and rear sections of the belt.

10

Fig. 3 is a schematic, exploded perspective view of components of a belt.

Fig. 4 is a schematic, close-up plan view of a portion of a belt.

Fig. 5 is a schematic cross section of the portion of the belt shown in Fig. 4.

Fig. 6 is a schematic side view of an apparatus and process for incrementally stretching or SELFing a web material.

15

Fig. 7 is a schematic perspective view of a pair of stretching rollers.

Fig. 8 is a schematic cross sectional view of a portion of a web material as it passes through a nip between a pair of stretching members with intermeshing features.

Fig. 9 is a schematic plan view of portion of a web material after incremental stretching.

Fig. 10 is a schematic cross section of the portion of web material of Fig. 9.

20

Fig. 11 is a schematic perspective view of a pair of stretching rollers.

Fig. 12 is a schematic plan view of a portion of a web material after SELFing.

Fig. 13 is a schematic perspective view of a portion of a web material after SELFing.

Fig. 14 is a schematic perspective view of a pair of stretching rollers.

Fig. 15 is a schematic perspective view of surfaces of a pair of stretching members with intermeshing features.

Fig. 16 is a schematic plan view of a portion of a web material after SELFing.

5 Fig. 17 is a schematic plan view of a portion of a web material after SELFing.

Fig. 18 is a schematic, close-up plan view of a portion of a belt having a SELFed layer.

Fig. 19 is a schematic cross-direction view of one alternative arrangement of components and a process used in a method for manufacturing a stretch laminate material as described herein.

10 Fig. 20 is a schematic cross-direction view of another alternative arrangement of components and a process used in a method for manufacturing a stretch laminate material as described herein.

DETAILED DESCRIPTION OF THE INVENTION

“Cross direction” (CD) - with respect to the making of a nonwoven web material, the nonwoven material itself, a laminate thereof, or an article in which the material is a component, 15 refers to the direction along the material substantially perpendicular to the direction of forward travel of the material through the manufacturing line in which the material and/or article is manufactured.

Throughout the present description, a material or composite of materials is considered to be “elastic” or “elastomeric” if, when a biasing force is applied to the material, the material or 20 composite can be extended to an elongated length of at least 150% of its original relaxed length (*i.e.* can extend at least 50%), without rupture or breakage which substantially damages the material or composite, and when the force is removed from the material or composite, the material or composite recovers at least 40% of such elongation. In various examples, when the force is removed from an elastically extensible material, the material or composite may recover 25 at least 60% or even at least 80% of its elongation.

“Film” means a skin-like or membrane-like layer of material formed of one or more polymers, which does not have a form consisting predominately of a web-like structure of consolidated polymer fibers and/or other fibers.

“Incremental stretching” (and forms thereof) refers to the process in which a web material is controllably plastically stretched in increments along one or more directions by being passed under tension between the surfaces of a pair of stretching members having continuously intermeshing teeth, ridges and valleys or other features, such as described in, for example, U.S. Pat. App. Pub. Nos. US 2013/0082418 (and by way of particular example but without limitation, features depicted in Figs. 5B, 7A and 7B thereof) and US 2002/0105110 (and by way of particular example but without limitation, features depicted in Fig. 2 thereof). The stretching members may be a pair of rollers (*e.g.*, “ring” rollers), gear-like rollers, belts or plates with intermeshing features. For purposes herein, “incremental stretching” is distinguished from “SElFing” in that the intermeshing features of the stretching members are continuously intermeshing such that no substantial portion of the web material passing between the surfaces is left unaffected.

“Lateral” - with respect to a pant and its wearer, refers to the direction generally perpendicular with the wearer’s standing height, or the horizontal direction when the wearer is standing.

“Longitudinal” - with respect to a pant and its wearer, refers to the direction generally parallel with the wearer’s standing height, or the vertical direction when the wearer is standing. “Longitudinal” is also the direction generally parallel to a line extending from the midpoint of the front waist edge to the midpoint of the rear waist edge.

“Machine direction” (MD) - with respect to the making of a nonwoven web material, the nonwoven material itself, or a laminate thereof, refers to the direction along the material or laminate substantially parallel to the direction of forward travel of the material or laminate through the manufacturing line in which the material or laminate is manufactured.

“Machine direction bias,” with respect to the fibers forming a nonwoven web, means that a majority of the fibers, as situated in the web (prior to any incremental stretching or SElFing of

the web)), have lengths with machine direction vector components that are greater than their cross direction vector components.

A "nonwoven" is a manufactured sheet or web of directionally or randomly oriented fibers which are first formed into a batt and then consolidated and bonded together by friction, cohesion, adhesion or one or more patterns of bonds and bond impressions created through localized compression and/or application of pressure, heat, ultrasonic or heating energy, or a combination thereof. The term does not include fabrics which are woven, knitted, or stitch-bonded with yarns or filaments. The fibers may be of natural and/or man-made origin and may be staple and/or continuous filaments or be formed in situ. Commercially available fibers have diameters ranging from less than about 0.001 mm to more than about 0.2 mm and they come in several different forms: short fibers (known as staple, or chopped), continuous single fibers (filaments or monofilaments), untwisted bundles of continuous filaments (tow), and twisted bundles of continuous filaments (yarn). Nonwoven fabrics can be formed by many processes including but not limited to meltblowing, spunbonding, spunmelting, solvent spinning, electrospinning, carding, film fibrillation, melt-film fibrillation, airlaying, dry-laying, wetlaying with staple fibers, and combinations of these processes as known in the art. The basis weight of nonwoven fabrics is usually expressed in grams per square meter (gsm).

"SELFing" (and forms thereof) refers to a process in which a web material is controllably plastically stretched in increments along one or more directions by being passed under tension between the surfaces of a pair of stretching members having discontinuously intermeshing teeth, ridges and valleys or other features, such as described in, for example, U.S. Pat. No. 5,650,214; and U.S. Pat. App. Pub. Nos. US 2013/0082418 (and by way of particular example but without limitation, features depicted in Fig. 11 thereof) and US 2002/0105110 (and by way of particular example but without limitation, features depicted in Fig. 6 thereof). The stretching members may be a pair of rollers (*e.g.*, "ring" rollers), gear-like members, belts or plates with intermeshing features. For purposes herein, "SELFing" is distinguished from "incremental stretching" in that the intermeshing features of the stretching members are discontinuously intermeshing such that portions of the web material (for example, bands, or patterns thereof) are left with relatively lower or no deformation. Non-limiting examples of "SELFed" material are depicted in U.S. Pat. App. Pub. Nos. US 2013/0082418, Figs. 12-14, showing areas 72 in which relatively lower or no

plastic deformation has occurred, forming patterns of bands of relatively unstretched material. For purposes herein, “SELFing” is not limited to a process to which a film web is subjected, but includes processes to which a nonwoven web may be subjected.

5 “z-direction,” with respect to a web, means generally orthogonal or perpendicular to the plane approximated by the web along the machine and cross direction dimensions.

Although examples of the structure of the invention are described herein as used to form the belt of a balloon-type absorbent pant, it will be appreciated that examples may be used to form other components of pants, diapers, other wearable articles, and other products as well.

10 Figs. 1A and 1B depict examples of balloon-type absorbent pants 10. The pant may include a panel structure in the form of a belt 20 supporting a central chassis 30. Central chassis 30 may include any combination of components found in disposable diapers and absorbent pants, including but not limited to a liquid impermeable backsheet 31, a liquid permeable topsheet (not shown), an absorbent core structure (not shown), and elasticized barrier cuffs 32. Examples and descriptions of components and configurations of a central chassis may be found in U.S. Pat.
15 App. Ser. No. 13/764,945, wherein the chassis described includes components and features that may be included in central chassis 30.

In the example shown in Fig. 1A, belt 20 stops short of the crotch region 12 of the pant, at lower edge 21. In the example shown in Fig. 1B, belt 20 is part of an outer structure that includes a belt portion 20a encircling the wearer’s waist, an outer wrap portion 20b that overlies
20 the central chassis to the outside thereof and wraps thereabout through the crotch region. The outer wrap portion 20b may be formed of a layer of nonwoven web, which also serves as the outer layer of the belt portion 20a. The belt may have front and rear portions 22, 23, which are joined together at seams 24, and define, respectively, front and rear waist regions of the pant.

25 Fig. 2 schematically depicts a structure that is the precursor to a pant such as depicted in Fig. 1B, prior to joining of front and rear portions 22, 23 at seams 24 as depicted in Figs. 1A and 1B. Central chassis 30 overlies front and rear portions 22, 23 to the inside thereof. Front and rear portions of the belt 22, 23 each have an elastic stretch direction ESD along which the belt

may elastically stretch laterally relative a wearer, which accommodates donning of the pant and provides for snug, comfortable and neat fit on the wearer.

Referring to Figs. 3-5, belt 20 may be formed of layers of nonwoven web 25a, 25b, which respectively form inner and outer layers of the belt. Suitable nonwoven web materials that may
5 be useful in the present invention also include, but are not limited to spunbond, spunlaid, meltblown, spunmelt, solvent-spun, electrospun, carded, film fibrillated, melt-film fibrillated, air-laid, dry-laid, wet-laid staple fibers, and other and other nonwoven web materials formed in part or in whole of polymer fibers, as known in the art. The nonwoven web may be formed predominately of polymeric fibers. In some examples, suitable non-woven fiber materials may
10 include, but are not limited to polymeric materials such as polyolefins, polyesters, polyamide, or specifically, polypropylene (PP), polyethylene (PE), poly-lactic acid (PLA), polyethylene terephthalate (PET) and/or blends thereof. In some examples, the fibers may be formed of PP/PE blends such as described in U.S. Pat. No. 5,266,392. Nonwoven fibers may be formed of, or may include as additives or modifiers, components such as aliphatic polyesters, thermoplastic
15 polysaccharides, or other biopolymers. Further useful nonwovens, fiber compositions, formations of fibers and nonwovens and related methods are described in U.S. Pat. No. 6,645,569; U.S. Pat. No. 6,863,933; and U.S. Pat. No. 7,112,621; and in co-pending U.S. patent application Ser. Nos. 10/338,603 and 10/338,610; and 13/005,237.

The individual fibers may be monocomponent or multicomponent. The multicomponent
20 fibers may be bicomponent, such as in a core-and-sheath or side-by-side arrangement. Often, the individual components comprise polyolefins such as polypropylene or polyethylene, or their copolymers, polyesters, thermoplastic polysaccharides or other biopolymers.

According to one example, the nonwoven may comprise a material that provides good recovery when external pressure is applied and removed. Further, according to one example, the
25 nonwoven may comprise a blend of different fibers selected, for example from the types of polymeric fibers described above. In some embodiments, at least a portion of the fibers may exhibit a spiral curl which has a helical shape. According to one example, the fibers may include bicomponent fibers, which are individual fibers each comprising different materials, usually a

first and a second polymeric material. It is believed that the use of side-by-side bi-component fibers is beneficial for imparting a spiral curl to the fibers.

In order to enhance softness perceptions of the laminate, nonwovens may be treated by hydrojet impingement, which may also be known as hydroenhancement, hydroentanglement or hydroengorgement. Such nonwovens and processes are described in, for example, U.S. Pats. Nos. 6,632,385 and 6,803,103, and U.S. Pat. App. Pub. No. 2006/0057921.

Other examples of nonwoven web that may be useful in the present laminate may be an SMS web (spunbond-meltblown-spunbond web) made by Avgol Nonwovens LTD, Tel Aviv, Israel, under the designation XL-S70-26; an SSS (spunbond-spunbond-spunbond) web made by Pegas Nonwovens AS in Znojmo, Czech Republic, under the designation 18 XX 01 00 01 00 (where XX = the variable basis weight); an SSS web made by Gulsan Sentetik Dok San VE TIC AS, in Gaziantep, Turkey, under the designation SBXXF0YYY (where XX = the variable basis weight, and YYY = the variable cross direction width); an HESB (hydroenhanced spunbond) web made by First Quality Nonwovens Inc., in Hazelton, Pennsylvania, under the designation SEH2503XXX (where XXX = the variable cross direction width); and a bicomponent SS web.

A nonwoven web useful as a component to form one or both of layers 25a, 25b may be pre-bonded, prior to aperturing as described below. A batt of fibers may be calendered and pre-bonded in a pattern, to consolidate the batt/fibers and create a pattern of bonds that adds tensile strength and dimensional stability, converting the batt of fibers to a coherent and useable nonwoven web material. The web may be imparted with a pattern of pre-bonding as described in, for example, U.S. Pat. No. 5,916,661 (pre-bonding in a pattern of “point calendered bonds 200 to form a coherent web structure”) and co-pending U.S. App. Ser. No. 13/893,405 (pattern of “primary fiber bonds”). The pre-bonding may consist of a pattern of thermal bonds, mechanical bonds or adhesive bonds, although in some circumstances thermal bonding may be preferred.

Layers of nonwoven web 25a, 25b may sandwich one or more elastic members such as a plurality of strands 26 of an elastomeric material, such as an elastane (for example, LYCRA HYFIT fiber, a product of Invista, Wichita, Kansas). Layers of nonwoven web 25a, 25b may be joined together about elastic strands 26 by adhesive deposited between the layers, by thermal

bonds, by compression bonds, or by a combination thereof. In other examples, the one or more elastic members may be strips or a section of film formed of elastomeric material.

The elastomeric members can also be formed from various other materials, such as but not limited to, rubbers, styrene ethylbutylene styrene, styrene ethylene propylene styrene, styrene ethylene ethylene propylene styrene, styrene butadiene styrene, styrene isoprene styrene, polyolefin elastomers, elastomeric polyurethanes, and other elastomeric materials known in the art, and combinations thereof. In some embodiments, the elastic members can be extruded strand elastics with any number of strands (or filaments). The elastomeric members can have a decitex ranging from 50 to 2000, or any integer value for any decitex value in this range, or any range formed by any of these integer values. The elastomeric members may be in a form of film. Examples of films have been described extensively in prior patent applications (*see*, for example, U.S. Pat. App. Pub. No. 2010/0040826). The film may be created with a variety of resins combined in at least one of several sublayers, the latter providing different benefits to the film.

During manufacture of the belt structure, the elastic member such as elastic strands 26 may be strained lengthwise by a desired amount as they are being incorporated into the belt structure. Upon subsequent relaxation of the belt, the elastic member such as elastic strands 26 will contract toward their unstrained lengths. This causes the layers of nonwoven material 25a, 25b to gather and form ruffles 27 having peaks 28a and depressions 28b generally transverse to the lengths of the elastic strands 26.

It may be appreciated that the size(s) and shape(s) of the ruffles 27 will be affected, and may be manipulated, by design of the pattern of joined portions and/or bonding between the layers of nonwoven web 25a, 25b, with respect to each other and with respect to elastic strands 26. When joining and/or bonding are effected using adhesive deposited upon one or both layers 25a, 25b prior to lamination, the adhesive may be deposited in a pattern. Examples of methods for applying patterned deposits of adhesive to a nonwoven web substrate to enable manufacture of an elasticized laminate are described in U.S. Pat. No. 8,186,296. The pattern selected may be effected by design of a correspondingly designed roller. The pattern of adhesive to be applied may be designed to affect the size(s) and shape(s) of the ruffles 27. The layers 25a, 25b may be adhesively joined and/or bonded to each other at the locations of adhesive deposits, and remain

unjoined or unbonded, or free, of each other at other locations, such that they may move and shift slightly relative each other as the laminate is moved and stretched, as during wear of the article. Similarly, when joining and/or bonding is effected using thermal calender bonding, the joining and/or bonding pattern may be designed to affect the size(s) and shapes of the ruffles 27. In one
5 example, deposits of adhesive bonding layers 25a, 52b together may be included along lines substantially parallel the elastic strands 26. In another example, deposits of adhesive bonding layers 25a, 52b together may be included along lines substantially perpendicular the elastic strands 26.

The ruffles 27 impart some z-direction loft and texture to the belt. It has been found,
10 however, that z-direction loft and texture of the belt may be further enhanced in surprising and esthetically pleasing ways by additional processing of one or both of the layers 25a, 25b prior to formation of the belt.

Incremental stretching (sometimes known as “activation”) techniques have heretofore been used to impart elastic extensibility to a laminate of, *e.g.*, one or more layers of nonwoven
15 web material and an elastic film layer or other arrangement of sandwiched elastic member(s). The nonwoven web layer(s) may be relatively inelastic. Thus, following lamination of the nonwoven web layer(s) with the elastic member(s), the laminate may be relatively inelastic despite the relative elasticity of the elastic member(s). When the laminate is incrementally stretched, or “activated,” fibers of the nonwoven layer(s) may be incrementally plastically
20 stretched or even broken to some extent, which allows the nonwoven layer(s), though still adhered to the elastic member(s), to extend and accommodate stretch with the elastic member(s). Incremental stretching may be directional, such that the nonwoven material is plastically stretched or broken along one (*e.g.*, the stretch) direction but not the direction perpendicular thereto.

25 SELFing techniques have heretofore been used to impart enhanced elastic-like qualities to polymer films such as polyethylene films that have relatively low elasticity. *See, e.g.*, U.S. Pat. No. 5,650,214. When the film is SELFed, discrete, discontinuous areas of the film are plastically stretched, while other continuous areas are left relatively unstretched. The stretched and unstretched areas are arranged in a pattern, with the unstretched areas forming bands of

relatively unstretched film, or a network of such bands along the film. The SELFed film may then stretch somewhat under tensile force along the direction of the stretching of the stretched areas, while the unstretched areas resist stretching and tend to cause the film to retract when the tensile force is removed, imparting enhanced elastic-like behavior to the film. An example of
5 SELFed film appears in consumer products in GLAD FORCEFLEX brand trash bags, a product of The Glad Products Company, Oakland, CA.

A single nonwoven web layer instead of a laminate may be incrementally stretched. Similarly, a nonwoven material instead of a film material may be SELFed. It has been found that when either process is applied to a nonwoven layer used to make the belt as described
10 herein, surprising and esthetically pleasing effects can result. For example, an incrementally stretched or SELFed nonwoven web layer component of a belt may impart a pleasing textured or even terrycloth-like appearance to the belt, and also add z-direction loft, as compared with a belt formed of nonwoven web layers not so processed.

Referring to Figs. 6-8, a nonwoven web 25 may be passed or conveyed from an upstream
15 supply 27 between the mating surfaces of a pair of stretching members 50. In the example depicted in Fig. 6, the pair of stretching members 50 are a pair of stretching rollers 50a, 50b proximately arranged with rotational axes in parallel along the cross direction to form a nip 51 therebetween. Rollers 50a, 50b each may have formed thereon a series of circumferential ridges 52a and valleys 52b that rotate in planes parallel to the machine direction MD. The ridges 52a
20 and valleys 52b of respective stretching rollers 50a, 50b, and the rollers, may be configured and arranged to intermesh without points of contact between them that may form pinch points at which squashing or severing of the web fibers might occur. Referring to Fig. 8, as nonwoven web 25 passes through nip 51, it is stretched in increments in the cross direction, at stretch zones 25d lying between contact zones 25c which contact the ridges. The extent of the increments of
25 stretch corresponds to the distance between the adjacent ridges 52a on the respective stretch rollers. In stretch zones 25d, the fibers of the nonwoven web may be plastically stretched, and some may even break, depending upon the composition and ductility of the fibers, the directional bias of the fibers (or lack thereof), the radial height of ridges 52a and depth of valleys 52b, the depth of intermeshing of the ridges/valleys of the respectively stretching rollers 50a, 50b, and the
30 machine direction speed of the nonwoven web 25 as it passes through nip 51.

The configuration and process schematically depicted in Figs. 6-8 is sometimes called “ring rolling.” In other alternatives, the pair of stretching members may be a belt and roller or pulley with intermeshing features, or pair of belts with intermeshing features, arranged to intermesh such as depicted and described in, for example, U.S. Pat. App. Pub. No.

5 US 2013/0082418.

In still another alternative using rollers, the ridges and valleys on stretching rollers 50a, 50b, rather than being circumferential about the stretching rollers, may be longitudinal, *i.e.*, parallel with the rotational axes of the rollers and extending along the cross direction, with configurations resembling, and intermeshed in the manner of, a pair of engaged spur gears. An
10 example of the latter configuration is suggested in Fig. 14. In yet another alternative (not shown), the stretching rollers 50a, 50b may be configured and arranged to intermesh in the manner of a pair of engaged helical gears.

Incrementally stretching a nonwoven web material in the manner described above will result in a nonwoven web material having an appearance schematically depicted in Figs. 9 and
15 10. The resulting web will have a series of generally linear ridges 29a and valleys 29b, corresponding with the ridges and valleys of the stretching members, that impart an appearance to the nonwoven web resembling corduroy material. The material has been incrementally stretched along a direction (stretched direction SD) generally perpendicular to the directional orientation of the ridges 29a and valleys 29b. It will be appreciated that stretched direction SD
20 will be perpendicular to the machine direction in, for example, a ring rolling operation, and parallel to the machine direction when the stretching rollers are configured like, for example, intermeshing spur gears.

As an alternative to incremental stretching as described above, a nonwoven web 25 used to form a layer of a belt 20 may be SELFed prior to formation of the belt. For example, referring
25 to Fig. 11, a pair of ring-rolling type stretching rollers 50a, 50b may be configured and arranged to stretch a nonwoven web in a manner similar to that described above. In an example of a SELFing process, one of the stretching rollers such as roller 50a, may be configured with breaks or interruptions 52c in the circumferential ridges 52a. As suggested in Fig. 11, the breaks or interruptions 52c may be regularly arranged along rows parallel to the machine direction. In

another alternative, however, they may be arranged helically or in any other configuration desired. The breaks or interruptions 52c may be configured to leave portions of the nonwoven web relatively less stretched, or unstretched, in a desired pattern.

Appropriately configured, a pair of stretching rollers 50a, 50b can cause the nonwoven web to be SELFed in a pattern resembling that depicted in Figs. 12 and 13. In that example, the nonwoven web 25 bears a pattern of ridges 29a and valleys 29b that are discontinuous, interrupted by bands 29c of material that is relatively less stretched, or unstretched. The bands shown in Fig. 12 reflect the pattern of interruptions 52c on the stretching roller 50a (Fig. 11) and are configured as regularly-spaced, parallel bands lying along the cross direction CD, which coincides with the stretched direction. It will be appreciated that the configuration of these bands may be changed as desired by changing the pattern of interruptions 52c on a stretching roller or other stretching member. Another example of a pair of stretching rollers that may be chosen to create a pattern of bands as shown in Figs. 12 and 13 is shown in Fig. 14. In the stretching roller configuration of Fig. 14, the bands 29c of the resulting SELFed material would lie along the machine direction rather than along the cross direction, and the stretch direction would also lie along the machine direction. It will be appreciated that a configuration of stretching rollers like that reflected in Fig. 11, or alternatively, a configuration like that reflected in Fig. 14, may be employed according to the orientation of the stretch direction and of the bands 29c desired in the SELFed nonwoven web material.

When a web material is SELFed, the relatively less stretched or unstretched bands 29c cause the material to more effectively or more closely retain its pre-stretched dimension along the longitudinal orientation of the bands 29c, when the material is not under tension, as compared with a material that is incrementally stretched. The bands 29c may also cause the material to retain more of its tensile strength along the direction of the bands.

From the foregoing it will be appreciated that stretching members 50 may be configured to impart differing patterns of stretched areas and relatively less stretched bands to a web material in a SELFing process. Referring to Fig. 15, a pair of stretching members may include first stretching member 50a and second stretching member 50b. Stretching members 50a and 50b may be formed with patterns of ridges 52a and valleys 52b, each stretching member's ridges

and valleys configured to intermesh with those of the other. For purposes of a SELFing process, one of the stretching members such as stretching member 50a may further include a pattern of interruptions 52c in the ridges 52a. As reflected in Fig. 15, the pattern of interruptions may be configured as a regular pattern of crossing pathways. Desired configurations of intermeshing features of stretching members 50a, 50b such as, for example, those suggested in Fig. 15, may be imparted to pair of intermeshing flat plates, to a pair of intermeshing rollers, belts, etc. forming a pair of stretching members.

When a nonwoven web material is passed between an intermeshing pair of stretching members having the features in the example reflected in Fig. 15, the web material may be imparted with a pattern of stretched areas having ridges 29a and valleys 29b, defined by a pattern of bands 29c of relatively less stretched or unstretched material – as reflected in Figs. 16 and 17. The stretched direction SD is the direction perpendicular to the orientations of the ridges 29a and valleys 29b. Generally, this means that the SELFed material will, subsequent to SELFing, stretch more easily in the stretched direction than in the non-stretched direction NSD perpendicular to it – but this may also be affected by the directional bias of the fibers in the nonwoven and the extent of stretching to which the material is subjected in the SELFing process. As noted the bands 29a of relatively less stretched or unstretched material help the SELFed material better retain its unstretched dimensions, as compared with an incrementally stretched material.

Referring now to Figs. 3-5, 9-10, 16, 17 and 18, one or both of the nonwoven web layers 25a, 25b forming a belt may be incrementally stretched or SELFed according to any of the examples described above, or any other alternatives thereto, prior to formation of the belt. As may be appreciated from Fig. 18, a nonwoven layer bearing a pattern of incremental stretching or SELFing may add surprising and esthetically pleasing visual complexity and texture to the belt and give it a more cloth-like appearance, *e.g.*, an appearance of terrycloth. The pattern ridges 29a and valleys 29b from incremental stretching or SELFing may combine with the pattern of ruffles 27 with peaks 28a and depressions 28b resulting from formation of the belt with pre-strained elastic strands 26 to add such visual complexity and texture. Because such nonwoven web material will have its own enhanced z-direction loft (*see, e.g.*, Figs. 10 and 13), use of such

material to form a belt layer will enhance the loft of the belt as well, as compared with a belt formed of material that is not incrementally stretched or SELFed.

When an incrementally stretched or SELFed nonwoven web material is used form one or both layers 25a, 25b of a belt, it may be desired that the stretch direction SD of the stretched web material be oriented in a direction not parallel with the elastic stretch direction ESD of the belt, more preferably forming an angle of 45 degrees or greater with elastic stretch direction ESD of the belt, and even more preferably approaching an angle of 90 degrees (substantially perpendicular) with elastic stretch direction of the belt, rather than approximately or substantially parallel thereto. This is because aligning the stretch direction SD of the web material substantially parallel to the elastic stretch direction ESD of the belt may result in permanent elongation of the web material along the elastic stretch direction when the belt is stretched therealong, which may result in giving the belt the appearance of becoming delaminated or otherwise falling apart when the belt contracts along the elastic stretch direction and the permanently elongated web is forced to gather therealong.

In some circumstances a SELFed nonwoven web rather than an incrementally stretched web may be preferred to be used as one or both of layers 25a, 25b of the belt. This may be desired for one or more of several reasons. As noted, the bands 29c of relatively less stretched, or unstretched, SELFed nonwoven web material help the material retain dimensional stability and reduce the chance that the material will permanently elongate and create a sloppy appearance when the pant including the belt is worn. Further, a pattern of adhesive bonding the nonwoven layers 25a, 25b together may be applied to the SELFed nonwoven web layer at the locations of, or corresponding with the bands 29c, thereby allowing for a sharper visual definition of the stretched areas of ridges and valleys 29a, 29b.

In a particular example, a belt may be constructed such that the fibers of a nonwoven web layer 25a (and/or 25b) have a machine direction bias substantially parallel with the elastic stretch direction ESD; and the layer may be incrementally stretched or SELFed with a stretch direction SD substantially perpendicular to the elastic stretch direction ESD. It is believed that this particular combination of features may provide a belt structure with the greatest tensile strength

in the elastic stretch direction and structural integrity, while taking advantage of the texture effects of incremental stretching or SELFing.

The loft and visual complexity added by incremental stretching or SELFing may contribute to tactile and visual perceptions of added softness and/or breathability of the belt.

5 It may be appreciated that the pattern of SELFing selected may be coordinated with the pattern of adhesive selected to adhere the laminate, for varying effects. Referring to Fig. 18, for example, a pattern of SELFing may be selected that is somewhat independent of the pattern of ruffles created by a pattern of adhesive. The adhesive pattern may be selected so as to provide, for example, orderly machine direction rows but disordered or random cross direction columns of ruffles 27. The pattern of SELFing may be sized and ordered so as to fall randomly on the ruffles 27 in the machine and/or cross directions. As a result, the stretched area will be positioned relative the ruffles in a somewhat random fashion, providing a particular visual effect. In another example (not shown), the pattern of adhesive may be selected to provide substantially orderly machine direction rows and cross-direction columns of ruffles. The SELFing may be patterned, for example, so as to cause stretched areas to fall on the peaks 28a of the ruffles 27, in, for example, substantially evenly-spaced rows and substantially evenly-distributed numbers. In this latter example, the stretched areas are positioned substantially at the peaks 28a of the ruffles 27 at a location on the nonwoven web layer at which they will experience the most movement (having another visual effect), as the belt is stretched and moved, as during wear of the article. 20 Similarly, the stretched areas may be patterned in coordination with the spacing between the elastic members such as strands 26, such that they are substantially evenly distributed relative the locations of the strands 26 in the belt.

Nonwoven web materials of the type typically used to form such belts are generally highly breathable. (Breathability, typically reflected in measurable vapor permeability of the material, is desired to avoid overhydration of the wearer's skin beneath the article.) 25 Accordingly, it not necessary or desirable to provide incremental stretching or SELFing merely for the purpose of increasing breathability. Because the materials are already highly breathable incremental stretching or SELFing may have little effect in this regard. However, it is believed that the visible presence of patterns of stretched areas and loft in the material may in some

circumstances give consumers the impression of high breathability, or reinforce or increase such impression – which may provide a marketing advantage for the manufacturer.

A method for forming a highly-textured stretch laminate may be described with reference to Fig. 19. A first nonwoven material layer 25a may be withdrawn from a supply thereof 27 and
5 passed through the nip between a pair of incremental stretching rollers 50a, 50b with their axes of rotation oriented in a cross direction, thereby incrementally stretching layer 25a. In an alternative the rollers 50a, 50b may be SELFing rollers. Following incremental stretching or SELFing, layer 25a may be conveyed toward the nip 60c between a pair of laminating rollers 60a, 60b. A second nonwoven material layer 25b may also be withdrawn from a supply 41, and
10 conveyed toward the laminating rollers. In one example, second nonwoven material layer 25b may be incrementally stretched or SELFed, in addition to first material layer 25a, prior to lamination. Elastic member(s) 26 may be withdrawn from a supply 40 and also conveyed toward the laminating nip 60c. In a step prior to lamination, elastic member(s) 26 may be pre-strained along the machine direction by, *e.g.*, regulation of feed speed thereof relative to speed of
15 laminating rollers 60a, 60 b. In another step prior to lamination, adhesive may be applied to any one or any combination of layer 25a, layer 25b and elastic member(s) 26. In one example elastic member(s) 26 may be a plurality of elastic strands spaced along the cross direction, and in one example these may be coated with adhesive by a strand coating apparatus 42. In another example elastic member(s) 26 may be an elastomeric film, which also may be apertured or
20 porous to enhance breathability of the stretch laminate. Layer 25a, elastic member(s) 26 and layer 25b, one or more of which bears applied adhesive, may then be passed into lamination nip 60c where they are compressed together, causing the applied adhesive to spread among them and bond them together to form stretch laminate 25f. As noted above, it may be desired that the direction of stretch of the incremental stretching or SELFing not be parallel with the direction of
25 stretch of the stretch laminate (here, the machine direction), and more preferably, that the direction of stretch of the incremental stretching or SELFing form an angle with the machine direction of from 45 degrees to 90 degrees.

In an alternative method and arrangement of equipment schematically depicted in Fig. 20, incremental stretching or SELFing rollers 50a, 50b may be situated downstream of laminating
30 rollers 60a, 60b, rather than upstream of them as depicted in Fig. 19. In that configuration,

rollers 50a, 50b may be configured and adjusted to incrementally stretch or SELF the entire laminate including all relatively inelastic layers, rather than, *e.g.*, only a single layer component of the laminate. It may be appreciated that where elastic members 26 are incorporated into the laminate while in a strained condition, incremental stretching or SELFing of the laminate following its formation may represent an atypical process.

While the foregoing description is presented within the context of features and formation of the belt structure of a balloon-style pant, it may be recognized that the manufacturing techniques described, and the resulting stretch laminate products, may have other applications. For example, the techniques and products thereof may be used to make the elastically extensible portions of components such as fastening members (also known as, *e.g.*, “ears” or “tape fasteners”) of disposable tape-type diapers, waistband components, etc., including any component of a disposable absorbent article in which directional elastic stretch may be desirable.

Any of the following non-limiting examples according to the foregoing description are contemplated herein:

1. A stretch laminate having an elastic stretch direction (ESD) and a second direction perpendicular to the elastic stretch direction, comprising:

a first layer formed of a first nonwoven web;

a second layer formed of a second nonwoven web;

an elastic member sandwiched between the first layer and the second layer; and

an adhesive deposited between the first layer and the second layer bonding the first and second layers about the elastic member,

wherein:

the elastic member has been incorporated into the laminate while strained in the elastic stretch direction, such that when the stretch laminate is in a relaxed condition at least one of the first and second layers forms ruffles of gathered material that extend in a z-direction;

at least one of the first and second layers has been incrementally stretched or SELFed prior to formation of the stretch laminate, and bears a pattern of ridges and valleys.

2. The stretch laminate of example 1 wherein the elastic member is a plurality of elastic strands extending along the elastic stretch direction, the elastic strands having been
5 incorporated into the laminate while strained in the elastic stretch direction.

3. The stretch laminate of example 2 wherein the elastic strands have been coated with said adhesive prior to their incorporation in to the stretch laminate.

4. The stretch laminate of any of the preceding examples wherein the elastic member is an elastic film extending in the elastic stretch direction.

10 5. The stretch laminate any of the preceding examples wherein the incremental stretching or SELFing has a stretched direction substantially parallel with the elastic stretch direction.

6. The stretch laminate of any of the preceding examples wherein the incremental stretching or SELFing has a stretched direction substantially perpendicular with the elastic
15 stretch direction.

7. The stretch laminate of any of the preceding examples wherein the fibers of the nonwoven web forming the at least one of the first and second layers that has been incrementally stretched or SELFed have a machine direction bias substantially parallel with the elastic stretch direction.

20 8. A disposable absorbent article comprising a chassis comprising a liquid permeable topsheet, a liquid impermeable backsheet, an absorbent core disposed between the topsheet and the backsheet, a front waist region, a crotch region and a rear waist region, and a side panel structure interconnecting the front waist region and the rear waist region, the side panel structure being formed of the stretch laminate of any of the preceding examples, the elastic
25 stretch direction being substantially parallel with a lateral direction relative the article.

9. A method of forming a stretch laminate material with a highly textured appearance and feel, the stretch laminate material having a machine direction and comprising a

first nonwoven layer, a second nonwoven layer, and an elastic member disposed between the first and second nonwoven layers, comprising the steps of:

incrementally stretching or SELFing at least one of the first and second nonwoven layers;

5 straining the elastic member to impart an amount of pre-strain along the machine
direction ;

applying adhesive to at least one of the first nonwoven, the elastic member and the second nonwoven;

10 passing the incrementally stretched or SELFed at least one of the first and second
nonwoven layers, the pre-strained elastic member and the other of first and second nonwoven
layers, along the machine direction through a nip between a pair of laminating rollers having
having axes of rotation along a cross direction, wherein the layers and the elastic member are
compressed therebetween and bonded together by said adhesive, thereby forming the stretch
laminate with the pre-strained elastic member disposed between the first and second nonwoven
layers.

15 10. The method of example 9 wherein the elastic member comprises a plurality of
strands formed of elastomeric material with their lengths in the stretch laminate substantially
aligned with the machine direction.

11. The method of example 9 wherein the elastic member comprises elastic film.

20 12. The method of example 10 wherein the adhesive applying step comprises coating
the strands with adhesive.

13. The method of example 9 wherein the incremental stretching step has a stretch
direction and the stretch direction is not parallel with the machine direction, in the stretch
laminate.

25 14. The method of example 13 wherein the stretch direction forms an angle of from
45 degrees to 90 degrees with the machine direction.

15. A disposable absorbent article comprising a chassis comprising a liquid permeable topsheet, a liquid impermeable backsheet, an absorbent core disposed between the topsheet and the backsheet, a front waist region, a crotch region and a rear waist region, and a side panel structure interconnecting the front waist region and the rear waist region, the side panel structure comprising the stretch laminate produced by the method of example 9, the machine direction being substantially parallel with a lateral direction relative the article.

* * *

All patents and patent applications (including any patents which issue thereon) referred to herein are hereby incorporated by reference to the extent consistent herewith.

10 The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as "40 mm" is intended to mean "about 40 mm." All documents cited in the Detailed Description of the Invention are, in relevant part, incorporated herein by reference; the citation of any document is not to be construed as an admission that it is prior art with respect to the present invention. To the extent that any meaning or definition of a term in this document conflicts with any meaning or definition of the same term in a document incorporated by reference, the meaning or definition assigned to that term in this document shall govern.

20 While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is, therefore, intended that the scope of the invention is limited only by the appended claims and equivalents thereof.

WHAT IS CLAIMED IS:

1. A stretch laminate having an elastic stretch direction (ESD) and a second direction perpendicular to the elastic stretch direction, comprising:

a first layer (25a) formed of a first nonwoven web;

a second layer (25b) formed of a second nonwoven web;

an elastic member (26) sandwiched between the first layer and the second layer; and

an adhesive deposited between the first layer and the second layer bonding the first and second layers about the elastic member,

wherein:

the elastic member has been incorporated into the laminate while strained in the elastic stretch direction, such that when the stretch laminate is in a relaxed condition at least one of the first and second layers forms ruffles (27) of gathered material that extend in a z-direction;

at least one of the first and second layers has been incrementally stretched or SELFed prior to formation of the stretch laminate, and bears a pattern of ridges (29a) and valleys (29b).

2. The stretch laminate of claim 1 wherein the elastic member is a plurality of elastic strands (26) extending along the elastic stretch direction, the elastic strands having been incorporated into the laminate while strained in the elastic stretch direction.

3. The stretch laminate of claim 2 wherein the elastic strands have been coated with said adhesive prior to their incorporation in to the stretch laminate.

4. The stretch laminate of any of the preceding claims wherein the elastic member is an elastic film extending in the elastic stretch direction.

5. The stretch laminate of any of the preceding claims wherein the incremental stretching or SELFing has a stretched direction substantially parallel with the elastic stretch direction.
6. The stretch laminate of any of the preceding claims wherein the incremental stretching or SELFing has a stretched direction substantially perpendicular with the elastic stretch direction.
7. The stretch laminate of any of the preceding claims wherein the fibers of the nonwoven web forming the at least one of the first and second layers that has been incrementally stretched or SELFed have a machine direction bias substantially parallel with the elastic stretch direction.
8. A disposable absorbent article (10) comprising a chassis (30) comprising a liquid permeable topsheet, a liquid impermeable backsheet (31), an absorbent core disposed between the topsheet and the backsheet, a front waist region, a crotch region and a rear waist region, and a side panel structure interconnecting the front waist region and the rear waist region, the side panel structure being formed of the stretch laminate of any of the preceding claims, the elastic stretch direction being substantially parallel with a lateral direction relative the article.
9. A method of forming a stretch laminate material with a highly textured appearance and feel, the stretch laminate material having a machine direction (MD) and comprising a first nonwoven layer (25a), a second nonwoven layer (25b), and an elastic member (26) disposed between the first and second nonwoven layers, comprising the steps of:

incrementally stretching or SELFing at least one of the first and second nonwoven layers;

straining the elastic member to impart an amount of pre-strain along the machine direction ;

applying adhesive to at least one of the first nonwoven, the elastic member and the second nonwoven;

passing the incrementally stretched or SELFed at least one of the first and second nonwoven layers, the pre-strained elastic member and the other of first and second nonwoven layers, along the machine direction (MD) through a nip between a pair of laminating rollers (60a, 60b) having axes of rotation along a cross direction, wherein the layers and the elastic member are compressed therebetween and bonded together by said adhesive, thereby forming the stretch

laminate with the pre-strained elastic member disposed between the first and second nonwoven layers.

10. The method of claim 9 wherein the elastic member comprises a plurality of strands (26) formed of elastomeric material with their lengths in the stretch laminate substantially aligned with the machine direction (MD).

11. The method of claim 9 wherein the elastic member comprises elastic film.

12. The method of claim 10 wherein the adhesive applying step comprises coating the strands with adhesive.

13. The method of any of claims 9-12 wherein the incremental stretching step has a stretch direction (SD) and the stretch direction is not parallel with the machine direction (MD), in the stretch laminate.

14. The method of claim 13 wherein the stretch direction (SD) forms an angle of from 45 degrees to 90 degrees with the machine direction (MD).

15. A disposable absorbent article comprising a chassis (30) comprising a liquid permeable topsheet, a liquid impermeable backsheet (31), an absorbent core disposed between the topsheet and the backsheet, a front waist region, a crotch region and a rear waist region, and a side panel structure interconnecting the front waist region and the rear waist region, the side panel structure comprising the stretch laminate produced by the method of any of claims 9-14, the machine direction (MD) being substantially parallel with a lateral direction relative the article.

1/14

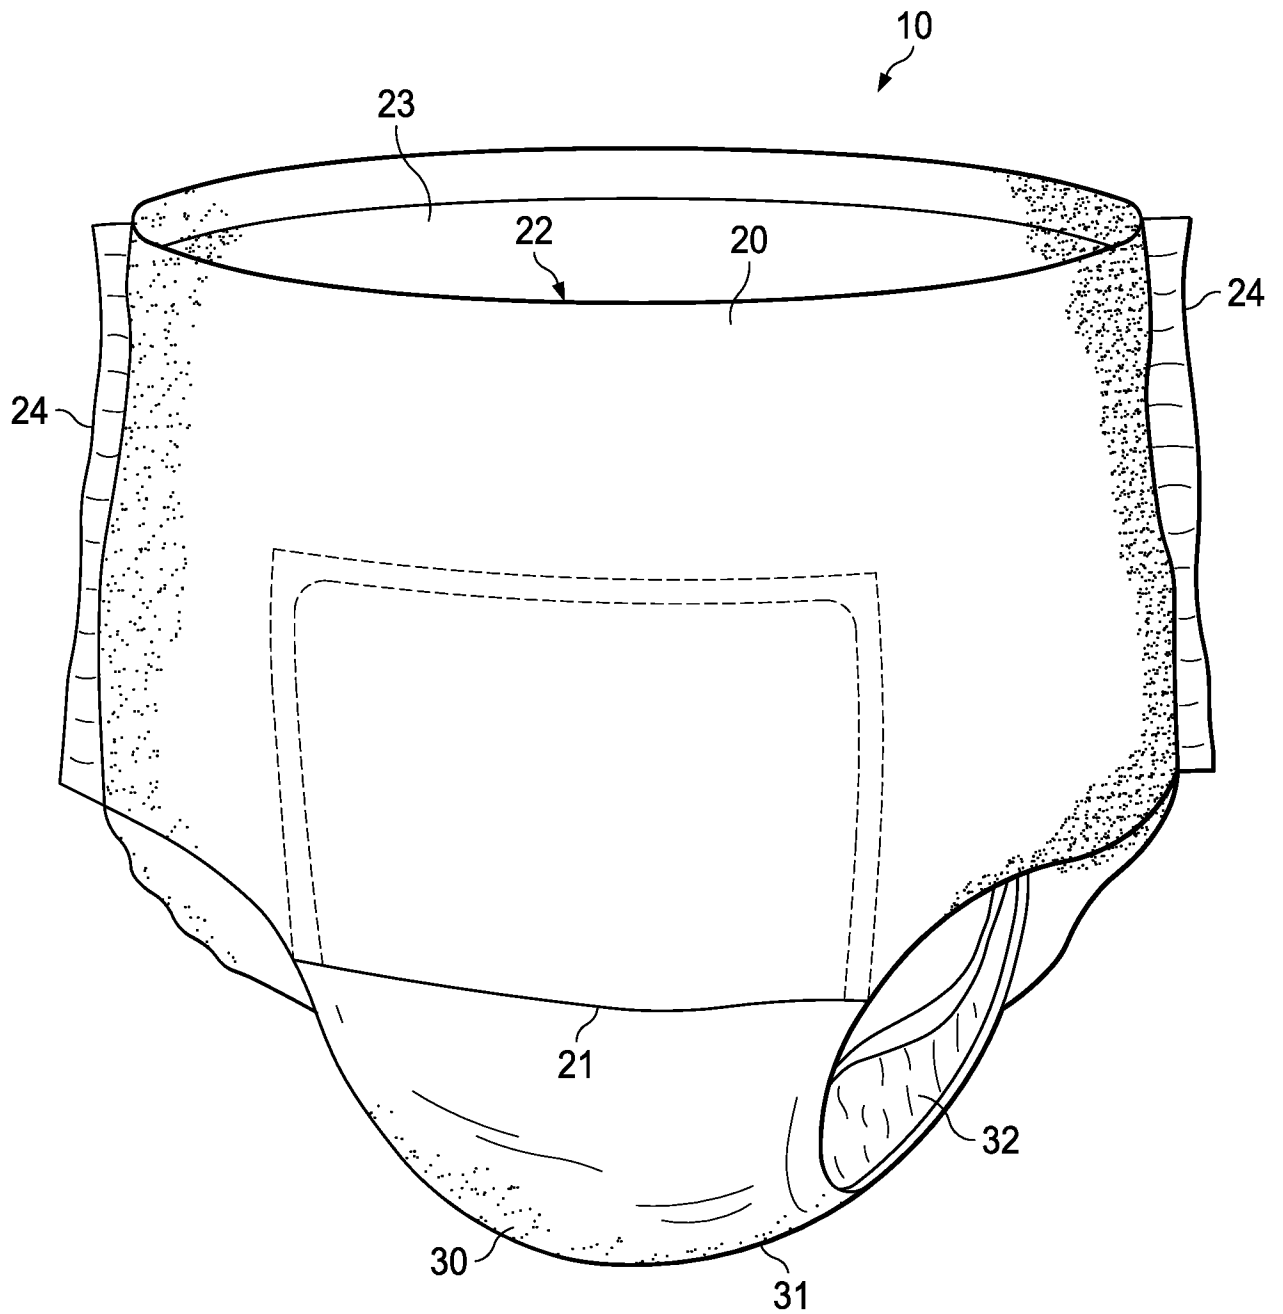


FIG. 1A

2/14

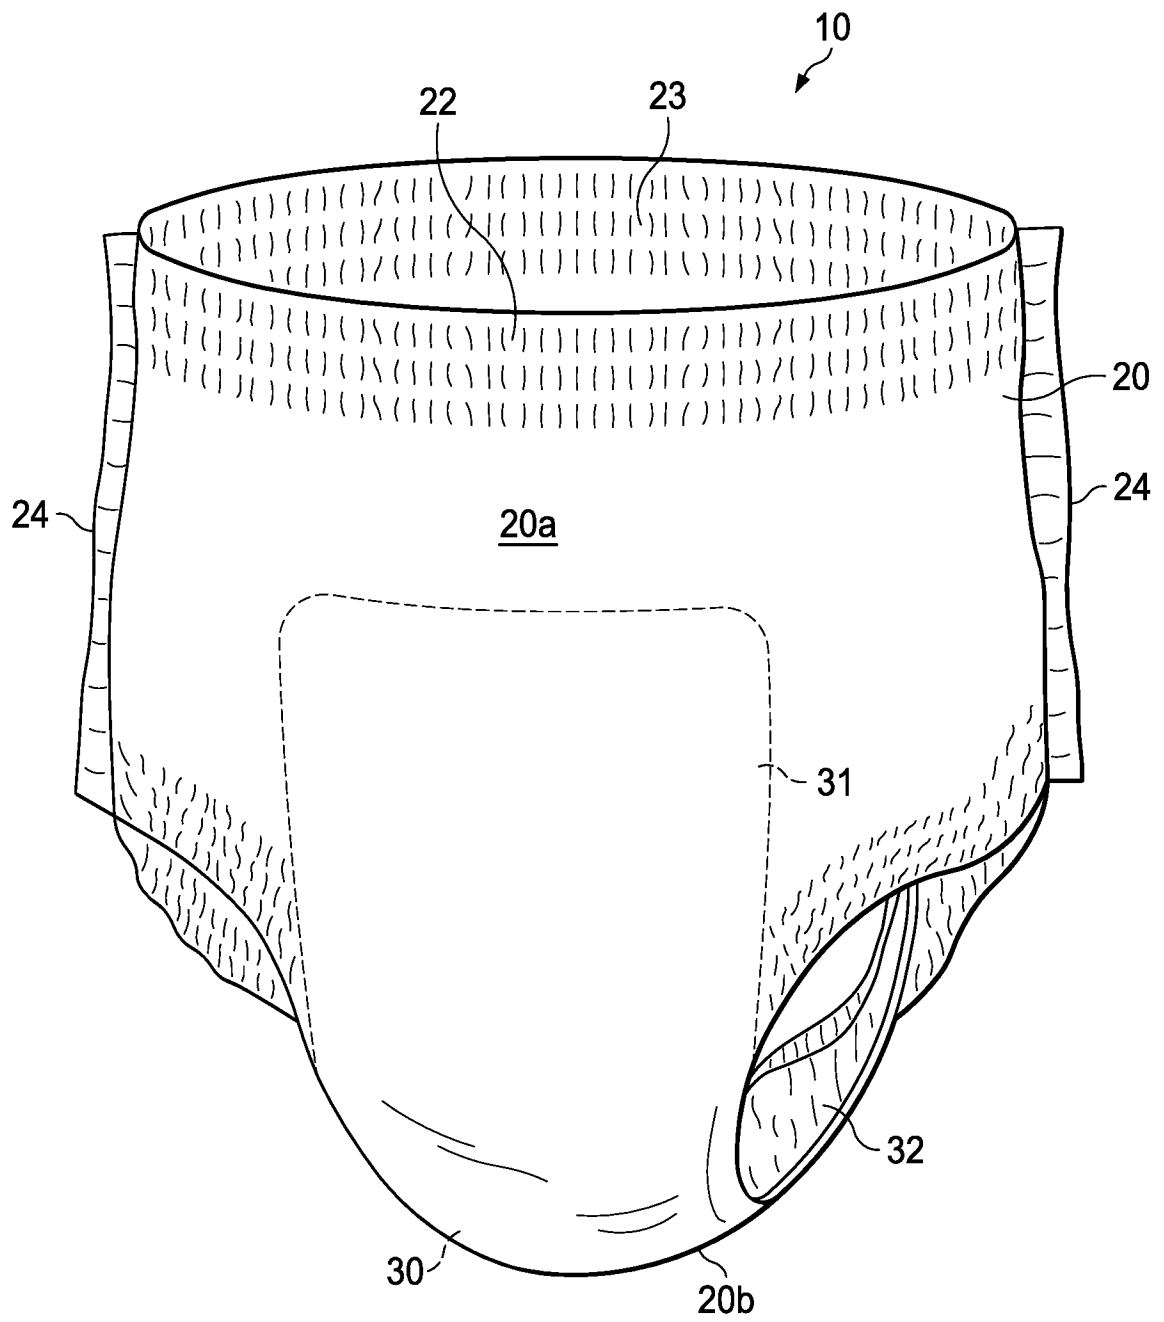
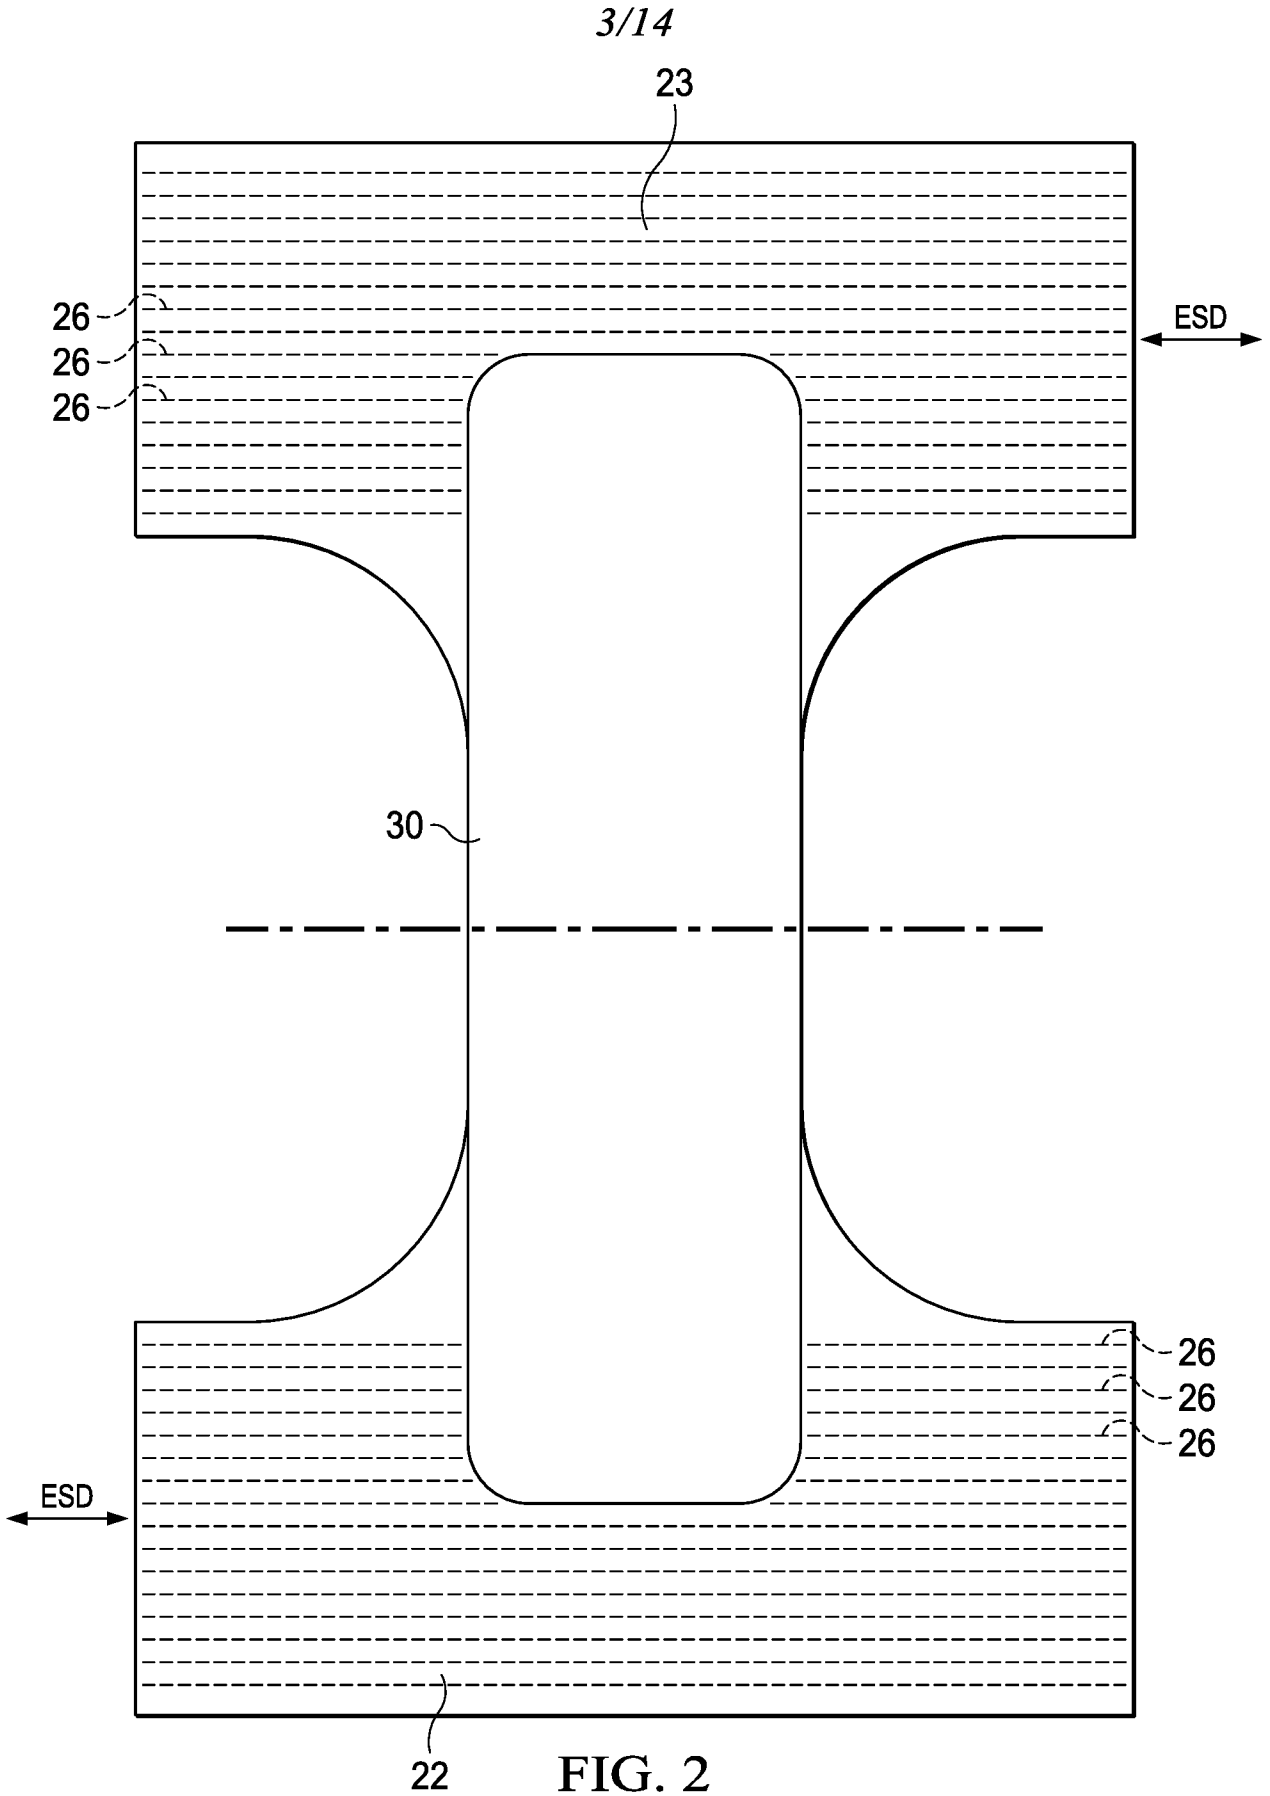


FIG. 1B



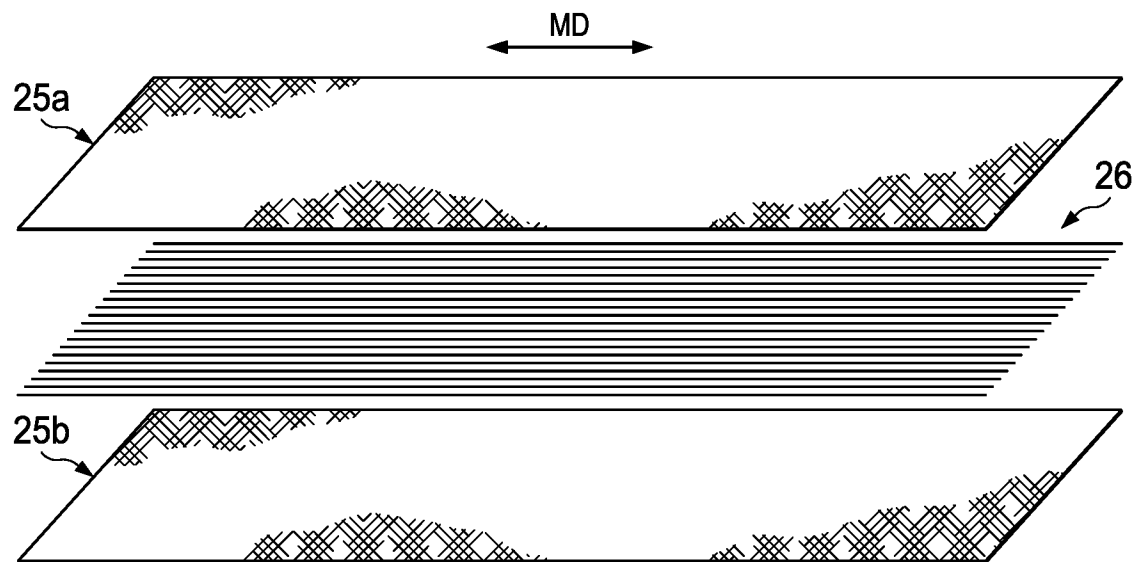


FIG. 3

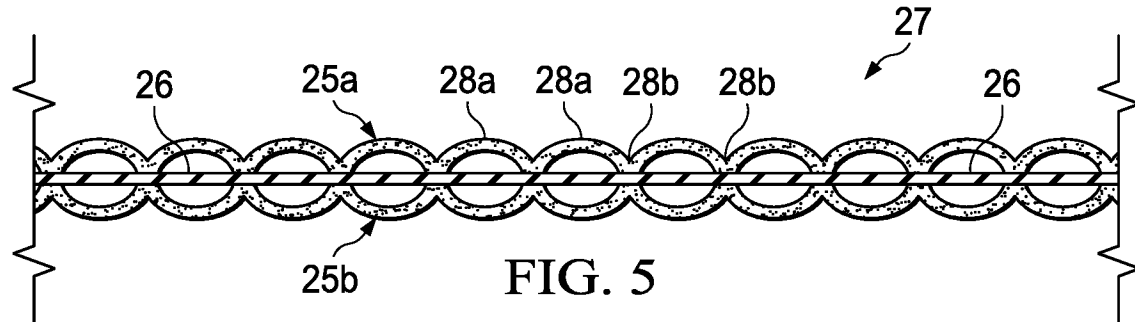


FIG. 5

5/14




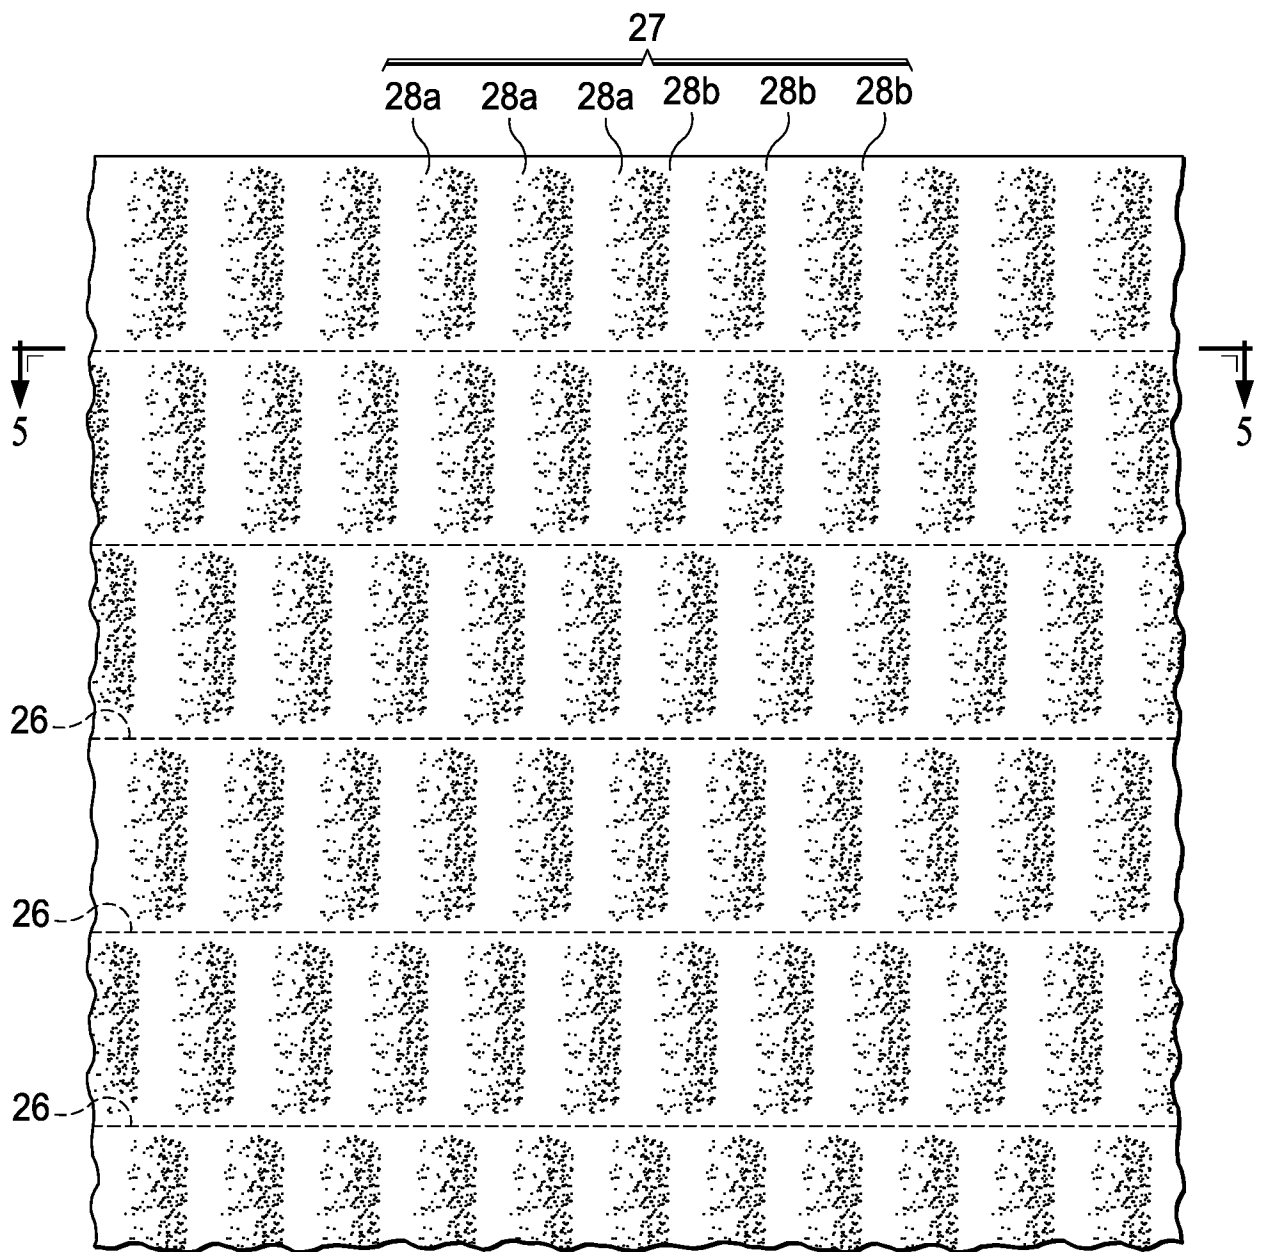


FIG. 4

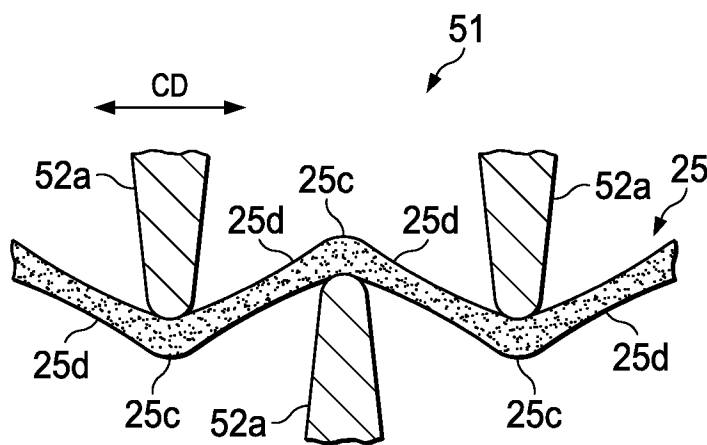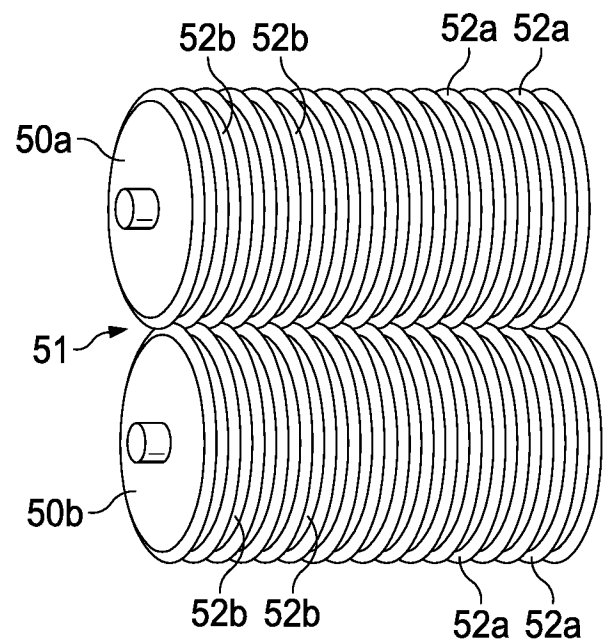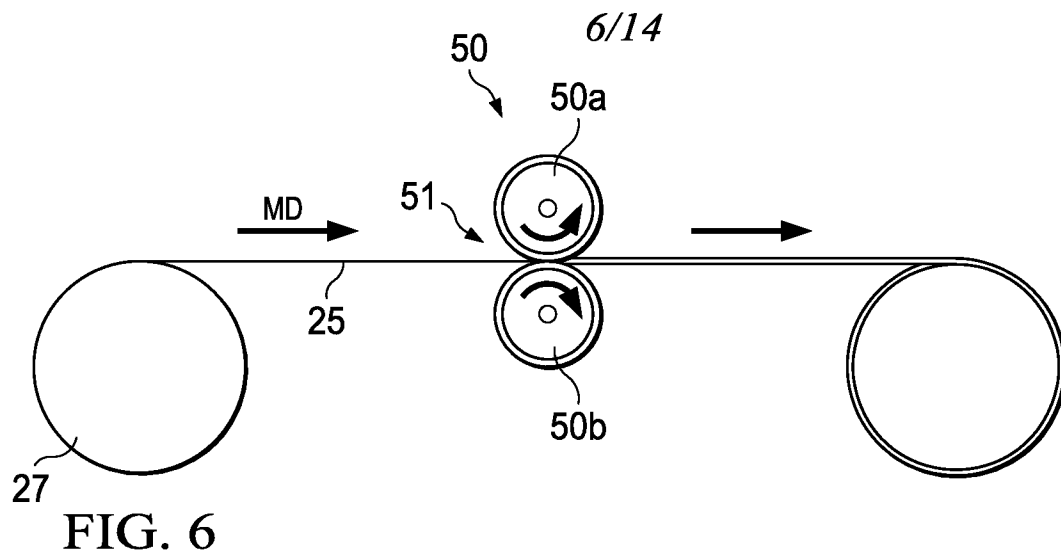

7/14

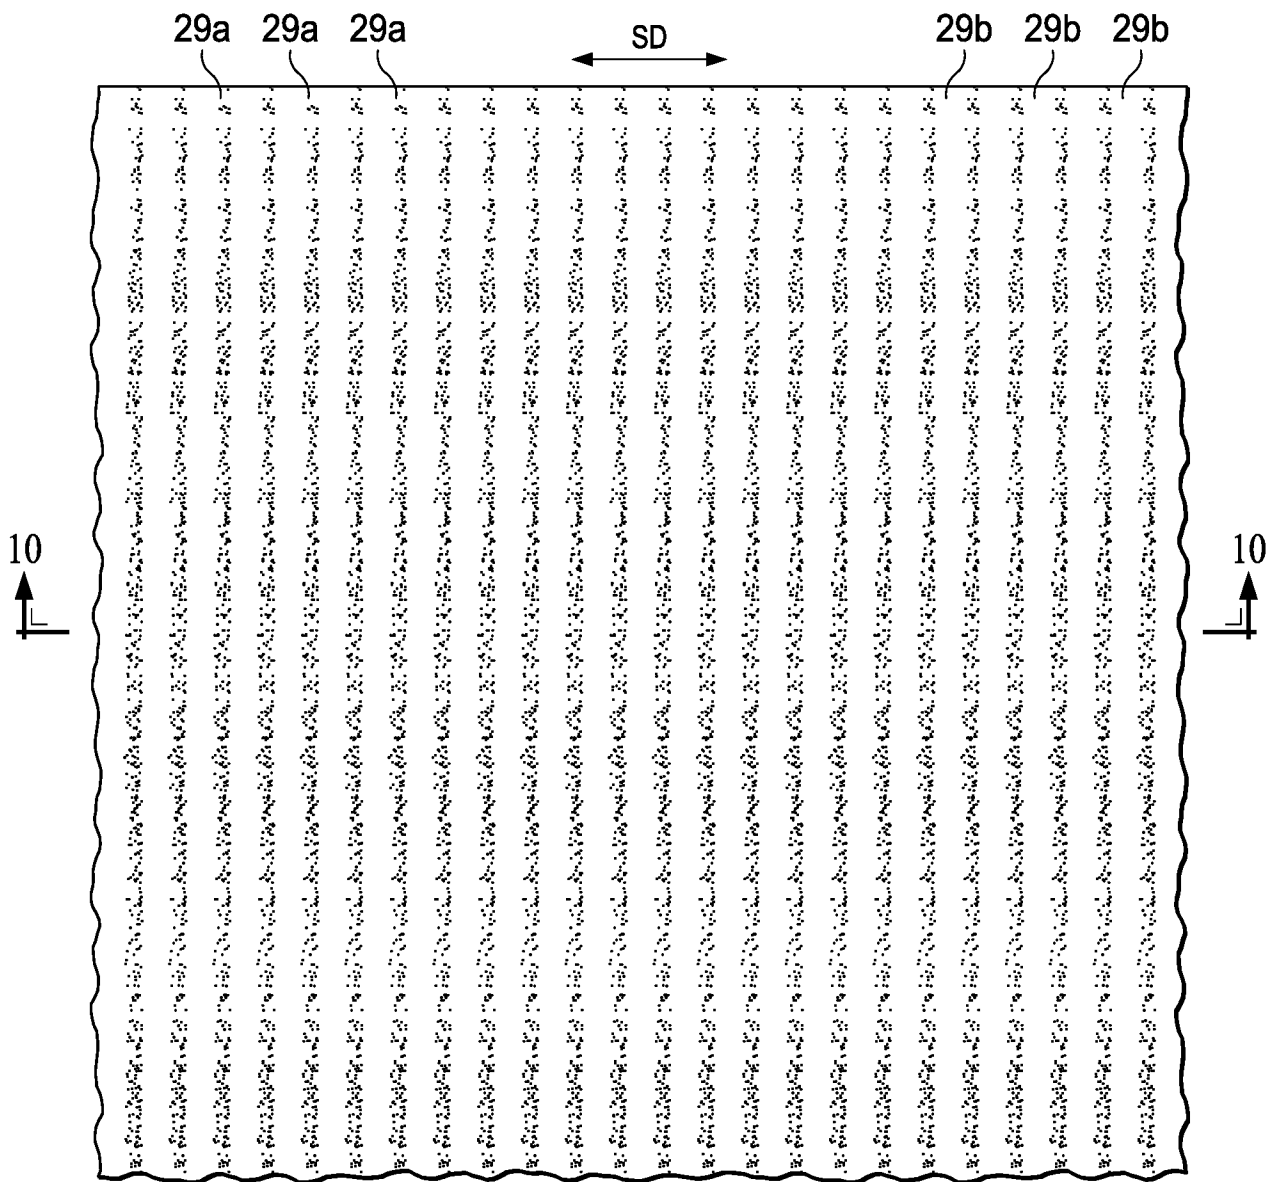
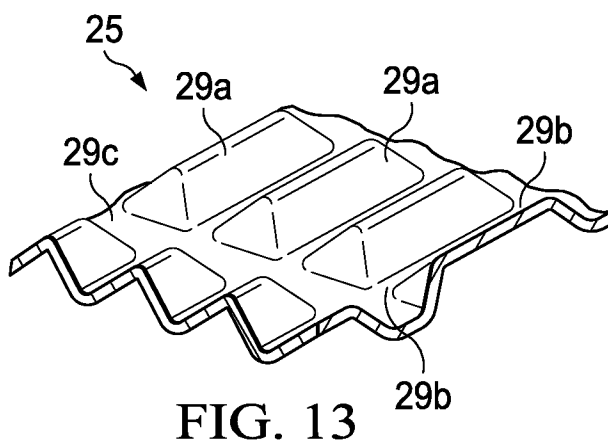
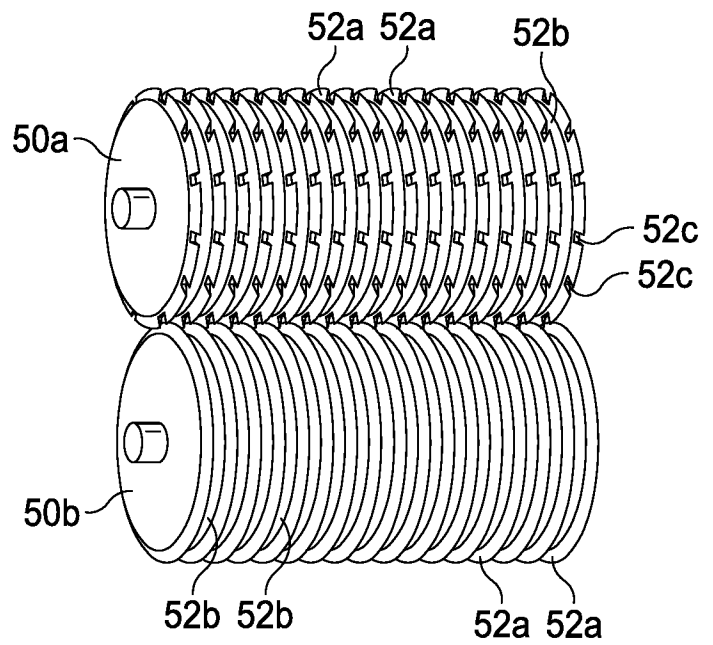
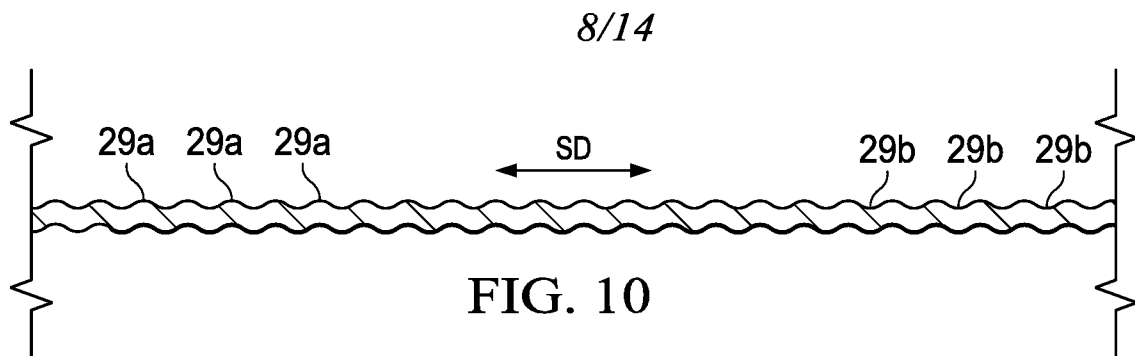


FIG. 9



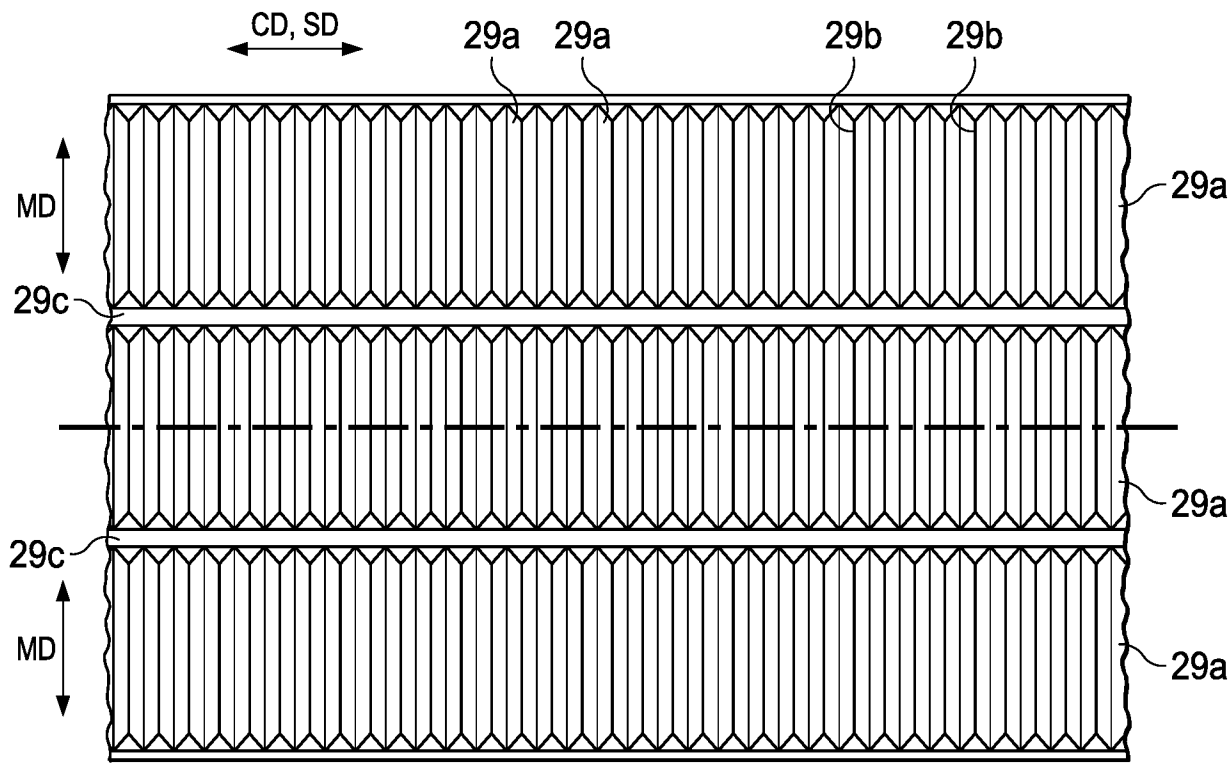


FIG. 12

10/14

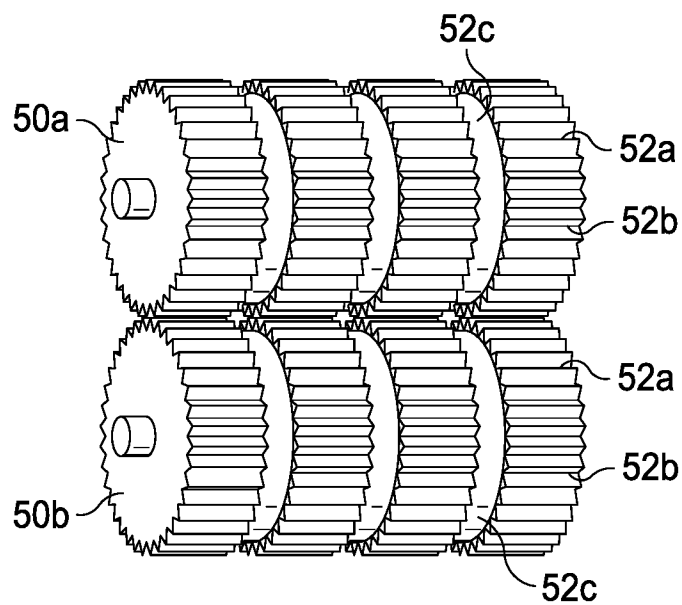


FIG. 14

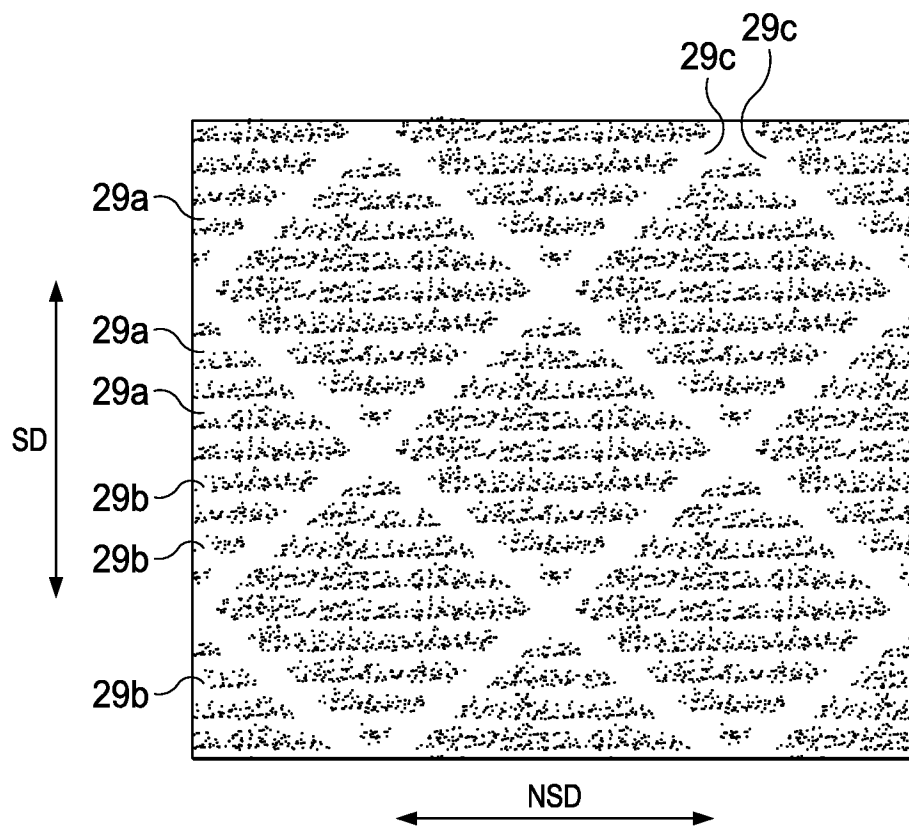


FIG. 16

11/14

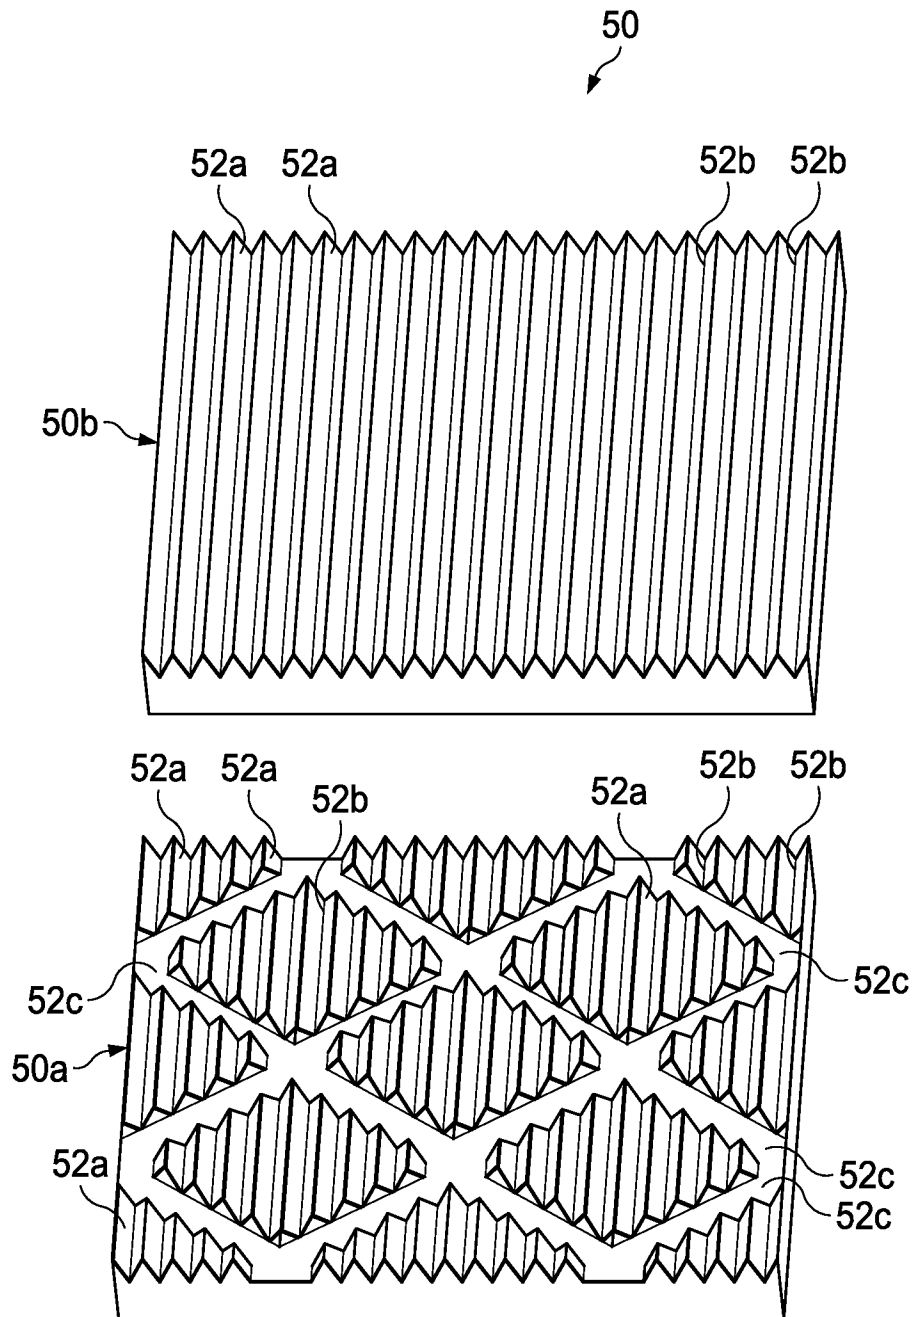


FIG. 15

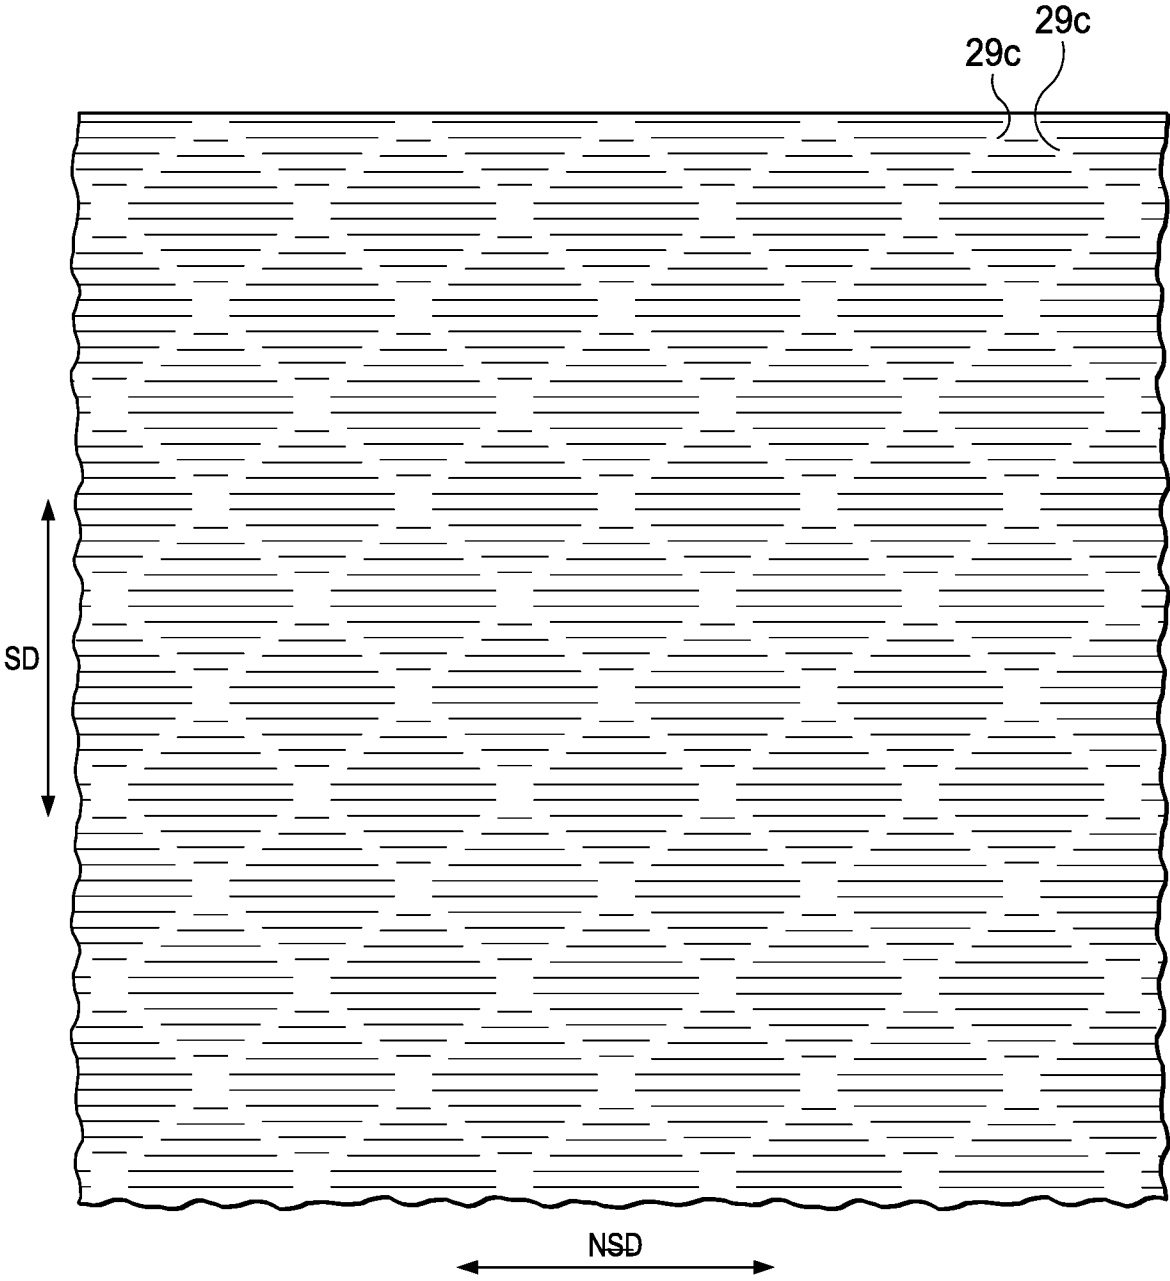


FIG. 17

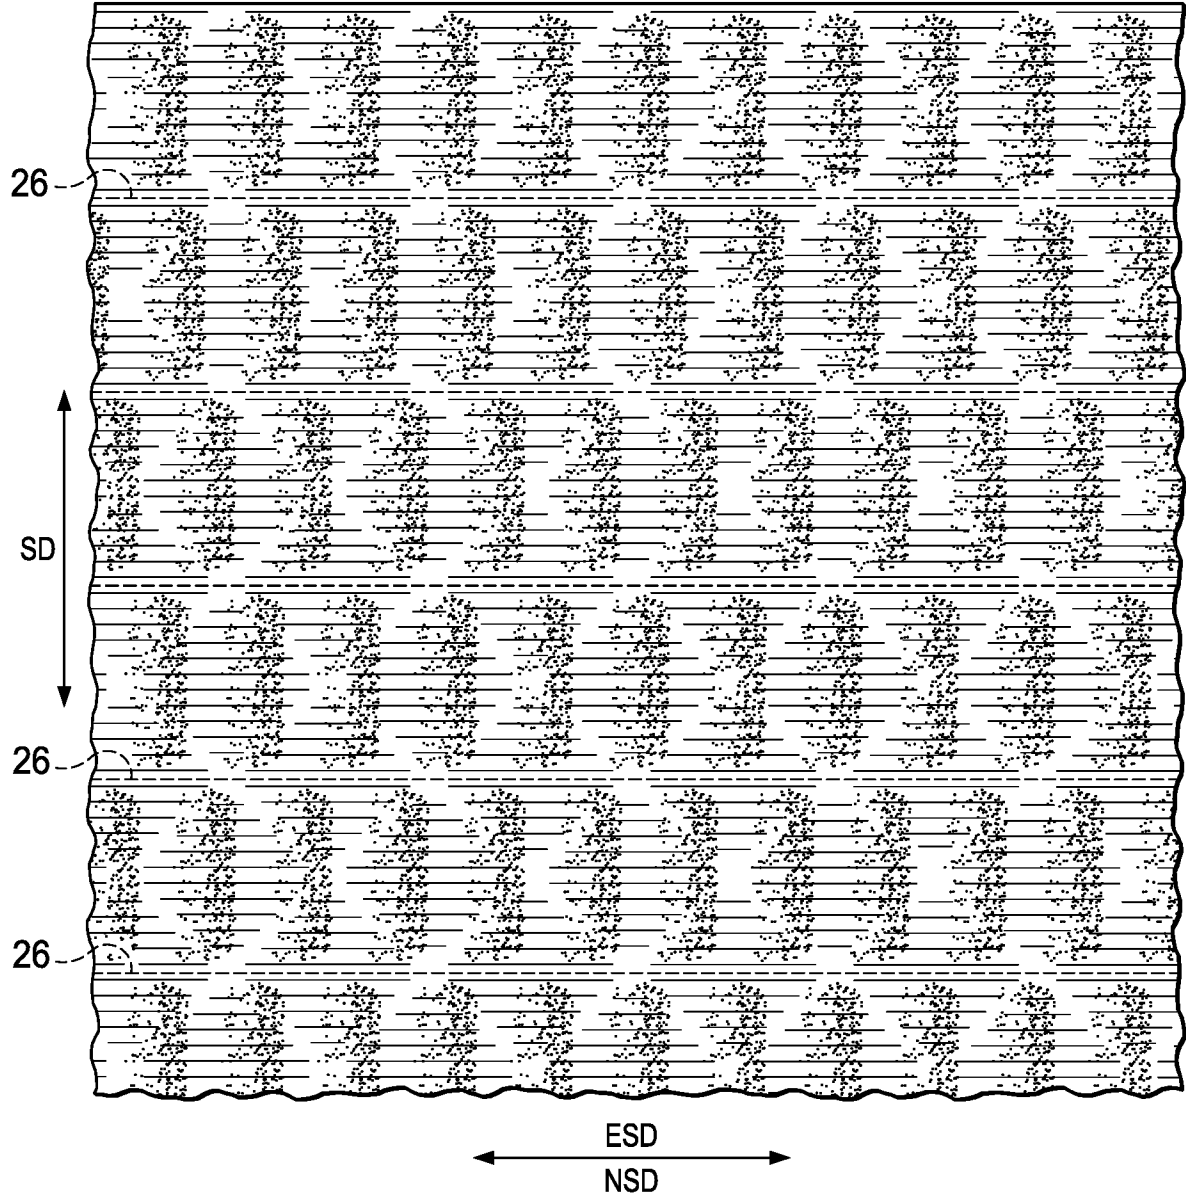


FIG. 18

14/14

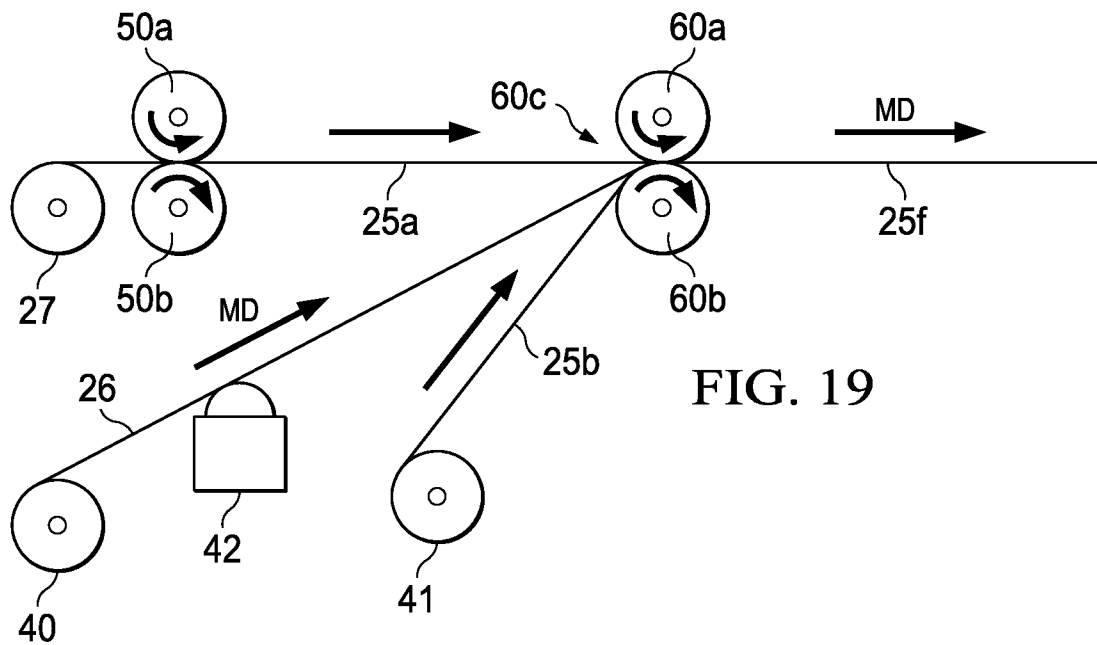


FIG. 19

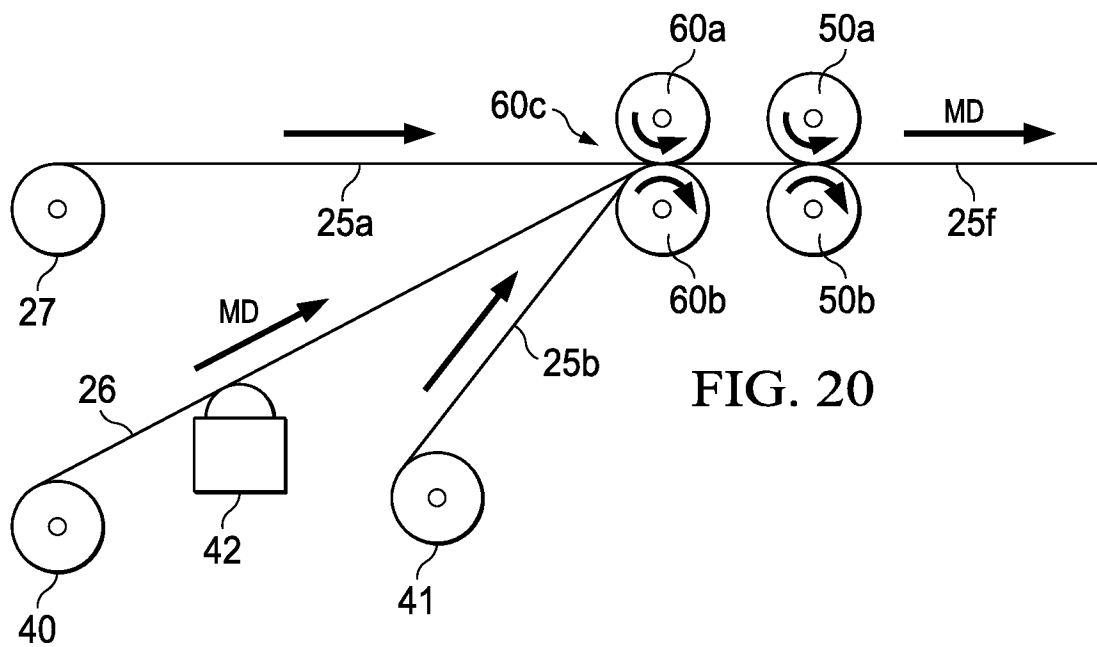


FIG. 20

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/040268

A. CLASSIFICATION OF SUBJECT MATTER INV. A61F13/15 A61F13/49 B32B5/26 B32B7/14 B32B27/12 B32B37/12 B32B37/20 B32B37/22 ADD. According to International Patent Classification (IPC) or to both national classification and IPC																				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) A61F B32B Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data																				
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Category*</th> <th style="width: 70%;">Citation of document, with indication, where appropriate, of the relevant passages</th> <th style="width: 20%;">Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td style="vertical-align: top;">US 2004/192140 A1 (SCHNEIDER UWE [US] ET AL) 30 September 2004 (2004-09-30)</td> <td style="vertical-align: top;">1,2,6,7,9,10</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td style="vertical-align: top;">paragraphs [0032] - [0034] paragraphs [0042] - [0044] paragraph [0051] -----</td> <td style="vertical-align: top;">4,11</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td style="vertical-align: top;">US 2013/306226 A1 (ZINK RONALD JOSEPH [US] ET AL) 21 November 2013 (2013-11-21) cited in the application</td> <td style="vertical-align: top;">1-3,5-10,13-15</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td style="vertical-align: top;">paragraphs [0071] - [0072] paragraphs [0107], [0109] paragraph [0141] -----</td> <td style="vertical-align: top;">4,11,12</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td style="vertical-align: top;">US 2006/121252 A1 (LIGHTCAP WILLIAM L [US] ET AL) 8 June 2006 (2006-06-08) paragraphs [0016], [0066], [0069], [0071] ----- -/-</td> <td style="vertical-align: top;">4,11</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	US 2004/192140 A1 (SCHNEIDER UWE [US] ET AL) 30 September 2004 (2004-09-30)	1,2,6,7,9,10	Y	paragraphs [0032] - [0034] paragraphs [0042] - [0044] paragraph [0051] -----	4,11	X	US 2013/306226 A1 (ZINK RONALD JOSEPH [US] ET AL) 21 November 2013 (2013-11-21) cited in the application	1-3,5-10,13-15	Y	paragraphs [0071] - [0072] paragraphs [0107], [0109] paragraph [0141] -----	4,11,12	Y	US 2006/121252 A1 (LIGHTCAP WILLIAM L [US] ET AL) 8 June 2006 (2006-06-08) paragraphs [0016], [0066], [0069], [0071] ----- -/-	4,11
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																		
X	US 2004/192140 A1 (SCHNEIDER UWE [US] ET AL) 30 September 2004 (2004-09-30)	1,2,6,7,9,10																		
Y	paragraphs [0032] - [0034] paragraphs [0042] - [0044] paragraph [0051] -----	4,11																		
X	US 2013/306226 A1 (ZINK RONALD JOSEPH [US] ET AL) 21 November 2013 (2013-11-21) cited in the application	1-3,5-10,13-15																		
Y	paragraphs [0071] - [0072] paragraphs [0107], [0109] paragraph [0141] -----	4,11,12																		
Y	US 2006/121252 A1 (LIGHTCAP WILLIAM L [US] ET AL) 8 June 2006 (2006-06-08) paragraphs [0016], [0066], [0069], [0071] ----- -/-	4,11																		
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex. </div>																				
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </div> </div>																				
Date of the actual completion of the international search <div style="text-align: center; font-size: 1.2em;">23 September 2016</div>		Date of mailing of the international search report <div style="text-align: center; font-size: 1.2em;">05/10/2016</div>																		
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center; font-size: 1.2em;">Mauhin, Viviane</div>																		

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/040268

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2013/090519 A1 (3M INNOVATIVE PROPERTIES CO [US]; ARAI NOBUHARU [JP]; KIMURA SHINJI [J]) 20 June 2013 (2013-06-20) page 17, line 20 - line 27 -----	12
A	US 2013/082418 A1 (CURRO JOHN JOSEPH [US] ET AL) 4 April 2013 (2013-04-04) cited in the application the whole document -----	1-15
A	US 5 650 214 A (ANDERSON BARRY J [US] ET AL) 22 July 1997 (1997-07-22) cited in the application the whole document -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/040268

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004192140	A1	30-09-2004	AT 444850 T 15-10-2009
		CN 1756659 A 05-04-2006	
		EP 1610950 A1 04-01-2006	
		JP 4180605 B2 12-11-2008	
		JP 2006520701 A 14-09-2006	
		MX 255436 B 18-03-2008	
		US 2004192140 A1 30-09-2004	
		US 2006009104 A1 12-01-2006	
		US 2007218245 A1 20-09-2007	
		WO 2004087416 A1 14-10-2004	
US 2013306226	A1	21-11-2013	CA 2873223 A1 21-11-2013
		CA 2873408 A1 21-11-2013	
		CL 2014003099 A1 06-03-2015	
		CL 2014003100 A1 08-05-2015	
		CN 104284644 A 14-01-2015	
		CN 104284645 A 14-01-2015	
		CN 104302261 A 21-01-2015	
		CN 104540487 A 22-04-2015	
		EP 2849697 A1 25-03-2015	
		EP 2849698 A1 25-03-2015	
		EP 2849699 A1 25-03-2015	
		EP 2849705 A1 25-03-2015	
		JP 5992608 B2 14-09-2016	
		JP 5992609 B2 14-09-2016	
		JP 2015516269 A 11-06-2015	
		JP 2015516270 A 11-06-2015	
		JP 2015516274 A 11-06-2015	
		JP 2015519950 A 16-07-2015	
		RU 2014141120 A 27-04-2016	
		RU 2014141121 A 10-05-2016	
		US 2013306226 A1 21-11-2013	
		US 2013310796 A1 21-11-2013	
		US 2013310797 A1 21-11-2013	
		US 2013324956 A1 05-12-2013	
		US 2016220425 A1 04-08-2016	
		US 2016220426 A1 04-08-2016	
		US 2016235599 A1 18-08-2016	
		WO 2013173289 A1 21-11-2013	
		WO 2013173291 A1 21-11-2013	
		WO 2013173293 A1 21-11-2013	
		WO 2013173310 A1 21-11-2013	
US 2006121252	A1	08-06-2006	US 2006121252 A1 08-06-2006
			US 2015231851 A1 20-08-2015
			WO 2006063232 A1 15-06-2006
WO 2013090519	A1	20-06-2013	CN 104039290 A 10-09-2014
			EP 2790628 A1 22-10-2014
			JP 2013126431 A 27-06-2013
			US 2014343522 A1 20-11-2014
			WO 2013090519 A1 20-06-2013
US 2013082418	A1	04-04-2013	US 2008224351 A1 18-09-2008
			US 2012003345 A1 05-01-2012
			US 2013082418 A1 04-04-2013
US 5650214	A	22-07-1997	AR 007326 A1 27-10-1999

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/040268

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		AT 220529 T	15-08-2002
		AU 3129697 A	05-01-1998
		BR 9709629 A	10-08-1999
		CA 2256510 A1	04-12-1997
		CN 1251512 A	26-04-2000
		CO 4990999 A1	26-12-2000
		CZ 9803929 A3	12-05-1999
		DE 69714079 D1	22-08-2002
		DE 69714079 T2	27-02-2003
		EG 21155 A	31-12-2000
		EP 0959845 A1	01-12-1999
		ES 2176746 T3	01-12-2002
		ID 17022 A	04-12-1997
		JP 3290996 B2	10-06-2002
		JP H11512643 A	02-11-1999
		KR 200000016188 A	25-03-2000
		MY 133608 A	30-11-2007
		NO 985592 A	19-01-1999
		PE 84498 A1	26-12-1998
		TR 9802489 T2	22-03-1999
		US 5650214 A	22-07-1997
		WO 9745086 A1	04-12-1997
		ZA 9704736 B	30-12-1997
