



(51) International Patent Classification:

B43K 29/08 (2006.01) B43K 7/02 (2006.01)
G06F 3/041 (2006.01)

(21) International Application Number:

PCT/EP2021/068189

(22) International Filing Date:

01 July 2021 (01.07.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20305772.4 07 July 2020 (07.07.2020) EP

(71) Applicants: **SOCIETE BIC** [FR/FR]; 14 Rue Jeanne d' Asnieres 92110, 92110 CLICHY (FR). **BIC VIOLEX S.A.** [GR/GR]; 58, Aghiou Athanasiou street, 14569 Anoixi (GR).

(72) Inventors: **FOLGOAS, Loic**; SOCIETE BIC IP department, 14, Rue Jeanne d' Asnières, 92110 CLICHY (FR).

GEORGAKIS, Georgios; BIC VIOLEX S.A. IP department, 58, Aghiou Athanasiou street, 14569 ANOIXI (GR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: WRITING INSTRUMENT

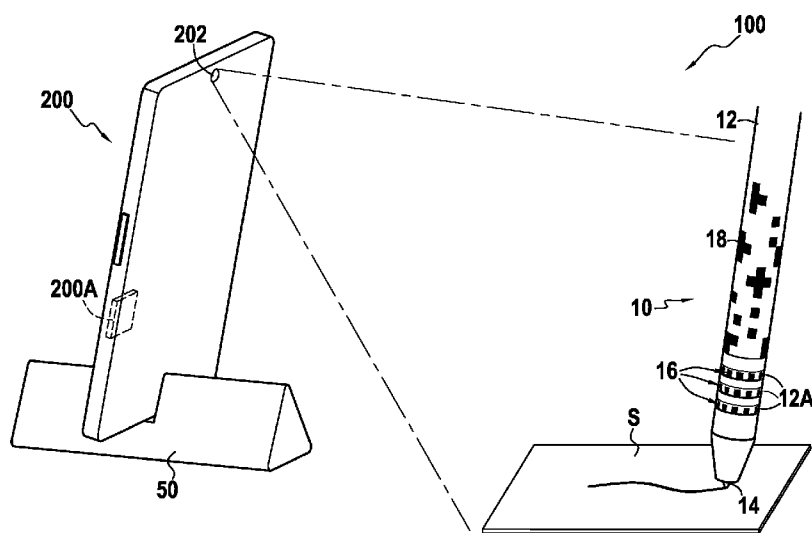


FIG.2

(57) Abstract: A writing instrument (10) comprising a body (12) having an axis (X), a writing tip (14), a reservoir (22) and at least one visual mark (16) being a specific mark for augmented reality applications, the at least one visual mark (16) being configured to be hidden/visible when the writing tip (14) is distant from a writing surface (S) and to be respectively visible/hidden when the writing tip (14) is in contact with a writing surface (S), at least a portion of the body (12) being configured to allow the at least one visual mark (16) to adopt two states, visible and hidden configuration.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

WRITING INSTRUMENT

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims benefit from European patent application
5 EP20305772.4, filed on 7-JUL-2020, its content being incorporated herein
by reference.

TECHNICAL FIELD

[0001] The present disclosure relates to a writing instrument,
for example a writing instrument configured to be tracked when contacting
10 a writing surface, for example in the frame of applications for tracking and
positioning a writing instrument in a 2D or 3D space, for example in the
frame of augmented reality applications and/or writing digitalizations.

BACKGROUND

15 [0002] Traditional writing instruments for augmented reality
applications and/or writing digitalizations are usually complex and
expensive, such as, for example, active pens. Therefore, a need exists to
provide a simpler and/or cost effective writing instrument adapted for
augmented reality applications and/or writing digitalization.

20

SUMMARY

[0003] In embodiments a writing instrument comprises a
body having an axis, a writing tip, a reservoir and at least one visual mark
being a specific mark for augmented reality applications, the at least one
25 visual mark being configured to be hidden/visible when the writing tip is
distant from a writing surface (i.e. not contacting any writing surface) and
to be respectively visible/hidden when the writing tip is in contact with a
writing surface, at least a portion of the body being configured to allow the
at least one visual mark to adopt two states, visible and hidden
30 configurations.

[0004] An axial direction corresponds to the axis of the body. The writing tip may be a felt tip, a ballpoint tip, a mechanical pencil, a graphite pencil lead, chalk, a stylus tip, or any other means making it possible to write on a substrate or surface. The writing tip may be fixed (i.e. always extending out of the body) or retractable.

[0005] In the following, unless otherwise specified, "the visual mark" or "the mark" should be understood as "the at least one visual mark". The visual mark may have any shape, may comprise any colour, relief, etc. The visual mark is a specific mark for augmented reality applications. This means that the visual mark may be configured to be detected by an augmented reality smart device. When visible, the visual mark may be seen from the outside of the writing instrument, directly, i.e. with a naked eye or indirectly, i.e. with the help of any tool, such as a specific camera, etc.. When hidden, the visual mark cannot be seen from the outside of the written instrument. For example, the visual mark may be visible when the writing tip is distant from a writing surface and hidden when the writing tip is in contact with a writing surface. In examples, the visual mark may be hidden when the writing tip is distant from a writing surface and visible when the writing tip is in contact with a writing surface. When visible, the entire visual mark may be visible, or only a part of the visual mark may be visible. When hidden, not part of the visual mark is visible. The visual mark may form a dynamic tracker. A dynamic tracker may be construed as a guiding system which may have different configurations/shapes/colors or the like in order to inform, for example an augmented reality application, that something happened/moved/etc., i.e. the occurrence of an event, predetermined or not.

[0006] Such a writing instrument may be passive, i.e. without any electric powered element/electronic element.

[0007] For example, when the visual mark (or primary visual mark) is hidden, another visual mark (or secondary visual mark), which is

distinct from the visual mark, may be visible, while the other visual mark is hidden when the visual mark is visible. In examples, when the visual mark is hidden a blank area may be visible, while the blank area is hidden when the visual mark is visible, i.e. there is no other mark visible/hidden when the visual mark is respectively hidden/visible, but only a blank area instead.

[0008] Thanks to the detection or not of the visual mark, it may be easily and accurately determined whether the writing tip is in contact or not with a writing surface. In the frame of an augmented reality application or writing digitalization, this may allow an easy and accurate determination of when a stroke needs to be recorded or not. A stroke may be any writing, for example just a point, a line, or any geometric shapes, a single letter, a single word, etc. Once a track is visible, a software from a mobile application / an augmented reality smart device may start recording the movement of the writing instrument, recording the stroke.

[0009] In embodiments, the writing tip may be axially movable with regard to the body between a rest position and a contact position when the writing tip is pressed against a writing surface, the at least one visual mark being hidden/visible when the writing tip is in the rest position and visible/hidden, respectively, when the writing tip is in the contact position.

[0010] In the rest position the writing tip may be distant from a writing surface while the contact position the writing tip may be in contact with a writing surface. The writing tip may extend from the body more in the rest position than in the contact position.

[0011] In embodiments, the at least one visual mark may extend annularly (i.e. all) around the axis.

[0012] In embodiments, the at least one visual mark may extend in a surface forming an angle comprised between 45° and 90° with the axis (X), at a rear end of the writing instrument.

[0013] The rear end of the writing instrument is the end, opposite along the axial direction, to the writing tip. The surface may have any shapes, a form at least locally an angle comprised between 45° and 90°. For example the surface may be plane or curved.

5 [0014] In embodiments, the body may comprise at least one transparent window, the at least one visual mark being visible through the at least one window, when visible (i.e. when not hidden).

[0015] In the following, unless otherwise specified, "the window" should be understood as "the at least one window". The window
10 may be made of any material, may have any colour, etc.

[0016] The number of windows may be the same as the number of visual marks. Each window may be associated with a single visual mark. When visible, the visual mark may be visible through the window. When hidden, the visual mark cannot be visible through the window. The
15 rest of the body, or at least portion(s) adjacent to the window, is(are) configured to hide the visual mark when it is not aligned with the window. For example, the rest of the body, or at least portion(s) adjacent to the window, is opaque.

[0017] In embodiments, the at least one window may extend
20 annularly (i.e. all) around the axis.

[0018] In embodiments, the at least one window may be formed by a portion of the body.

[0019] In embodiments, a writing element may comprise the writing tip, the at least one visual mark being formed on a portion of the
25 writing element.

[0020] For example, the writing element may comprise the writing tip and a reservoir. The reservoir may be provided with ink or with one or several leads. If the writing element is part of a stylus, there is no necessarily a reservoir. In this case, the writing element may comprise a
30 stylus tip and a barrel or a mounting portion supporting the stylus tip. The

writing elements may be retractable by any mechanism known by the skilled person, or fixed (i.e. the writing tip always projecting from the body). The visual mark may be coupled with the writing element and move together with the writing element when the writing tip moves between the rest position and the contact position.

[0021] In embodiments, a shutter may be coupled to the writing tip, the shutter being configured to hidden/reveal the visual mark when the writing tip moves between the rest position and the contact position (and vice versa).

[0022] For example, when the writing tip touches any surface, the shutter is actuated and opens hence « revealing » the visual mark(s) and when the writing tip is not in contact with a surface, the shutter remains closed hence « hiding » the visual marks. The operation of the shutter may be mechanical (i.e. mechanically connected with the tip) or electronical, for example depending on the required sensitivity (electronic device may be much more sensitive to pressure changes than mechanical device).

[0023] In embodiments, the at least one visual mark may be hidden when the writing tip is in the rest position and may be visible when the writing tip is in the contact position.

[0024] In embodiments, the at least one visual mark may be not visible by naked eye.

[0025] For example, the mark may be formed with a material mainly visible via a camera and post-processing, such as ink mainly visible out of the naked eye visible spectrum. In other words, the mark is visible, but not by naked eye. In particular, the mark is visible (but not by naked eye) in the visible configuration, and hidden (and thus not visible at all) in the hidden configuration.

[0026] In embodiments, the writing instrument may comprise at least one second visual mark configured to be detected by an augmented

reality smart device, the at least one second visual mark being always visible.

[0027] In the following, unless otherwise specified, "the second visual mark" or "the second mark" should be understood as "the at least one second visual mark". The second visual mark may have any shape, may comprise any colour, relief, etc. The second visual mark is a specific mark for augmented reality applications. The second visual mark may form a static tracker. A static tracker may be construed as a guiding system having always the same configuration/shape or the like.

10 [0028] In embodiments, the at least one second visual mark may extend annularly (i.e. all) around the axis.

[0029] In embodiments, the at least one visual mark may comprise a first visual pattern and the at least one second visual mark may comprise a second visual pattern which is different from the first visual pattern.

15 [0030] In embodiments, the at least one second visual mark is not visible by naked eye.

[0031] In embodiments, a set comprises a writing instrument according to any one of the embodiments of the present disclosure, and a holder for a smart device.

20 [0032] The holder may be formed by a cap or a protective box of the writing instrument.

[0033] In embodiments, a method for detecting whether a writing tip contacts a writing surface, comprises providing a writing instrument substantially as disclosed herein, and detecting whether the at least one visual mark is visible/hidden for determining whether the writing tip is in contact with a writing surface or not.

25 [0034] Such a method may be part of a method for tracking and positioning a writing instrument in a 2D or 3D space (i.e. two or three dimensions space).

30

[0035] In embodiments, a computer program includes instructions for executing the steps of the method substantially as disclosed herein when the program is executed by a computer.

[0036] The program may use any programming language and
5 may take the form of source code, object code or a code intermediate between source code and object code, such as a partially compiled form, or any other desirable form.

[0037] In embodiments, a recording medium readable by a computer has recorded thereon a computer program including instructions
10 for executing the steps of the method substantially as disclosed herein.

[0038] The recording medium may be any entity or device capable of storing the program. For example, the medium may include storage means such as a ROM, for example a CD ROM or a microelectronic circuit ROM, or magnetic storage means, for example a diskette (floppy
15 disk) or a hard disk. In examples, the recording medium may be an integrated circuit in which the program is incorporated, the circuit being adapted to execute the method in question or to be used in its execution.

[0039] Such writing instruments, sets, and methods may form simpler and/or cost effective writing instrument adapted for
20 augmented reality applications and/or writing digitalization. Such writing instruments, sets, and methods may help to easily and accurately determine whether the writing tip is in contact or not with a writing surface and may allow an easy and accurate determination of when a stroke needs to be recorded or not.

25

BRIEF DESCRIPTION OF THE DRAWINGS

[0040] The disclosure can be better understood by reading the detailed description of various embodiments given as non-limiting examples. The description refers to the accompanying sheets of figures, in
30 which:

- Figure 1 shows a set comprising a writing instrument, the writing tip being distant from a writing surface
- Figure 2 shows the writing instrument of figure 1 when the writing tip is in contact with a writing surface, and
- 5 - Figure 3 shows an exploded view the writing instrument of figure 1.

DETAILED DESCRIPTION

[0041] Figures 1 and 2 show a set 100 comprising a writing instrument 10 and a holder 50 for a smart device 200. The smart device
10 200 may be removably placed on the holder 50 with its camera 202 oriented toward a 3D space comprising a writing surface S.

[0042] The writing instrument 10, in this example a ball point pen, comprises a body 12 having an axis X and a writing tip 14. The writing instrument 10 comprises at least one visual mark 16, in this example three
15 visual marks 16, configured to be hidden when the writing tip 14 is distant from a writing surface S (see figure 1) and to be visible when the writing tip 14 is in contact with a writing surface S (see figure 2). The marks 16 are configured to be detected by an augmented reality smart device, such as the smart device 200. The writing instrument 10 may comprise less or more
20 than three visual marks 16. In alternative embodiments, the visual marks 16 may be hidden when the writing tip 14 is in contact with the writing surface S and visible when the writing tip 14 is distant from the writing surface S. Each visual mark 16 may extend annularly all around the axis X.

[0043] In the example of figures 1 to 3, the body 12
25 comprises three transparent windows 12A, one for each visual mark 16, the visual marks 16 being visible through the windows 12A, when visible (i.e. when not hidden). The windows 12A may each extend annularly all around the axis X. The windows 12A may respectively be formed by a portion of the body 12. In examples, other number of windows may be foreseen,
30 depending on the number of visual marks. In examples, the number of

windows does not correspond to the number of visual marks, e.g. two visual marks may be visible through the same window or a single visual mark may be visible through more than one window.

[0044] The writing instrument 10 may comprises a second
5 visual mark 18 which is always visible. The second visual mark is configured to be detected by an augmented reality smart device, such as the smart device 200. The second visual mark 18 may extend annularly all around the axis X. The visual marks 16 may each comprise the same first visual pattern 16A while the second visual mark 18 may comprise a second visual pattern
10 18A which is distinct and different from the first visual pattern 16A. The writing instrument 10 may comprise more than a single second visual mark. Some or all of the visual patterns of the visual marks 16 may be different from each other. The visual marks 16 may form a dynamic tracker and the second visual mark 18 may form a static tracker.

15 [0045] with the provision of the second visual mark 18 forming a static tracker on an outer surface of the body 12 of the writing instrument 10 allows for the writing instrument 10 to be accurately tracked and positioned relative to the camera of the smart device 200, e.g. using augmented reality techniques that support the capture real-time interaction
20 of the specific visual mark 18 when the writing instrument 10 moves on the writing surface S and to create, register and/or translate the 2D or 3D representations in space of such movement of the writing instrument 10 on the writing surface S. Smart devices, e.g. a mobile phone or a tablet having a camera and enabled to create augmented reality representations are well-
25 known in the field and will thus not be discussed in detail.

[0046] With reference to figure 3, the writing instrument 10 may comprise a writing element 20 received in part within the body 12. The body 12 may comprise a rear barrel 122 and a front part 124 mounted onto the rear barrel 122. The front part 124 may be screwed, snap fitted, welded,
30 etc. with the rear barrel 122. The front part 124 may comprise a nose cone,

a front barrel, etc. The windows 12A may be formed in the wall of the rear barrel 122.

[0047] The writing element 20 may comprises the writing tip 14 and a reservoir 22 onto which the writing tip 14 is mounted. The writing
5 element 20 may comprise an annular portion 25 having the visual marks 16. The annular portion 25 may be fitted, for example press fitted, around and coaxially with the reservoir 22. The annular portion 25 may be blank between the adjacent visual marks 16.

[0048] The writing tip 14 may be configured to axially move
10 with regard to the body 12 between a rest position (see figure 1) and a contact position (see figure 2) when the writing tip is pressed against a writing surface. For example, the reservoir 22 may comprises two radially opposed projections 22A configured to bear against an end 24A of a compression spring 24. The opposite end 24B of the compression spring 24
15 may bear against an abutment not shown located inside the body 12, in this example inside the rear barrel 122. The writing element 20, and thus in this example the writing tip 14, may axially move due to the compression of the spring 24 when a pressure is applied onto the writing tip 14, for example when writing. For example, the axial strike of the writing tip 14 may be
20 axially limited due to the stiffness of the spring 24, or due to an abutment between the coils of the spring 24, or due to an abutment of the writing element 20 against a stop not shown located inside the body 12. The axial strike of the writing tip 14 may be configured so that the writing tip 14 remains always at least in part out of the body 12 and able to be in contact
25 with a writing surface for writing.

[0049] The writing instrument 10 may be configured so that the visual marks 16 are hidden within the body 12 when the writing tip 14 is in the rest position and visible through the windows 12A when the writing tip 14 is in the contact position. For example, the axial strike of the writing
30 tip 14 may be equal or less than the axial space between the adjacent

windows 12A. The axial space (or distance) between the adjacent visual marks 16 may corresponds to the axial extension of the windows 12A. The axial space between the adjacent windows 12A may be equal or more than the axial extension of the marks 16. The axial extension of each window 12A may be equal or different, the axial extension of each visual mark 16 may be equal or different, the axial space or distance between each adjacent window 12A may be equal or different and the axial space or distance between each adjacent visual mark 16 may be equal or different.

[0050] The writing instrument 10 may be totally passive.

10 [0051] The smart device 200 may comprise a recording medium 200A readable by a computer and may have recorded thereon a computer program including instructions for executing the steps of the method described hereafter. In other words, the smart device 200 may include an application, as a computer program including instructions for executing the steps of the method described hereafter when the program is executed by a computer (in this example the smart device 200).

[0052] An embodiment of a method for detecting whether a writing tip contacts a writing surface, using the set 100, is described with reference to figures 1 and 2.

20 [0053] The method may comprise a preliminary step of placing the smart device 200 onto the holder 50. The camera 202 of the smart device may be oriented toward a 3D space comprising a writing surface S and wherein the writing instrument 10 may be used.

[0054] The position of the writing instrument 10 in the 3D space may be determined using the second visual mark 18.

[0055] The method may comprise detecting whether the visual marks 16 are visible/hidden for determining whether the writing tip 14 is in contact with the writing surface S or not.

30 [0056] In the present example, when the visual marks 16 are hidden, it is determined that the writing tip 14 is not in contact with the

writing surface S, as in figure 1. When the visual marks 16 are visible, it is determined that the writing tip 14 is in contact with the writing surface S, as in figure 2.

[0057] In examples, when the visual marks 16 (either hidden
5 or visible) indicate that the writing instrument 10 is in a writing state, the method may further comprise determining a position of the writing instrument 10 in the 3D space using the second visual marks 18. This may be done by tracking or tracking and recording the second visual mark 18 in 2D or 3D space using the camera 202 of the smart device 200. The method
10 may further comprise processing the tracked images to determine what is being written by the user. The method may further comprise reproducing the processed tracked images, i.e. what is being written by the user on the screen of the smart device 200. In examples, provided an adequate connection is established, the step of reproducing the processed tracked
15 images on the screen may involve a screen of a separate device. When the user stops writing, the visual marks 16 indicate that the writing device is now in non-writing (hovering) mode and thus the smart device 200 stops the tracking / recording of the second visual mark 18 and no further output is depicted and/or recorded on the screen.

20 [0058] The visual marks 16 and/or the second visual mark 18 may be not visible by naked eye. The method may comprise a specific step of post-processing the image captured by the camera 202 of such visual marks 16/18.

[0059] Such a method may be part of method for tracking
25 and positioning a writing instrument in a 2D or 3D space. Such a method may be part of an augmented reality application and/or of a writing digitalization.

[0060] Although the present disclosure is described with
reference to specific examples, it is clear that modifications and changes
30 may be made to these examples without going beyond the general scope

of the disclosure. In particular, individual characteristics of the various embodiments shown and/or mentioned may be combined in additional embodiments. Consequently, the description and the drawings should be considered in a sense that is illustrative rather than restrictive.



- 5 [0061] Additionally, all of the disclosed features of an apparatus may be transposed, alone or in combination, to a method and vice versa.

CLAIMS


1. A writing instrument (10) comprising a body (12) having an axis (X),
a writing tip (14), a reservoir (22) and at least one visual mark (16)
5 being a specific mark for augmented reality applications, the at least
one visual mark (16) being configured to be hidden/visible when the
writing tip (14) is distant from a writing surface (S) and to be
respectively visible/hidden when the writing tip (14) is in contact with
a writing surface (S), at least a portion of the body (12) being
10 configured to allow the at least one visual mark (16) to adopt two
states, visible and hidden configuration.
2. The writing instrument (10) according to claim 1, wherein the writing
tip (14) is axially movable with regard to the body (12) between a
rest position and a contact position when the writing tip (14) is
15 pressed against a writing surface (S), the at least one visual mark
(16) being hidden/visible when the writing tip (14) is in the rest
position and visible/hidden, respectively, when the writing tip (14) is
in the contact position.
3. The writing instrument (10) according to claim 1 or 2, wherein the
20 at least one visual mark (16) extends annularly around the axis (X).
4. The writing instrument (10) according to claims 1 to 3, wherein the
at least one visual mark (16) extends in a surface forming an angle
comprised between 45° and 90° with the axis (X), at a rear end of
the writing instrument.
- 25 5. The writing instrument (10) according to any one of claims 1 to 4,
wherein the body (12) comprises at least one transparent window
(12A), the at least one visual mark (16) being visible through the at
least one window (12A), when visible.
- 30 6. The writing instrument (10) according to claim 5, wherein the at least
one window (12A) is formed by a portion of the body (12).

7. The writing instrument (10) according to any one of claims 1 to 6, wherein a writing element (20) comprises the writing tip (14), the at least one visual mark (16) being formed on an annular portion (25) fitted around the writing element (20).
- 5 8. The writing instrument (10) of claim 7, wherein the annular portion (25) is coaxially with the reservoir (22).
9. The writing instrument (10) according to any one of claims 1 to 8, wherein the reservoir (22) comprises two radially opposed projections (22A) configured to bear against an end (24A) of a
10 compression spring 24.
10. The writing instrument (10) of claim 9, wherein an opposite end (24B) of the compression spring (24) bears against an abutment located inside the body 12.
11. The writing instrument (10) according to any one of claims 1 to 10,
15 wherein the at least one visual mark (16) is not visible by naked eye.
12. The writing instrument (10) according to any one of claims 1 to 11, comprising at least one second visual mark (18) being a specific mark for augmented reality applications, the at least one second visual mark (18) being always visible.
- 20 13. The writing instrument (10) according to claim 12, wherein the at least one visual mark (16) comprises a first visual pattern (16A) and the at least one second visual mark (18) comprises a second visual pattern (18A) which is different from the first visual pattern (16A).
14. The writing instrument (10) according to claim 12 or 13, wherein the
25 at least one second visual mark (18) is not visible by naked eye.
15. A set (100) comprising a writing instrument (10) according to any one of claims 1 to 14, a holder (50) for a smart device (200) and a smart device (200).
16. A method for detecting whether a writing tip contacts a writing
30 surface (S), comprising providing a set (100) according to claim 15,

- placing the smart device (200) onto the holder, orienting a camera (202) of the smart device toward a 3D space comprising the writing surface (S) and detecting whether the at least one visual mark (16) is visible/hidden thereby determining whether the writing tip (14) is in contact with a writing surface (S) or not.
- 5
17. The method of claim 16, further comprising, using the writing instrument (10) on the writing surface (S), determining a position of the writing instrument (10) in the 3D space using the second visual mark (18).
- 10
18. The method of claim 17, further comprising processing images captured by the camera (202) of the visual marks (16,18) to determine what is being written by a user using the writing instrument (10) on the writing surface (S).
- 15
19. The method of claim 18, further comprising reproducing the processed images on a screen of the smart device (200).
20. A computer program including instructions for executing the steps of the method according to any of claims 16-19 when the program is executed by a computer or smart device (200).
- 20
21. A recording medium (200A) readable by a computer or smart device (200) and having recorded thereon a computer program including instructions for executing the steps of the method according to any of claims 16-19.

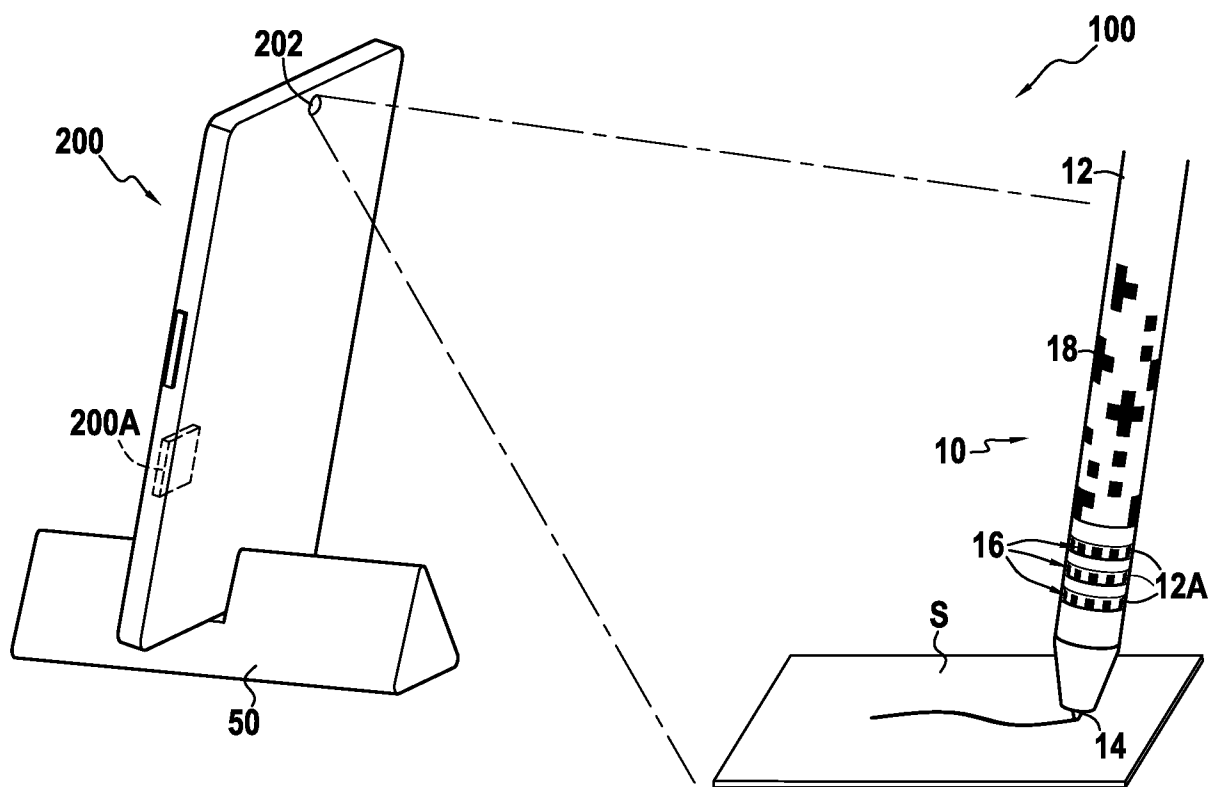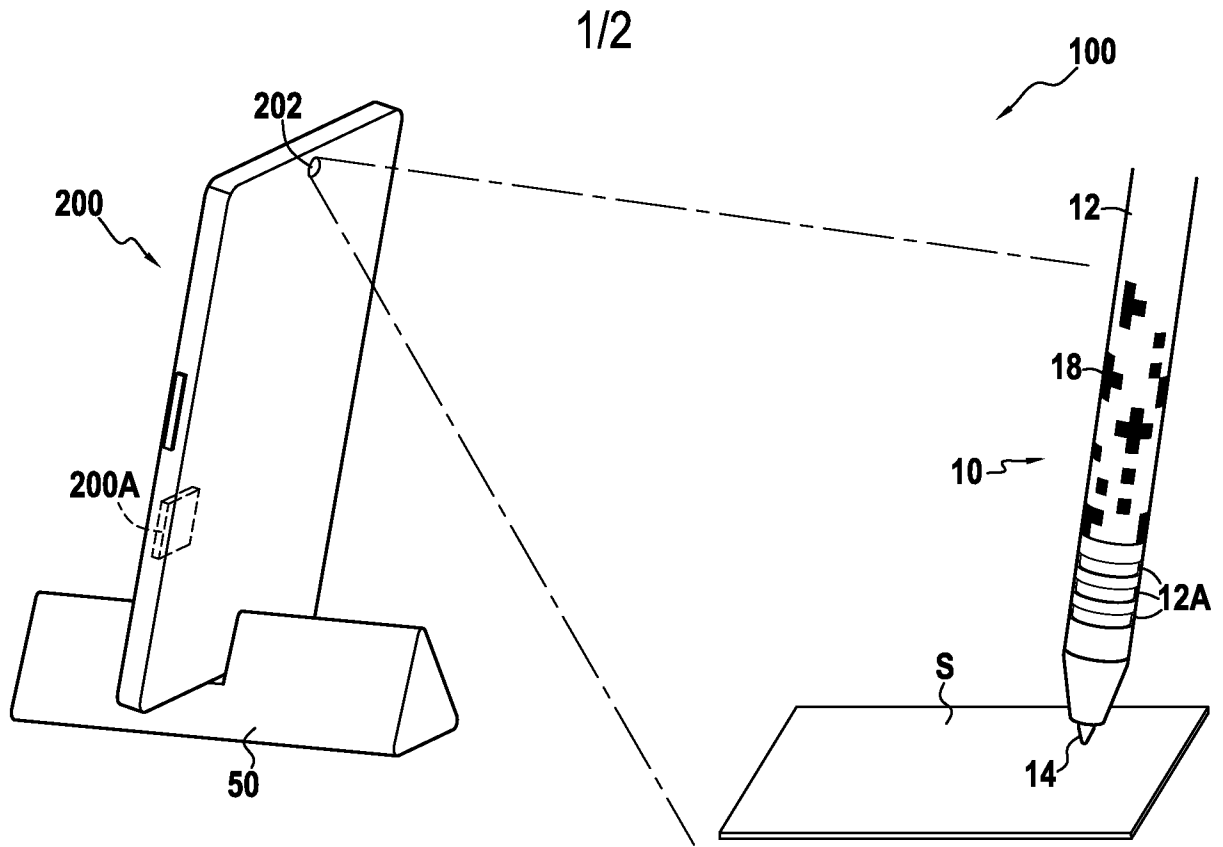

2/2

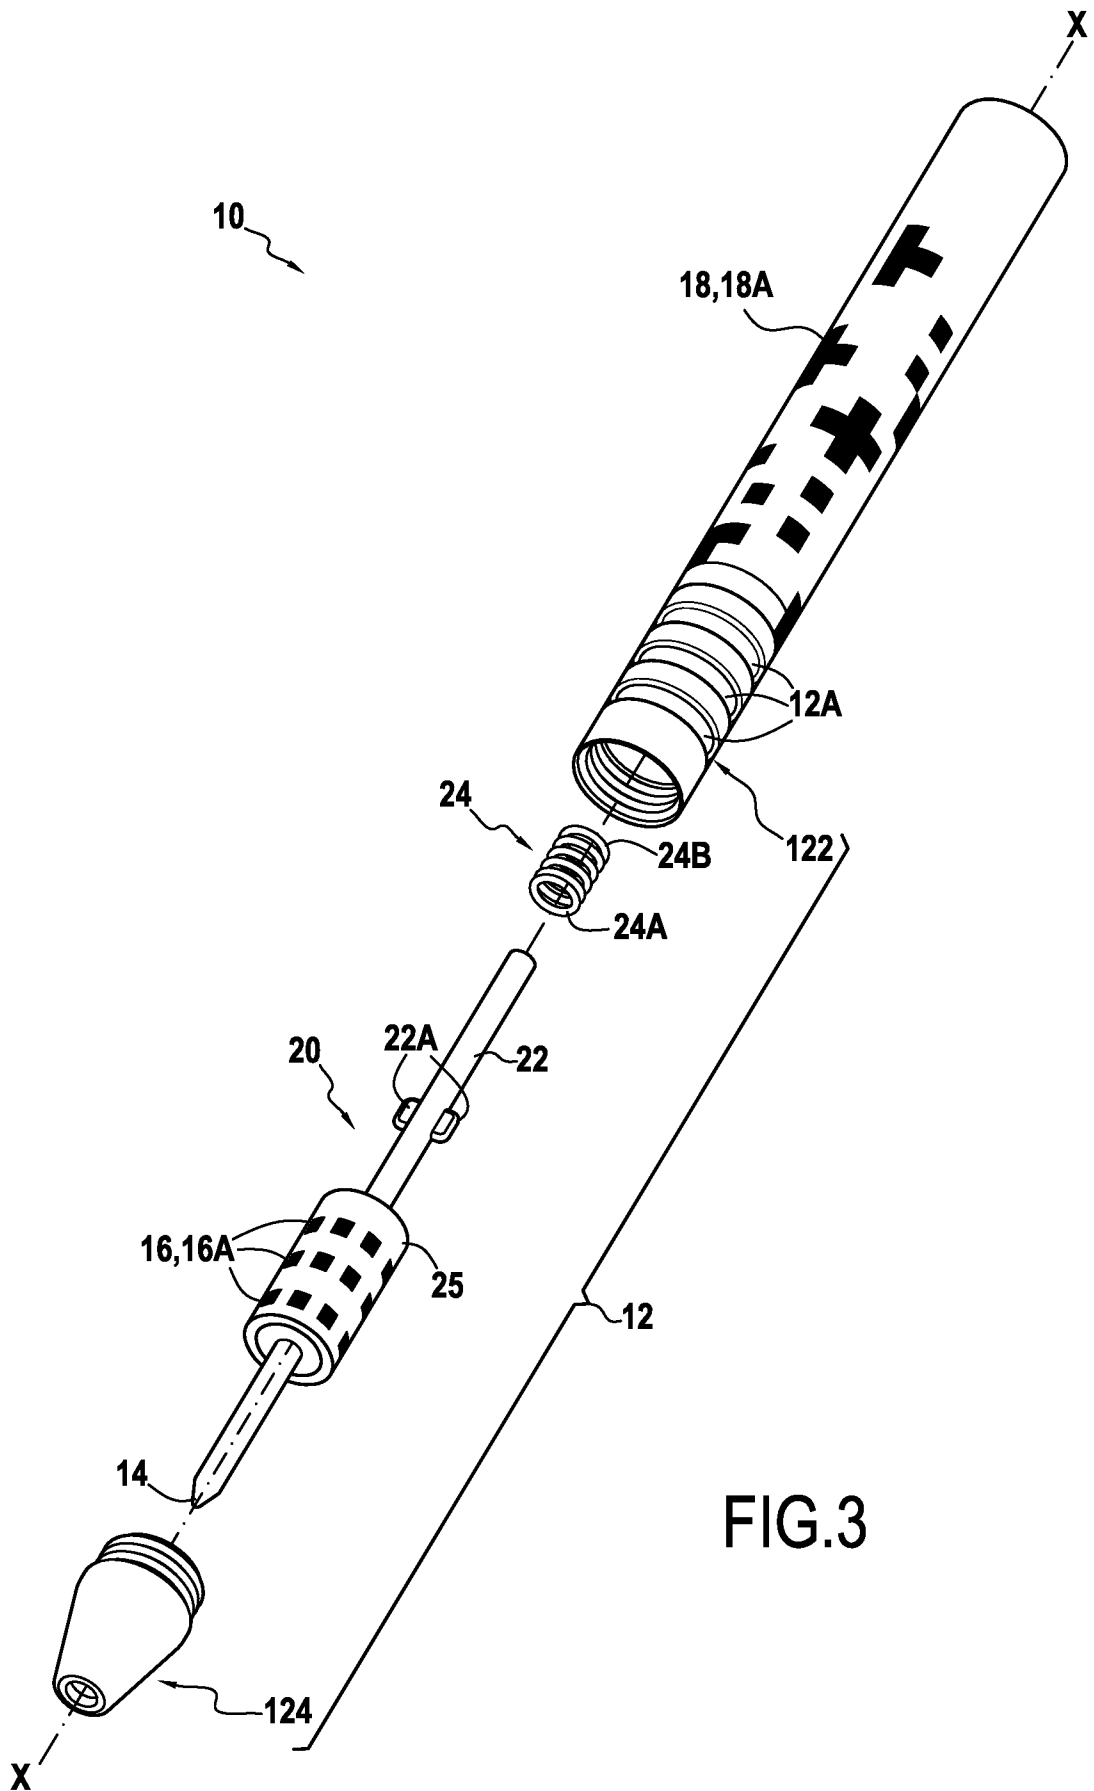

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2021/068189

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-14

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2021/068189

A. CLASSIFICATION OF SUBJECT MATTER INV. B43K29/08 G06F3/041 B43K7/02 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) B43K G06F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006/147245 A1 (CETERA CARL [US]) 6 July 2006 (2006-07-06)	1-4,8-14
Y	the whole document -----	5-7
X	FR 2 776 959 A1 (AVERINK LEENDERT [FR]) 8 October 1999 (1999-10-08)	1-8, 11-13
Y	the whole document -----	5-7
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 2 September 2021		Date of mailing of the international search report 02/11/2021
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Kelliher, Cormac

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2021/068189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006147245	A1	06-07-2006	NONE

FR 2776959	A1	08-10-1999	NONE

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-14

A writing instrument having a marking disposed upon it.

2. claim: 15

A set comprising the writing instrument of claim 1 and a holder for an entity other than the writing instrument.

3. claims: 16-19

A method for detecting whether the writing tip, of the writing instrument of claim 1, contacts a writing surface.

4. claim: 20

A computer program.

5. claim: 21

A recording medium.
