

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 February 2003 (27.02.2003)

PCT

(10) International Publication Number
WO 03/015579 A1

(51) International Patent Classification⁷: **A47B 57/40**,
96/14, B21D 39/03

(21) International Application Number: PCT/GB02/01828

(22) International Filing Date: 19 April 2002 (19.04.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20013930 13 August 2001 (13.08.2001) NO

(71) Applicant (for all designated States except US): **DEXION GROUP LIMITED** [GB/GB]; Maylands Avenue, Hemel Hempstead, Hertfordshire HP2 7EW (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ULF, Persson** [SE/SE]; Vintergatan 25 e, S-66 132 Saffle (SE).

(74) Agent: **JENSEN & SON**; 70 Paul Street, London EC2A 4NA (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent

[Continued on next page]

(54) Title: METHOD FOR MANUFACTURING A BEAM FOR A STORAGE RACK AND ARRANGEMENT FOR BEAMS FOR STORAGE RACKS

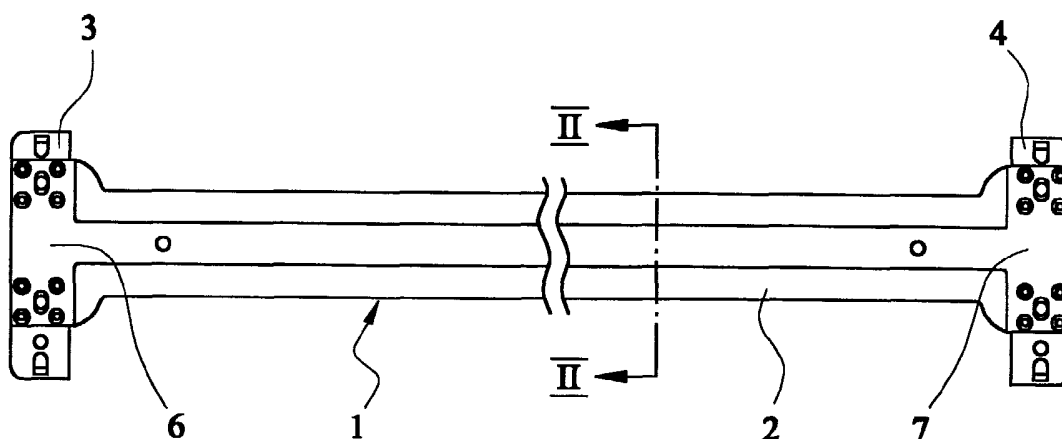

(57) Abstract: Method for manufacturing a supporting beam (1) for a storage rack, where a beam section (2) is pressed flat (6, 7) at both ends and where hooks are provided for engagement with holes in uprights 810, 13) in the storage rack which are provided with rows of holes, and where each such pressed-flat end (7) and said angle side (8) are interconnected by discrete material portions, which form rivets, being pressed through the pressed-flat beam end (7) from the angle side (8). Arrangement for said supporting beam (1), where the plane surface (7) and the angle side (8) in mutual contact and are interconnected by discrete material portions (11), which form rivets, pressed through the plane surface (7) from the angle side (8).



WO 03/015579 A1



(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD FOR MANUFACTURING A BEAM FOR A STORAGE RACK
AND ARRANGEMENT FOR BEAMS FOR STORAGE RACKS

5 The invention relates to a method for manufacturing a beam for a storage rack, in which method a profiled beam of suitable cross-section is pressed together or pressed flat at both ends and hooks are provided there for engagement with holes in uprights in the storage rack which are provided with rows of holes.

10 The invention also relates to an arrangement for beams for storage racks, which beams are designed to be fastened to uprights provided with rows of holes, each beam consisting of a section of suitable cross-section, the two ends of which are pressed together to form a plane surface in each case, which extends in the longitudinal direction of the beam, which plane surface is connected to a, preferably angle, section
15 with hooks, bent out from the side connected to the plane surface, for engagement with holes in said rows of holes.

 One of the main components of a pallet rack system is a supporting beam which, together with a corresponding, parallel supporting beam, constitutes a horizontal
20 “shelf” on which the pallets can rest. Such a supporting beam usually consists of three parts, namely a beam section of a given length and a fitting (end attachment/locking piece) at each end of the beam. Said fittings are equipped with a form of hook/lip for fixing into corresponding holes in vertical frames/uprights. The fittings are normally joined to the beam sections by welding. A disadvantage of this is that the weld has to be
25 lacquered or painted afterwards, which involves a considerable production cost. Nor is it particularly advantageous to use galvanized sections and end attachments, because the welding destroys the thin zinc layer, so that the weld is susceptible to corrosion. The weld thus needs to be lacquered or painted afterwards, which increases the production costs of supporting beams.

30

 Another embodiment of supporting beams in pallet racks is one where the supporting beam is made in one piece and the section itself of the supporting beams is flattened at each end and hooks are formed directly in the flattened section material. A

disadvantage of such an embodiment is that it is then necessary to have the same material thickness and quality in both the beam section itself and the end attachments, with the result that, by optimizing the material in the beam section itself, that is, to use the minimum amount of material to give the desired load bearing capacity, too little
5 strength is obtained in the end attachments, or that, by optimizing with regard to the end attachments, the material consumption in the beam section is excessive and uneconomical.

The present invention relates to pallet racks in which the supporting beams
10 consist of a number of parts, that is to say the beam section itself and the associated fittings. The advantage of this is that it is possible to select different thickness and qualities for the fittings or end attachments in relation to the beam section itself.

It is a particular aim of the invention to make it possible to use materials which
15 are surface-treated in advance, for example pre-lacquered/painted or pre-galvanized materials, for both the beam section and the fittings.

It is a particular aim to use a joining technique which provides the desired load capacity and load rigidity in the connection between the beam sections and the end
20 attachments and between the end attachments and the uprights.

According to the invention, a method as mentioned in the introduction is therefore proposed, which is characterized in that each of the pressed-flat ends is brought into contact with an end section, which end section is provided with hooks for
25 engagement with the holes in the uprights, and in that the pressed-flat beam end and said end section are interconnected by discrete material portions, which form rivets, being pressed through the pressed-flat beam end from the angle side.

According to the invention, an arrangement as mentioned in the introduction is
30 also proposed, which arrangement is characterized in that the plane surface and said end section are in mutual contact and are interconnected by discrete material portions, which form rivets, pressed through the plane surface from the angle side.

The pressed-together or pressed-flat beam portions are located at the two beam ends, but it is also possible to imagine beam embodiments in which one or more pressed-flat or pressed-together beam portion(s) is or are present between the two beam ends, which beam portion or beam portions is or are provided with one or two end sections as mentioned, if appropriate a U section with hooks bent out in the U bottom.

It will be understood that what distinguishes the invention is that the components are joined together mechanically without the use of heat (welding) or any form of additional material/components. In this way, the advantage is obtained of being able to select different thicknesses and qualities for the end attachments in relation to the beam section itself, and possibilities are afforded for using materials which are surface-treated in advance. A considerable advantage in this connection is an environmental advantage which is obtained by avoiding the heating/melting of the materials.

15

The joining technique employed is a "riveting" technique which can be performed by a pressing tool being introduced partly into the two plates which have been placed together and pressing out a discrete material portion in such a manner that a type of rivet connection is formed.

20

By virtue of the pressing-out of the material taking place from the end sections where the bent-out hooks are pressed out, the surface, which is otherwise smooth there and is designed for contact with the respective upright, is retained.

25

The invention results in the production costs of pallet racks being reduced considerably, especially when compared with welded and lacquered solutions.

The invention will now be explained in greater detail with reference to the drawings, in which:-

30

Fig. 1 shows a front view of a supporting beam according to the invention;

Fig. 2 shows a section through the supporting beam in Fig. 1 along section line II;

- Fig. 3 shows an example of a pallet rack with supporting beams according to the invention;
- Fig. 4 shows a pressed-flat beam section end and an angle section before joining together;
- 5 Fig. 5 shows the two components shown in Fig. 4 joined together;
- Fig. 6 shows an end view of the supporting beam in Figs 1 and 5;
- Fig. 7 shows a top view of the end detail in Fig. 5;
- Fig. 8 shows a front view of a possible beam embodiment according to the invention, and
- 10 Fig. 9 shows a section through a typical "rivet" connection.

The supporting beam 1 shown in Fig. 1 consists of three components, namely a beam section 2 and an end section for each end, the end sections being in the form of angle sections 3 and 4 having in cross-section two arms substantially at right angles to each other.

15

The beam section 2 has a cross-sectional shape known per se as shown in Fig. 2, and the beam section is shaped like this by bending a plate into the shape shown in Fig. 2. Alternative cross-sections may be provided to suit required sizes and load capacities.

20 Reference number 5 indicates suitable connections made by a joining technique as described hereinafter with reference to Fig. 9.

The beam section 2 is pressed flat at each end, that is to say it is designed with a pressed-together portion 6, 7 in such a manner that, at each end of the supporting beam 1, a plane surface is formed, which extends in the longitudinal direction of the beam.

25

Each angle section 3, 4, see in particular the angle section 4 in Figs 4 to 7, is provided on one angle side 8 with a number of pressed-out hooks 9, designed to be hung in a manner known per se in holes in rows of holes in uprights 10 in a pallet rack, see Fig. 3. In Fig. 3, the rows of holes in the uprights 10 are not shown in greater detail, however, as this technique is well known to the person skilled in the art.

30

The angle side 8 provided with the hooks or the claws 9 is placed against the pressed-together beam end portion 7 and is connected thereto by discrete material portions 11, which will go into and through the plane surface 7 and each form a rivet connection, being pressed out from the angle side 8, more specifically from that side thereof where the hooks 9 are pressed out.

This joining technique is known. Fig. 9 shows a section through a typical "rivet" connection known per se which can be used. The angle side 8 bears against the pressed-together beam end portion 7. A pressing tool 20 presses the material of the angle 8 and of the end portion 7 against a female reaction member 21, by means of which a rivet connection as shown is formed.

In most cases, the individual beams 1 will be made as shown in Fig. 1, but it is also possible to imagine supporting beam embodiments in which pressed-flat portions are designed between the ends provided with fastening fittings, at which portions fittings are mounted, so that therefore, as shown in Fig. 8 for example, a supporting beam 1' can extend over and past an upright 14 arranged between two uprights 12, 13. Angle sections 16, 17 are then, like at the beam ends, fixed into the intermediate pressed-flat portion 15. If appropriate, the two angle sections 16, 17 can be designed as an integrated unit, and also as a U section. Beam embodiments such as that shown in Fig. 8 can suitably be used to produce a storage rack which is better held together and more stable, so that, for example, the storage rack shown in Fig. 3 then has longitudinal beams which thus extend from the upright 12 to the upright 18 in Fig. 3.

The advantages mentioned in the introduction are achieved by means of the invention. The individual elements can be treated in advance, for example galvanized or lacquered. The use of angle sections in the end fittings also provides increased stability in the storage rack.

Claims

1. Method for manufacturing a supporting beam (1) for a storage rack, in which method a beam section (2) of suitable cross-section is pressed flat (6, 7) at both ends and hooks (9) are provided there for engagement with holes in uprights (10, 13) in the storage rack which are provided with rows of holes, characterized in that each such pressed-flat end (6, 7) is brought into contact with an end-section (8) which end section (8) is provided with hooks (9) for engagement with said holes, and in that the pressed-flat beam end (7) and said end section (8) are interconnected by discrete material portions (11), which form rivets, being pressed through the pressed-flat beam end (7) from the angle side (8).
2. Arrangement for supporting beams (1) for storage racks, which beams (1) are designed to be fastened to uprights (10, 13) provided with rows of holes, each beam (1) consisting of a beam section (2) of suitable cross-section, the two ends of which are pressed together to form a plane surface (6, 7) in each case, which extends in the longitudinal direction of the beam, which plane surface (7) is connected to an end section (8) with hooks (9), formed out from the end section connected to the plane surface (7), for engagement with holes in said rows of holes, characterized in that the plane surface (7) and said end section (8) are in mutual contact and are interconnected by discrete material portions (11), which form rivets, pressed through the plane surface (7) from the end section (8).
3. Arrangement according to Claim 2, characterized by one or more pressed-flat beam portions (15) between the two beam ends, which beam portion (15) is provided with one or two mid-sections (16, 17).
4. Arrangement according to Claim 3, wherein the mid-sections have a U-shaped cross-section with hooks formed out in the U bottom.
5. Arrangement according to Claims 2, 3 or 4, wherein the end sections comprise an angle section (4).

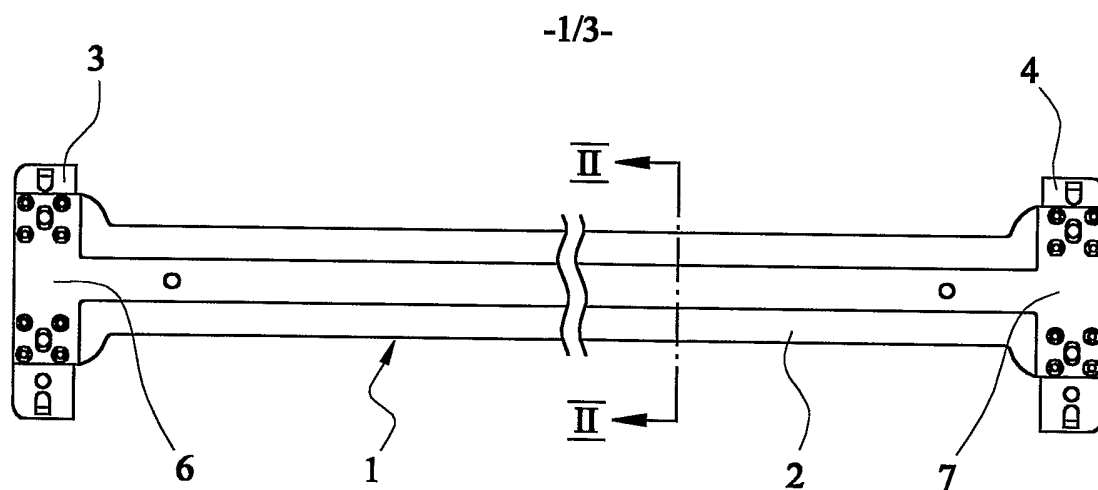


FIG. 1




FIG. 2

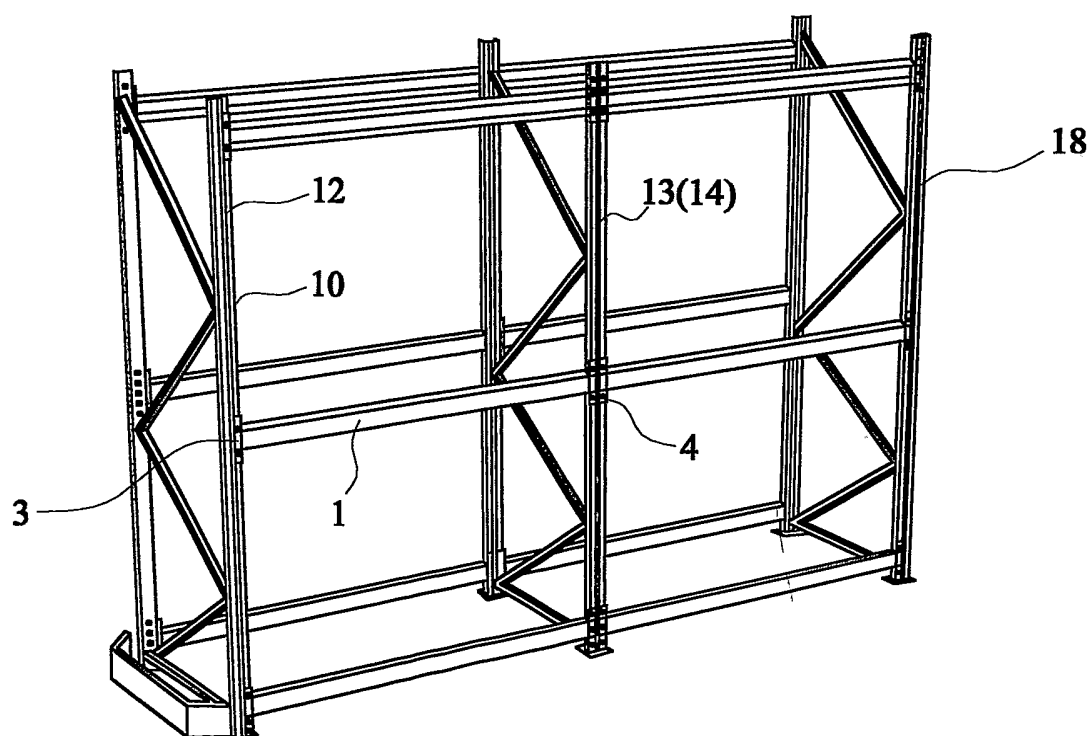


FIG. 3

-2/3-

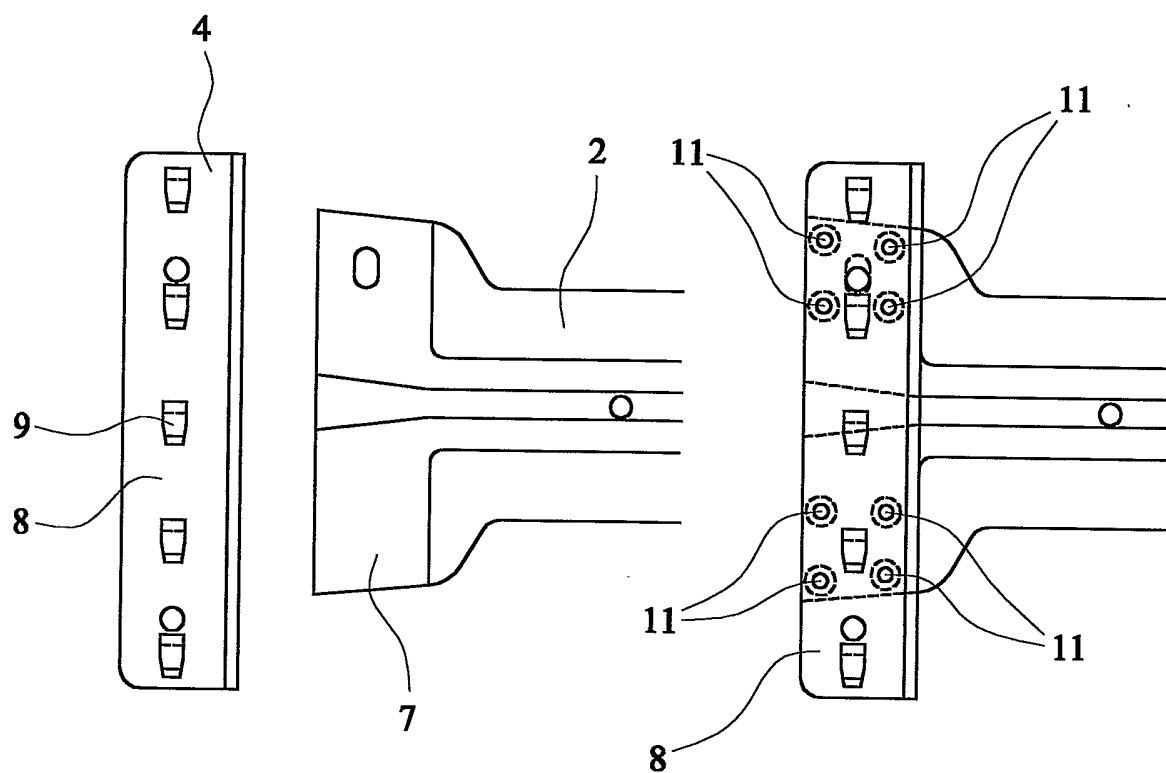


FIG. 4

FIG. 5

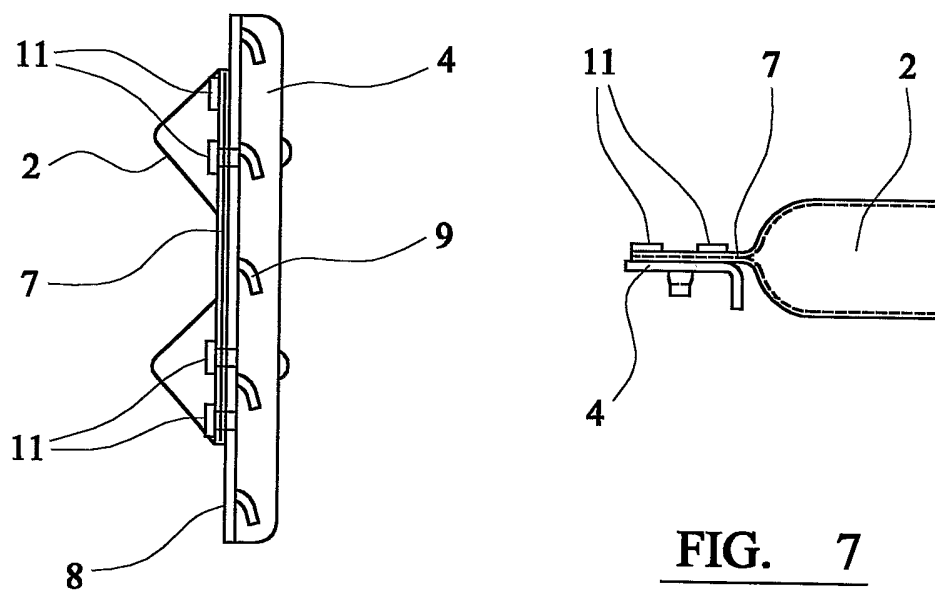
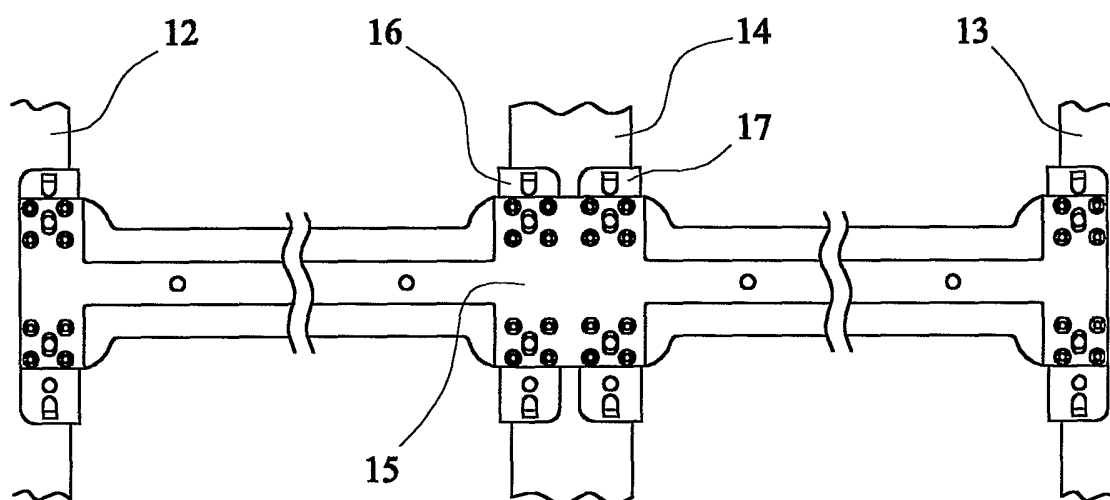
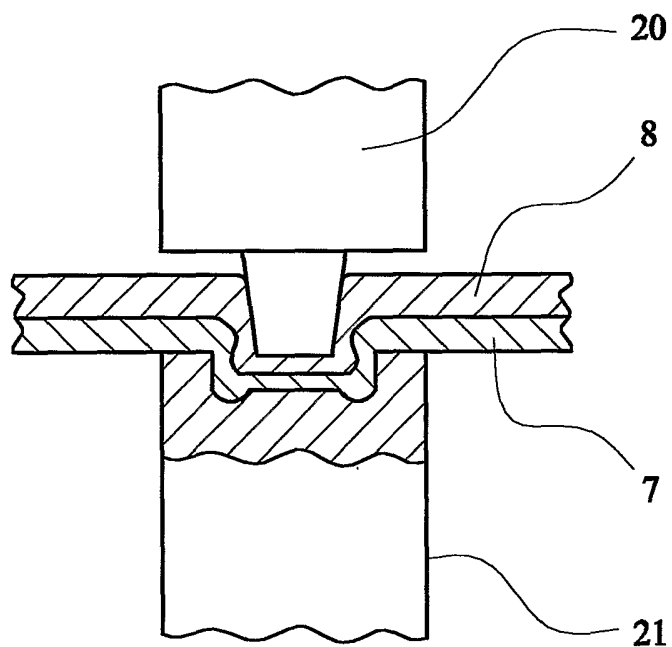


FIG. 6

FIG. 7

-3/3-

FIG. 8FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/01828

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A47B57/40 A47B96/14 B21D39/03

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A47B B21D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 647 079 A (OHLIN BROR ERIC GUSTAV) 7 March 1972 (1972-03-07) abstract; figures ----	1-5
A	EP 0 664 094 A (ROSSI DEI FRATELLI BETTINI S N) 26 July 1995 (1995-07-26) abstract; figures ----	1-5
A	US 5 036 778 A (BRIOSI ANTONELLO) 6 August 1991 (1991-08-06) abstract; figures ----	1-5
A	US 5 432 989 A (TUREK STANLEY P) 18 July 1995 (1995-07-18) abstract; figures -----	1-5

☐ Further documents are listed in the continuation of box C.


Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

24 July 2002

Date of mailing of the international search report

05/08/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ottesen, R

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No
PCT/GB 02/01828

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3647079	A	07-03-1972	SE 325527 B	29-06-1970
			DE 2021641 A1	15-04-1971
			DK 121816 B	06-12-1971
			ES 186803 Y	01-08-1974
			FI 54400 B	31-07-1978
			FR 2047510 A5	12-03-1971
			GB 1248876 A	06-10-1971
			JP 50025371 B	22-08-1975
			NO 131668 B	01-04-1975
EP 0664094	A	26-07-1995	IT F1940015 A1	20-07-1995
			AT 166546 T	15-06-1998
			DE 69502632 D1	02-07-1998
			DE 69502632 T2	26-11-1998
			EP 0664094 A1	26-07-1995
			ES 2118522 T3	16-09-1998
US 5036778	A	06-08-1991	NONE	
US 5432989	A	18-07-1995	NONE	