

W. H. GREENWALT.
Improvement in Lifting-Jacks.

No. 126,286.

Patented April 30, 1872.

Fig. 1.


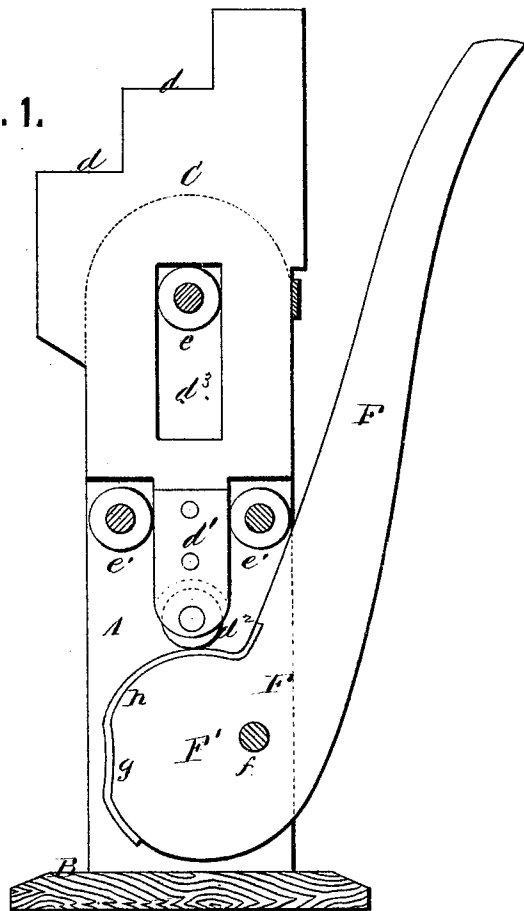


Fig. 2.

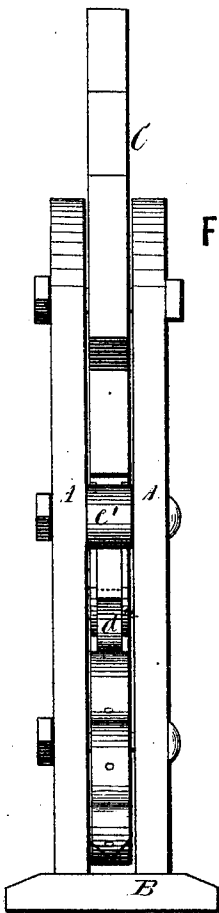

WITNESSES.

E. A. Bates.
J. E. Upham.

INVENTOR.

William H. Greenwalt.
Chipman & Co.,
Attys.

UNITED STATES PATENT OFFICE.

WILLIAM H. GREENWALT, OF STRICKERSVILLE, PENNSYLVANIA.

IMPROVEMENT IN LIFTING-JACKS.

Specification forming part of Letters Patent No. 126,286, dated April 30, 1872.

To all whom it may concern:

Be it known that WILLIAM H. GREENWALT, of Strickersville, in the county of Chester and State of Pennsylvania, has invented a new and valuable Improvement in Carriage-Jacks; and he does hereby declare that the following is a full, clear, and exact description of the construction and operation of the same, reference being had to the annexed drawing making a part of this specification, and to the letters and figures of reference marked thereon.

Figure 1 of the drawing is a representation of a vertical longitudinal section of my invention. Fig. 2 is a front view of the same.

This invention has relation to carriage-jacks; and consists in the construction and novel arrangement of the lifting-lever, vertically-moving post, and anti-friction rollers, as hereinafter described.

Referring to the accompanying drawing, A represent two parallel uprights, secured to a sill, B, and supporting between them the operative devices of the jack. C designates a vertically-movable post, constructed with the steps or offsets *d* to receive the carriage-axle, the depending arm *d*¹ holding the anti-friction roller *d*² and the vertical slots *d*³, through which passes the pin that keeps the post C in place, and which is provided with an anti-friction roller *e*. *e'* represents other anti-friction rollers arranged on either side of the depending arm *d*¹, and adapted to guide the same. F

designates the lifting-lever, constructed with rounded head F' eccentrically pivoted. The edge of said lever-head is in contact with the roller *d*², so that when the arm of the lever is lowered the post C is raised. At a point furthest distant from the pivot *f* a concave depression, *g*, is made in the edge of the lever-head, into which the roller *d*² falls when the post C is raised to its highest position. The object of this depression is to lock the lever and post. When the roller *d*² is in the notch *g* the weight upon the post can have no effect on the movement of the lever. To prevent wear the edge of the lever-head should be covered by a strip of metal, *h*.

What I claim as my invention, and desire to secure by Letters Patent, is—

1. The lever F, having the eccentric head F' with notch *g*, in combination with the sliding post C having the anti-friction roller *d*², substantially as and for the purpose specified.

2. The combination of the post C having the slot *d*³ and depending arm *d*¹ with the anti-friction rollers *e* *e'* *d*² and eccentric lever F, substantially as and for the purpose specified.

In testimony that I claim the above I have hereunto subscribed my name in the presence of two witnesses.

WILLIAM H. GREENWALT.

Witnesses:

GEO. H. WATSON,

WM. H. SIMPERS.