



(51) International Patent Classification:
H04R 19/00 (2006.01) *H04R 1/34* (2006.01)

(21) International Application Number:
PCT/FI2009/050282

(22) International Filing Date:
15 April 2009 (15.04.2009)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20085333 18 April 2008 (18.04.2008) FI

(71) Applicant (for all designated States except US): **PAN-PHONICS OY** [FI/FI]; Olarinluoma 16, FI-02200 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KELLONIEMI, Antti** [FI/FI]; Mäntytie 11 A 6, FI-00270 Helsinki (FI). **HONKAKOSKI, Erkki** [FI/FI]; Puljuskokantie 20, FI-38200 Sastamala (FI). **PELTOLA, Pasi** [FI/FI]; Hennerinkatu 6, FI-33270 Tampere (FI).

(74) Agent: **KOLSTER OY AB**; Iso Roobertinkatu 23, P.O.Box 148, FI-00121 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: DIRECTING SOUND FIELD OF ACTUATOR

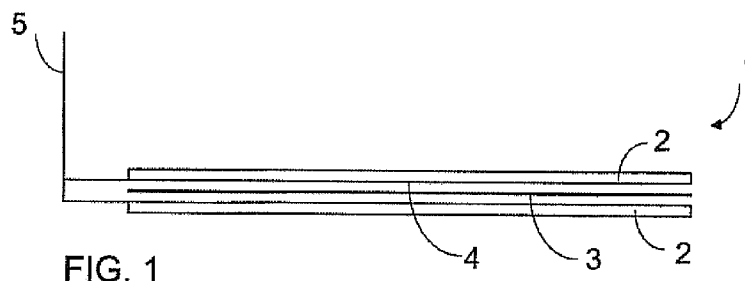


FIG. 1

(57) Abstract: The invention relates to a plate-like electrostatic actuator which comprises at least one plate-like stator (2) with an electrode (4) formed on its surface and at least one moving diaphragm (3), and in which a signal is transmitted to the electrode along a signal line (5). In the solution of the invention, the delay directing the sound field of the actuator is formed at least partly of an RC circuit composed of components of the actuator.

DIRECTING SOUND FIELD OF ACTUATOR

BACKGROUND OF THE INVENTION

[0001] The invention relates to a plate-like electrostatic actuator which comprises at least one plate-like stator with an electrode formed on its surface and at least one moving diaphragm, and in which a signal is transmitted to the electrode along a signal line.

[0002] The invention further relates to a method for directing the sound field of a plate-like electrostatic actuator which comprises at least one plate-like stator with an electrode formed on its surface and at least one moving diaphragm, and in which a signal is transmitted to the electrode along a signal line.

[0003] Today, the directing of a radiation sound field is typically implemented by forming several sound sources and feeding a signal to each sound source by using a different delay and/or signal amplitude. The delay and frequency filtration of the signal is established by using either a constant-value or adjustable RC circuit, or alternatively by multi-channel analogue or digital signal processing. The use of several sound sources requires several delay circuits, and it is possibly necessary to use several amplification channels. Therefore, the system becomes complex and the number of required components large.

[0004] Publication US 4 338 489 discloses a structure used mainly in headsets for directing the radiation field of an actuator. In this solution, the sound-producing diaphragm is divided into several sections and a signal directed to the different sections is delayed differently. Publication JP 2 265 400 discloses a solution for adjusting the directivity of a loudspeaker. In this solution, a large number of vibrators are arranged on the same plane, and the signal coming to each vibrator is directed through its own delay device. Directivity is provided by adjusting the phase delay angles of the delay devices appropriately. Both solutions do, however, require separate delay devices or circuits for forming the delay for different parts of the diaphragm or separate vibrators, which increases the number of components and the complexity of the system.

BRIEF DESCRIPTION OF THE INVENTION

[0005] It is an object of the present invention to provide a novel and improved way of directing the radiation sound field of an actuator.

[0006] The method of the invention is characterised by providing directivity by forming the delay directing the sound field with an RC circuit that is at least partly composed of components of the actuator.

5 [0007] The device of the invention is characterised in that the delay directing the sound field is at least partly formed of an RC circuit composed of components of the actuator.

10 [0008] The idea of the invention is that, instead of several sound sources and several delay circuits and amplification channels needed to control them, the plate-like electrostatic actuator itself is at least partly used. In the solution of the invention, the directivity of the sound field is based on forming the delay directing the sound field with an RC circuit that is at least partly composed of components of the electrostatic actuator. According to an embodiment, the electrostatic actuator itself serves as the capacitor of the RC circuit, which is possible, because the stators are so close to each other, preferably at
15 less than 0.5 mm apart, that the capacitance of the electrostatic actuator is quite high. Further, according to an embodiment, the resistor of the RC circuit is in turn formed by making the electrode, that is, the surface of the stator, of a somewhat resistive material.

20 [0009] The invention provides the advantage that the number of required components decreases and both the structure and control become significantly simpler in comparison with when the corresponding directing is implemented using the prior art. This is achieved, because separate resistors, for instance, are not necessarily needed and the structure as such is at least partly used as the components.

25 [0010] Another advantage of the solution of the invention is that, with it, it is possible to achieve good directivity and plane waveform, whereby for instance the reflection of sound from walls, ceilings, and other corresponding elements can be efficiently prevented or utilised as necessary.

30 [0011] Yet another advantage of the invention is the optimisation of the listening area and the number of loudspeakers, since the same technology is capable of producing very different, exactly specified sound fields according to application from very narrow to very wide.

BRIEF DESCRIPTION OF THE INVENTION

35 [0012] Some embodiments of the invention are described in more detail in the attached drawings, in which

Figure 1 is a schematic representation of the structure of an electrostatic actuator, such as loudspeaker,

Figure 2 is a schematic representation of a sound field formed by a prior-art electrostatic actuator,

5 Figure 3 is a schematic side view of a directed sound field formed using an electrostatic actuator of the invention,

Figure 4 is a schematic front view of the directed sound field formed using the electrostatic actuator of the invention shown in Figure 3,

10 Figure 5 is a schematic front view of a sound field that is directed with an embodiment of an electrostatic actuator of the invention, in which the input site of the signal is on the midline of the actuator,

Figure 6 is a schematic representation of a sound field of a prior-art dipole actuator hung close to the ceiling of a passageway, and

15 Figure 7 is a schematic representation of a sound field of a dipole actuator of the invention hung close to the ceiling of a passageway.

[0013] In the figures, some embodiments of the invention are shown simplified for the sake of clarity. Similar parts are marked with the same reference numbers in the figures.

DETAILED DESCRIPTION OF THE INVENTION

20 **[0014]** Figure 1 is a schematic representation of the structure of an electrostatic actuator, such as loudspeaker. The electrostatic actuator 1 comprises at least one plate-like stator 2 and a moving diaphragm 3. In the embodiment of Figure 1, there are two stators 2, and the moving diaphragm 3 is arranged between the stators. Electrodes 4 are formed on the surface of the stators 2. Signals are transmitted to the electrodes along a signal line 5.

25 **[0015]** Figure 2 shows a sound field formed by a prior-art electrostatic actuator. In the prior-art solution, the electrode 4 conducts electricity extremely well, that is, the surface 4 of the stator 2 is metal-coated, for instance, to be electrically conductive. A signal then does not, in practice, have a propagation time delay in the electrostatic actuator even though it is inputted on the edge of the actuator. The sound field then becomes as shown in Figure 2.

30 **[0016]** Figures 3 and 4 are schematic representations of a directed sound field formed using an electrostatic actuator of the invention, when a signal is inputted on the left edge of the actuator 1. Figure 3 is a side view of the sound field of the embodiment, and Figure 4 is a front view of the sound field.

35

The sound field then opens and turns more to the right. In other embodiments, a signal may, if required, also be inputted at some other point of the actuator, whereby the location of the connecting point in the actuator affects the values of the RC circuit and the shape of the radiation field, of which examples are shown in Figures 4 and 5.

[0017] In the solution of the invention, the directivity of a sound field is based on forming the delay directing the sound field with an RC circuit that is at least partly composed of components of the electrostatic actuator 1. The electrostatic actuator 1 itself serves as the capacitor of the RC circuit, because the stators 2 are so close to each other, preferably less than 1 mm apart, especially preferably less than 0.5 mm apart, that the capacitance of the electrostatic actuator 1 is quite high. In embodiments of the invention with only one stator, the capacitance is formed between the stator and diaphragm. The distance between the stator and diaphragm in a one-stator embodiment is preferably less than 0.5 mm.

[0018] The resistor of the RC circuit is in turn formed by making the electrode 4, that is, the surface of the stator 2, of a somewhat resistive material in such a manner that the resistance measured from the stator surface between the connecting point and the point of the same surface furthest away from it is at least 1 k Ω . The size of the actuators and naturally also the distances between the connecting points and the most distant point may vary in the embodiments from one centimetre to several metres, for instance. Because the forming capacitance may be adjusted in the manufacturing process, the desired specific resistance of the stator surface may extend on a wide area be $1 \cdot 10^{-7} - 1 \cdot 10^5 \Omega \cdot m$, for example. The resistive material of the stator surface may then be formed of chromium, titan, stainless steel, or an electroconductive or semiconductive polymer, for instance, thus enabling several manufacturing methods. The capacitance and resistance and consequently also delay of the circuit may be adjusted even during the final manufacturing process, since the internal shapes of the electrostatic element affect the capacitance, and the resistance may also be adjusted by the selection of the length and location of the electric conductor. In addition, it is possible to add to the circuit separate resistors, capacitors, coils, and other corresponding components as desired.

[0019] Contrary to the prior-art solution, in the solution of the invention, the stator surface 4 is thus somewhat resistive, which is why differing from the prior-art solution, the delay of the signal increases in relation to the dis-

tance of the signal from its input site. Therefore, when the signal is inputted on the edge of the actuator 1 and the electrode 4 forms the RC circuit together with the actuator, the audio signal from a location further away from the signal input site 7 is delayed more than from a location closer to the signal input site 7; in the embodiment of Figure 3, the signal on the opposite edge to the signal input site 7 is thus delayed, and the actuator 1 produces the directed sound field according to Figure 3. The signal input site 7 is the point from which the signal is inputted to the actuator. The terms connecting point or connector may also be used to refer to the connecting site 7, as well as the term input point when referring specifically to a point-like input site.

[0020] Directing a sound field solely or primarily with actuator components reduces the number of required components and simplifies both structure and control. This is possible, because the static surfaces are very close to each other, which is why the capacitance of the actuator is high contrary to conventional solutions in which the static surfaces are distant from each other. When the capacitance is low, as is the case in the conventional solutions, the resistance needs to be high to obtain a corresponding time delay. In addition, due to a sufficiently high actuator capacitance, time delays required to direct a sound field are achieved already with electrode resistance values that do not weaken the sound quality, width of the frequency band, or energy efficiency to a significant extent.

[0021] Figure 5 is a schematic representation of an example illustrating the changing of the directivity of a sound field in comparison with the sound field shown in Figure 4 in a second embodiment of the invention, when the signal input site 7 is altered. In this embodiment, the input site 7 is on the midline of the actuator 1, whereby the sound field opens more to the sides than upward and downward.

[0022] One embodiment of the invention is illustrated in Figures 6 and 7, which show schematically a dipole actuator 1 that is hung close to the ceiling 6 of a passageway and radiates sound into two different directions. The signals are brought to the electrodes along a signal line 5. Figure 6 shows a prior-art sound field that partly hits the ceiling 6 and thus incurs interfering reflections. Figure 7 in turn shows a sound field in which the actuator 1 is made sound-directing in accordance with the invention in such a manner that the sound field is directed away from the input edge of the signal. This way, the arrangement of Figure 7 is capable of avoiding the interfering reflection from

the ceiling 6. This is especially advantageous in acoustically demanding locations, such as passageways and tunnels, as well as stores, shopping centres, and airports.

[0023] In different embodiments of the invention, the radiation field
5 may also be expanded and directed into another direction than the normal of the radiation surface as desired. In addition, it is possible to produce separate sound fields by using two or more actuator or loudspeaker elements. These separate sound fields may, depending on their purpose, be summed into different directivity fields, they may be directed to the same target or to several
10 different targets. This way, for instance flat loudspeakers that transmit a wave front generally perpendicular to the amplification surface may create sound field of very different types. Further, by combining the directivity of a sound field obtained by a delay and the bending of the element in the direction of the time delay, for example, or perpendicular to it and/or to the arrangement of the
15 elements into groups in parallel or series, the listening area and directivity of the sound field and the sound environments obtained thereby may be adjusted in an even more versatile manner.

[0024] The actuator of the invention is especially useful in applications where the location of the actuator cannot be made optimal in relation to
20 the listeners or the position of the actuator needs to be defined on manufacturing-engineering or visual grounds. An example of such an embodiment is a projection surface that also needs to serve as a loudspeaker. The surface has to be straight, but the sound radiation pattern may need to open asymmetrically. An optimally active surface area is also large, but the narrow radiation
25 beam resulting from it needs to be expanded to suit a wider listening area. Another working example is loudspeakers in cars. Their optimal positioning and directing is often not possible, in which case the optimisation of the radiation beam with an actuator of the invention improves the experienced sound quality and system usability. A third example is headsets in which the actuator of the
30 invention may achieve exactly regulated sound field properties close to the ear and outer auditory canal.

[0025] Further, in an embodiment of the invention, it is possible to form a spherical radiator for acoustic measurements. In this embodiment, by utilising the solution of the invention it is possible to form a polyhedron made of
35 planes, whose radiation field properties may be balanced electrically without using multi-channel technology. This type of radiator is easier to manufacture

than solutions based on the prior art, and acoustically it resembles a spherical radiator more closely.

[0026] In addition to the above-mentioned embodiments, the invention may also be utilised as various applications by utilising a direct or reflected
5 sound field in other acoustic measuring devices and home sound reproduction equipment, multi-channel loudspeakers, and other vehicle loudspeakers. It is also possible to utilise loudspeaker elements as sound sensors (microphones), if desired.

[0027] In some cases the features presented in this application may
10 be used as such regardless of other features. On the other hand, the features presented in this application may, if necessary, be combined to form various combinations.

[0028] The drawings and the related description are only intended
15 to illustrate the idea of the invention. The invention may vary in detail within the scope of the claims.

CLAIMS

1. A plate-like electrostatic actuator which comprises at least one plate-like stator (2) with an electrode (4) formed on its surface and at least one moving diaphragm (3), and in which a signal is transmitted to the electrode along a signal line (5), characterised in that a delay directing a sound field is at least partly formed by an RC circuit composed of components of the actuator.
2. An actuator as claimed in claim 1, characterised in that the resistor of the RC circuit is at least partly formed by making the stator surface (4) serving as the electrode from a somewhat resistive material, whereby the sound signal from a location away from the signal input site (7) is delayed more than from a location closer to the signal input site.
3. An actuator as claimed in claim 2, characterised in that the resistance measured from the stator surface between the input site (7) and the point of the same surface furthest away from it is at least 1 k Ω .
4. An actuator as claimed in any one of the preceding claims, characterised in that the signal input site (7) is on the edge of the actuator.
5. An actuator as claimed in any one of claims 1 to 3, characterised in that the signal input site (7) is on the midline of the actuator.
6. An actuator as claimed in any one of the preceding claims, characterised in that the electrostatic actuator (1) as such acts at least partly as the capacitor of the RC circuit.
7. An actuator as claimed in any one of the preceding claims, characterised in that it comprises two plate-like stators (2) and a moving diaphragm (3) arranged between them.
8. An actuator as claimed in claim 7, characterised in that the distance between the stators (2) of the electrostatic actuator (1) acting as the capacitor of the RC circuit is less than 1.0 mm, preferably less than 0.5 mm.
9. An actuator as claimed in any one of claims 1 to 6, characterised in that the distance between the plate-like stator (2) and moving diaphragm (3) of the electrostatic actuator (1) serves at least partly as the capacitor of a one-stator RC circuit, and the distance is less than 0.5 mm.

10. An actuator as claimed in any one of the preceding claims, characterised in that the actuator is a loudspeaker.

11. An actuator as claimed in any one of the preceding claims, characterised in that the actuator is a microphone.

5 12. A method for directing the sound field of a plate-like electrostatic actuator which comprises at least one plate-like stator with an electrode formed on its surface and at least one moving diaphragm, and in which a signal is transmitted to the electrode along a signal line, characterised by providing directivity by forming the delay directing the sound field with an RC
10 circuit that is at least partly composed of components of the actuator (1).

13. A method as claimed in claim 12, characterised in that the resistor of the RC circuit is formed by making a stator surface (4) serving as the electrode of a somewhat resistive material, whereby the sound signal from a location away from the signal input site (7) is delayed more than from a
15 location closer to the signal input site (7).






14. A method as claimed in claim 13, characterised in that the resistance measured from the stator surface (4) between the input site (7) and the point of the same surface furthest away from it is at least 1 k Ω .

15. A method as claimed in any one of claims 12 to 14, characterised in that the signal input site (7) is on the edge of the actuator (1).
20

16. A method as claimed in any one of claims 12 to 14, characterised in that the signal input site (7) is on the midline of the actuator (1).

17. A method as claimed in any one of claims 12 to 16, characterised in that the electrostatic actuator (1) as such acts at least partly as
25 the capacitor of the RC circuit.

18. A method as claimed in any one of claims 12 to 17, characterised in that the actuator comprises two plate-like stators (2) and a moving diaphragm (3) arranged between them.

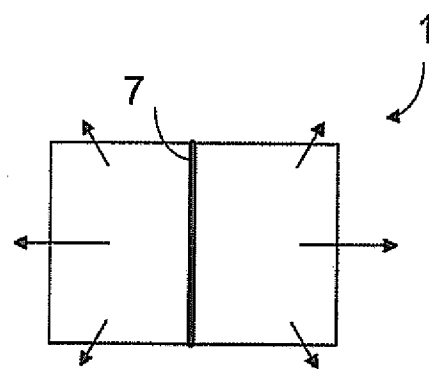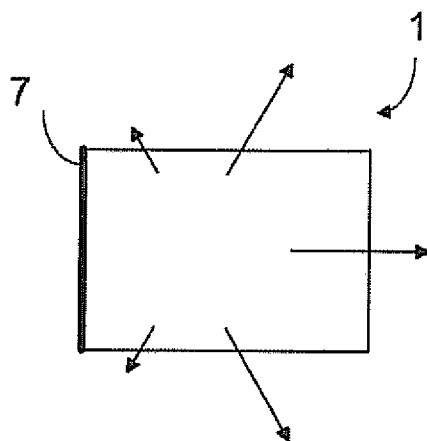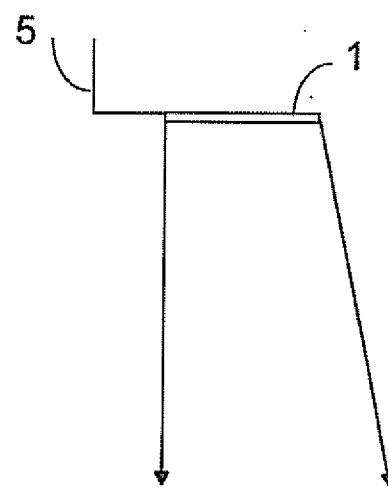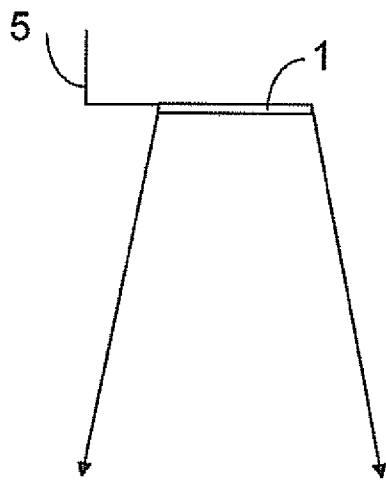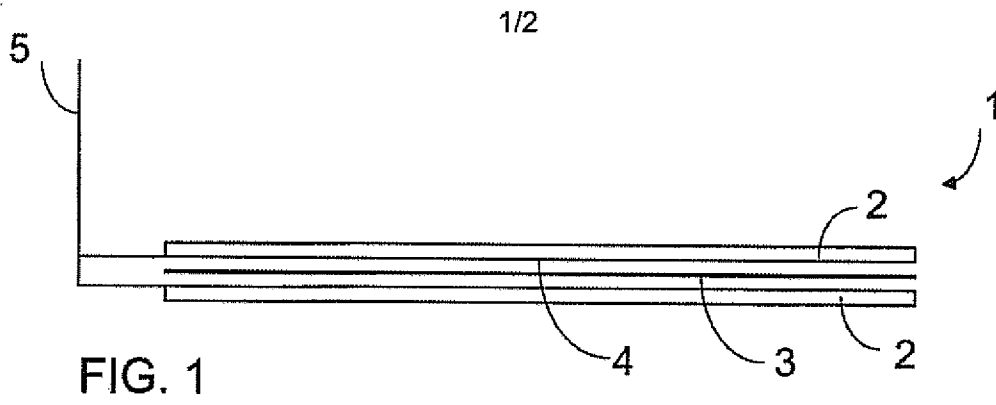

2/2

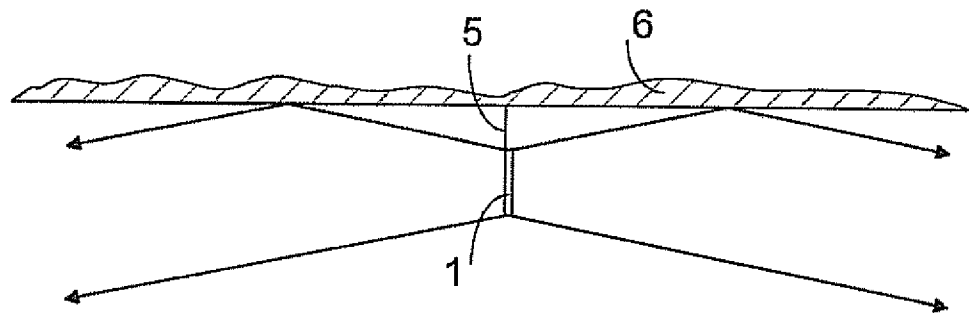


FIG. 6

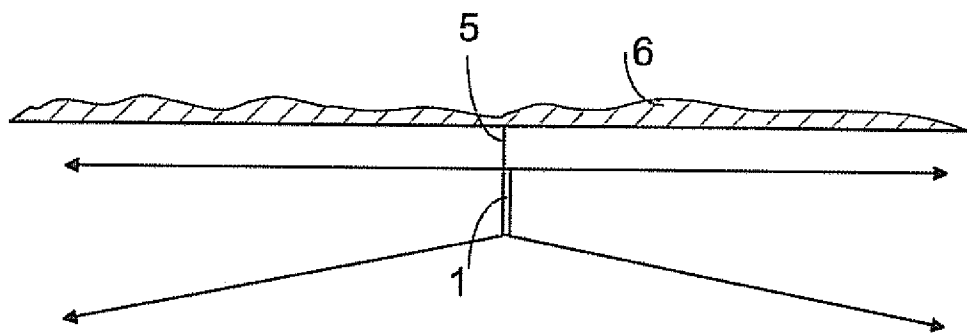


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2009/050282

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
FI, SE, NO, DK

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI, BIOSIS, BOCA, COMPDX, EMBASE, INSPEC, MEDLINE, NPL, TDB, XPAIP, XPESP, XPI3E, XPIEE, XPIETF, XPIPCOM, XPMISC, XPOAC, XPRD, XPTK

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002080984 A1 (CROFT III JAMES J et al.) 27 June 2002 (27.06.2002), abstract; figures 1 - 4, 7 - 14; paragraphs [0029], [0031], [0036], [0038] - [0052]	1 - 18
X	US 4703509 A (KANCHEV PETER K) 27 October 1987 (27.10.1987), abstract; figure 1; column 1, line 43 - column 2, line 8; column 2, lines 28 - 44; column 2, line 66 - column 3, line 2	1 - 18
X	CA 1200888 A1 (ZAVOD ZA ELEKTRONNI PREOBRAZUVATELNI ELEMENTI) 18 February 1986 (18.02.1986), abstract; page 2, lines 26 - 29; page 3, line 25 - page 4, line 5; page 5, line 8 - page 6, line 9; figures 1, 7	1 - 18
A	US 3135838 A (WRIGHT WILLIAM M) 02 June 1964 (02.06.1964), figures 1 - 6; column 1, lines 54 - 71; column 5, line 37 - column 6, line 25	
A	US 3773976 A (BEVERIDGE HAROLD N) 20 November 1973 (20.11.1973), figures 7a, 9; column 6, line 64 - column 7, line 59; column 9, lines 28 - 41	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 June 2009 (25.06.2009)

Date of mailing of the international search report

14 July 2009 (14.07.2009)

Name and mailing address of the ISA/FI
National Board of Patents and Registration of Finland
P.O. Box 1160, FI-00101 HELSINKI, Finland

Facsimile No. +358 9 6939 5328

Authorized officer

Antti Salmela

Telephone No. +358 9 6939 500

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2009/050282

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3668336 A (WRIGHT WILLIAM M D) 06 June 1972 (06.06.1972), figure 10; column 7, lines 62 - 75	
A	GB 838022 A (PYE LTD) 22 June 1960 (22.06.1960), page 1, line 78 - page 2, line 40; page 3, lines 106 - 127; figure 2	
A	GB 1228775 A (ACOUSTICAL MANUFACTURING CO LTD) 21 April 1971 (21.04.1971), page 2, lines 64 - 123; claim 1; figures 1 - 2	
A	JP 2003116851 A (HONDA ELECTRONIC CO LTD) 22 April 2003 (22.04.2003) & PAJ abstract; IPDL machine translation: paragraphs [0006] - [0010]; figures 1 - 3	
A	EP 0258912 A1 (NV PHILIPS) 09 March 1988 (09.03.1988), abstract; column 7, lines 1 - 57; figures 2 - 3	
A	US 3892927 A (LINDENBERG THEODORE) 01 July 1975 (01.07.1975), abstract; figures 1, 5; column 2, line 60 - column 3, line 35; column 4, line 42 - column 5, line 8	

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/FI2009/050282

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
US 2002080984 A1	27/06/2002	None	
US 4703509 A	27/10/1987	None	
CA 1200888 A1	18/02/1986	JP 58131900 A EP 0084608 A1 AT 17910T T BG 34753 A1	05/08/1983 03/08/1983 15/02/1986 15/11/1983
US 3135838 A	02/06/1964	None	
US 3773976 A	20/11/1973	GB 1319652 A GB 1319651 A US 3668335 A	06/06/1973 06/06/1973 06/06/1972
US 3668336 A	06/06/1972	GB 1332336 A DE 2059973 A1 CA 866963 A	03/10/1973 09/06/1971 23/03/1971
GB 838022 A	22/06/1960	None	
GB 1228775 A	21/04/1971	None	
JP 2003116851 A	22/04/2003	None	
EP 0258912 A1	09/03/1988	JP 63028199 A US 4799265 A NL 8601772 A	05/02/1988 17/01/1989 01/02/1988
US 3892927 A	01/07/1975	None	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI2009/050282

CLASSIFICATION OF SUBJECT MATTER

Int.Cl.

H04R 19/00 (2006.01)

H04R 1/34 (2006.01)