


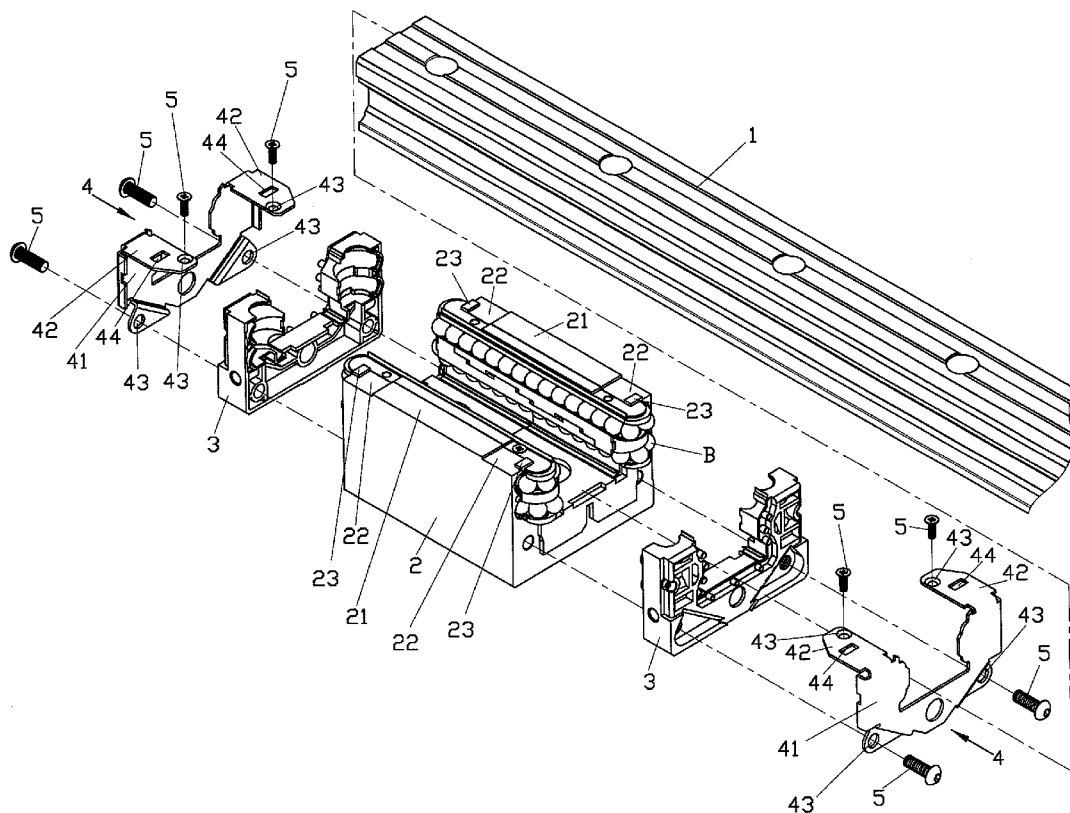

US 20130294713A1

(19) **United States**(12) **Patent Application Publication**
HSU(10) **Pub. No.: US 2013/0294713 A1**(43) **Pub. Date: Nov. 7, 2013**(54) **MOVABLE MEMBER FOR LINEAR SLIDE ASSEMBLY**(75) Inventor: **Ming-che HSU**, Tainan City (TW)(73) Assignee: **Chieftech Precision Co., Ltd.**(21) Appl. No.: **13/461,018**(22) Filed: **May 1, 2012****Publication Classification**(51) **Int. Cl.**
F16C 29/00 (2006.01)(52) **U.S. Cl.**
USPC **384/7**(57) **ABSTRACT**

A movable member of a linear slide assembly includes a slide member having two legs to mount the slide member to a rail. Two covers are respectively connected to two ends of the slide member. A track is formed between the legs of the slide member and the rail. Rolling members are installed in the circulation path of the slide assembly and drive the movable member along the rail back and forth. Two reinforcement plates are respectively connected to outside of the two covers and each reinforcement plate has a side plate and two bent extensions which are fixed to the legs of the slide member. The bent extensions each have an engaging portion which is engaged with the protrusion on the slide member. The engaging portions bear axial force applied to the rolling members to secure the connection between the covers and the slide member.



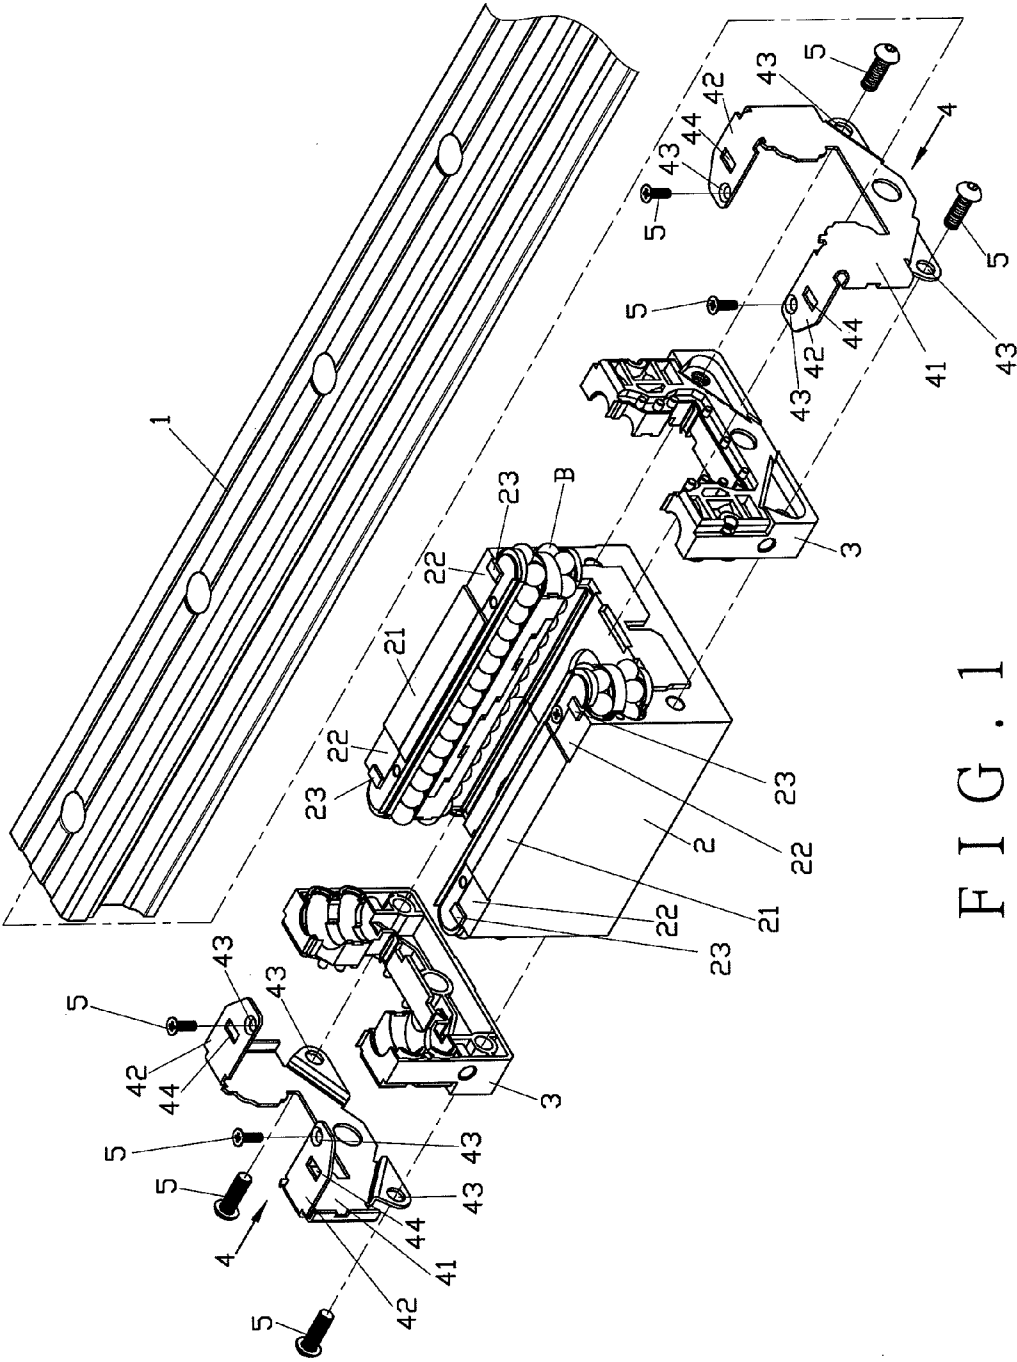


FIG. 1

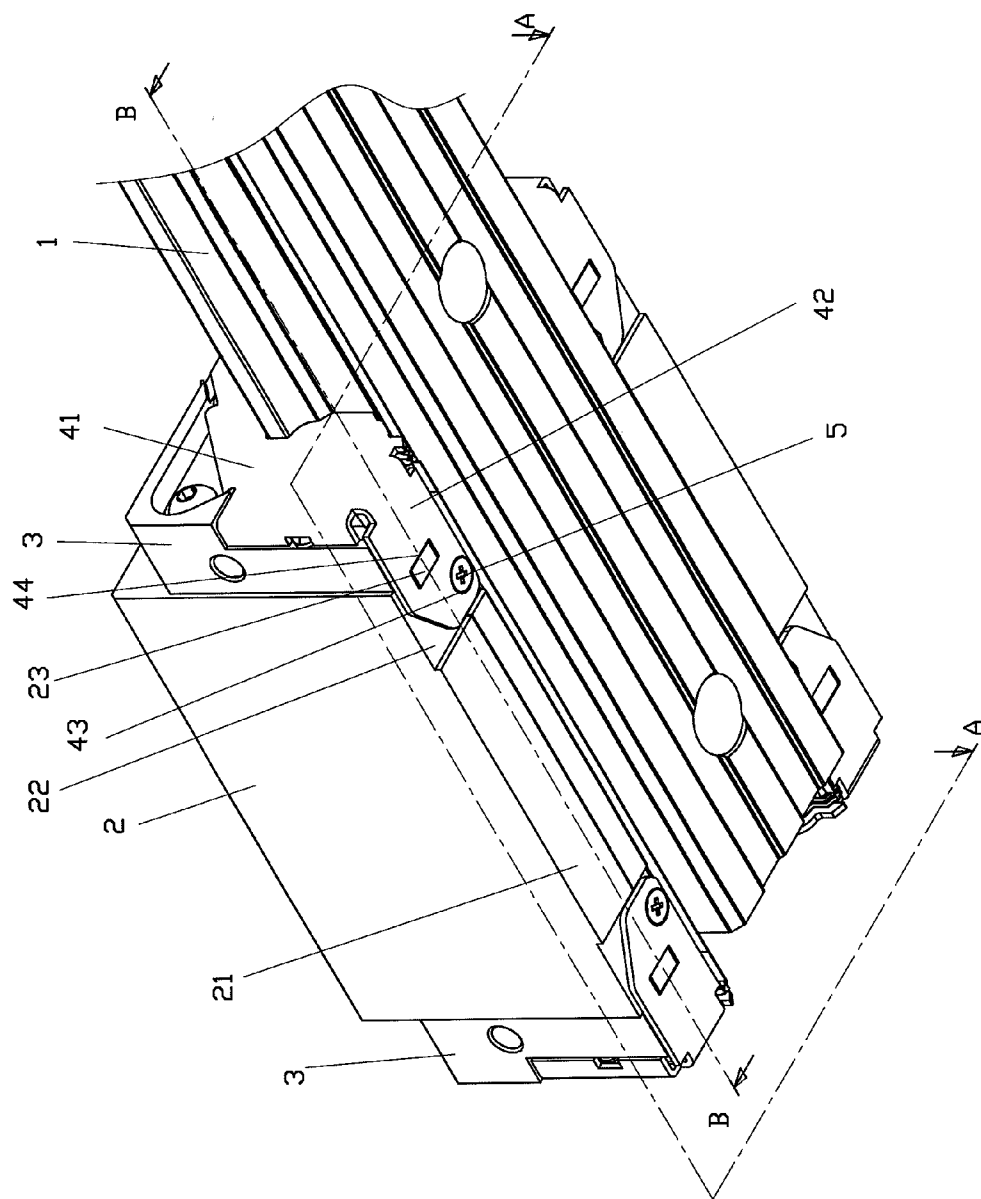


FIG. 2

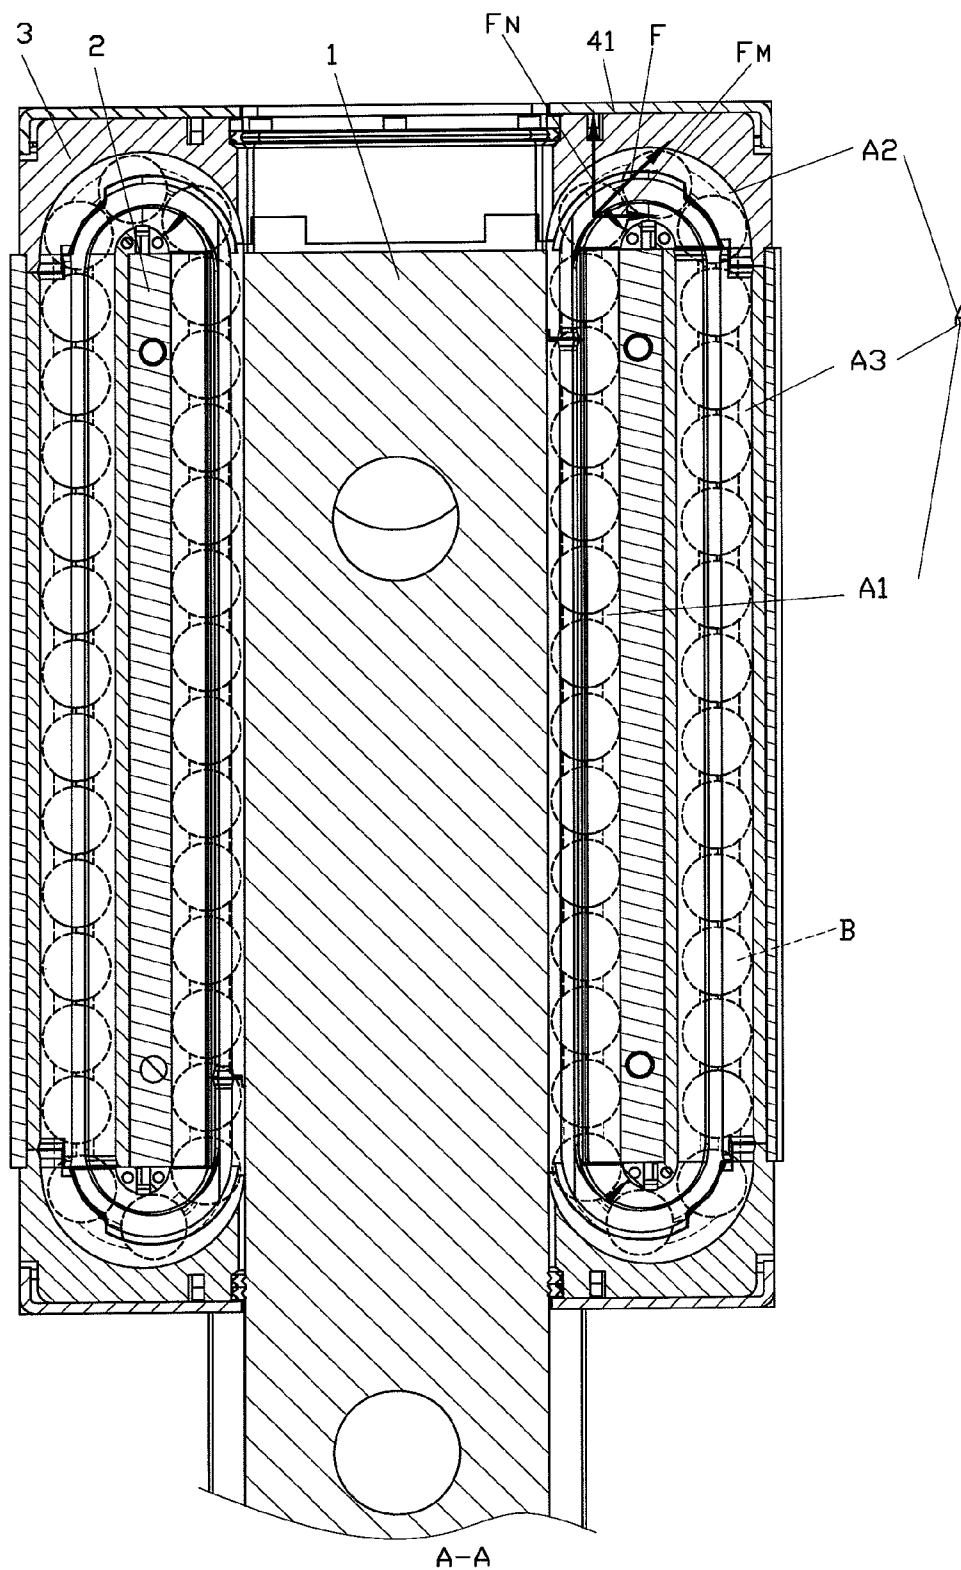


FIG. 3

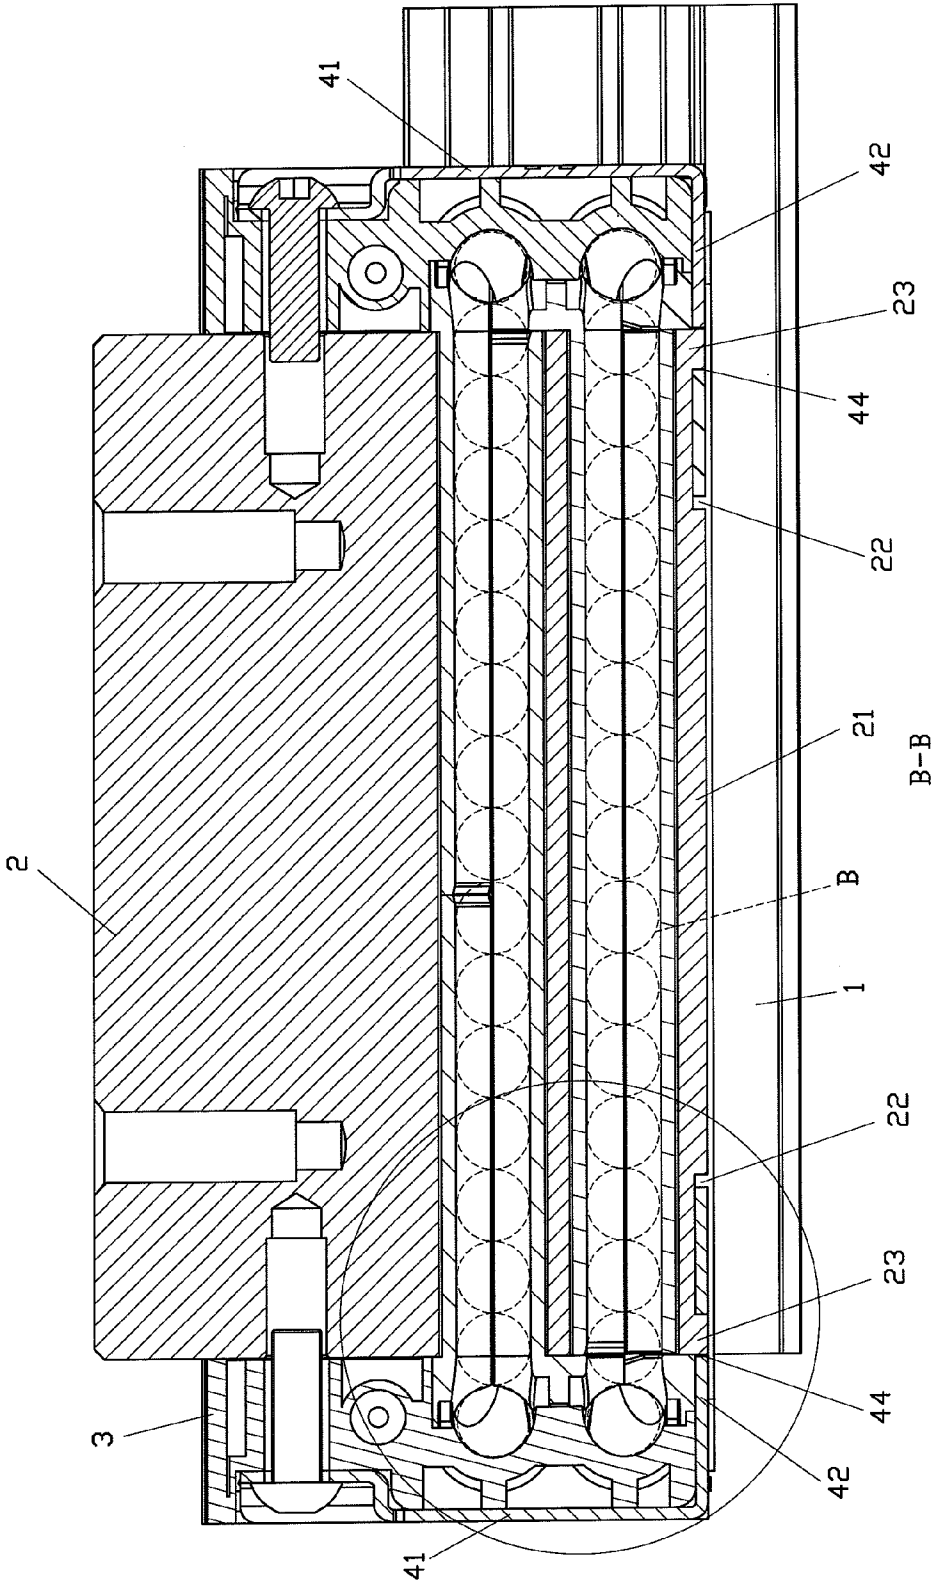


FIG. 4

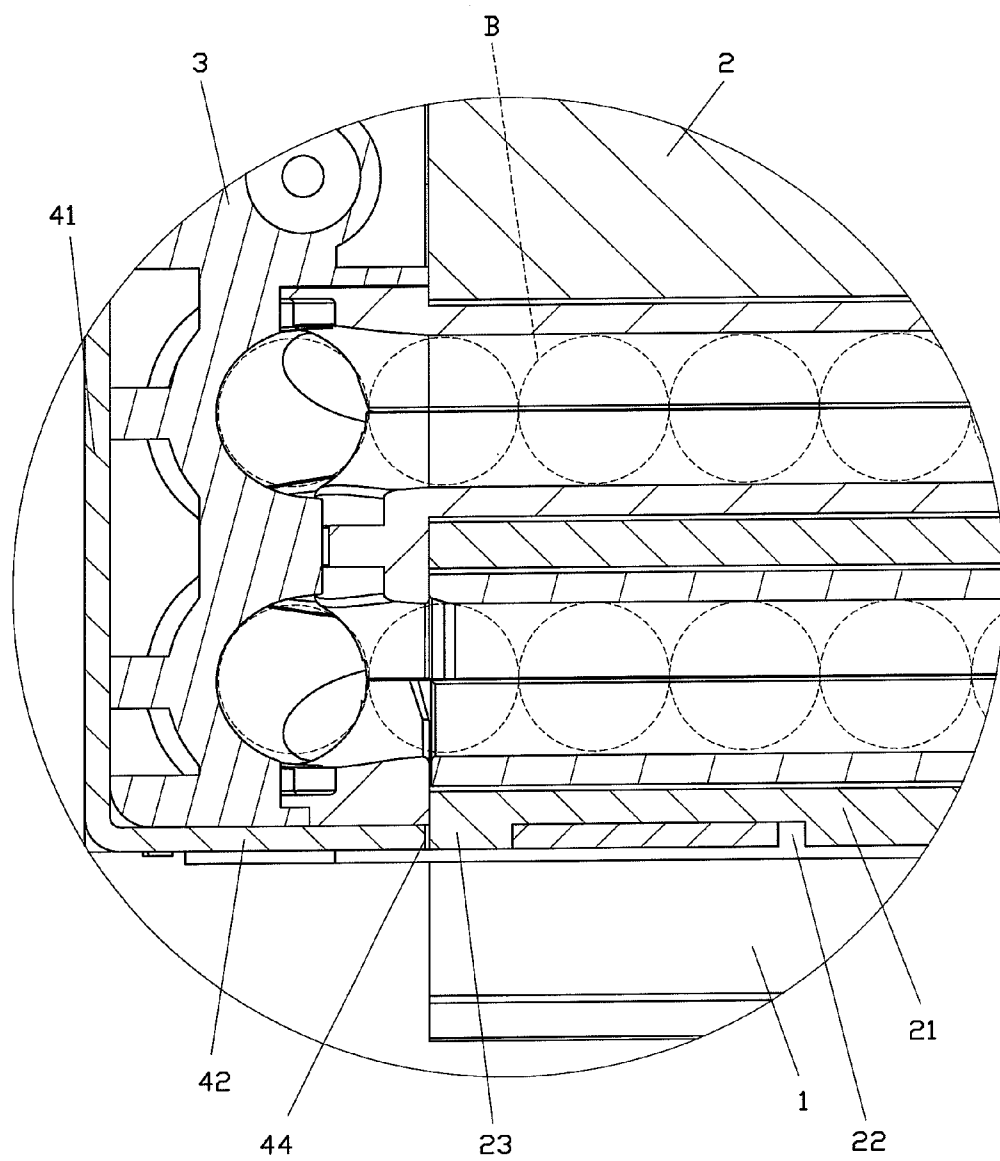


FIG. 5

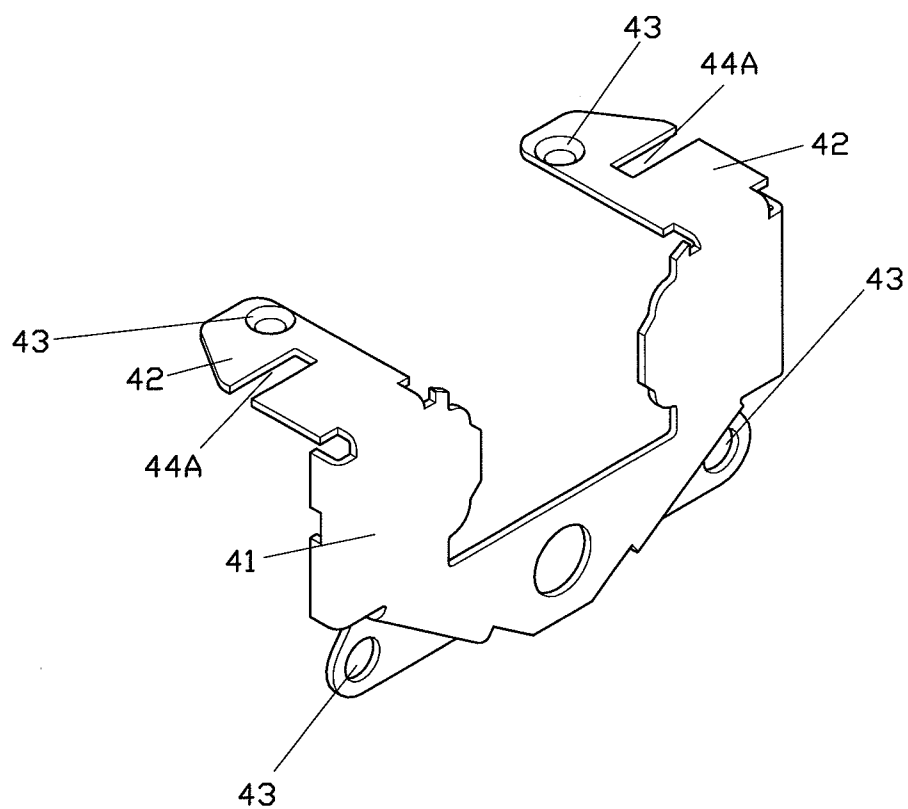


FIG. 6

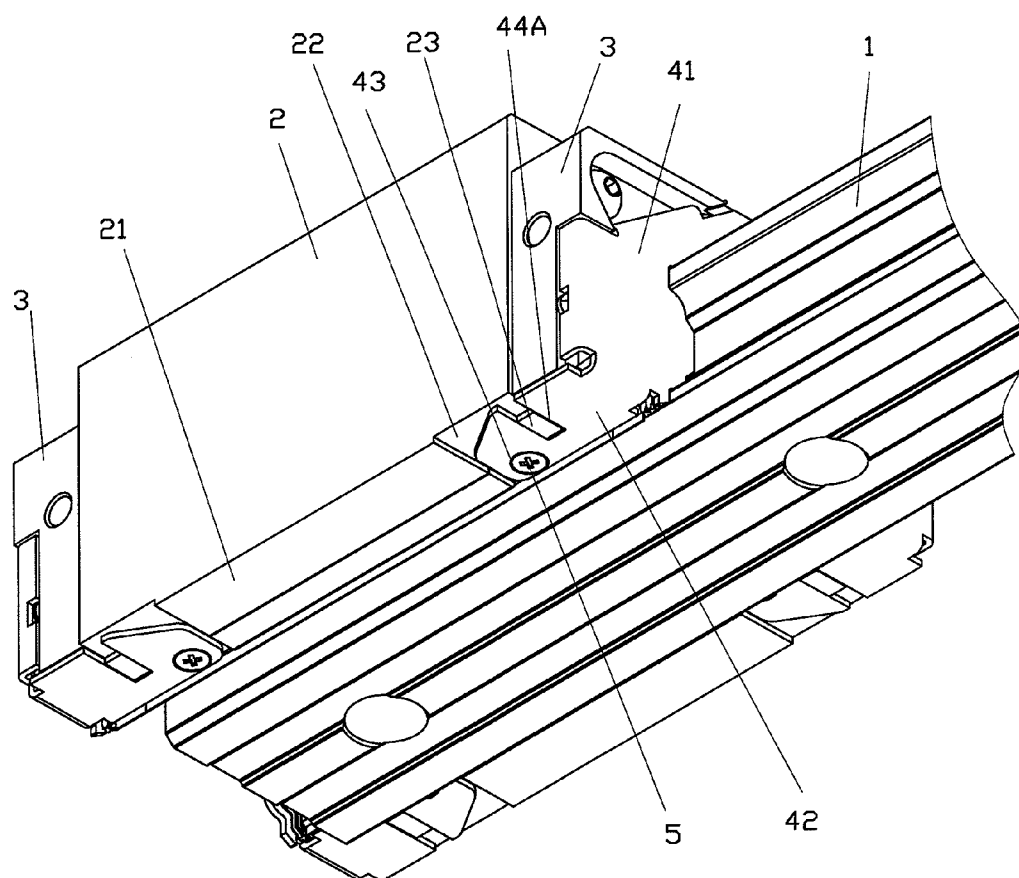


FIG. 7

MOVABLE MEMBER FOR LINEAR SLIDE ASSEMBLY

FIELD OF THE INVENTION

[0001] The present invention relates to a movable member for a linear slide assembly, and more particularly, to an engaging portion with reinforcement plates and the engaging portion engaged with the protrusions of the slide member to reinforce the connection between the covers and the slide member.

BACKGROUND OF THE INVENTION

[0002] The conventional linear slide assembly is used on precise machine of large scale so as to increase the precision, smoothness, stability and life of use of the parts movable along the slide assembly.

[0003] The linear slide assembly is composed of a rail and a movable member which is movably mounted to the rail. The movable member has a slide member and two covers which are connected to two ends of the slide member. The slide member provides two legs which are cooperated with the slide to form a track. The covers form a turning path connected with the track. The slide member further provides a returning path which is connected with the turning path such that the track, the turning path and the returning path form an enclosed circulation path. The rolling members are installed in the circulation path and drive the movable member along the rail back and forth. The related inventions are disclosed in Taiwan Utility Model No. M392890, I32036 or M347492.

[0004] The relative inventions have a drawback which is that the covers are made by way of plastic injection so as to obtain their complicated shapes, however, the plastic material cannot bear large load so that the rolling members moving in the circulation path apply a component force to the covers when the rolling members enters into the returning path from the returning path or the track. When the slide member moves at high speed, the force applied to the covers is increased and the covers sometimes are deformed or even disengaged from the slide member. This makes the slide member to be damaged or unstable when moving along the rail. The drawback also restricts the speed of the slide member because the higher speed that the slide member moves, the rolling members also move at higher speed and which makes the covers to bear higher axial force. In order to avoid from damage to the covers, the speed of the slide member is restricted.

[0005] In order to improve the weak connection between the covers and the slide member, and the speed restriction of the slide member, the application has filed Taiwan Patent No. 1285244 and Taiwan Patent Application No. 201118271, and a metallic reinforcement plates is provided on the outside of the cover to bear higher load by the high strength of the metal material such that the connection between the covers and the slide member, and the speed of the slide member can be increased.

[0006] However, the connection between the reinforcement plate and the cover is made by using screws connecting the bent extensions of the legs of the slide member and the reinforcement plate. The static friction of the screws bears the axial force of the cover. However, when the axial force is larger than the static friction, the cover may loose from the slide member.

[0007] The present invention intends to provide a movable member of a linear slide assembly in response to the require-

ment of high speed movement of the slide member. The reinforcement plate has an engaging portion which is engaged with the protrusion of the slide member such that the reinforcement plate is connected to the slide member by engagement in the form of recess and protrusion to bear larger axial load. The connection between the cover and the slide member is more secure and the slide member is allowed to move faster.

SUMMARY OF THE INVENTION

[0008] The present invention relates to a movable member of a linear slide assembly, and comprises a slide member having two legs extending therefrom so as to mount the slide member to a rail. Each leg has more than one protrusion on each of two ends thereof. Two covers are respectively connected to two ends of the slide member. Two reinforcement plates are respectively connected to outside of the two covers and each reinforcement plate has a side plate and two bent extensions extend from the side plate. Each of the two bent extensions has a fixing hole and more than one engaging portion. Two fixing members respectively extend through the fixing holes to fix the two bent extensions to the two legs of the slide member. The more than one engaging portion of the two bent extensions is engaged with the more than one protrusion.

[0009] Preferably, the more than one engaging portion is an engaging hole or a notch.

[0010] Preferably, each of the two legs of the slide member has a recess defined in each of two ends thereof and the two respective recesses are located corresponding to the two bent extensions. The depth of each of the recesses and the height of each of the protrusions are equal to the thickness of the bent extensions.

[0011] Preferably, the more than one protrusion and the more than one engaging portion are polygonal or circular.

[0012] The present invention provides reinforcement plates which have engaging portions engaged with the protrusions of the slide member so as to directly bear axial force and spread the axial component force applied to the covers by the rolling members. This increases the connection between the covers and the slide member to allow the covers to bear larger axial loads. When the rolling members enter the turning path from the track, the axial component forces applied to the covers from the rolling members do not deform and loosen the covers.

[0013] The connection between the covers and the slide member is more secure so that the rolling members can move in the circulation path at high speed, and the movable member moves along the rail at high speed.

[0014] The present invention will become more obvious from the following description when taken in connection with the accompanying drawings which show, for purposes of illustration only, a preferred embodiment in accordance with the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] FIG. 1 is an exploded view to show the rail and the slide member of the present invention;

[0016] FIG. 2 is a cross sectional view of the connection between the rail and the slide member of the present invention;

[0017] FIG. 3 is a cross sectional view, taken along line A-A in FIG. 2;

[0018] FIG. 4 is a cross sectional view, taken along line B-B in FIG. 2;

[0019] FIG. 5 is an enlarged view of the circled portion in FIG. 4;

[0020] FIG. 6 shows the reinforcement plate of the second embodiment of the present invention, and

[0021] FIG. 7 is a perspective view to show the second embodiment of the rail and the slide member of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0022] Referring to FIGS. 1 and 2, the present invention comprises a rail 1 and a slide member 2 which has two legs 21 extending therefrom so as to mount the slide member 2 to the rail 1. Each leg 21 has a recess 22 in each of two ends thereof and each recess 22 has more than one protrusion 23 extending therefrom.

[0023] Two covers 3 are respectively connected to two ends of the slide member 2. Two reinforcement plates 4 are respectively connected to outside of the two covers 3 and each reinforcement plate 4 has a side plate 41 and two bent extensions 42 extend from the side plate 41. Each of the two bent extensions 42 has a fixing hole 43 located corresponding to the recess 22 of each leg 21 of the sliding member 2. The side plates 41 each have another fixing hole 43. The two bent extensions 42 each have more than one engaging hole 44 which is engaged with the more than one protrusion 23. In this embodiment, the more than one protrusion 23 and the more than one engaging hole 44 are polygonal in shape. In the drawing, the quadrilateral protrusion 23 is engaged with the engaging hole 44. It is noted that the more than one protrusion 23 and the more than one engaging hole 44 can be circular in shape which is not shown, depending on the needs and convenience. Fixing members 5 are used to respectively extend through the fixing holes 43 to fix the side plates 41 to the covers 3, and to fix the two bent extensions 42 to the two legs 21 of the slide member 2. Generally, the fixing members 5 are bolts which extend through the fixing holes 43 to perpendicularly fix the two bent extensions 42 of the reinforcement plate 4 to the slide member 2. The depth of each of the recesses 22 and the height of each of the protrusions 23 are equal to the thickness of the bent extensions 42. When the two bent extensions 42 of the reinforcement plate 4 are fixed to the legs 21 of the slide members 2, it does not increase the volume of the slide member 2 for the miniaturized linear slide assembly.

[0024] As shown in FIG. 3, the rail 1, the slide member 2 and the covers 3 form a circulation path "A" which comprises a track "A1" between the rail 1 and the two legs 21 of the slide member 2, a turning path "A2" on the covers 3 and connected with the track "A1", and a returning path "A3" on the slide member 2 and connected to the turning path A2. The rolling members "B", rollers, or rolling rods (rollers are used in this embodiment) are installed in the circulation path "A" and move in the endless travel in the circulation path "A". The rolling members "B" drive the slide member 2 along the rail 1 back and forth.

[0025] Referring to FIGS. 3 to 5, when the rolling members "B" enter into the turning path "A2" from the track "A1" or the returning path "A3", the force "F" that the rolling members "B" apply to the inside of the covers 3 can be divided into the axial component force "Fn" and a horizontal component force "Fm". The axial component force "Fn" applies to the rear side of the inside of the cover 3. Thanks to the reinforcement

plate 4 on the outside of the cover 3, the axial component force "Fn" is directly applied to the reinforcement plate 4 and is transferred to the slide member 2 via the fixing members 5. Therefore, the axial component force "Fn" that the rolling members "B" apply to the cover 3 can be spread. This is the way that the reinforcement plate 4 bears the load of the cover 3. In other words, the fixing members 5 use the locking force and the static friction force to bear the axial force. In this embodiment, the engaging holes 44 of the bent extensions 42 are engaged with the protrusions 23 of the slide member 2. The connection between the reinforcement plates 4 and the slide member 2 is made not only by the locking force of the fixing member 5, but also by the engagement between the contours of protrusions and recesses such that the engaging holes 44 of the bent extensions 42 bear and spread the axial force applied to the protrusions 23 of the slide member 2 by the rolling members "B". Accordingly, the covers 3 can bear larger axial load and this allows the rolling members "B" to move in the circulation path "A" at higher speed and the movable member moves along the rail 1 smoothly.

[0026] FIGS. 6 and 7 show the second embodiment of the present invention, wherein the difference from the first embodiment is that the reinforcement plates 4 each have an engaging portion which is a notch 44A with which the protrusion 23 is engaged.

[0027] The notches 44A of the bent extensions 42 bear and spread the axial force applied to the protrusions 22 of the slide member 2 by the rolling members "B". Accordingly, the covers 3 can bear larger axial load.

[0028] While we have shown and described the embodiment in accordance with the present invention, it should be clear to those skilled in the art that further embodiments may be made without departing from the scope of the present invention.

What is claimed is:

1. A movable member of a linear slide assembly, comprising:
 - a slide member having two legs extending therefrom so as to mount the slide member to a rail, each leg having more than one protrusion on each of two ends thereof;
 - two covers respectively connected to two ends of the slide member, and
 - two reinforcement plates respectively connected to outside of the two covers, each reinforcement plate having a side plate and two bent extensions extending from the side plate, each of the two bent extensions having a fixing hole and more than one engaging portion, two fixing members respectively extending through the fixing holes to fix the two bent extensions to the two legs of the slide member, the more than one engaging portion of the two bent extensions engaged with the more than one protrusion.
2. The movable member as claimed in claim 1, wherein the more than one engaging portion is an engaging hole.
3. The movable member as claimed in claim 1, wherein the more than one engaging portion is a notch.
4. The movable member as claimed in claim 1, wherein each of the two legs of the slide member has a recess defined in each of two ends thereof, the two respective recesses are located corresponding to the two bent extensions, a depth of each of the recesses and a height of each of the protrusions are equal to a thickness of the bent extensions.

5. The slide member as claimed in claim 1, wherein the more than one protrusion and the more than one engaging portion are polygonal in shape.

6. The slide member as claimed in claim 1, wherein the more than one protrusion and the more than one engaging portion are circular in shape.

* * * * *