

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2016/179187 A1

(43) International Publication Date
10 November 2016 (10.11.2016)

WIPO | PCT

(51) International Patent Classification:
B21D 51/26 (2006.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:
PCT/US2016/030595

(22) International Filing Date:
3 May 2016 (03.05.2016)

(25) Filing Language:
English

(26) Publication Language:
English

(30) Priority Data:
62/156,666 4 May 2015 (04.05.2015) US

(71) Applicant: BELVAC PRODUCTION MACHINERY, INC. [US/US]; 237 Graves Mill Road, Lynchburg, Virginia 24502 (US).

(72) Inventor: MEADOR, Gerald; 11210 Booker T. Washington Hwy, Hardy, Virginia 24101 (US).

(74) Agents: GARETTO, Janet, M. et al.; Nixon Peabody LLP, 70 W. Madison St., Suite 3500, Chicago, Illinois 60602 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR CURLING AN ARTICLE

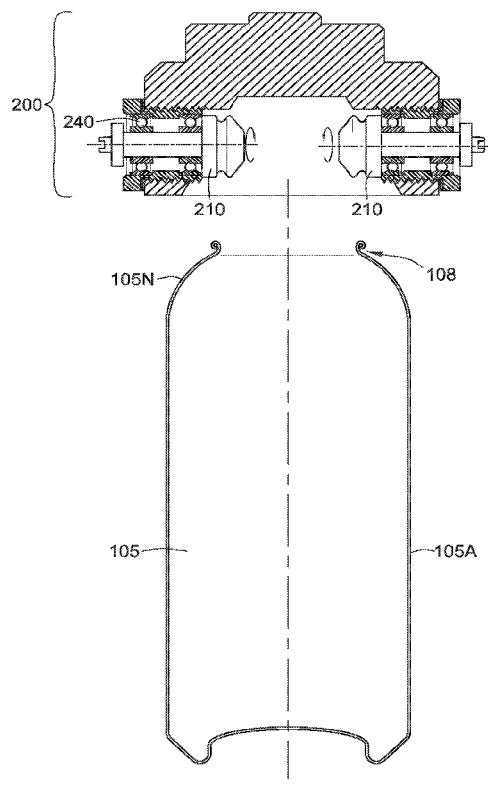


FIG. 1

(57) Abstract: An apparatus for forming a curl on an article includes a first forming tooling having a first set of rollers mounted on a common head. The first set of rollers has a respective groove having a first groove radius. The apparatus further includes a first rotating turret configured to load the article into the first forming tooling. The apparatus further includes a second forming tooling having a second set of rollers mounted on a common head. The second set of rollers has a respective groove having a second groove radius. The second groove radius is larger than the first groove radius. The apparatus further includes a second rotating turret configured to load the article into the second forming tooling. The apparatus further includes a first transfer star wheel configured to transfer the article from the first rotating turret to the second rotating turret.



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))* — *with international search report (Art. 21(3))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

METHOD AND APPARATUS FOR CURLING AN ARTICLE

CROSS-REFERENCE TO RELATED APPLICATION(S)

[0001] The application claims the benefit of and priority to U.S. Provisional Patent Application No. 62/156,666, filed on May 4, 2015, which is herein incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] The present invention relates generally to the field of forming or processing an article, such as a beverage container or can. More specifically, the invention relates to an apparatus and method for forming a curl on an article.

BACKGROUND

[0003] Containers used, for example, for packaging liquid products, often include a container body that terminates at the top end with a radially outwardly, downwardly, and inwardly directed curl. For internally pressurized containers (e.g., aerosol containers), for example, the purpose of the curl is to support the valve cup and a gasket to seal against and strengthen the area where a connection is made to the valve cup.

[0004] Conventional curls and curling processes have been found to have several disadvantages. For example, forming a curl with a large radius presents a greater opportunity for the material to split as the material is being formed outward from its original state. This is particularly true if compression was previously applied to the material during prior necking or forming operations and/or where the container includes a welded seam along the axis of the cylindrical body of the container and the weld is harder than the base material (e.g., in aerosol containers).

[0005] It would be desirable to have methods and apparatuses that address these deficiencies.

SUMMARY

[0006] According to one aspect, an apparatus for forming a curl on an article comprises a first forming tooling having a first set of rollers mounted on a common head. The first set of rollers has a respective groove having a first groove radius. The apparatus further comprises a first rotating turret configured to load the article into the first forming tooling. The apparatus further comprises a second forming tooling having a second set of rollers mounted on a common head. The second set of rollers has a respective groove having a second groove radius. The second groove radius is larger than the first groove radius. The apparatus further

comprises a second rotating turret configured to load the article into the second forming tooling. The apparatus further comprises a first transfer star wheel configured to transfer the article from the first rotating turret to the second rotating turret.

[0007] According to one process described herein, a method of forming a curl in a top edge of an article comprises feeding an article into a first rotating turret and loading the article into a first forming tooling having a first set of rollers. The method further comprises using the first set of rollers to form a curl in the top edge of the article. The curl has a first radius. The method further comprises transferring the article having the curl to a second rotating turret and loading the article having the curl into a second forming tooling having a second set of rollers. The method further comprises using the second set of rollers to modify the curl. The modified curl has a second radius, the second radius being larger than the first radius.

[0008] Still other aspects, features, and advantages of the present invention are readily apparent from the following detailed description, by illustrating a number of exemplary embodiments and implementations, including the best mode contemplated for carrying out the present invention. The present invention is also capable of other and different embodiments, and its several details can be modified in various respects, all without departing from the spirit and scope of the present invention. Accordingly, the drawings and descriptions are to be regarded as illustrative in nature, and not as restrictive. The invention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] Exemplary embodiments are illustrated in referenced figures. It is intended that the embodiments and figures disclosed herein are to be considered illustrative rather than restrictive.

[0010] FIG. 1 is a cross-sectional view of a forming tooling of a curling apparatus with a can.

[0011] FIG. 2 is a front perspective view of a forming tooling according to one embodiment.

[0012] FIG. 3a is a top view of a set of rollers that may be used in a forming tooling according to one embodiment.

[0013] FIG. 3b is a perspective side view of the set of rollers of FIG. 3a and a container.

[0014] FIG. 4 is a schematic of a machine line with a can curling apparatus according to one embodiment.

[0015] FIGs. 5a-5d illustrate close-up side views of a curl being formed and modified using various rollers.

[0016] FIGs. 6a-6b illustrate examples of other curl geometries that may be formed using the methods described herein.

[0017] FIG. 7 is a perspective view of the can curling apparatus of FIG. 4.

[0018] FIG. 8 is a perspective view of the forming tooling of FIG. 2.

[0019] While the invention is susceptible to various modifications and alternative forms, specific embodiments have been shown by way of example in the drawings and will be described in detail herein. It should be understood, however, that the invention is not intended to be limited to the particular forms disclosed. Rather, the invention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DESCRIPTION OF ILLUSTRATED EMBODIMENTS

[0020] Existing curling methods and apparatus suffer from a number of significant limitations. In particular, for example, the geometry of the curl formed by existing machinery is susceptible to cracking and/or splitting as the material is being formed outward from its original state. This is especially problematic where the container has a welded seam along the axis of the cylinder that is harder than the base material (e.g., as in internally pressurized containers or aerosol cans), and/or when compression was previously applied during necking or forming operations.

[0021] According to aspects of the present disclosure, systems and methods are described for improving the integrity of containers that include a curl at the top end of the container.

[0022] FIG. 1 illustrates an exemplary article 105 for forming a curl thereon. The article 105 may be a can, any suitable food or beverage container, jar, bottle, or any other suitable article. The article 105 has an open end, opposite closed end, and a sidewall extending from the closed end. Alternatively, the article 105 may be open at both ends. A top, lid, or other closure may be added to the article 105 after the curling process.

[0023] For exemplary purposes only, the below description will describe the curling apparatus and method for use on a can 105. It is contemplated, however, that any other type of article 105 may be used.

[0024] Curling describes a process by which the open end of a can 105 is formed into a rounded, flat, or other shape. One example of a curling process that may be used with the present invention is described in U.S. Patent No. 7,464,573, which is hereby incorporated by reference in its entirety. For example, a forming head or tooling 200, as shown, for example, in FIGs. 1 and 2, may provide a curl comprising a rounded section and/or a flat section. The

forming tooling 200 may include a first set of rollers 210 as shown, for example, in FIGs. 1, 2, 3a, 3b. Although in the illustrated embodiment, each of the plurality of rollers 210 is generally the same on the forming tooling 200, it is contemplated that two or more different kinds of rollers may be used on a single forming tooling and/or the position of the rollers on the forming tooling may be non-uniform (e.g., alternating positions, staggered, etc.). Curling may turn the open edge of the can 105 greater than 90° from its normal (initial) orientation. However, curling may comprise turning the open edge of the can 105 greater than, equal to, or less than 90°.

[0025] In one embodiment, cans 105 may be fed into a first continuously rotating turret (e.g., turret 410a of FIG. 4), either from an infeed track or from a preceding process turret, which may be part of a machine line 411. FIG. 4 illustrates a turret star wheel 402a passing a can 105 to a first continuously rotating forming turret 410a of a can curling process according to one embodiment. While the first rotating turret 410a is rotating with the can 105 inserted into a first forming station therein, the can 105 is loaded into a first forming tooling (e.g., forming tooling 200 of FIG. 2) having a first set of rollers (e.g., rollers 210) mounted on a common head (e.g., head 212). The can 105 may be loaded into the forming tooling using, e.g., a push ram or the like. The sets of rollers described herein may include one or more rollers. As shown and described in more detail below, each of the sets of rollers includes a respective pilot with an extended portion and a groove. The groove is generally concave and has a groove radius, as shown, for example, in FIGs. 5a-5d.

[0026] Accordingly, the first set of rollers includes a respective first groove having a first groove radius. The first set of rollers is used to form a preliminary first curl having a first curl radius on an end of the can 105. The curl radius is generally measured from a straight sidewall 105A of the container 105 (see FIG. 1) to a midpoint measured horizontally between the straight sidewall 105A and the outer portion of the curl (see, e.g., FIGs. 5a-5d below).

[0027] After the first curl has been formed, the can 105 is withdrawn from the first forming tooling. The can 105 is then transferred from the first rotating turret 410a onto a second rotating turret 410b via a transfer star wheel 402b (see FIG. 4). While the second rotating turret 410b is rotating with the can 105 inserted into a second forming station thereon, the can 105 is loaded into a second forming tooling having a second set of rollers mounted on a common head. The second set of rollers has a respective second concave groove having a larger groove radius than the first groove radius of the first set of rollers. The second set of rollers (and the second groove thereon) is used to modify the first curl formed by the first set of rollers into a second, modified curl having a second curl radius, which is larger than the

first curl radius of the first curl. By forming a first curl with a smaller radius and then expanding the curl radius using subsequent process steps, as described herein, the container 105 is less susceptible to cracking or splitting because less material is displaced and placed under tension. After forming the second curl, the can is then withdrawn from the second forming tooling and may then be transferred from the second rotating turret 410b onto another process turret (not shown) or to a discharge track or star wheel 402c, in the direction illustrated by the arrows in FIG. 4.

[0028] One example of a multiple stage process for forming a curl on an article in accordance with the present disclosure is shown in FIGs. 5a-5d. Referring to FIG. 5a, a can 105 positioned in a first rotating turret (e.g., turret 410a of FIG. 4) is loaded into a first forming tooling having a first set of one or more rollers 502, a portion of which is shown in FIG. 5a. The first set of rollers 502 has a first groove radius R_{1G} . The first groove radius R_{1G} may range from about 0.01 to about 0.04 inches. The resulting first curl 504 has a first curl radius R_{1C} that is smaller than a final curl radius R_{FC} (see FIG. 5d) such that less can material is displaced and less tension is created as the can material moves outward and is tucked inward, thereby lessening the chances for a crack or split in the can material.

[0029] The resulting can 105 is then withdrawn from the first forming tooling and transferred, via the first star wheel 402b, to a second rotating turret 410b, where the can 105 is loaded into a second forming station and then into a second forming tooling having a second set of rollers 512, a portion of which is shown in FIG. 5b. The second set of rollers 512 has a second groove radius R_{2G} that is larger than the first groove radius R_{1G} , as shown in FIG. 5b. FIG. 5b shows the can 105 and first curl 504 prior to modification by the second set of rollers 512. As the second set of rollers 512 are applied to the can 105 and, more specifically, the first curl 504, the first curl 504 is modified into a second modified curl 506, as shown in FIG. 5c. A second curl radius R_{2C} near the top 514 of the modified curl 506, which contacts the second set of rollers 512, expands to generally conform to the second groove radius R_{2G} , while the first curl radius R_{1C} near the bottom 516 of the modified curl 506 remains generally rigid and, as such, generally remains in its originally formed state (see FIG. 5a), since less tension is applied at that area. It should be noted, however, that, in some embodiments, the curl radius near the bottom 516 of the modified curl 506 may also be modified (e.g., slightly expand from its originally formed state of FIG. 5a) during the process shown in FIGs. 5b-5c. Generally, however, the first curl radius R_{1C} near the bottom 516 of the modified curl 506 is smaller than the second curl radius R_{2C} near the top 514 of the modified curl 506.

[0030] The resulting can is then withdrawn from the second forming station. If the modified curl 506 meets the desired/specified dimensions of a final curl, the can 105 may then be transferred to a discharge star wheel. If, however, further modification of the curl is desired, the can may be transferred to a third rotating process turret (not shown) into a third forming station via a third star wheel (e.g., star wheel 402c). The can may then be loaded into a third forming tooling having a third set of rollers 522. In the illustrated embodiment of FIGs. 4 and 5a-5d, the third forming tooling is the final forming tooling. However, it is contemplated that any suitable number of process turrets and forming toolings may be used.

[0031] The third set of rollers 522 has a final groove radius R_{FG} that forms a final curl 526 to the desired/specified dimensions. The final groove radius R_{FG} is larger than the first groove radius R_{1G} . In some embodiments, such as in the illustrated embodiment, the groove radius increases as the can moves down the process line. In this way, the tension applied to the can material can be minimized, since less material is displaced during each stage of the process, thereby resulting in less cracking and/or splitting of the can material. It is also contemplated that the groove radius of the third set of rollers (or a set of rollers further down the process line, such as the final set of rollers) may have multiple radii. For example, the groove radius may have a combination of larger and smaller radii, one or more straight sections, combinations thereof, or the like such that the final curl conforms to desired/specified dimensions.

[0032] As the third set of rollers 522 is applied to the can and, more specifically, the modified curl 506, a final curl radius R_{FC} near the top of the resulting, final curl 526, which contacts the third set of rollers 522, expands to generally fit within the final groove radius R_{FG} of the third set of rollers 522. As described above with respect to FIGs. 5b-5c, the first curl radius R_{1C} near the bottom 516 of the final curl 526 remains smaller than the final curl radius R_{FC} near the top 514 of the final curl 526.

[0033] Although the shapes of the curls shown in the illustrated embodiments are generally circular or oval, it is contemplated that other shapes may also be formed, as shown, for example, in FIGs. 6a and 6b. As such, the term “radius,” as used herein may still be applied in a corresponding way to non-circular or non-oval geometries and would be measured accordingly, e.g., as the distance between the straight sidewall 105A of the container 105 and the midpoint between the straight sidewall 105A of the container 105A and the outer portion of the curl.

[0034] While the invention is not so limited, embodiments of the invention are such that curling machines are constructed as modules 700, as shown, for example, in FIG. 7. The use

of can curling modules allows for the machine line 411 to be assembled/changed to provide as many can curling stages as is required and to allow for the addition of additional stages such as flanging, necking, trimming, expansion, threading, and/or base reforming/reprofiling, which may be added/removed as desired.

[0035] In an embodiment, the turret star wheels 402, 410 may be composed of two segments, which are connected to a drive shaft by way of a timing plate. These timing plates are individually adjustable with respect to the respective turret drive shaft in a manner which allows their angular rotational position with respect to the turret drive shaft to be adjusted and then fixed to the degree that the two segments of the turret star wheel which are mounted thereon, are positioned/timed with respect to the transfer star wheels on either side thereof, so that a smooth, continuous, incident-free transfer of cans between the turret star wheels and the respective transfer star wheels, can take place.

[0036] The infeed star wheels, discharge star wheels, and/or the transfer star wheels 402, 410 may be arranged to hold the cans 105 in position using suction. The star wheels 402, 410 may have a vacuum port formed in a channel portion(s) that are fluidly communicating with a source of vacuum (negative pneumatic pressure) via a suitable manifold. The vacuum is delivered to the vacuum ports, and the surface area of the cans 105, which are exposed to the suction, is increased to a degree that the cans 105 are stably held in position as each can 105 passes below the transfer star wheel axis of rotation.

[0037] As shown in FIG. 7, for example, the forming rotating turrets 410 may comprise a positioning star wheel 410S at the straight wall 105A of the can 105, and the forming (curling) tooling 200 (see FIGS. 1, 2) at the open end of the can 105. The positioning star wheels 410S help keep the can 105 oriented and aligned with the forming tooling 200 to enable proper curling (forming) of the can 105.

[0038] The forming tooling (head) 200 may comprise multiple independent rollers mounted on a common head 212, as shown, for example, in FIG. 8. The rollers are mounted on bearings 240 (see FIG. 1) and are free spinning. The rollers 210 are independent such that each roller 210 can spin independently, that is, separately from the other rollers 210 in the forming tooling 200. Further, each roller in each set of rollers 210 may be adjusted, replaced, altered or repositioned to change the angle of the roller relative to the remaining rollers and/or a neck 105N of the can 105.

[0039] The forming tooling 200 is coaxial with the can 105. The forming tooling 200 rotates relative to the can 105 so that the rollers 120 are made to travel around the perimeter of the opening of the can 105. Although not shown in the illustrated embodiments, the forming

tooling 200 may have multiple sets of rollers. One set of rollers may be shaped to form the inner portion of the curl 108, and another set of rollers may be shaped to form the outer portion of the curl 108.

[0040] The can 105 is moved by, e.g., a push ram assembly such that the open edge of the can 105 is positioned adjacent to the groove in the roller. When the can 105 is aligned relative to the rollers, the rollers 210 spin on opposite sides of the neck 105N of the can 105, thus turning an edge of the neck 105N into a curl 108. During this moment in the process, the turret 210 is continuously moving with the can 105 and the can 105 is moving axially into the forming tooling 200 and, thus, between the rotating rollers to form the curl 108.

[0041] Although the methods of forming a curl have been described herein with respect to machine line processes, it is contemplated that methods may also be applied in other (e.g., non-machine-line) processes.

[0042] While the invention is susceptible to various modifications and alternative forms, specific embodiments and methods thereof have been shown by way of example in the drawings and are described in detail herein. It should be understood, however, that it is not intended to limit the invention to the particular forms or methods disclosed, but, to the contrary, the intention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the invention.

WHAT WE CLAIM IS:

1. An apparatus for forming a curl on an article, the apparatus comprising:
 - a first forming tooling having a first set of rollers mounted on a common head, the first set of rollers having a respective groove having a first groove radius;
 - a first rotating turret configured to load the article into the first forming tooling;
 - a second forming tooling having a second set of rollers mounted on a common head, the second set of rollers having a respective groove having a second groove radius, the second groove radius being larger than the first groove radius;
 - a second rotating turret configured to load the article into the second forming tooling; and
 - a first transfer star wheel configured to transfer the article from the first rotating turret to the second rotating turret.
2. The apparatus of claim 1, wherein the first set of rollers comprises one or more rollers and the second set of rollers comprises one or more rollers.
3. The apparatus of claim 1 further comprising:
 - a third forming tooling having a third set of rollers mounted on a common head, the third set of rollers having a respective groove having a third groove radius, the third radius being larger than the first groove radii.
 - a third rotating turret configured to load the article into the third forming tooling; and
 - a second transfer star wheel configured to transfer the article from the second rotating turret to the third rotating turret.
4. The apparatus of claim 1, wherein the article is an aerosol can.
5. The apparatus of claim 1, wherein the first and second rotating turrets are continuously rotating.
6. The apparatus of claim 1, wherein the first set of rollers is configured to form a curl in a top edge of the article and the second set of rollers is configured to modify the curl formed by the first set of rollers.
7. The apparatus of claim 6, wherein the curl formed by the first set of rollers has a first curl radius and the modified curl formed by the second set of rollers has a second curl radius, the second curl radius being larger than the first curl radius.
8. A method of forming a curl in a top edge of an article, the method comprising:
 - feeding an article into a first rotating turret;
 - loading the article into a first forming tooling having a first set of rollers;

using the first set of rollers to form a curl in the top edge of the article, the curl having a first radius;

transferring the article having the curl to a second rotating turret;

loading the article having the curl into a second forming tooling having a second set of rollers;

using the second set of rollers to modify the curl, the modified curl having a second radius, the second radius being larger than the first radius.

9. The method of claim 8, wherein the first set of rollers comprises one or more rollers and the second set of rollers comprises one or more rollers.

10. The method of claim 8, wherein the article is an aerosol can.

11. The method of claim 8, wherein the first and second rotating turrets are continuously rotating.

12. The method of claim 8, wherein the transferring of the article is performed by a transfer star wheel.

13. The method of claim 8, wherein the first set of rollers has a respective first groove used to form the curl and the second set of rollers has a respective second groove used to modify the curl, the second groove having a larger groove radius than the first groove.

14. The method of claim 8, further comprising:

transferring the article having the modified curl to a third rotating turret;

loading the article having the modified curl into a third forming tooling having a third set of rollers;

using the third set of rollers to further modify the curl, the further modified curl having a third radius, the third radius being larger than the first and second radii.

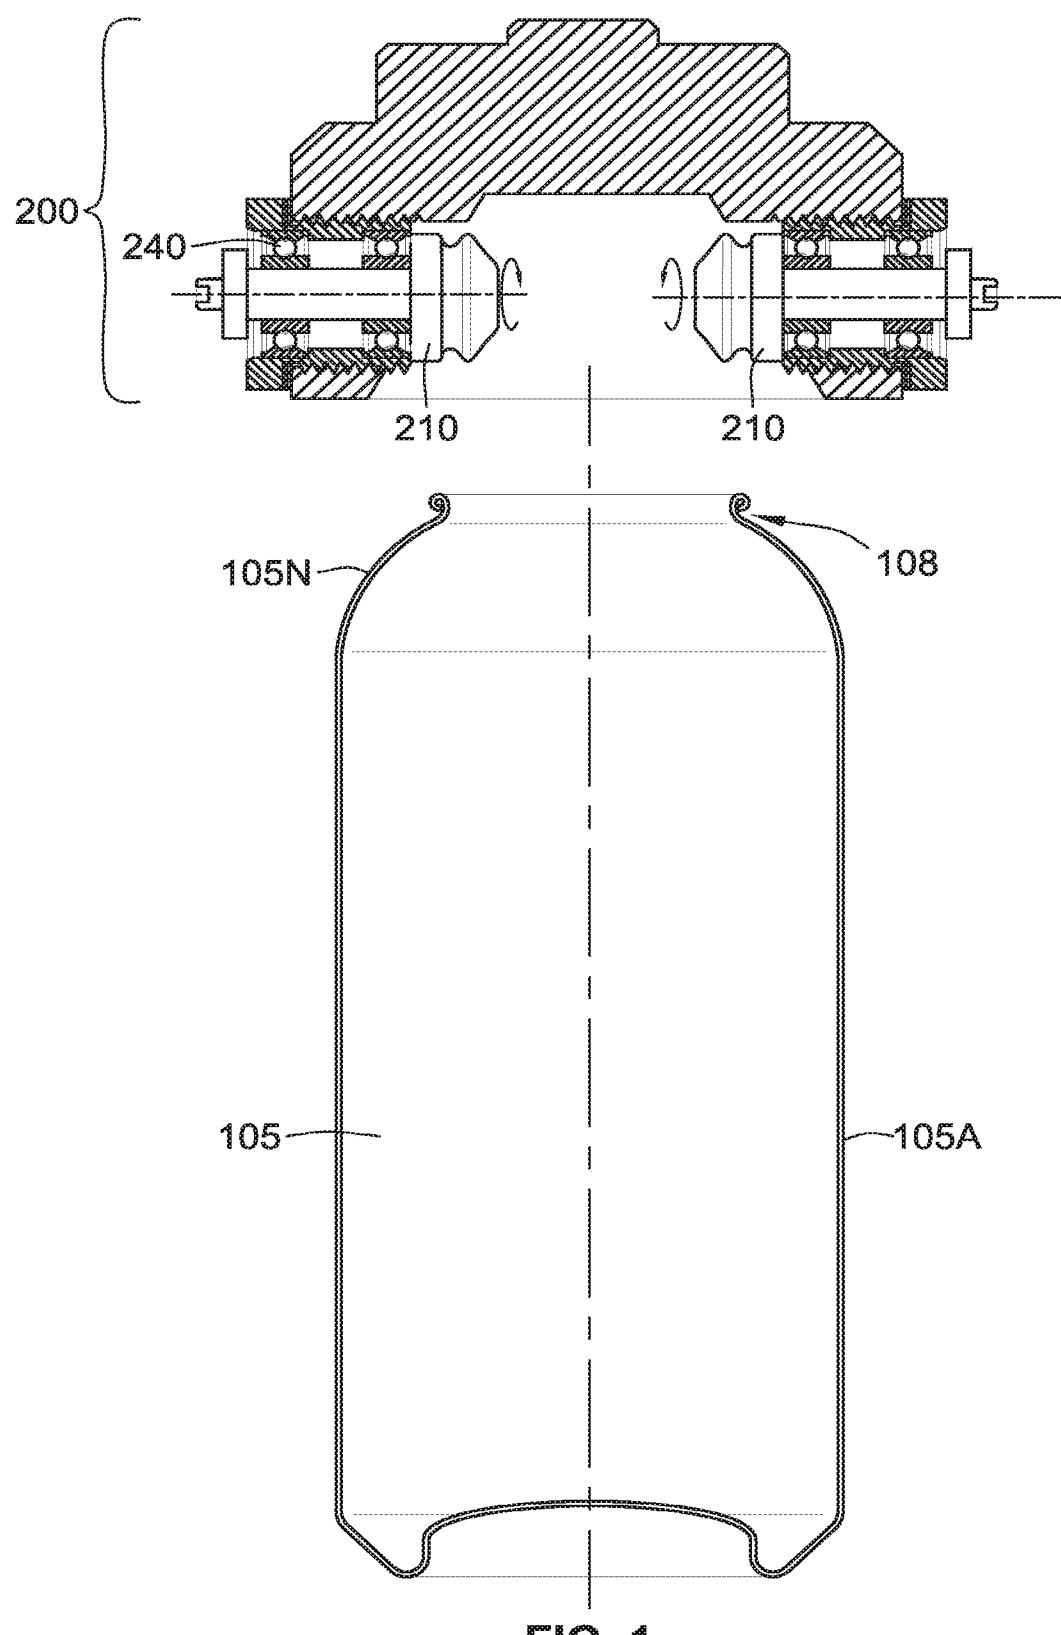
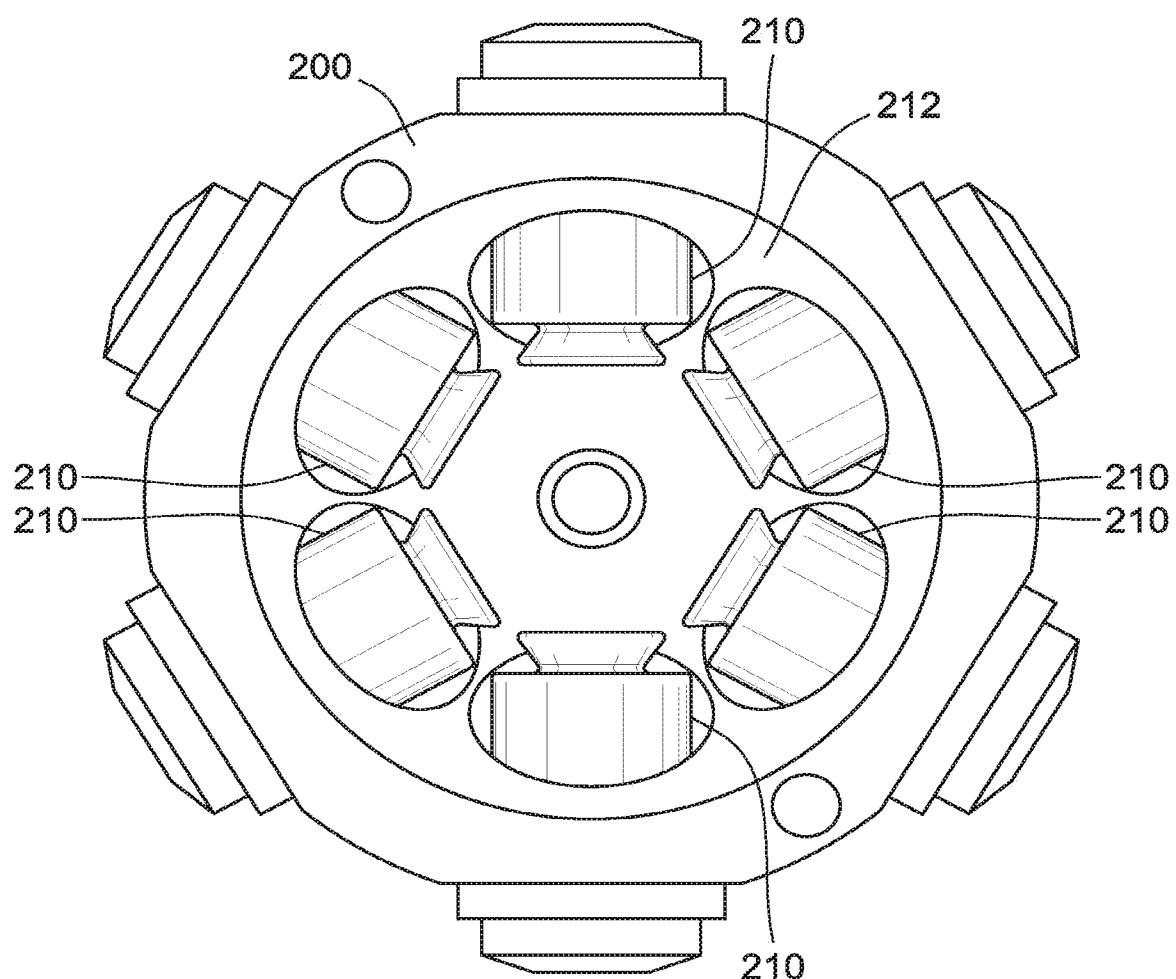


FIG. 1

**FIG. 2**

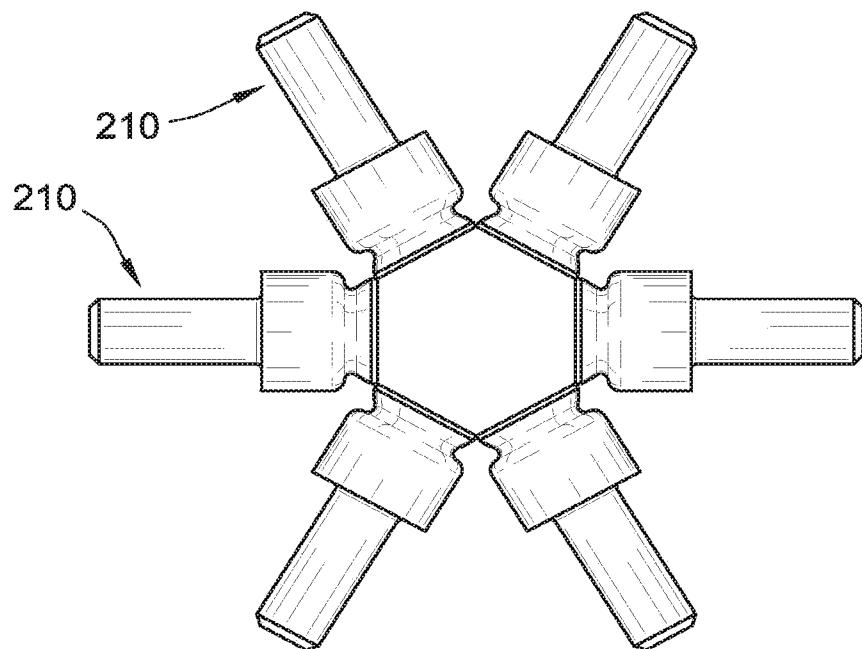


FIG. 3A

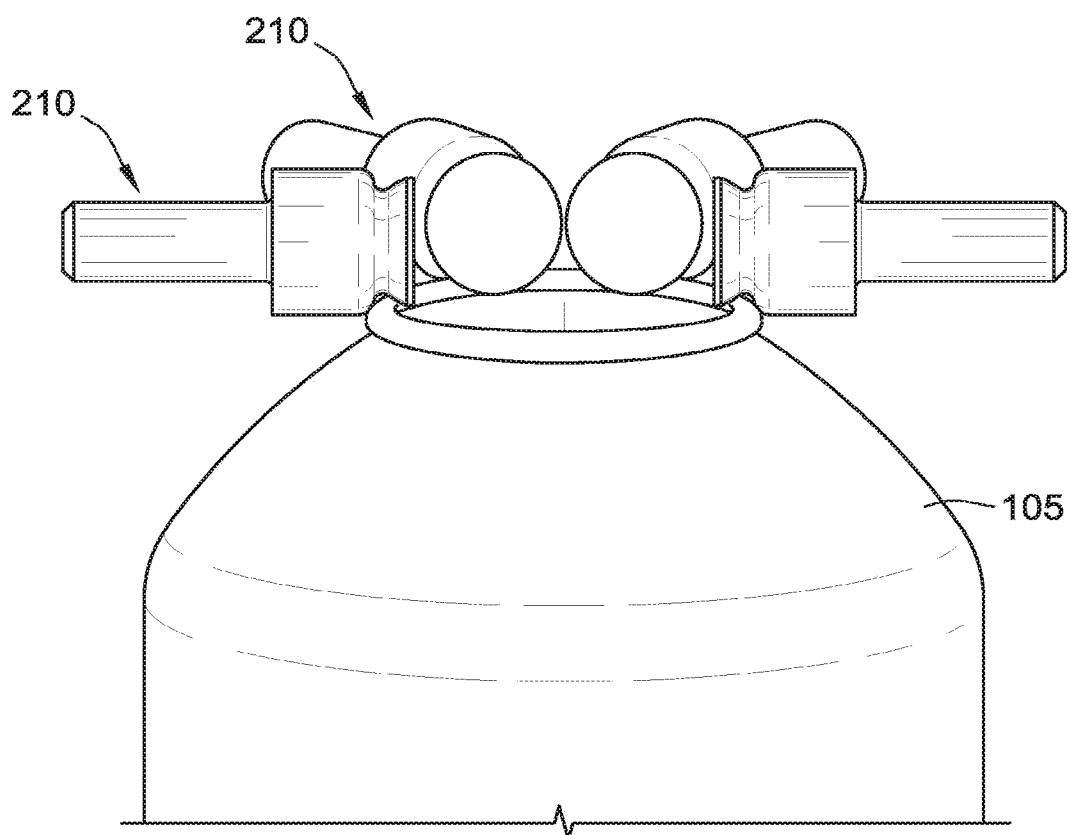


FIG. 3B

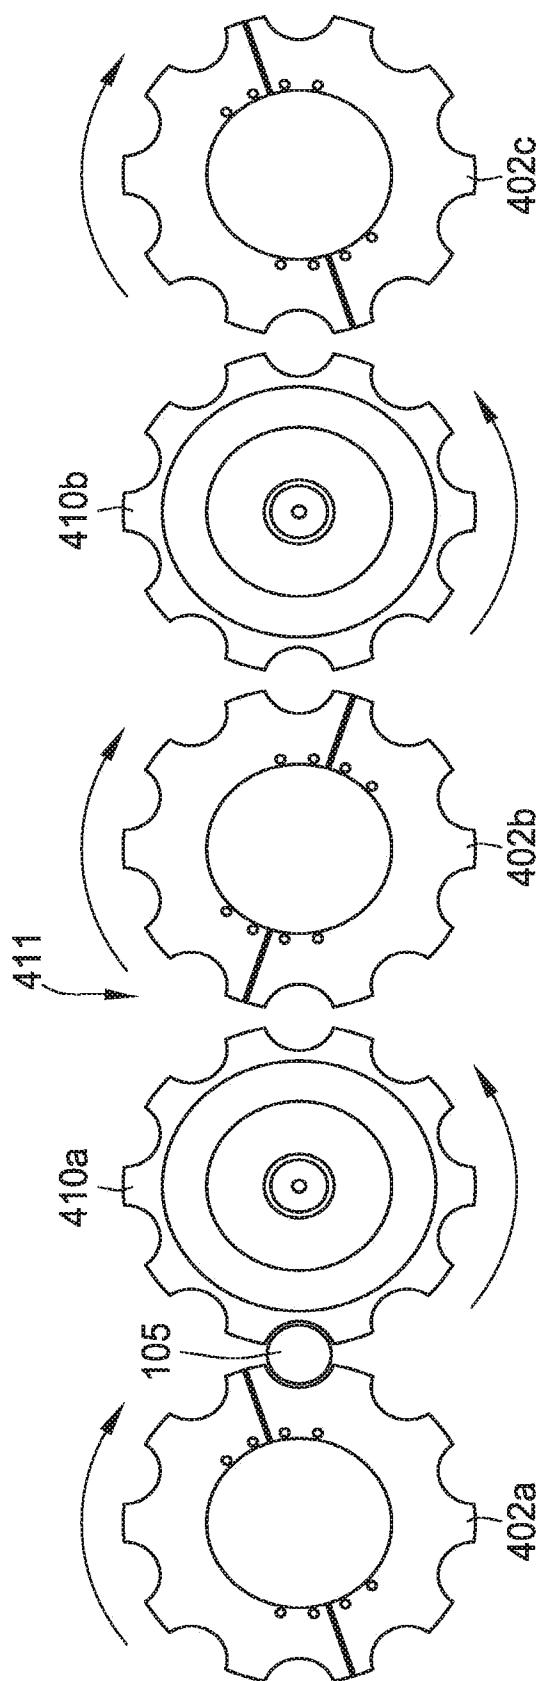


FIG. 4

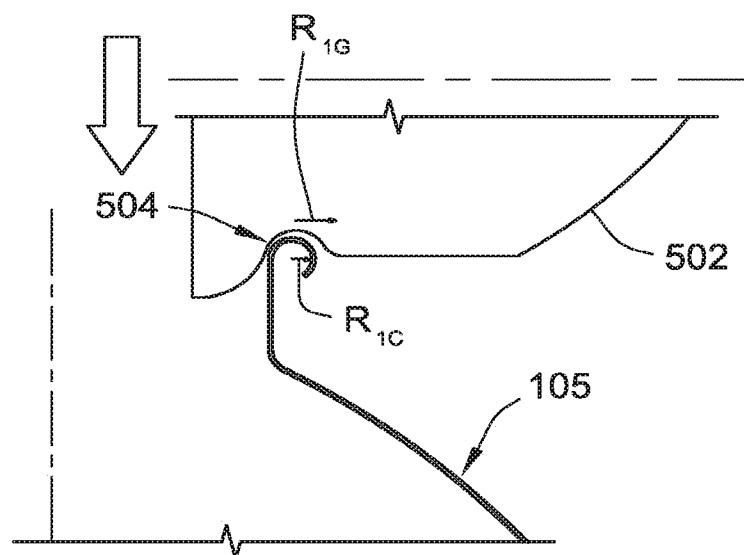


FIG. 5A

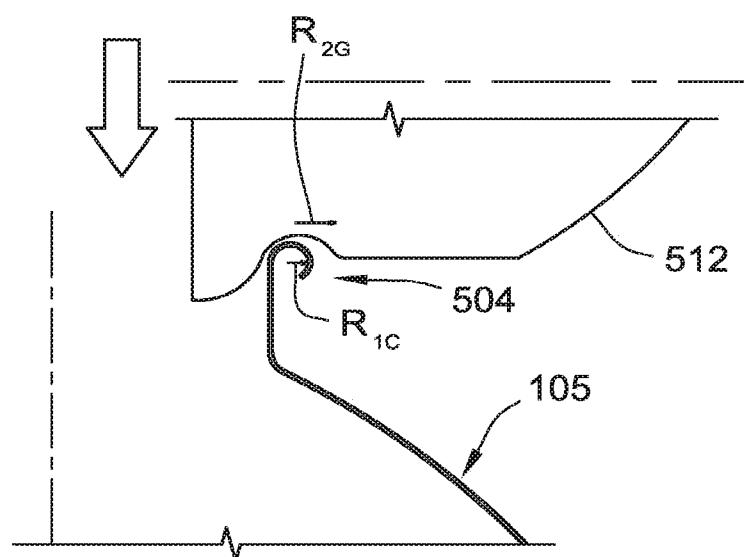


FIG. 5B

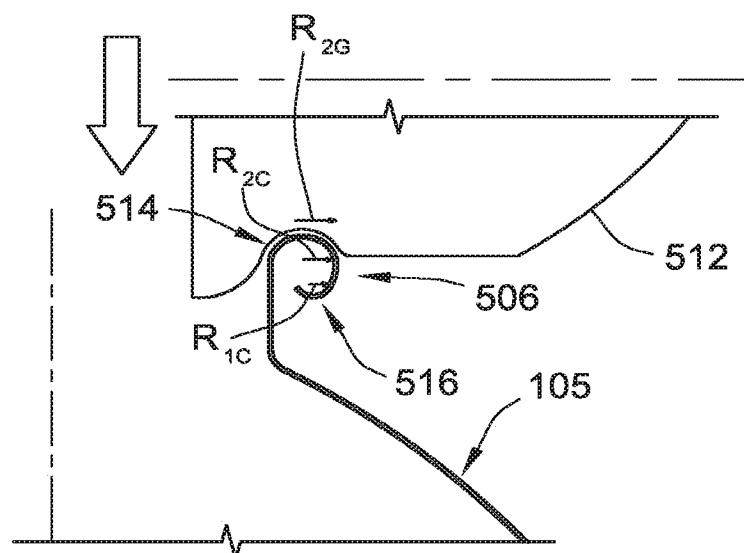


FIG. 5C

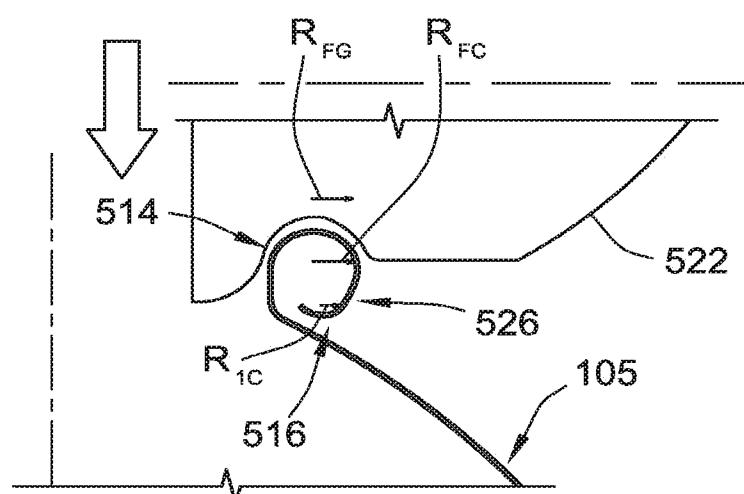


FIG. 5D

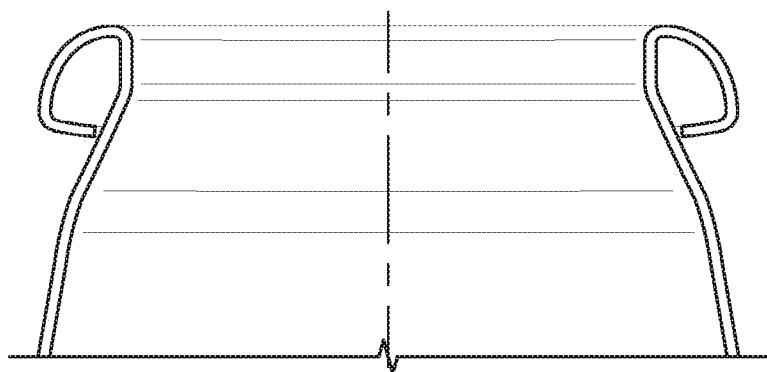


FIG. 6A

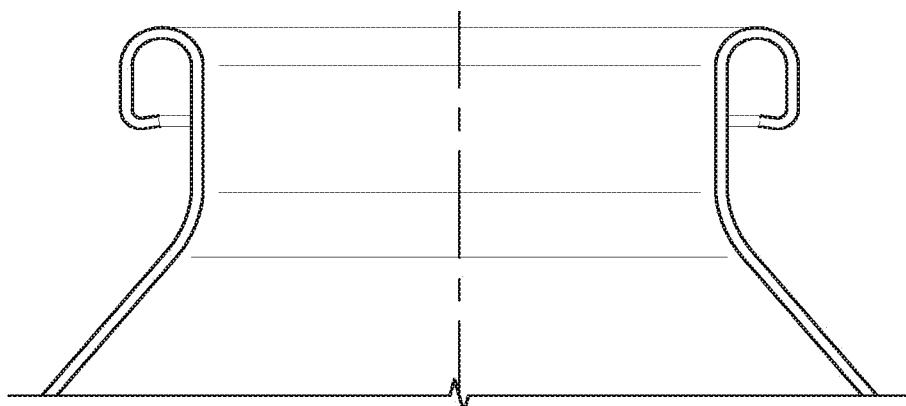
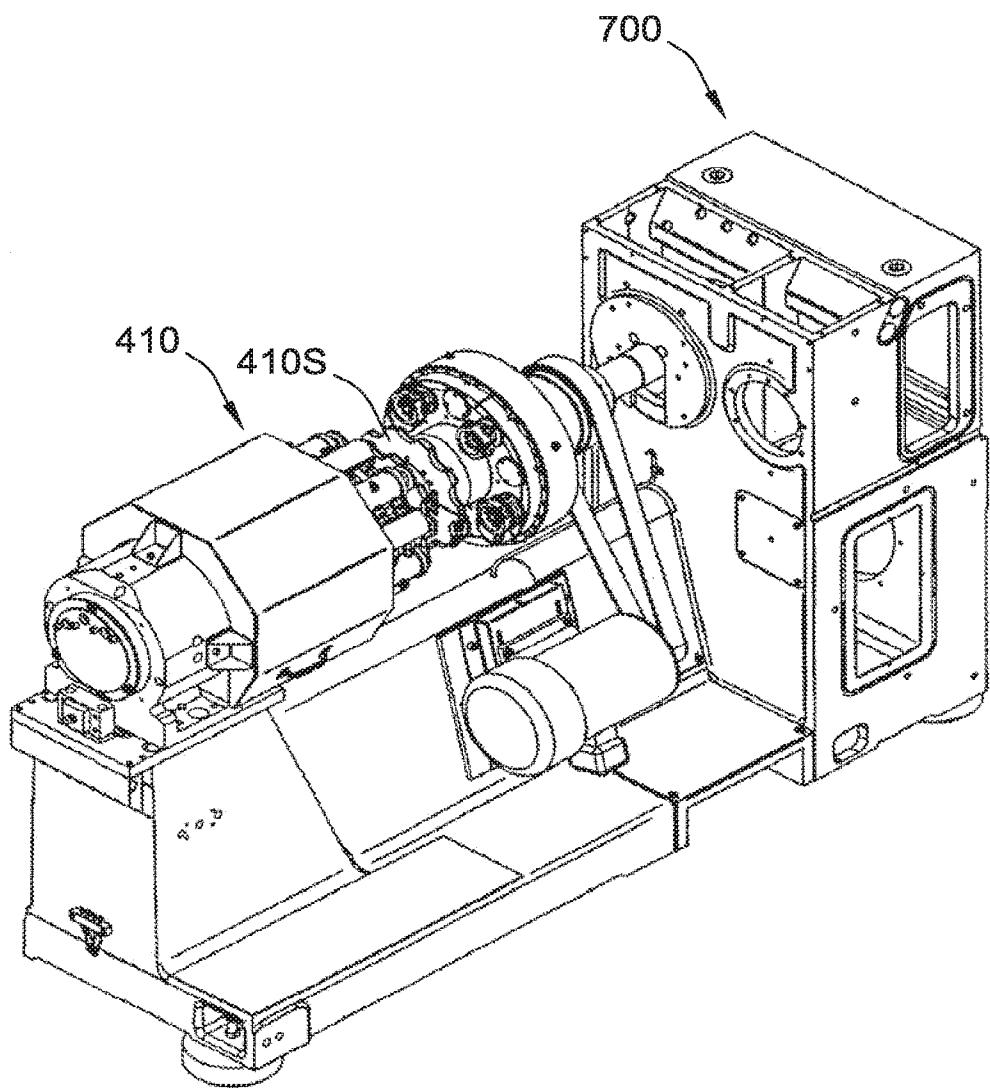
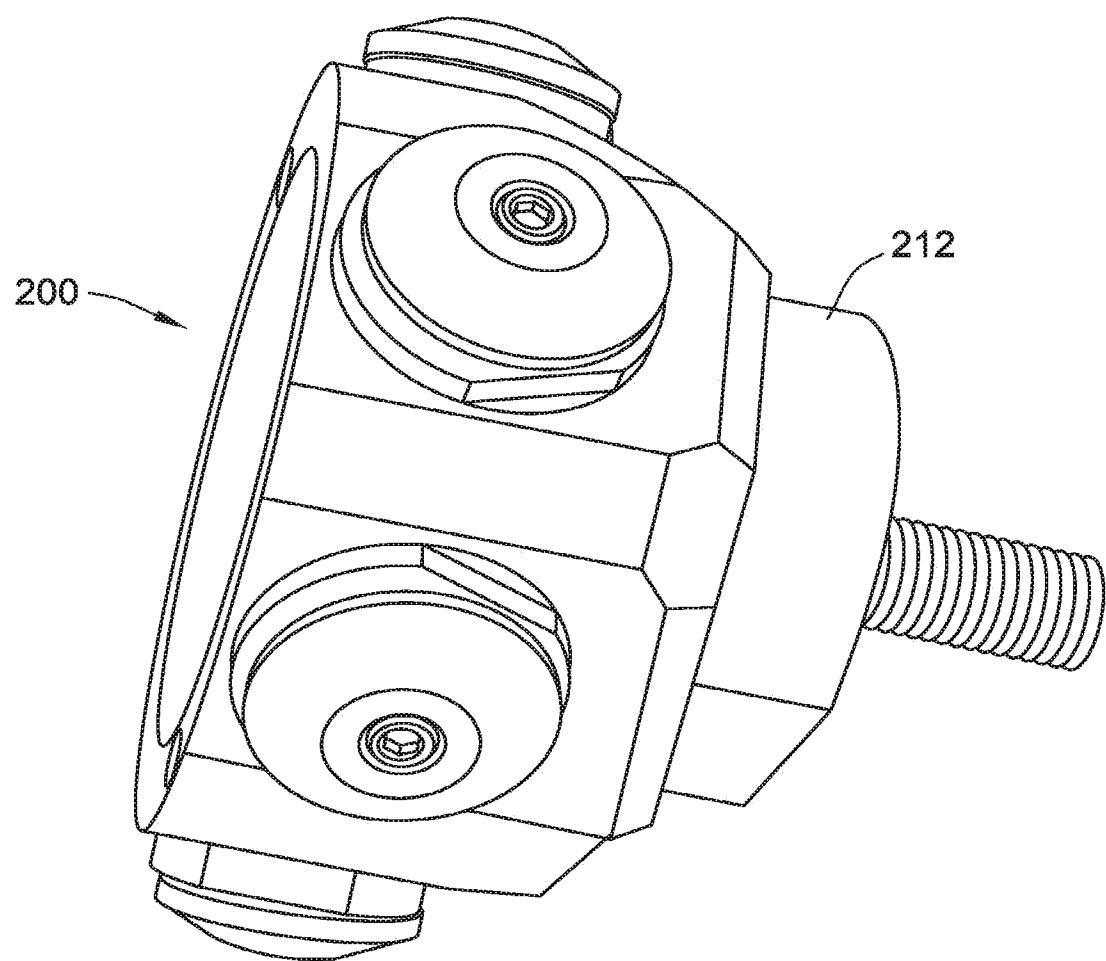


FIG. 6B

**FIG. 7**

**FIG. 8**

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/030595

A. CLASSIFICATION OF SUBJECT MATTER
INV. B21D51/26
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B21D B31F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 86/03471 A1 (RHEEM AUSTRALIA PTY LTD [AU]) 19 June 1986 (1986-06-19) page 9, line 18 - page 10, line 27; figures 6a,6b page 12, line 33 - page 13, line 7; figure 8 ----- A US 7 464 573 B2 (SHORTRIDGE JEFFREY L [US]) 16 December 2008 (2008-12-16) cited in the application the whole document ----- A DE 76 21 025 U1 (ALCAN ALUMINIUMWERKE) 25 November 1976 (1976-11-25) the whole document ----- -/-	1-14 1-14 1-14

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
18 July 2016	27/07/2016

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Knecht, Frank

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/030595

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 28 18 894 A1 (STYNER & BIENZ AG) 16 November 1978 (1978-11-16) claim 1; figures -----	1-14
A	RU 2 073 575 C1 (NP TS VOLGOAGROTEKHNIKA PRI SARATOVSKOM G AGROINZHENERNOM UNI) 20 February 1997 (1997-02-20) abstract; figures & DATABASE WPI Week 199739 Thomson Scientific, London, GB; AN 1997-423337 & RU 2 073 575 C1 (UNIV SARAT VOLGOAGROTEKHNIKA CENTRE) 20 February 1997 (1997-02-20) abstract -----	1-14
A	KR 101 505 780 B1 (YOO IL HAN [KR]) 25 March 2015 (2015-03-25) figures 12,13 -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2016/030595

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO 8603471	A1 19-06-1986	AT 51371 T CA 1265075 A DE 3576804 D1 EP 0205494 A1 JP 2521468 Y2 JP H0737440 U NZ 214466 A US 4938051 A WO 8603471 A1		15-04-1990 30-01-1990 03-05-1990 30-12-1986 25-12-1996 11-07-1995 28-07-1988 03-07-1990 19-06-1986
US 7464573	B2 16-12-2008	EP 2001618 A1 US 2007227218 A1 WO 2007123717 A1		17-12-2008 04-10-2007 01-11-2007
DE 7621025	U1 25-11-1976	NONE		
DE 2818894	A1 16-11-1978	CH 617107 A5 DE 2818894 A1		14-05-1980 16-11-1978
RU 2073575	C1 20-02-1997	NONE		
KR 101505780	B1 25-03-2015	CN 105312442 A JP 2016002595 A KR 101505780 B1 TW 201600196 A US 2015360280 A1		10-02-2016 12-01-2016 25-03-2015 01-01-2016 17-12-2015