

PCTWORLD INTELLECTUAL PROPI
International B

INTERNATIONAL APPLICATION PUBLISHED UNDER

WO 9607051A1

(51) International Patent Classification ⁶ :

F21V 7/06, H01J 5/02

A1

(11) International Publication Number:

WO 96/07051

(43) International Publication Date:

7 March 1996 (07.03.96)

(21) International Application Number: PCT/IB95/00635

(22) International Filing Date: 11 August 1995 (11.08.95)

(30) Priority Data:

94202459.7 29 August 1994 (29.08.94) EP

(34) Countries for which the regional or
international application was filed: NL et al.

95200563.5 8 March 1995 (08.03.95) EP

(34) Countries for which the regional or
international application was filed: NL et al.(71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groe-
newoudseweg 1, NL-5621 BA Eindhoven (NL).(71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE];
Kottbygatan 5, Kista, S-164 85 Stockholm (SE).(72) Inventor: MAASSEN, Egbertus, Johannes, Petrus; Groe-
newoudseweg 1, NL-5621 BA Eindhoven (NL).(74) Agent: ROODA, Hans; Internationaal Octrooibureau B.V., P.O.
Box 220, NL-5600 AE Eindhoven (NL).(81) Designated States: CN, JP, European patent (AT, BE, CH, DE,
DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published

With international search report.

(54) Title: ELECTRIC REFLECTOR LAMP

(57) Abstract

The electric reflector lamp has a reflector body (1) with a light-beam shaping surface (2) which comprises a body of revolution of a branch (7) of a parabola which has been tilted towards the optical axis (3) of the light-beam shaping surface. The light-beam shaping surface has superimposed plane axial lanes (6) of which the number in a first zone (9) remote from the light emission window (4) is half that in a second zone (10) adjacent said window. The axial lanes give the light-beam shaping surface cross sections which are regular polygons. A light source (13) is positioned on the optical axis, while the focus (8) is inside this light source. The lamp has a universal burning position, a good mixing of the generated light, and a comparatively high luminous flux in the beam.

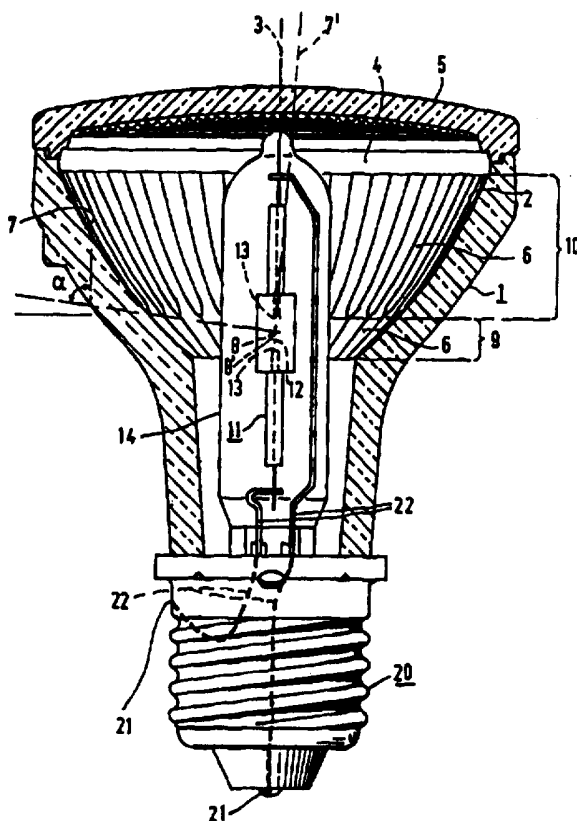

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Electric reflector lamp.

The invention relates to an electric reflector lamp provided with a reflector body with a concave light-beam shaping surface having an optical axis, which reflector body has a light emission window which is closed off with a light-transmitting cover,

5 a light source on the optical axis, accommodated in a lamp vessel which is closed in a gastight manner,

a lamp cap provided with contacts and connected to the reflector body, current conductors which connect the light source to respective contacts of the lamp cap,

10 the light-beam shaping surface being subdivided into axial lanes.

Such an electric reflector lamp is known from EP-A 0 543 448 (PHN 13.900).

The known reflector lamp may have electrodes in an ionizable filling or an incandescent body as its light source.

15 The known lamp was found to yield a light beam in which differences in brightness between portions of the incandescent body become evident in the presence of an incandescent body as the light source, so that the beam is inhomogeneous. With a discharge arc between electrodes in an ionizable filling, differences in brightness may also arise in the beam, for example owing to a current conductor which extends alongside the discharge arc. With a high-pressure metal halide discharge, the lamp provides an illuminated field in which colour differences occur. When the lamp radiates predominantly upwards, the colour pattern is different from the pattern when it radiates predominantly downwards. The shape of the generated light beam, in addition, strongly depends on the position occupied by the discharge arc in the reflector body.

25 It is an object of the invention to provide a reflector lamp of the kind described in the opening paragraph in which inhomogeneities in the light beam formed are avoided and whose light beam moreover shows little dependence on the position of the light

source in the reflector body, while still yielding a comparatively narrow beam.

According to the invention, this object is achieved in that the light-beam shaping surface has the body of revolution around the optical axis of a branch of a parabola which has been tilted towards the optical axis and whose focus lies on the optical axis inside
5 the light source, the axial lanes being superimposed on said surface,

the axial lanes are plane transverse to their axial direction and give the light-beam shaping surface cross-sections transverse to the optical axis which are regular polygons,

a first zone remote from the light emission window has half the number
10 of axial lanes which a second zone adjacent the light emission window has.

The measures taken in the reflector lamp according to the invention result in an effective beam concentration and mixing of the light generated by the light source. As a result, a light beam with a comparatively high luminous flux and a high degree of homogeneity is obtained. The reflector lamp with a discharge arc yields a beam with a
15 high colour uniformity, also when it is operated in a random position. The properties of the light beam of the reflector lamp show little dependence on the position of the light source in the reflector body in directions transverse to the axis thereof, so that the light source has a wide mounting tolerance. Also a position of the light source which has been tilted through up to a few degrees relative to the optical axis has little or no adverse effect on the beam
20 formed, as long as the focus remains inside the light source.

To obtain a comparatively high brightness in the centre of a field illuminated by the reflector lamp, as well as a sharp demarcation of the illuminated field, it is favourable to give the light source a slight displacement over the optical axis towards the lamp cap. The focus then still lies in the light source, but outside the centre thereof.
25 Depending on the size of the reflector body and the heat generated by the light source, the lamp temperature may rise locally, such as near the lamp cap, to a comparatively high value.

To avoid this, in a favourable embodiment, the first zone of the light-beam shaping surface is paraboloidally curved and its focus substantially coincides with the focus of the second zone. The first, paraboloidally curved zone then mainly illuminates the
30 central region of the field covered by the lamp, while the second zone curved along a revolved, tilted parabola branch mainly throws light on a region around the centre. Both zones, however, also contribute to the illumination of the other region, so that mixing of light is maintained. The light source may be comparatively far removed from the lamp cap in this embodiment, so that comparatively high temperatures in the first zone are counteracted.

The lamp vessel of the reflector lamp may be made of glass, for example of quartz glass, or alternatively of hard glass with an incandescent body acting as the light source, or of a ceramic material, for example mono- or polycrystalline aluminium oxide. If so desired, for example in the case of a ceramic lamp vessel, it may be accommodated in an envelope, for example one which is closed in a gastight manner, and for example made of quartz glass, such as for example if the space within the reflector body is not evacuated or filled with an inert gas.

The reflector body and the cover may be moulded from glass, but may alternatively be made from, for example, a synthetic resin. The reflector body may alternatively be made from metal. The light-beam shaping surface in the latter case may be obtained, for example, through polishing, or in the case of aluminium, through anodizing. The light-beam shaping surface may be obtained through deposition of a metal film, for example by vapour deposition, for example an aluminium, silver, or gold film. Alternatively, a reflecting interference film may be provided, built up from alternating layers of high and low refractive index such as, for example, of niobium oxide, tantalum oxide, silicon nitride, etc., and silicon oxide, respectively.

The cover may be formed as a lens, for example a prismatic lens. In that case the cover has, for example, prismatic rings at its inner surface. An otherwise narrow beam of approximately 10° may then be widened to, for example, approximately 30° .

It is favourable when the second zone having the greater number of axial lanes extends entirely between the light emission window and a plane perpendicular to the optical axis and through the focus. In particular, the second zone extends up to locations which enclose an angle α of $80 \pm 5^\circ$ with the optical axis, measured from the focus. The first zone completes the light-beam shaping surface.

The reflector lamp according to the invention provides a welcome solution especially where the light source is formed by electrodes in an ionizable filling containing metal halides because of the unpleasant colour differences in the beam which occur with conventional reflector lamps having such light sources. The axial dimension of the light source may be, for example, approximately 5 to 10 mm, also depending on its type and envelope. Alternatively, the lamp is useful with an incandescent body, for example in a gas containing halogen, as the light source. Such an incandescent body may be, for example, a linear cylindrical body with an axial dimension of, for example, 3.5 mm in the case of a low-voltage lamp, or have an M-shape of, for example, 6 mm axial length in the case of a mains voltage lamp.

An embodiment of the reflector lamp according to the invention is shown in the drawing, in which

Fig. 1 shows a lamp partly in axial section, partly in side elevation;

Fig. 2 is the axial elevation of the light-beam shaping surface of Fig. 1;

5 and

Fig. 3 is a burner for an embodiment different from that in Fig. 1 in side elevation.

The electric reflector lamp of Fig. 1 is provided with a reflector body 1
10 with a concave light-beam shaping surface 2 having an optical axis 3. The reflector body has a light emission window 4 which is closed with a light-transmitting cover 5. A light source 13, electrodes in an ionizable gas with a discharge path 12 in between in the Figure, is arranged on the optical axis, accommodated in a lamp vessel 11 which is closed in a gastight manner and which is made of polycrystalline aluminium oxide in Fig. 1. A lamp cap 20 with
15 contacts 21 is connected to the reflector body 1. Current conductors 22 connect the light source 13 to respective contacts 21 of the lamp cap 20. The light-beam shaping surface 2 is subdivided into axial lanes 6.

The light-beam shaping surface 2 has the body of revolution about the optical axis 3 of a branch 7 of a parabola which has been tilted towards the optical axis 3 and
20 whose focus 8 lies on the optical axis inside the light source 13, between the electrodes. The axis of the parabola branch 7 is referenced 7' in Fig. 1. This axis encloses an angle of a few, for example 3 to 6, degrees with the optical axis 3. The axial lanes 6 are superimposed on said surface. The axial lanes 6 are plane in a direction transverse to their axial direction and give the light-beam shaping surface 2 cross-sections transverse to the optical axis 3 which are
25 regular polygons.

In the lamp drawn, the first zone 9 of the light-beam shaping surface 2 is paraboloidally curved, and its focus 8' substantially coincides with the focus 8 of the second zone 10.

It is evident from Fig. 2 that, when the light-beam shaping surface is
30 intersected by a plane transverse to the optical axis 3, for example adjacent its greatest or its smallest width, the lanes which are plane transversely to their axial direction give the cross-sections a regular polygonal shape. Similar cross-sections are obtained elsewhere with the exception of the small transitional area where the number of lanes changes.

A first zone 9 (Fig. 1) remote from the light emission window 4 has half

the number of axial lanes, i.e. 30 in the Figure, of a second zone 10 adjacent the light emission window, which has 60 lanes. The number of lanes in the first zone, however, may be chosen to be greater or smaller.

5 The second zone 10 extends completely between the light emission window 4 and a plane perpendicular to the optical axis 3 and through the focus 8, in Fig. 1 up to locations which enclose an angle α of $80 \pm 5^\circ$ with the optical axis, measured from the focus 8.

The ionizable filling of the discharge vessel 11 comprises rare gas and metal halides, for example sodium, thallium, and dysprosium halides. A high-pressure
10 discharge is maintained therein during operation.

The cover 5 is a lens with a prismatic inner surface.

In Fig. 1, the lamp vessel 11 is arranged in a gastight quartz glass envelope 14.

The lamp shown has a light emission window of approximately 6.5 cm,
15 consumes a power of 35 W during operation, and yields approximately 3400 lm. The reflector lamp generates a light beam which is independent of the burning position and homogeneous in colour, and which has a width of 30° and a luminous intensity of 7 kcd in the centre of the beam. The current conductor 22 which runs alongside the lamp vessel has no observable influence on the beam. When an optically inactive cover is used, the beam
20 width is 10° and the luminous intensity in the centre approximately 33 kcd. The beam formed shows little dependence on the location of the focus inside the light source in directions transverse to the axis 3.

In Fig. 3, the burner has an incandescent body as its light source 33 in the shape of an M in the elevation shown, accommodated in a glass lamp vessel 31 from
25 which current conductors 42 issue to the exterior, capable of connecting the light source to respective contacts of the lamp cap of a lamp. The burner may be accommodated in the reflector body of Fig. 1 or in a modification thereof, where the light-beam shaping surface entirely consists of the body of revolution of a tilted parabola branch. The focus 8 thereof will be positioned inside the light source. The light source consumes a power of 75 W when
30 operated on mains voltage. The lamp vessel has a filling of rare gas and hydrogen bromide. Inhomogeneities are avoided in the beam formed by the reflector lamp having this burner. The location of the focus within the light source in directions perpendicular to the axis 3 is found to be of little influence.

CLAIMS:

1. An electric reflector lamp provided with
a reflector body (1) with a concave light-beam shaping surface (2) having
an optical axis (3), which reflector body has a light emission window (4) which is closed off
with a light-transmitting cover (5),
5 a light source (13) on the optical axis, accommodated in a lamp vessel
(11) which is closed in a gastight manner,
a lamp cap (20) provided with contacts (21) and connected to the
reflector body (1),
current conductors (22) which connect the light source (13) to respective
10 contacts (21) of the lamp cap (20),
the light-beam shaping surface (2) being subdivided into axial lanes (6),
characterized in that
the light-beam shaping surface (2) is the body of revolution around the
optical axis (3) of a branch (7) of a parabola which has been tilted towards the optical axis
15 (3) and whose focus (8) lies on the optical axis inside the light source (13), the axial lanes
(6) being superimposed on said surface,
the axial lanes (6) are plane transverse to their axial direction and give
the light-beam shaping surface (2) cross-sections transverse to the optical axis (3) which are
regular polygons,
20 a first zone (9) remote from the light emission window (4) has half the
number of axial lanes which a second zone (10) adjacent the light emission window has.
2. An electric reflector lamp as claimed in Claim 1, characterized in that
the first zone (9) is paraboloidally curved and has a focus (8') which coincides substantially
with the focus (8) of the second zone (10).
- 25 3. An electric reflector lamp as claimed in Claim 1 or 2, characterized in
that the second zone (10) extends entirely between the light emission window (4) and a plane
perpendicular to the optical axis (3) and through the focus (8) of the second zone (10).
4. An electric reflector lamp as claimed in Claim 3, characterized in that
the second zone (10) extends up to locations which enclose an angle α of $80 \pm 5^\circ$ with the

optical axis, measured from its focus (8).

5. An electric reflector lamp as claimed in Claim 1 or 2, characterized in that the light source (13) is formed by electrodes in an ionizable filling containing metal halides.

5 6. An electric reflector lamp as claimed in Claim 1 or 2, characterized in that the cover (5) is a lens.

1/2

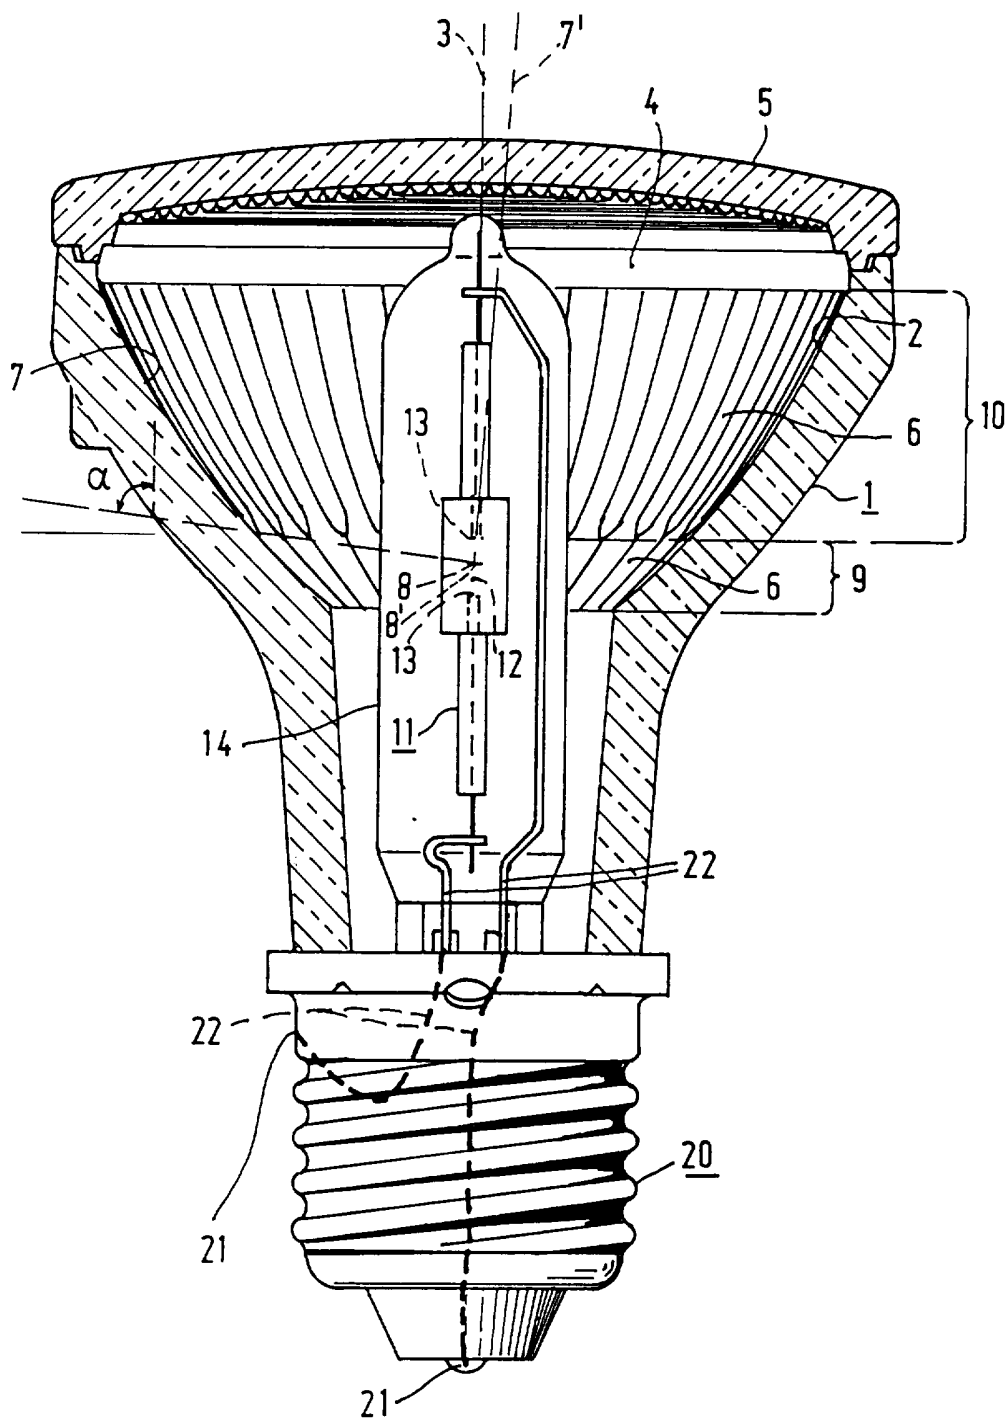


FIG. 1

2/2

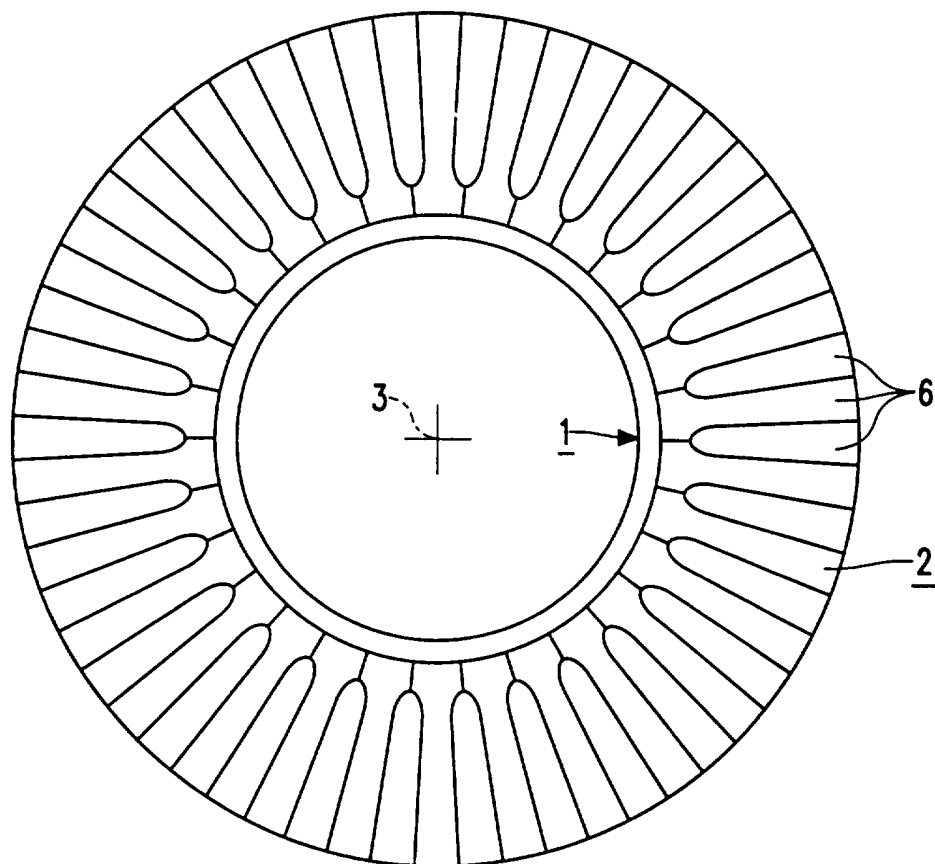


FIG. 2

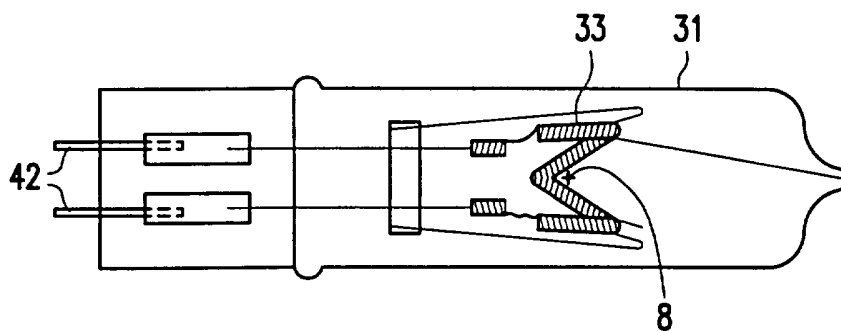


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 95/00635

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: F21V 7/06, H01J 5/02 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: F21V, H01J		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0543448 A1 (N.V. PHILIPS' GLOEILAMPENFABRIEKEN), 26 May 1993 (26.05.93), column 4, line 34 - line 35, figure 2 --	1-6
A	US 1726379 A (F.A. BENFORD), 27 August 1929 (27.08.29), page 1, line 15 - line 22, figure 2 --	1-6
A	US 4310772 A (D.O. TYLER ET AL), 12 January 1982 (12.01.82), column 2, line 21 - line 35, figure 1 --	1-6
A	US 4494176 A (R.W. SANDS ET AL), 15 January 1985 (15.01.85), column 3, line 44 - line 54, figures 1, 2 --	1-6
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
5 December 1995		12-12-95
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Vilho Juvonen Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 95/00635

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4982132 A (K.L. MEYER ET AL), 1 January 1991 (01.01.91), column 3, line 6 - line 36, figure 1 -- -----	1-6

INTERNATIONAL SEARCH REPORT

Information on patent family members

30/10/95

International application No.

PCT/IB 95/00635

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A1- 0543448	26/05/93	CA-A- 2083013 CN-A- 1073299 JP-A- 6060856 US-A- 5367219	19/05/93 16/06/93 04/03/94 22/11/94
US-A- 1726379	27/08/29	NONE	
US-A- 4310772	12/01/82	CA-A- 1134895	02/11/82
US-A- 4494176	15/01/85	CA-A- 1256078	20/06/89
US-A- 4982132	01/01/91	NONE	