

(86) Date de dépôt PCT/PCT Filing Date: 2003/01/16
(87) Date publication PCT/PCT Publication Date: 2003/07/31
(45) Date de délivrance/Issue Date: 2009/06/30
(85) Entrée phase nationale/National Entry: 2004/07/02
(86) N° demande PCT/PCT Application No.: JP 2003/000298
(87) N° publication PCT/PCT Publication No.: 2003/062474
(30) Priorités/Priorities: 2002/01/24 (JP2002-15741);
2002/10/02 (JP2002-290389)


(51) Cl.Int./Int.Cl. *C21B 13/14* (2006.01),
C21B 13/10 (2006.01)

(72) Inventeurs/Inventors:
KOBAYASHI, ISAO, JP;
MIYAHARA, ITSUO, JP;
TANAKA, HIDETOSHI, JP;
TOKUDA, KOJI, JP

(73) Propriétaire/Owner:
KABUSHIKI KAISHA KOBE SEIKO SHO, JP

(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : PROCEDE DE FABRICATION DE FER FONDU
(54) Title: METHOD FOR MAKING MOLTEN IRON

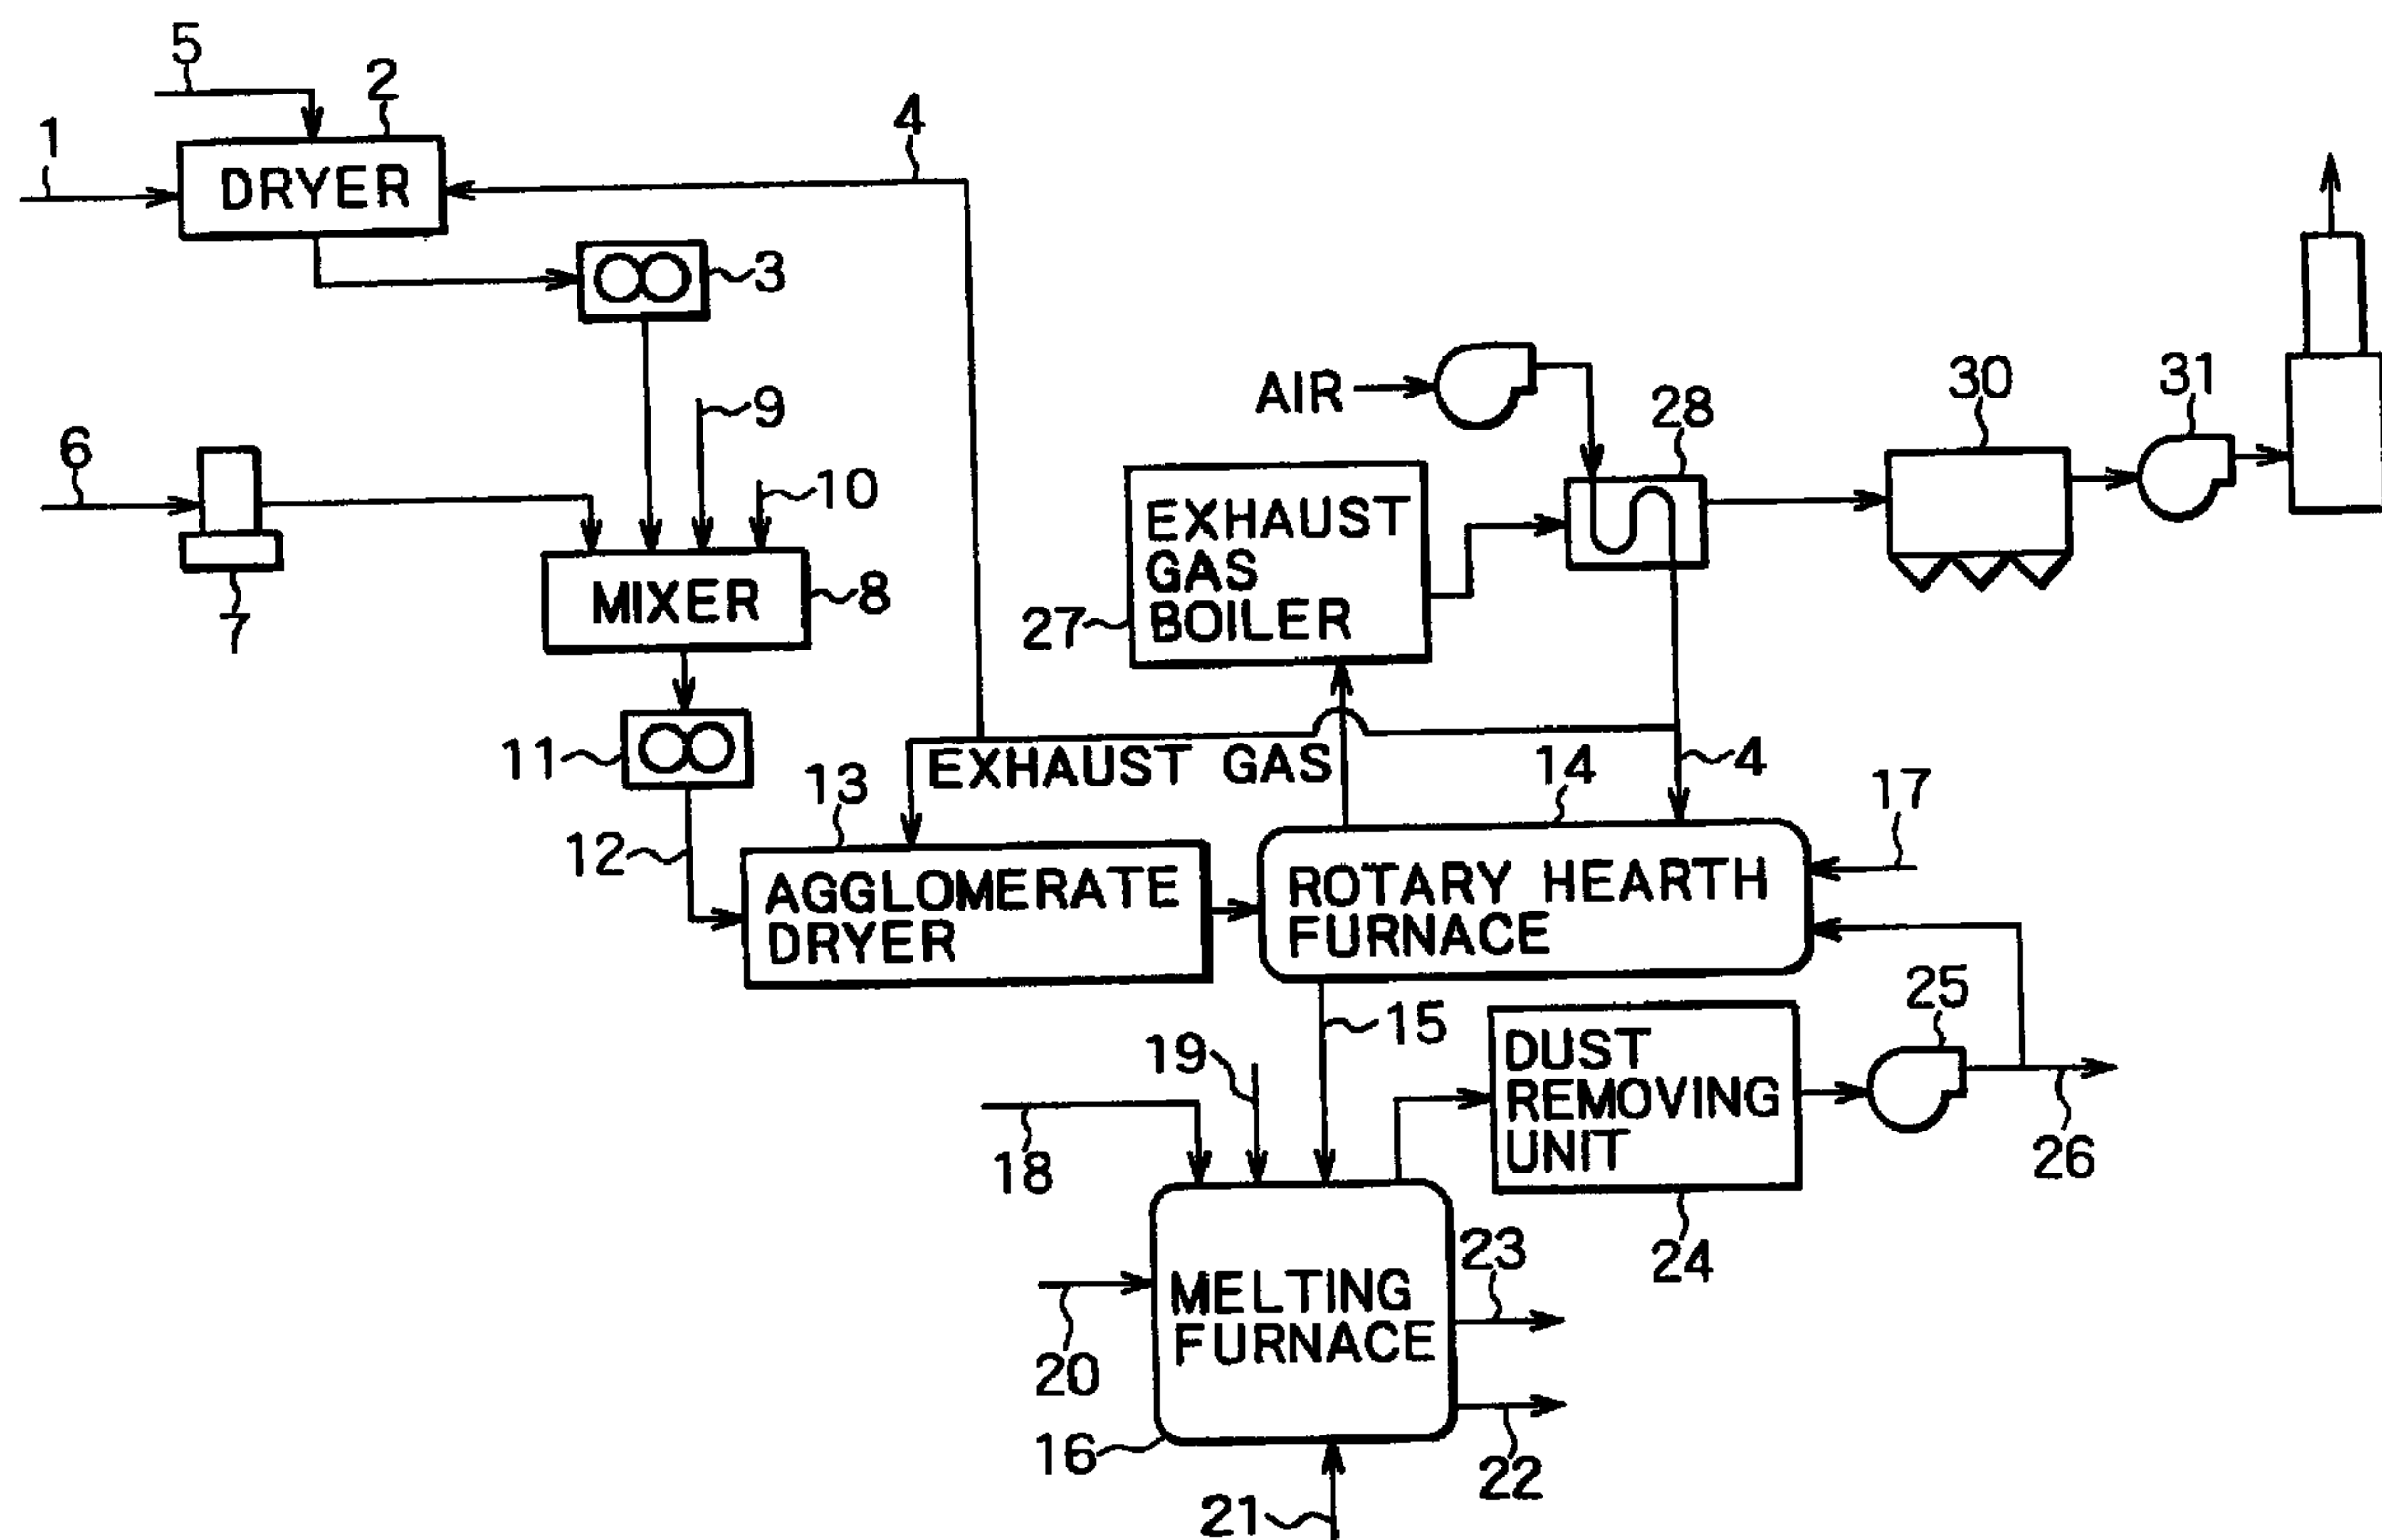

(57) **Abrégé/Abstract:**

A method for making molten iron includes the steps of feeding a raw material mixture containing an iron oxide material and a carbonaceous reductant into a heating reduction furnace to reduce iron oxide in the raw material mixture with the carbonaceous reductant into solid reduced iron; transporting the solid reduced iron to a melting furnace; and combustion of a carbonaceous material supplied as fuel to melt the solid reduced iron in the melting furnace for producing molten iron. After the metallization of the solid reduced iron is enhanced to at least 60%, the solid reduced iron is transported to the melting furnace. The amounts of oxygen

(57) **Abrégé(suite)/Abstract(continued):**

and the carbonaceous material supplied to the melting furnace are controlled so that the secondary combustion ratio of CO gas in the melting furnace is reduced to 40% or less. The heat transfer efficiency of the secondary combustion heat to the molten iron is preferably increased to at least 60%.

- 43 -

ABSTRACT

A method for making molten iron includes the steps of feeding a raw material mixture containing an iron oxide material and a carbonaceous reductant into a heating reduction furnace to reduce iron oxide in the raw material mixture with the carbonaceous reductant into solid reduced iron; transporting the solid reduced iron to a melting furnace; and combustion of a carbonaceous material supplied as fuel to melt the solid reduced iron in the melting furnace for producing molten iron. After the metallization of the solid reduced iron is enhanced to at least 60%, the solid reduced iron is transported to the melting furnace. The amounts of oxygen and the carbonaceous material supplied to the melting furnace are controlled so that the secondary combustion ratio of CO gas in the melting furnace is reduced to 40% or less. The heat transfer efficiency of the secondary combustion heat to the molten iron is preferably increased to at least 60%.

- 1 -

DESCRIPTION

METHOD FOR MAKING MOLTEN IRON

Technical Field

5 The present invention relates to methods for making molten iron. In particular, the present invention relates to a method for effectively making high-purity molten iron by thermal reduction of iron oxide materials such as iron ore with carbonaceous reductants such as carbonaceous
10 materials.

Background Art

 Nowadays, molten iron is produced by reduction of iron oxide materials such as iron ore by blast furnace-converter processes in the main. This process absolutely requires
15 coke as a reductant. Furthermore, the process makes economics of scale a priority; hence, the process cannot meet limited production of diversified products upon a change in economic trend.

 Direct ironmaking processes such as a MIDREX process
20 are suitable for limited production of diversified products. Unfortunately, these processes use natural gas as a reductant; hence, the sites for constructing plants are limited.

 Another method for making molten iron is a SL/RN
25 process that includes production of reduced iron with coal-

- 2 -

based carbonaceous reductants and melting of the reduced iron in an electric furnace. Many direct ironmaking processes have also been reported in which a rotary hearth furnace and an electric melting furnace are combined for
5 integration of reduction of iron oxide and melting of the reduced iron. Since these processes consume a great deal of electric power, construction of plants is limited to sites to which electric power can be easily supplied.

Under such circumstances, improvements in smelting
10 reduction process that produces molten iron using iron sources such as iron ore and carbonaceous reductants such as coal have been intensively studied. Typical examples of the processes are a DIOS process and a Hismelt process using a combination of a prereduction furnace and a smelting
15 reduction furnace. Key points in practical use of these processes are a high secondary combustion ratio and high heat transfer efficiency in the smelting reduction furnace. However, in such conditions, slag, which is produced as by-product during smelt reduction from gangue components in
20 iron sources such as iron ore, inevitably contains a high content of iron oxide (FeO). The iron oxide significantly erodes lining refractory of the furnace. A proposed method includes water-cooling of the furnace to suppress the erosion of the refractory. This proposed method, however,
25 has large heat loss from the furnace, significantly reducing

- 3 -

the productivity of molten iron and thermal energy efficiency.

One of the direct ironmaking processes includes heating of carbonaceous agglomerates (pellets or briquettes), which are shaped mixtures of iron sources such as iron ore and carbonaceous reductants such as carbonaceous materials, in a rotary furnace to reduce the iron sources and reduction of the product in a smelting reduction furnace. This process introduces hot exhaust gas generated in the smelting reduction furnace into the rotary furnace and uses the heat of the exhaust gas in the smelting reduction furnace to enhance the overall heat efficiency of the facilities. However, the hot exhaust gas from the smelting reduction furnace contains a large amount of dust that is deposited not only on the inner walls of pipes but also on the walls of the rotary furnace, inhibiting a stable continuous operation.

This process has another problem. If thermal fluctuation occurs in the smelting reduction furnace, the heat quantity of the hot gas supplied to the rotary furnace and the reduction potential vary, resulting in an unstable operation of the facilities. Such an unstable operation causes changes in reduction efficiency of iron oxide and metallization in the rotary furnace. As a result, the produced iron does not have constant purity. Furthermore,

- 4 -

the byproduct slag contains an increased amount of iron oxide (FeO), which erodes the hearth refractory.

In addition, in the smelting reduction process, large amounts of oxygen and heat are supplied into the smelting
5 reduction furnace. Thus, maintenance of furnace refractory and the tuyere is essential by using equipment for tilting and moving the furnace, resulting in increased production costs of molten iron.

Disclosure of Invention

10 An object of the present invention is to provide a method for effectively making high-purity molten iron from a mixture of iron oxide and a carbonaceous reductant with minimized erosion of a rotary hearth furnace and a melting
15 furnace refractory by adequately controlling operation conditions in a molten iron production process that uses a combination of a rotary hearth furnace and a melting furnace.

A method for making molten iron according to the present invention includes the steps of feeding a raw material mixture containing an iron oxide material and a
20 carbonaceous reductant into a heating reduction furnace to reduce iron oxide in the mixture with the carbonaceous reductant into solid reduced iron; transporting the solid reduced iron to a melting furnace; and combustion of a carbonaceous material supplied as fuel to melt the solid
25 reduced iron in the melting furnace for producing molten

- 5 -

iron, wherein after the metallization of the solid reduced iron is enhanced to at least 60%, the solid reduced iron is transported to the melting furnace, and the amounts of oxygen and the carbonaceous material supplied to the melting furnace are controlled so that the secondary combustion ratio of CO gas in the melting furnace is reduced to 40% or less.

The secondary combustion ratio in the melting furnace in the present invention is calculated from the analytical concentrations of exhaust gases from the melting furnace by the following formula:

$$\text{Secondary combustion ratio} = 100 \times (\text{CO}_2 + \text{H}_2\text{O}) / (\text{CO} + \text{CO}_2 + \text{H}_2 + \text{H}_2\text{O})$$

The heat transfer efficiency is calculated from the observed temperatures of the gas and the molten iron discharged from the melting furnace and the above secondary combustion ratio.

In the raw material mixture used in the present invention, the carbon content (A), excluding volatile components, in the carbonaceous reductant and the carbonaceous material is preferably equal to or higher than the sum of the chemical equivalent necessary for reduction of iron oxide in the mixture, a target carbon content in the molten iron product, and an amount corresponding to the heat quantity necessary for melting of the solid reduced iron.

- 6 -

In such a condition, a series of steps including solid reduction of iron oxide in the raw material mixture, reduction, melting, and preparation of molten metallic iron can be smoothly performed with high efficiency.

5 The carbon content (A) may be adjusted by at least one of the carbonaceous reductant compounded in the raw material mixture to be fed into the heating reduction furnace, a carbonaceous reductant compounded in the reduced iron that is produced in the heating reduction furnace, and the
10 carbonaceous material supplied to the melting furnace.

 An oxygen-containing gas supplied to the melting furnace is preferably high-purity oxygen gas containing at least 90% oxygen, which enhances secondary combustion ratio in the melting furnace, facilitates control of the
15 combustion temperature in the secondary combustion and the heat transfer efficiency to the molten iron bath, and reduces exhaust gas and thus dust generation. The high-purity oxygen gas may be supplied to the melting furnace by bottom blowing, top blowing, side blowing, or combination
20 thereof. Top blowing and side blowing of the high-purity oxygen gas toward a slag layer preferably enhances the combustion efficiency of the added carbonaceous material in the slag layer, resulting in enhanced heat transfer efficiency. Preferably, the heat transfer efficiency of the
25 secondary combustion heat to the molten iron is increased to

- 7 -

at least 60%.

The melting furnace may be of a stationary (i.e. non-tilting) type or a tilting type. A preferable process for facilitating reduction melting by simple operations includes
5 feeding the solid reduced iron, the carbonaceous material, and a flux for adjusting the slag compositions from the top of the melting furnace by gravity. Preferably, in the melting furnace, inert gas is injected into the molten iron to agitate the molten iron. Melting of the solid reduced
10 iron is further facilitated and the processing time is reduced.

In case of use of the stationary melting furnace, preferably a tap hole is provided in a sidewall for discharging molten iron and molten slag at a height from
15 which the inert gas cannot be blown over slag layer. Clogging of the tuyere due to gas blowing is thereby prevented.

The iron oxide material used in the present invention is generally iron ore, and may be mill scales; iron oxide-
20 containing dust i.e., blast furnace dust and converter furnace dust; and iron oxide containing nonferrous metal or its oxide, i.e., ore containing nonferrous metals, such as nickel, chromium, manganese, and titanium and oxides thereof, and dust and slag discharged from metal refining facilities.
25 These nonferrous metals and oxides thereof may be allowed to

- 8 -

be transferred to slag that is generated during producing the molten iron so that high-purity nonferrous metals and nonferrous metal oxides are recovered as products or raw materials.

5 In the process of melting the solid reduced iron in the melting furnace, the molten metallic iron contains a considerable amount of sulfur, which is derived from carbonaceous materials. In this process, preferably, an adequate amount of CaO-containing material is added such
10 that the basicity (CaO/SiO_2) of the slag formed in the melting furnace is at least 1.2. Thereby, the sulfur transferred to the molten slag is readily increased, resulting in a reduction in sulfur content in metallic iron. Preferably, the amount of the carbonaceous material fed into
15 the melting furnace is adjusted such that the carbon content in the molten metallic iron is at least 2%. The sulfur partition ratio in the slag is thereby increased to further reduce the sulfur content in the molten iron.

 The solid reduced iron produced in the heating
20 reduction furnace is directly fed into the melting furnace while maintaining high temperature. Thus, the heat of the solid reduced iron is effectively used for melting the solid reduced iron. By occasion of restriction of the facilities, the solid reduced iron may be temporarily stored in a yard
25 and then may be fed into the melting furnace.

In the above process, the combustion gas generated in the melting furnace has a considerable amount of heat. The heat may be used as a heat source in the heating reduction furnace. In such a case, the combustion gas is cooled and subjected to dust removal to reduce the dust volume in the gas to 5 g/Nm³ or less. Deposition of dust on the inner faces of pipes and on the walls of the heating reduction furnace is thereby prevented. Preferably, the exhaust gas from the heating reduction furnace is used for preheating of air. The hot air is used as at least one of combustion air in the heating reduction furnace, drying of the raw material mixture, and drying of the iron oxide material and the carbonaceous reductant to enhance overall heat efficiency of the process.

Accordingly, in one aspect, the present invention resides in a method for making molten iron, comprising the steps of: feeding a raw material mixture containing an iron oxide material and a carbonaceous reductant into a heating reduction furnace to reduce iron oxide in the raw material mixture with the carbonaceous reductant into solid reduced iron; transporting the solid reduced iron to a melting furnace; and combustion of a carbonaceous material supplied as fuel to melt the solid reduced iron in the melting furnace for producing molten iron, wherein after the metallization of the solid reduced iron is enhanced to at least 80%, the solid reduced iron is transported to the melting furnace, and the amounts of oxygen and the carbonaceous material supplied to the melting furnace are controlled so that a secondary combustion ratio of CO gas in the melting furnace is reduced to 40% or less.

9a

Preferably, in another aspect, the present invention reside in a first carbon content (A), excluding volatile components, in a first carbonaceous reductant and carbonaceous material is equal to or higher than the sum of the chemical equivalent necessary for reduction of iron oxide in the raw material mixture, a target carbon content in the molten iron product, and an amount corresponding to the heat quantity necessary for melting of the solid reduced iron.

More preferably, another aspect, the present invention resides in the first carbon content (A) is adjusted by at least one of the carbonaceous reductant compounded into the raw material mixture to be fed into the heating reduction furnace, a carbonaceous reductant compounded into the reduced iron that is produced in the heating reduction furnace, and the carbonaceous material supplied to the melting furnace.

In another aspect, the present invention provides a method for making molten iron, comprising the steps of: feeding a raw material mixture containing an iron oxide material and a carbonaceous reductant into a rotary hearth furnace to reduce the iron oxide material in the raw material mixture with the carbonaceous reductant into solid reduced iron; transporting the solid reduced iron to a melting furnace; and combustion of a carbonaceous material supplied as fuel to melt the solid reduced iron in the melting furnace for producing molten iron, wherein when the metallization of the solid reduced iron is enhanced to a range of 60% to 80%, the solid reduced iron is transported to the melting furnace, and the amounts of oxygen and the carbonaceous material supplied to the melting furnace are controlled so that a secondary combustion ratio of CO gas in the melting furnace is reduced to a range of 20% to 40%; and when the metallization of the solid reduced iron is enhanced to a range of more than 80%, the solid reduced iron is transported to the melting furnace, and amounts of oxygen and the carbonaceous material supplied to the melting furnace are controlled so that

9b

the secondary combustion ratio of CO gas in the melting furnace is reduced to a range of 40% or less.

Brief Description of the Drawings

Fig. 1 is a flow chart of an overall system according to an embodiment of the present invention.

Fig. 2 is a graph showing the relationship between the consumption of the carbonaceous material and the metallization at various secondary combustion ratios in a melting furnace.

Fig. 3 is a graph showing the relationship between the consumption of the carbonaceous material and the secondary combustion ratio at various metallizations.

- 10 -

Fig. 4 is a graph showing the relationship between the heat transfer efficiency to molten iron in a melting furnace and the secondary combustion ratio at various temperatures of exhaust gas from the melting furnace.

5

Best Mode for Carrying Out the Invention

Embodiments of the present invention will now be described in detail with reference to the drawings. As many different embodiments of the present invention may be made
10 without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments.

Fig. 1 is a flow chart of an overall system according to an embodiment of the present invention. Iron ore 1 as an
15 iron source is preferably fine ore having a particle size of about 8 mm or less. The iron ore 1 is dried in a dryer 2 and is pulverized in an ore mill 3. The dryer 2 uses air 4 as a heat source that is preheated by heat exchange with the sensible heat of the exhaust gas from a rotary hearth
20 furnace 14 and additional heat from auxiliary fuel 5, if necessary. Coal 6 used as a carbonaceous reductant is pulverized in a coal mill 7 and fed into a mixer 8. In the mixer 8, the pulverized iron ore 1, the milled coal 6, and optionally a binder 9 and an adequate amount of water are
25 mixed and are shaped into agglomerates 12, such as solid

- 11 -

spheres, grains, pellets, or briquettes, in an agglomeration machine 11. In this step, auxiliary materials 10 such as alumina, silica, and calcia may be used. The auxiliary materials 10 are consumed in smelting reduction in a melting
5 furnace. The auxiliary material 10 may be added alone or in combination.

In this embodiment, the raw material mixture is shaped into agglomerates. In the present invention, the use of such agglomerates is most preferable and the embodiments
10 using the agglomerates will be described below. In place of the agglomerates, however, a powdered mixture, or a lightly compacted mixture may be used in the present invention. A typical iron source is iron ore. Blast furnace dust and mill scales, which contain iron oxide, may be used together
15 the iron ore. In addition, other materials containing iron oxide and nonferrous metals and corresponding oxides, such as dust generated from metal refining facilities, may be used.

When carbonaceous materials such as coal 6 are used as
20 carbonaceous reductants, volatile components contained in the carbonaceous materials vaporize above 600°C and substantially do not contribute to reduction of iron oxide. Thus, on the basis of the carbon content, excluding the volatile carbon content, in the carbonaceous material, the
25 amount of the carbonaceous material used in the present

- 12 -

invention is determined by the sum of the chemical equivalent necessary for reduction of iron oxide, a target carbon content in the molten iron product, the heat quantity necessary for melting of the solid reduced iron in the melting furnace, and a small excessive amount corresponding to loss in the process.

The agglomeration machine 11 used in production of the agglomerates 12 is, for example, a pelletizing or briquetting machine. Preferably, the agglomerates 12 have a bulk density of at least 1.2 g/cm^3 and more preferably at least 1.8 g/cm^3 . This bulk density is determined such that heat transmitted to the surfaces of the agglomerates 12 rapidly enters the interior of the agglomerates 12 in a heating reduction furnace (rotary hearth furnace).

Preferably, the agglomerates 12 are dried in an agglomerate dryer 13 into a moisture content of 1% or less and are fed to a rotary hearth furnace 14 (heating reduction furnace). Drying air 4 used in this process is preferably preheated by heat exchange with the sensible heat of the exhaust gas from the rotary hearth furnace 14 to effectively utilize the exhaust heat. Preferably, the temperature of the drying air 4 is about 200°C or less to prevent explosive fracture of the agglomerates 12 caused by sudden volatilization of water. The dried agglomerates 12 are consecutively fed into the rotary hearth furnace 14 for

- 13 -

smelt reduction.

Preferably, the metallization of reduced iron 15 formed by smelt reduction is at least 60%, more preferably at least 80%, and most preferably at least 90% that correspond to the heat of fusion of scraps, as described below with reference to Fig. 2. Reducing gas discharged from a melting furnace 16 is used as fuel for the smelt reduction. The reducing gas is burned at a burner provided on the sidewalls of the rotary hearth furnace 14 to heat the agglomerates 12.

10 In order to maintain the above metallization of the reduced iron 15 in the heat reduction step, the combustion state of the burner must be always stable. Preferably, the exhaust gas from the melting furnace 16 is cooled and subjected to dust removal to reduce the dust volume in the gas to 5 g/Nm³ or less and more preferably 1 g/Nm³ or less. Furthermore, natural gas or powdered coal is preferably stocked as additional fuel 17, which is used in an initial stage of the operation of the facilities and in thermal compensation for the rotary hearth furnace 14.

20 In the rotary hearth furnace 14, CO gas generated by the reactions represented by formulae (2) and (4) below is subjected to secondary combustion in the presence of the preheated drying air 4, as represented in formula (1):



25 This heat of reaction is used for heat reduction of the

- 14 -

agglomerates 12. In this step, carbon monoxide is completely oxidized such that oxygen in the exhaust gas is substantially completely consumed. This means that the energy of the carbonaceous material is completely consumed
5 in the rotary hearth furnace 14. Accordingly, this process has high energy efficiency.

The reduced iron 15 produced in the rotary hearth furnace 14 may be discharged to the exterior of the production line, but preferably, is fed into the melting
10 furnace 16 as it is heated to enhance the heat efficiency. It is preferable that the reduced iron 15 be continuously fed from the top of the melting furnace 16 by gravity. In this step, a carbonaceous material 18 as a heat source for melting the reduced iron 15 and an auxiliary material 19 for
15 slag control are also fed from the top of the melting furnace 16. Such top feeding facilitates maintenance of the feeding unit.

The carbonaceous material 18 are allowed to react (burned) with an oxygen source 20 in the melting furnace 16
20 to reduce iron oxide remaining in the reduced iron 15 and to melt the reduced iron for producing molten iron having a carbon content of preferably 2% or more, more preferably 2.5% to 4.5%.

Preferably, the amounts of the oxygen source 20 and the
25 carbonaceous material 18 are controlled such that the

- 15 -

secondary combustion ratio of CO gas generated in the melting furnace 16 is 40% or less, and more preferably in the range of 20% to 40%. As a result, the heat efficiency of the heat of the secondary combustion to the molten metal can be increased to at least 60%, more preferably at least 75%, and most preferably at least 80%. The reasons for limitation of these figures will be described below.

Preferably, the oxygen source 20 used is high-purity oxygen gas containing at least 90% oxygen, which is injected toward the slag layer on the molten metal in the melting furnace 16 by top blowing, side blowing, or bottom blowing to agitate the slag layer. Top blowing and side blowing of the high-purity oxygen gas are preferable to facilitate the maintenance of the tuyere. Furthermore, such blowing manner does not require tilting of the melting furnace 16; hence, the structure of the melting furnace can be simplified.

The use of high-purity oxygen gas containing at least 90% oxygen facilitates control of the secondary combustion ratio and calorie control of the reducing gas fed from the melting furnace 16 to the rotary hearth furnace 14, namely, necessary and sufficient control for maintaining a theoretical combustion temperature. Preferably, inert gas 21 is injected into the molten iron by bottom blowing to agitate the molten iron. Melting of the solid reduced iron 15 is further facilitated.

- 16 -

At least part or all of the carbonaceous material 18 fed into the melting furnace 16 and/or another carbonaceous material may be directly fed into the rotary hearth furnace 14, in addition to the agglomerates 12. These another
5 carbonaceous materials may be fed as a hearth material on the hearth of the rotary hearth furnace 14, may be fed with the agglomerates 12 in the rotary hearth furnace 14, or may be fed in the rotary hearth furnace 14 after the agglomerates 12 are fed. The another carbonaceous materials
10 may be powdered when they are used as the hearth material. However, the another carbonaceous materials are not necessarily powdered and may be agglomerates when they are simultaneously fed together with the agglomerates 12 or fed after the agglomerates 12 are fed, into the rotary hearth
15 furnace 14. Since the volatile components in the another carbonaceous materials are vaporized and are used as a heating material, the volume of the additional fuel 17 is reduced.

The other carbonaceous material represents a different
20 type from the carbonaceous material 18 fed into the melting furnace 16. For example, when the carbonaceous material 18 fed into the melting furnace 16 is coke, the other carbonaceous material is coal. Accordingly, the other carbonaceous material in the present invention does not
25 necessarily represent a quite different type. In addition,

- 17 -

the other carbonaceous material and the carbonaceous material 18 may be the same type.

The carbonaceous material is heated to be charred in the rotary hearth furnace 14 and is fed to the melting furnace
5 for melting of the reduced iron. In this process, the volatile components of the carbonaceous material are removed and the heated char is fed into the melting furnace. Thus, the volume of the exhaust gas when the carbonaceous material is fed into the melting furnace is reduced compared with a
10 case of use as the carbonaceous material 18 for the melting furnace, resulting in simplification of the exhaust gas facility and reduction in the volume of the exhaust gas 26. As in the carbonaceous material 18, the other carbonaceous material may be coal, wood chips, waste plastic, or waste
15 tires. Alternatively, the other carbonaceous material may be coke, wood coal, or coke breeze not containing volatile components.

The melting furnace 16 is provided with a tap hole on a sidewall to discharge the molten iron 22 and molten slag 23.
20 The tap hole is preferably provided at a height from which the inert gas 21 cannot be discharged. Preferably, the melting furnace 16 has an enclosed structure so that all or part of the gas generated in the melting furnace 16 is fed into the rotary hearth furnace 14 and is effectively used as
25 a heat source. As shown in the drawing, the gas generated

- 18 -

in the melting furnace 16 is cooled, fed into a dust removing unit 24 to reduce the dust volume to about 5 g/Nm³ or less and more preferably 1 g/Nm³ or less, and fed into the rotary hearth furnace 14. Deposition of dust on the inner faces of pipes and on the inner walls of the rotary hearth furnace 14 is thereby prevented. In order to effectively use the sensible heat of the exhaust gas from the heating reduction rotary hearth furnace 14, preferably, the sensible heat of the exhaust gas is recovered with, for example, a radiant heat transfer boiler that is provided at the outlet of the melting furnace 16 and is supplied to the dust-removing unit 24.

The gas is fed into a booster blower 25 for control of the pressure and is fed into the combustion burner of the rotary hearth furnace 14. Preferably, the excess gas 26 is discharged to the exterior and is used as fuel gas for adjacent facilities. Preferably, high-pressure oxygen is charged into the melting furnace 16 having an enclosed structure to pressurize the interior of the melting furnace 16. In such a process, the booster blower 25 is unnecessary.


The exhaust gas from the rotary hearth furnace 14 does not substantially have latent heat but still is at high temperature. Thus, the exhaust gas is preferably subjected to heat recovery in an exhaust gas boiler 27 and is used for preheating of air in a heat exchanger 28. The exhaust gas

- 19 -

after heat recovery in the heat exchanger 28 is purified through a dust-removing unit 30 and is discharged into atmosphere through a suction fan 31. The suction fan 31 controls the internal pressure of the rotary hearth furnace
 5 14.

The method of the present invention is performed according to the above process flow. The operation conditions of the rotary hearth furnace 14 and the melting furnace 16 will now be described in further detail, because
 10 these conditions are particularly important in the present invention.

First, the rotary hearth furnace 14, a main component of the reduced iron making facilities, will be described. When a mixture of an iron oxide-containing material and a
 15 carbonaceous reductant or preferably agglomerates of the mixture are fed into and heated in the rotary hearth furnace, reactions represented by formulae (2) to (4) proceeds:

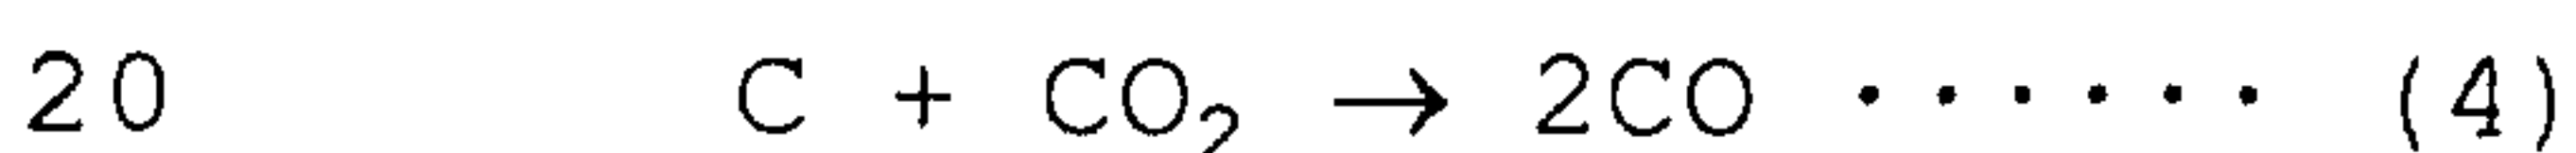

Iron oxide is thereby reduced. The amount of CO and CO₂ generated depends on the amount of the carbonaceous reductant contained in the agglomerates and the heating conditions.

25 The raw material mixture fed into the rotary hearth

- 20 -

furnace is heated by the heat of combustion from the burner and by the radiant heat from the sidewalls and ceiling of the furnace. Since heat radiation is in proportional to a fourth power of the temperature, rapid heating and reduction are achieved. Iron oxide in the raw material mixture can be reduced into metallic iron by heating for a significantly short time, for example, for 6 to 12 minutes.

The heat received on the surface of the raw material mixture is transported toward the interior of the mixture by thermal conduction to promote the reactions represented by formulae (2) to (4). Preferably, the raw material mixture is agglomerate having a bulk density of at least 1.2 g/cm^3 and more preferably 1.8 g/cm^3 for promoting the heat conduction toward the interior of the raw material mixture.

The ratio of the iron oxide material to the carbonaceous reductant must be determined so that the solid carbon content (A), excluding the volatile components, in the carbonaceous reductant and the carbonaceous material is equal to or higher than the chemical equivalent required for reduction of iron oxide. Preferably, the ratio is determined in view of the heat of combustion required for melting in the melting furnace and a target carbon content in the molten iron formed by smelting reduction.

In the raw material mixture used in the present invention, the carbon content (A), excluding volatile

- 21 -

components, in the carbonaceous reductant and carbonaceous material is preferably equal to or higher than the sum of the chemical equivalent necessary for reduction of iron oxide in the mixture, the target carbon content in the molten iron product, and an amount corresponding to the heat quantity necessary for melting of the solid reduced iron. The carbon content may be adjusted by at least one of (1) a carbonaceous reductant compounded in the raw material mixture to be fed into the heating reduction furnace, (2) a carbonaceous reductant compounded in the reduced iron that is produced in the heating reduction furnace and that is not yet fed into the melting furnace, and (3) the another carbonaceous material fed into the heating reduction furnace. When a large amount of carbonaceous material is compounded in the preparation step of the raw material mixture, the amount of the carbonaceous material added to the solid reduced iron prepared by smelt reduction and the amount of the carbonaceous material fed into the melting furnace may be appropriately reduced.

20 In the smelting reduction in the melting furnace, a CaO-containing material is preferably added to the melting furnace alone or in combination with the solid reduced iron so that the basicity of the by-product slag is at least 1.2. At a basicity of 1.2 or more, the sulfur components

25 contained in the molten iron migrate toward the molten slag,

- 22 -

and thus the resulting metallic iron contains reduced amounts of sulfur components.

As the FeO content in the by-product slag decreases, the distribution coefficient of the sulfur components in the slag increases and thus the sulfur content in the molten iron decreases. Since the FeO content decreases as the carbon content (B) increases in the molten iron, the carbon content (B) in the molten iron is preferably at least 2% and more preferably at least 3% to enhance the distribution coefficient of the sulfur components in the slag and thus to reduce the sulfur content in the molten iron. Since FeO erodes the lining refractory, such a reduction in FeO content is preferable in order to suppress the erosion. The carbon content (B) in the molten iron may be adjusted by at least one of (1) a carbonaceous reductant compounded in the raw material mixture to be fed into the heating reduction furnace, (2) a carbonaceous reductant compounded in the reduced iron that is produced in the heating reduction furnace and that is not yet fed into the melting furnace, (3) a carbonaceous material supplied to the melting furnace, and (4) the another carbonaceous material fed into the heating reduction furnace.

In order to carry out smelting reduction in the melting furnace effectively, a key point is how the metallization of the iron source (reduced iron) fed into the melting furnace

- 23 -

is increased. Thus, the metallization of the reduced iron must be increased in the rotary hearth furnace.

The heating condition of the raw agglomerates, therefore, must be adequately controlled in the rotary
5 hearth furnace. Thus, the properties of the fuel gas for such heating must be stabilized as much as possible. When the gas generated in the melting furnace is used as fuel gas in the rotary hearth furnace, higher calorie enables rapid heating and facilitates temperature control in the rotary
10 hearth furnace. This indicates that the secondary combustion ratio in the melting furnace is suppressed to reduce the CO₂ content. In order to ensure stable combustion at the burner for a long time, it is preferable that the dust volume in the fuel gas be minimized for
15 preventing deposition of the dust on the feeding pipes and fuel gas burner and clogging of nozzles.

Equipment for cooling the gas from the melting furnace and removing the dust, therefore, is provided upstream of the rotary hearth furnace. It is preferable in the dust-
20 removing process that the dust volume in the gas be 5 g/Nm³ or less and more preferably 1 g/Nm³ less. The operation temperature of the removing unit is preferably about 800°C or less in view of heat resistance and safety of the unit.

The operation conditions of the melting furnace for
25 smelting reduction of the solid reduced iron will now be

- 24 -

described. The carbonaceous material fed into the iron bath in the melting furnace reacts with simultaneously supplied high-purity oxygen to form CO gas as shown in formula (5):



5 The CO gas is secondarily burned in a gas phase on the iron bath as shown in formula (6):



Since these reactions are exothermic, the heat is transported to the iron bath and is used for further
10 reducing and melting the solid reduced iron.

Fig. 2 is a graph showing the relationship between the consumption of the carbonaceous material and the metallization and Fig. 3 is a graph showing the relationship between the consumption of the carbonaceous material and the
15 secondary combustion ratio. These graphs demonstrate that the consumption of the carbonaceous material decreases with an increase in the metallization of the fed iron source (Fig. 2) and with an increase in the secondary combustion ratio (Fig. 3).

20 Fig 2 shows that the consumption of the carbonaceous material is saturated at a metallization of 60% or more for a secondary combustion ratio of 40% or less. This condition is significantly favorable in a stable operation since the consumption of the carbonaceous material is stable
25 regardless of the metallization.

- 25 -

Accordingly, the metallization of the iron source (reduced iron) fed into the melting furnace is preferably increased as much as possible to at least 60%, more preferably at least 80%, and most preferably at least 90% that corresponds to a value for general iron scrap, for suppressing the consumption of the carbonaceous material and stable operation.

A metallization of at least 60% is achieved by, for example, adequately controlling the amount of the carbonaceous reductant added during the production of the raw material mixture and the heat reduction conditions in the rotary hearth furnace. Specifically, the carbonaceous reductant is added in a necessary and sufficient amount for reduction of the iron oxide in the preparation stage of the raw material mixture, the operational temperature of the rotary hearth furnace is between 1,100°C and 1,400°C and more preferably between the 1,250°C and 1,350°C, and the holding time is at least 6 minutes and more preferably at least 8 minutes.

Fig. 3 shows that a higher secondary combustion ratio is preferable to effectively reduce the consumption of the carbonaceous material in the melting furnace and is more preferably at least 20%. At a secondary combustion ratio exceeding 40%, however, the consumption of the carbonaceous material is not further reduced. Accordingly, the secondary

- 26 -

combustion ratio is preferably 40% or less and more preferably 30% or less.

5 The secondary combustion ratio varies with the carbonaceous material content and the oxygen gas content in the melting furnace. Thus, the amounts of the carbonaceous material and the oxygen gas are adequately controlled to achieve a secondary combustion ratio of 40% or less and more preferably 20% to 40%.

10 The secondary combustion increases the temperature of the gas phase in the melting furnace and has a severe thermal impact on the lining refractory. A reduced metallization in the iron source represents an increased unreduced iron oxide (FeO) content in the iron source and thus accelerated erosion of the lining refractory due to an
15 increased FeO content in the molten slag. Water cooling, which is carried out for suppressing erosion of the refractory, causes heat loss that adversely affects the production efficiency and costs.

20 Agitation of the iron bath is effective for promoting the melting of the iron source (reduced iron) added to the melting furnace. Vigorous agitation, however, causes an increase in dust in the exhaust gas from the melting furnace up to about 100 g/Nm^3 , resulting in reduced iron yield and clogging of the hot gas pipes due to deposition of the dust.

25 Accordingly, in the present invention, the

- 27 -

metallization of the reduced iron fed into the melting furnace is increased to at least 60% and more preferably at least 80% to reduce the consumption of the carbonaceous material, and the secondary combustion ratio in the melting furnace is reduced to 40% or less, more preferably 20% to 40%, and most preferably 20% to 35% to prevent an excess increase in gas phase temperature and to reduce impact to the melting furnace.

The oxygen source fed into the melting furnace may be air. In such a case, however, nitrogen that contained in an amount four times oxygen is also heated, resulting in increased preheating loss and an increased volume of discharged gas. Accordingly, the oxygen source is preferably high-purity oxygen and more preferably high-purity oxygen gas containing at least 90% oxygen to enhance heat efficiency and to avoid an increased volume of the discharged gas. The high-purity oxygen can also reduce the formation of dust.

Fig. 4 is a graph showing the relationship between the heat transfer efficiency and the secondary combustion ratio at various temperatures of exhaust gas from the melting furnace for comparison of the present invention with conventional examples.

Fig. 4 demonstrates that the exhaust gas temperature increases as the secondary combustion ratio increases at

- 28 -

constant heat transfer efficiency and that an increased amount of heat is discharged without being used in the melting furnace. When the exhaust gas temperature is maintained at constant, the heat transfer efficiency
5 increases with the secondary combustion ratio, showing effective use of heat. In EXAMPLE A in Fig. 4, scrap is used as the iron source fed into the melting furnace where the heat transfer efficiency is as high as 89% and the exhaust gas temperature is as low as about 1,650°C at a
10 secondary combustion ratio of 20%.

In EXAMPLE B, reduced iron having a metallization of 30% is used as the iron source fed into the melting furnace. Since the secondary combustion ratio is as high as about 45%, the exhaust gas temperature is 1,900°C causing increased
15 thermal impact to the lining refractory and the heat transfer efficiency is decreased to 85%. Since the metallization of the iron source is 30% in EXAMPLE B, the FeO content in the by-product slag formed during the smelting reduction increases, accelerating erosion of the
20 lining refractory.

According to these results, the preferable conditions for operating the combined facilities including the heat reducing apparatus (rotary hearth furnace) and the melting furnace for smelting reduction of the reduced iron produced
25 in the rotary hearth furnace are as follows: (1) the

- 29 -

metallization in the rotary hearth furnace is increased to at least 60% and more preferably at least 80% to reduce residual FeO as much as possible; (2) the secondary combustion ratio in the melting furnace is controlled to be 5 40% or less and more preferably in the range of 20% to 40% so that the exhaust gas from the melting furnace has calorie that is necessary for fuel in the rotary hearth furnace; and (3) the secondary combustion ratio is suppressed to 40% or less to suppress an increase in the exhaust gas temperature 10 and thus to suppress erosion of the lining refractory in the melting furnace. In Fig. 4, the hatched region represents the preferable conditions.



As shown in Figs. 2 and 3, the amounts of the oxygen and the carbonaceous material fed into the melting furnace 15 are controlled and the heat transfer efficiency of the secondary combustion to the molten iron is increased to at least 60% and more preferably at least 75% so that the metallization of the reduced iron in the rotary hearth furnace is increased to at least 60% and the secondary 20 combustion ratio of CO gas generated in the melting furnace is reduced to 40% or less.

The heat transfer efficiency (Ef) of the heat of the secondary combustion to the molten iron is defined as follows:

25
$$Ef (\%) = \{1 - (H_3 + H_4 - H_2) / H_1\} \times 100$$

- 30 -

wherein H_1 is the heat of secondary combustion of CO and H_2 gases generated in the bath as represented by the following reactions:

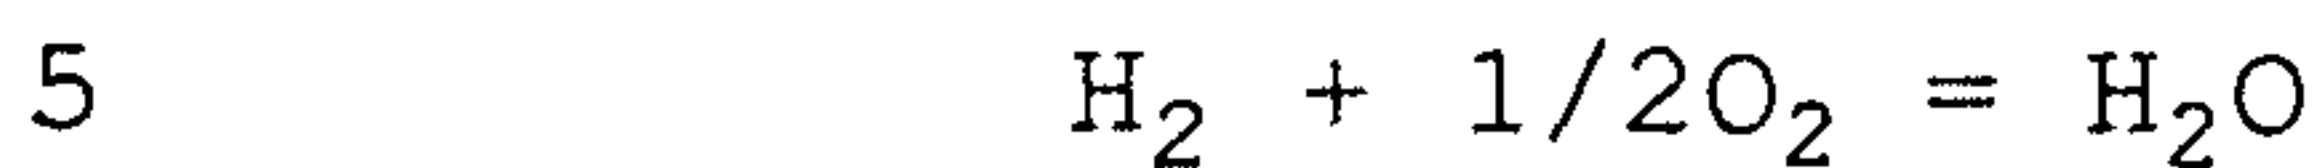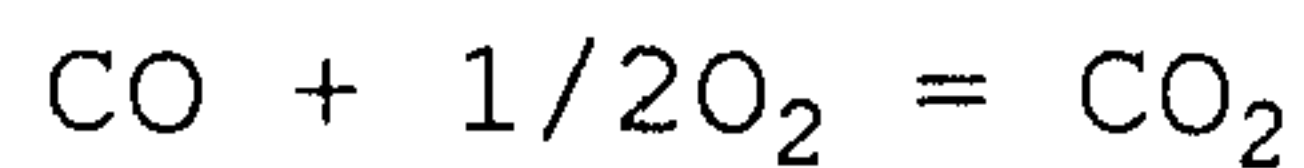

H_2 is the sensible heat of gas generated in the bath, wherein the volume and the composition of the gas are calculated from the material balance and the temperature of the gas is assumed to be the same as the bath temperature;

10 H_3 is the sensible heat of gas discharged from the furnace; and

H_4 is the heat loss at the gas phase in which the secondary combustion reaction occurs, the heat loss corresponding to 10% to 20% of the total heat input.

15 Under such conditions, the life of the lining refractory in the melting furnace is prolonged. When the melting furnace is of a stationary type, it can be operated for a long time without maintenance and repairing. However, in the present invention, a tilting type melting furnace may
20 be used instead of the stationary melting furnace.

According to the present invention, in the production of molten iron by feeding a raw material mixture containing a carbonaceous reductant into a heating reduction furnace such as a rotary hearth furnace, reducing iron oxide in the
25 mixture to form solid reduced iron, and further reducing and

- 31 -

melting the reduced iron in a melting furnace,

(1) the metallization of the solid reduced iron in the heating reduction furnace is increased to at least 60%;

(2) the amounts of oxygen and a carbonaceous material
5 are controlled so that the secondary combustion ratio of CO generated in the melting furnace is reduced to 40% or less;

(3) the heat transfer efficiency of heat of the secondary combustion is increased to at least 60%; and

(4) the melting furnace has an enclosed structure and
10 all or part of the gas generated in the melting furnace is fed into the heating reduction furnace to heat the solid reduced iron in the melting furnace. Molten reduced iron having a carbon content of about 1.5% to 4.5% can thereby be produced with high productivity and high energy efficiency
15 with suppressed deterioration of the heating reduction furnace and the melting furnace.

EXAMPLES

The present invention will now be described in further
20 detail by EXAMPLES. According to the flow chart shown in Fig. 1, operations were carried out using raw ore and coal having compositions shown in Table 1 under conditions shown in Table 2. The results are also shown in Table 2.

25 Table 1 Composition of Raw Materials (mass percent)

- 32 -

Iron ore	Total Fe	68.18 (Note)
	FeO	0.01
	SiO ₂	0.83
	Al ₂ O ₃	0.47
	CaO	0.05
Coal	Fixed carbon	71.0
	Volatile component	19.8
	Ash	9.2

Note: 91.4% as Fe₂O₃; the balance is TiO₂, Na₂O, K₂O etc.

Table 2

Experiment		1	2	3	4	5	6
Iron ore (kg/ton product)		1,410	1,410	1,411	1,411	1,411	1,410
Coal (kg/ton product)	Amount as carbon	459	459	459	459	459	459
	Amount as carbon fed into melting furnace	105	111	111	124	73	211
Oxygen injected into melting furnace (Nm ³ /ton product)		108	119	111	126	93	211
Secondary combustion ratio in melting furnace (%)		30.0	30.0	28.0	30.0	50.0	10
Heat transfer efficiency in melting furnace (%)		84.6	89.3	88.7	73.1	85.0	72.5
Metallization in rotary hearth furnace (%)		90	90	90	90	90	90
Amount of auxiliary fuel supplied into rotary hearth furnace (Nm ³ /ton product)		6	0	0	0	39.0	0
Excess gas generated in melting furnace (Nm ³ /ton product)		0	3	0	36	0	0
Carbon content in molten iron (%)		3	3.2	2.8	3.8	2.3	4.5
Dust volume in exhaust gas from melting furnace (g/Nm ³)		1.0	4.0	3.2	5.4	3.1	5.0
Oxygen purity percent of oxygen gas blown into melting furnace (%)		99.8	99.8	99.8	99.8	99.8	99.8

- 34 -

In Experiments 1 to 3 shown in Table 2, the metallization of the reduced iron produced in the rotary hearth furnace was maintained at 90%, the secondary combustion ratio in the melting furnace was maintained at 40% or less, and the heat transfer efficiency was maintained at 60% to 90%. In Experiment 1, all the gas generated in the melting furnace was introduced into the rotary hearth furnace and an auxiliary fuel (natural gas) supplied a deficiency of calorie.

10 In Experiment 2, the heat transfer efficiency and gas generation were enhanced so that no auxiliary fuel was used in the rotary hearth furnace. Although the dust volume in the exhaust gas from the melting furnace slightly increased but did not disturb the operation. A slightly excess amount
15 of exhaust gas, which could be used as an external heat source, was generated in the melting furnace.

In Experiment 3, all process parameters were optimized not to use the auxiliary fuel and not to generate the excess gas from the melting furnace. An energy-closed operation in
20 view of energy was achieved in a combination of the rotary hearth furnace and the melting furnace.

In Experiment 4, the secondary combustion ratio was as low as 30%. Since the heat transfer efficiency to the molten iron in the melting furnace was 73% that was a
25 somewhat low level, the amounts of coal and oxygen used were

- 35 -

increased. Thus, the excess gas and the dust concentration also slightly increased. In Experiment 6, the carbonaceous material fed into the melting furnace was increased to increase the carbon content in the molten iron to a
5 saturated carbon content. According to the present invention, the carbon content in the molten iron can be increased to a saturated content by adjusting the carbon content fed into the melting furnace.

In Experiment 5, the secondary combustion ratio in the
10 melting furnace was excessively increased. Although the heat transfer efficiency is enhanced, the volume of the exhaust gas fed into the heating reduction furnace and the quantity of heat (reducing potential) were decreased. As a result, the rotary hearth furnace required additional
15 burning using auxiliary fuel.

These results show that optimization of the operation conditions allows production of high-purity molten iron with high energy efficiency and high productivity through a series of stable operations from solid reduction to smelting
20 reduction without excess thermal impact to the melting furnace. As shown in Experiment 3, an energy-closed operation in view of energy was achieved using these molten iron production facilities.

In production of molten iron according to Experiment 3,
25 an additional carbonaceous material for heating the melting

- 36 -

furnace and calcium oxide (CaO) were added so that the basicity (CaO/SiO₂ ratio) of the product slag was in the range of 1.5 to 1.6. The sulfur content of the molten iron was determined. In the initial stage of the operation, the sulfur content gradually increased and reached about 0.04 mass percent 40 minutes later. The sulfur content was saturated at 0.04 mass percent thereafter. Probably, an increased basicity due to addition of CaO promotes migration of sulfur from the molten iron to the slag.

10

Industrial Applicability

The method for making molten iron according to the present invention can effectively produce molten iron with reduced energy compared with conventional methods. This method suppresses damaging of the refractory and provides elasticity of production in an iron making process.

15

CLAIMS:

1. A method for making molten iron, comprising the steps of:
feeding a raw material mixture containing an iron oxide material and a carbonaceous reductant into a rotary hearth furnace to reduce the iron oxide material in the raw material mixture with the carbonaceous reductant into solid reduced iron;
transporting the solid reduced iron to a melting furnace;
and

combustion of a carbonaceous material supplied as fuel to melt the solid reduced iron in the melting furnace for producing molten iron,

wherein when the metallization of the solid reduced iron is enhanced to a range of 60% to 80%, the solid reduced iron is transported to the melting furnace, and the amounts of oxygen and the carbonaceous material supplied to the melting furnace are controlled so that a secondary combustion ratio of CO gas in the melting furnace is reduced to a range of 20% to 40%; and when the metallization of the solid reduced iron is enhanced to a range of more than 80%, the solid reduced iron is transported to the melting furnace, and amounts of oxygen and the carbonaceous material supplied to the melting furnace are controlled so that the secondary combustion ratio of CO gas in the melting furnace is reduced to a range of 40% or less.

2. The method according to claim 1, wherein air is preheated by using the heat of exhaust gas from the rotary hearth furnace and is used as at least one of combustion air in the rotary hearth furnace and for drying the raw material mixture.

3. The method according to claim 1 or claim 2, wherein a first carbon content, excluding volatile components, in the carbonaceous reductant and the carbonaceous material is equal to or higher than the sum of the chemical equivalent necessary for reduction of the iron oxide material in the raw material

mixture, a second carbon content in the molten iron product, and an amount corresponding to the heat quantity necessary for melting of the solid reduced iron.

4. The method according to claim 3, wherein the first carbon content is adjusted by at least one of the carbonaceous reductant compounded into the raw material mixture to be fed into the rotary hearth furnace, a carbonaceous reductant compounded into the reduced iron that is produced in the rotary hearth furnace, and the carbonaceous material supplied to the melting furnace.

5. The method according to any one of claims 1 to 4, wherein high-purity oxygen gas containing at least 90% oxygen is supplied to the melting furnace by bottom blowing, top blowing, or side blowing for agitating a slag layer in the melting furnace.

6. The method according to any one of claims 1 to 5, wherein the heat transfer efficiency of a secondary combustion heat to the molten iron is increased to at least 60%.

7. The method according to any one of claims 1 to 6, wherein the solid reduced iron, the carbonaceous material, and a flux for adjusting the slag compositions are fed from the top of the melting furnace by gravity.

8. The method according to any one of claims 1 to 7, wherein inert gas is injected into the molten iron in the melting furnace to agitate the molten iron.

9. The method according to any one of claims 1 to 8, wherein the melting furnace is of a stationary type or tilting type.

10. The method according to claim 5, wherein the melting

furnace is of a stationary type, and has a tap hole in a sidewall for discharging the molten iron and molten slag at a height from which an inert gas cannot be blown over the slag layer.

11. The method according to any one of claims 1 to 10, wherein the iron oxide material includes iron oxide and a nonferrous metal or its oxide.

12. The method according to any one of claims 1 to 11, wherein the iron oxide material includes material generated from a metal refining facility.

13. The method according to any one of claims 1 to 12, wherein a CaO-containing material is added such that the basicity of a slag formed in the melting furnace is at least 1.2 and sulfur components in the molten iron are thereby transferred to the molten slag.

14. The method according to any one of claims 1 to 13, wherein the solid reduced iron produced in the rotary hearth furnace is immediately transported and discharged to the melting furnace for melting.

15. The method according to any one of claims 1 to 14, wherein the solid reduced iron produced in the rotary hearth furnace is transported substantially without cooling to the melting furnace for melting.

16. The method according to any one of claims 1 to 13, wherein the solid reduced iron produced in the rotary hearth furnace is stored and then is transported to the melting furnace for melting.

17. The method according to any one of claims 1 to 16, wherein at least part of a gas generated in the melting furnace is fed into the rotary hearth furnace and is used as a heat source.

18. The method according to claim 17, wherein the gas generated in the melting furnace is cooled, is subjected to dust removal to reduce the dust volume to about 5 g/Nm³ or less, and then is fed into the rotary hearth furnace.

19. The method according to any one of claims 1 to 18, wherein at least part or all of the carbonaceous material or another carbonaceous material is fed into the rotary hearth furnace.

20. The method according to any one of claims 1 to 18, wherein at least part or all of the carbonaceous material and another carbonaceous material is fed into the rotary hearth furnace.

21. The method according to any one of claims 1 to 18, wherein at least part or all of the carbonaceous material or another carbonaceous material is fed into the rotary hearth furnace prior to combustion in the melting furnace, is heated, and then fed to the melting furnace together with the solid reduced iron.

22. The method according to any one of claims 1 to 18, wherein at least part or all of the carbonaceous material and another carbonaceous material is fed into the rotary hearth furnace prior to combustion in the melting furnace, is heated, and then fed to the melting furnace together with the solid reduced iron.

23. The method according to claim 3, wherein the second carbon content in the molten iron is adjusted by at least one selected from the carbonaceous reductant compounded in the raw material mixture fed into the rotary hearth furnace prior to combustion in the melting furnace, another carbonaceous material fed into the rotary hearth furnace prior to combustion in the melting

furnace, the carbonaceous reductant compounded in the reduced iron produced in the rotary hearth furnace, and the carbonaceous material fed into the melting furnace.

24. The method according to claim 3 or 23, wherein the second carbon content in the molten iron is at least 2 mass percent.

25. The method according to claim 1 or claim 2, wherein a first carbon content in the carbonaceous reductant and carbonaceous material is adjusted by at least one of the carbonaceous reductant compounded into the raw material mixture to be fed into the rotary hearth furnace, a carbonaceous reductant compounded into the reduced iron that is produced in the rotary hearth furnace, and the carbonaceous material supplied to the melting furnace.

FIG. 1

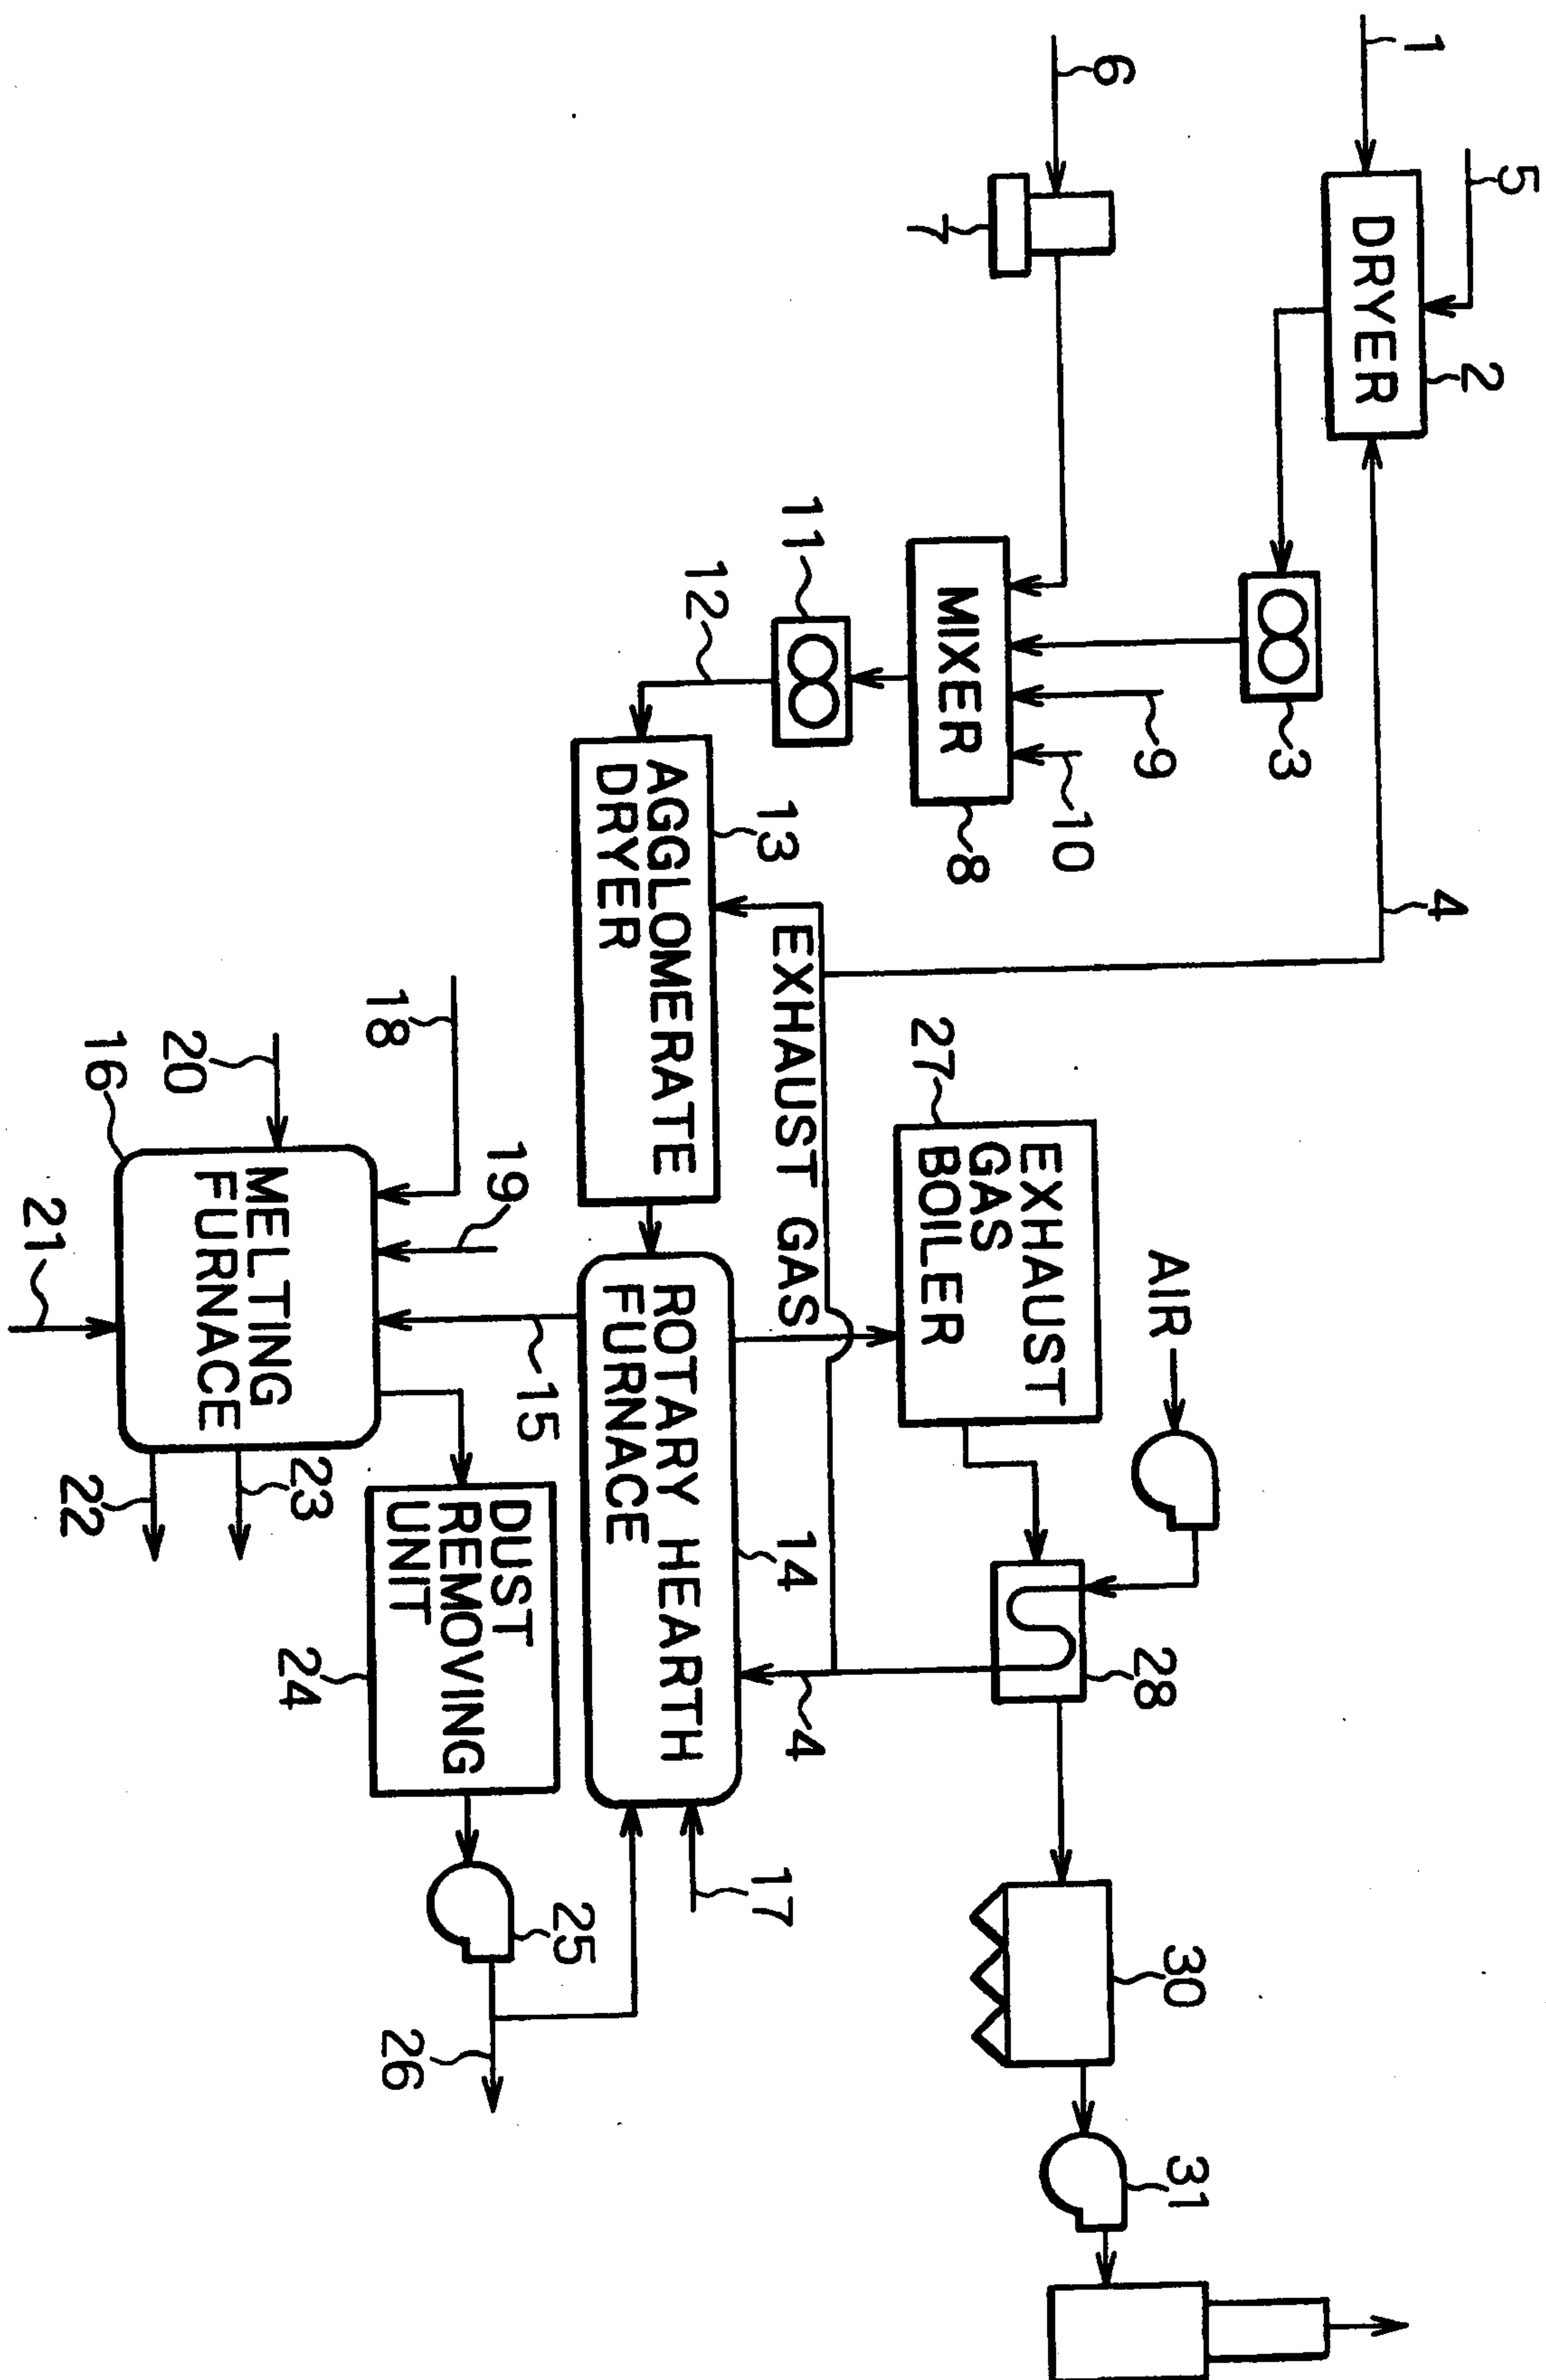


FIG. 2

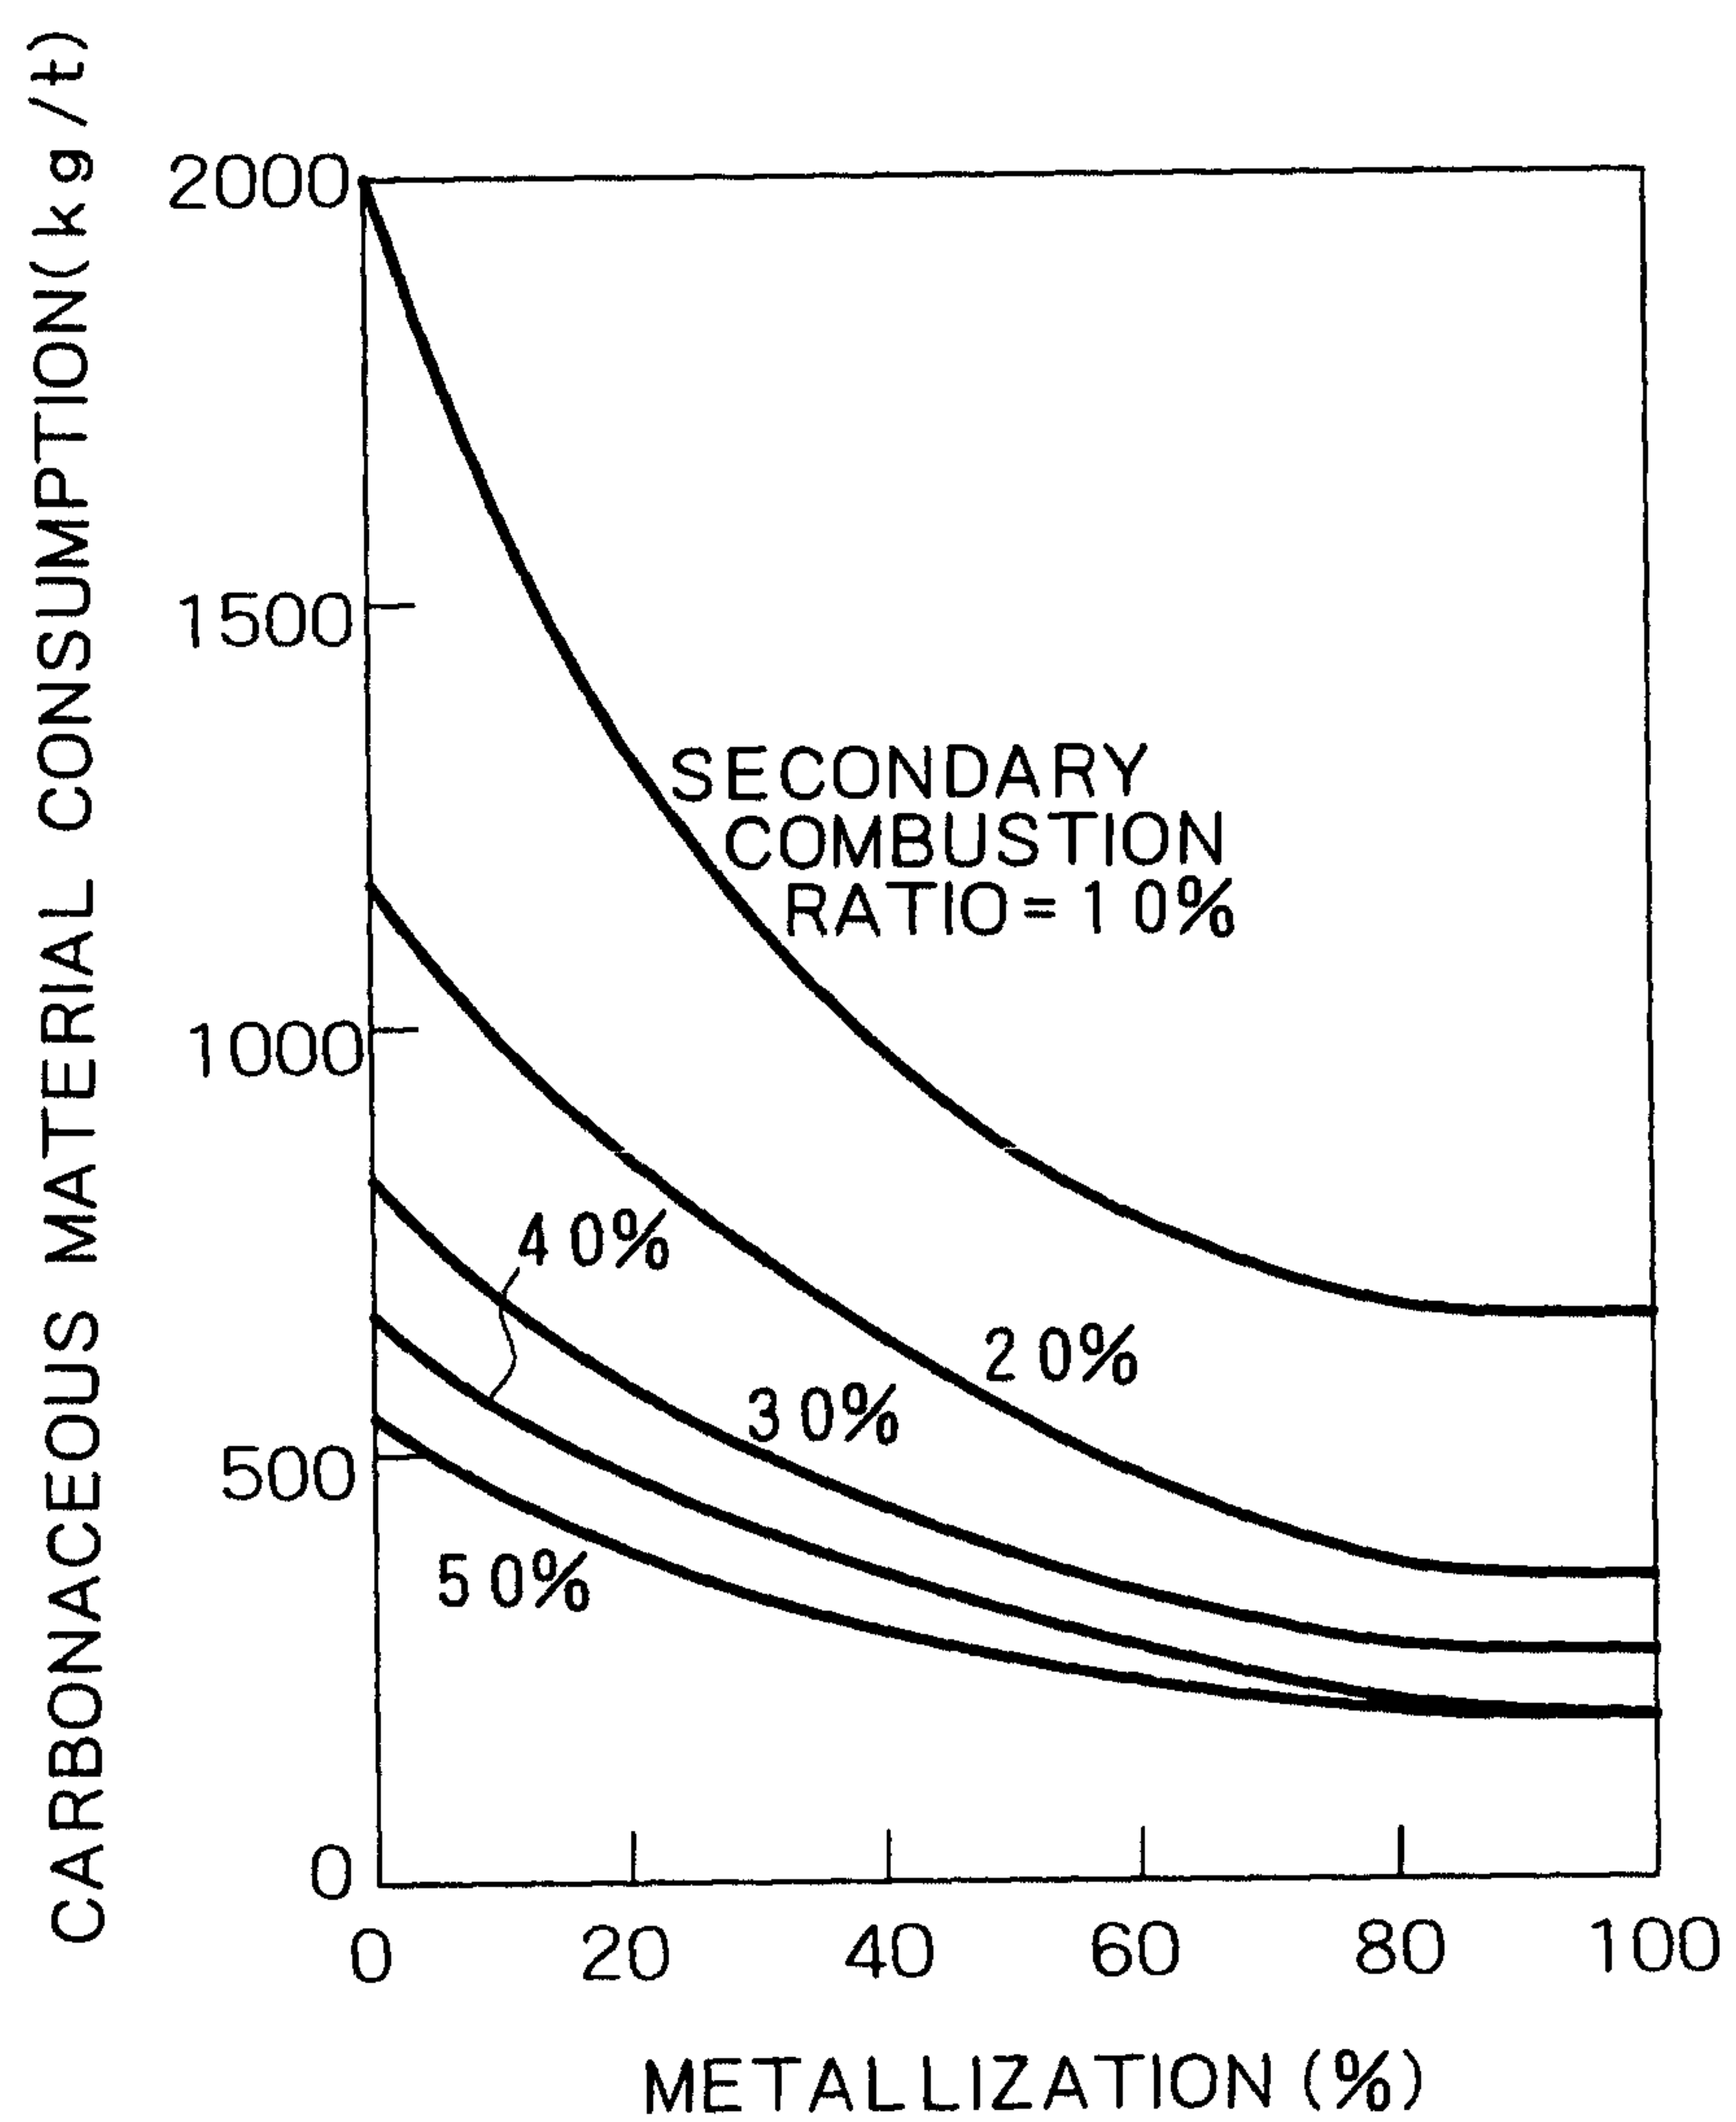


FIG. 3

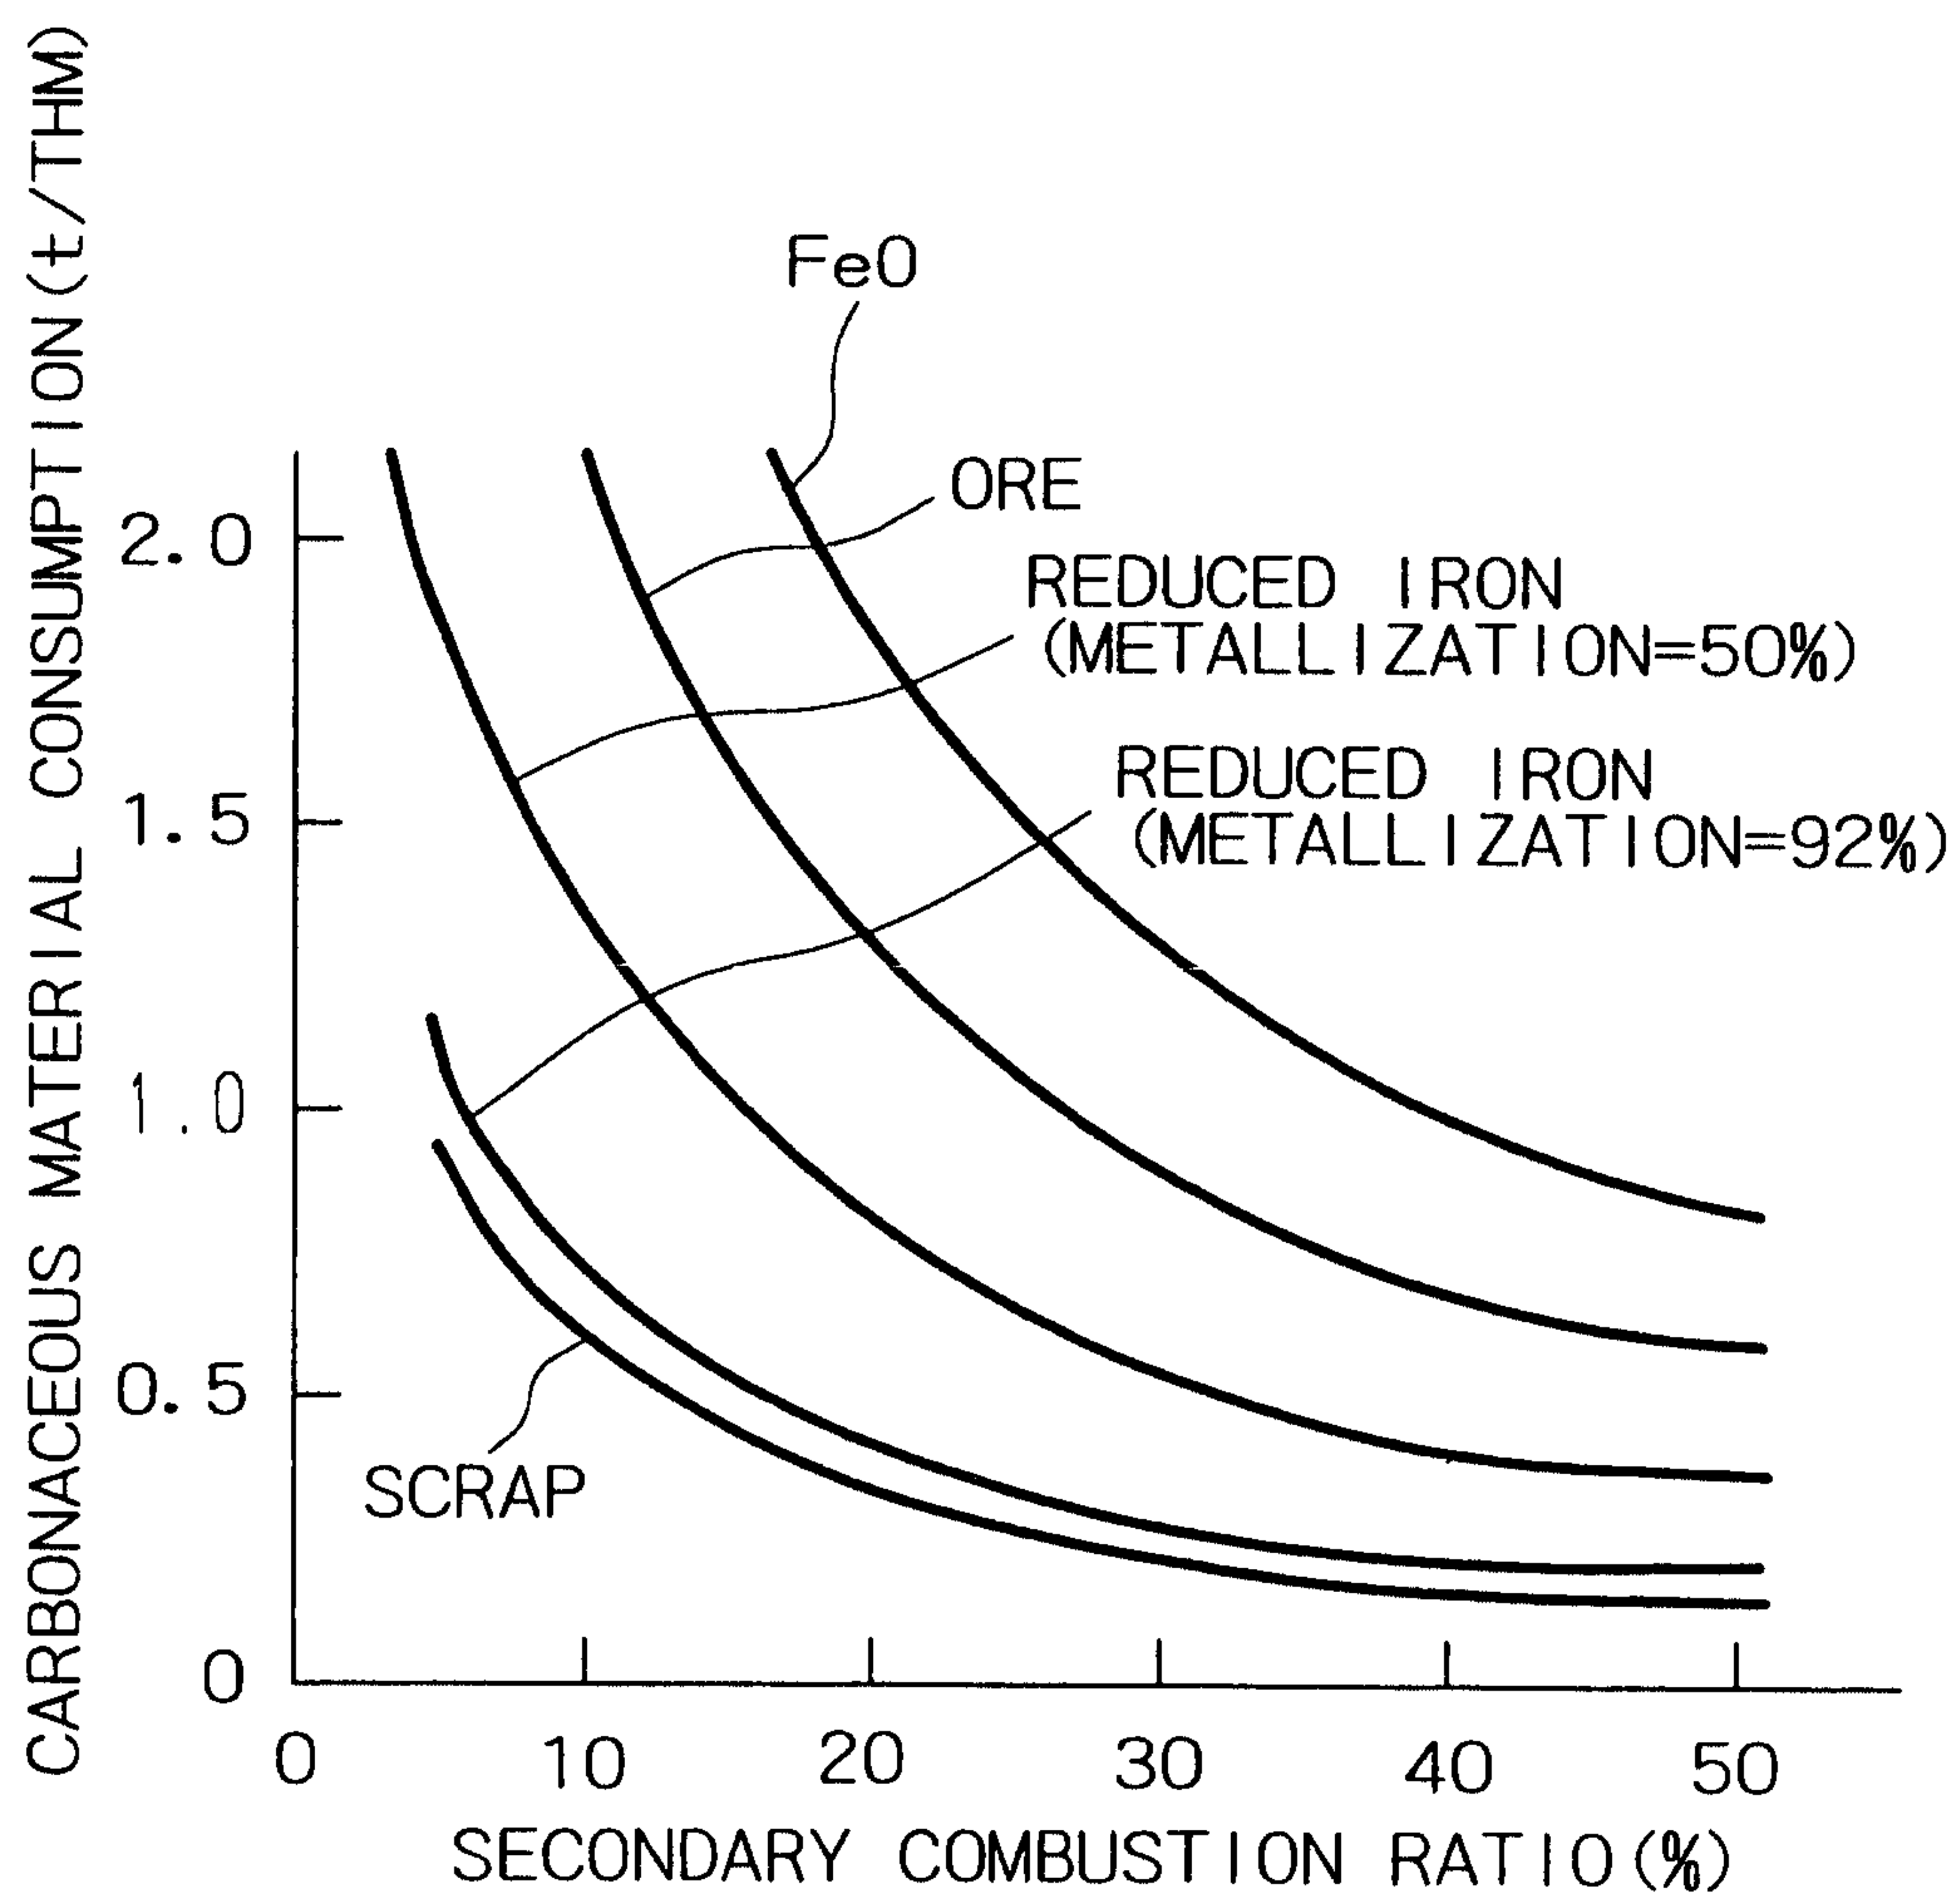


FIG. 4

