



(51) International Patent Classification:

C01B 3/34 (2006.01) *C01B 3/56* (2006.01)
C01B 3/48 (2006.01) *C07C 29/151* (2006.01)
C01B 3/50 (2006.01)

(21) International Application Number:

PCT/US2018/022114

(22) International Filing Date:

03 April 2018 (03.04.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/637,189 29 June 2017 (29.06.2017) US

(71) Applicant: **L'AIR LIQUIDE, SOCIETE ANONYME
 POUR L'ETUDE ET L'EXPLOITATION DES PRO-
 CEDES GEORGES CLAUDE** [FR/FR]; 75 Quai d'Orsay,
 F-75007 Paris (FR).

(72) Inventors; and

(71) Applicants (for US only): **ROESCH, Alexander** [DE/US];
 26103 Jasmine Field Way, Katy, Texas 77494 (US).
GUILLARD, Alain [FR/US]; 2116 Milford Street, Hous-
 ton, Texas 77098 (US). **CASTILLO-WELTER, Frank**
 [DE/DE]; Gwinnerstrasse 27-33, 60388 Frankfurt am Main
 (DE). **SCHUHMANN, Timm P.** [DE/DE]; Roedernstrasse
 12, 63067 Offenbach (DE). **SCHMID MCGUINNESS,
 Teja** [IE/DE]; Savignystrasse 65, 60325 Frankfurt am Main
 (DE). **OELMANN, Tobias** [DE/DE]; Berliner Strasse 45,
 61118 Bad Vilbel (DE).

(74) Agent: **HAYNES, Elwood L.** et al.; 9811 Katy Freeway,
 Suite 100, Houston, Texas 77024 (US).

(81) Designated States (unless otherwise indicated, for every
 kind of national protection available): AE, AG, AL, AM,
 AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
 CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
 DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
 HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
 KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

(54) Title: METHOD AND APPARATUS FOR CO-PRODUCTION OF METHANOL AND HYDROGEN

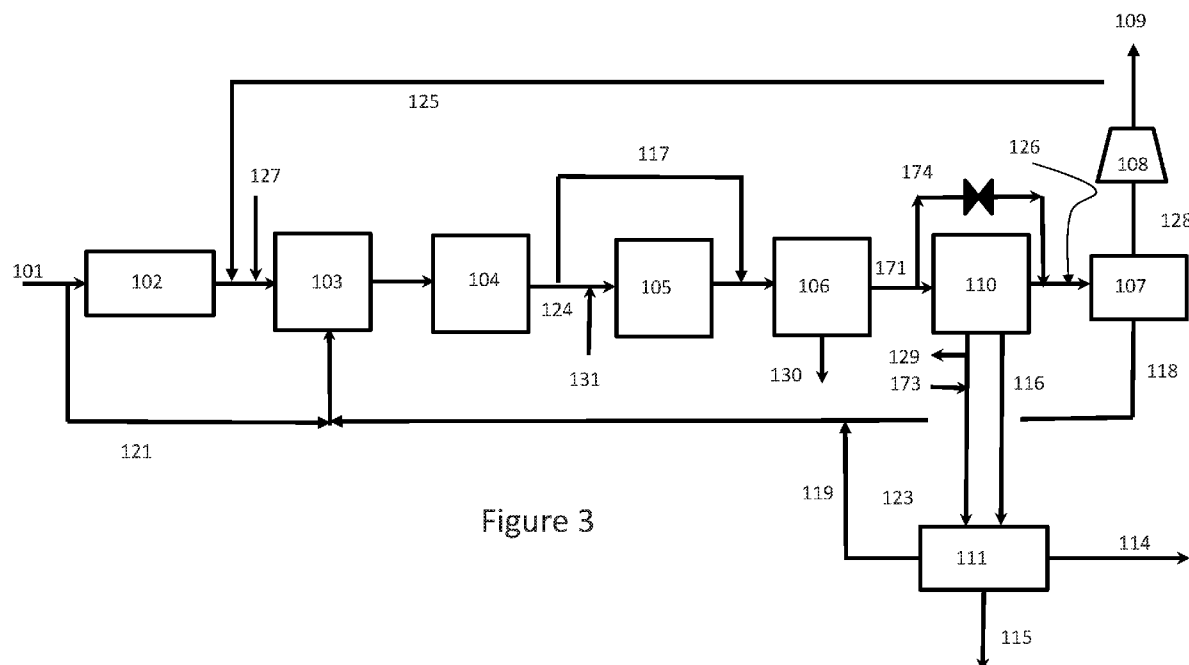


Figure 3

(57) Abstract: A method for the co-production of hydrogen and crude methanol, including; a hydrocarbon processing reforming or gasification process generating a syngas stream comprising hydrogen, carbon monoxide and carbon dioxide; introducing at least a portion of the syngas stream to a once-through methanol synthesis reactor; introducing at least a portion of the stream from methanol reactor to a separation device separating this stream into a crude methanol stream and methanol synthesis off gas stream; introducing at least a portion of the methanol synthesis off gas to a hydrogen separation device, thereby producing a pure hydrogen stream.



MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

METHOD AND APPARATUS FOR CO-PRODUCTION OF METHANOL AND HYDROGEN

Cross Reference to Related Application

This application claims priority to U.S. Patent Application No. 15/637,189 filed June 29, 2017, the entire contents of which are incorporated herein by reference.

Background

A significant portion of the world's methanol is produced by the catalytic reaction of synthesis gas obtained by reforming hydrocarbons. The synthesis gas may be produced in a steam reformer, an autothermal reformer, or a partial oxidation reformer containing hydrogen, carbon monoxide, and carbon dioxide.

The majority of hydrogen is produced from a synthesis gas produced by the mentioned reforming technologies. For hydrogen production the hydrogen content in the syngas shall be as high as possible whereas for methanol production a suitable synthesis gas composition may be characterized by a hydrogen-carbon oxide molar ratio defined as:

$$\frac{[H_2] - [CO_2]}{[CO] + [CO_2]}$$

where $[H_2]$, $[CO]$, and $[CO_2]$ are the mole fractions of the respective components in the synthesis gas.

The methanol production typically takes place at location where the hydrocarbon feedstock e.g. natural gas is available at low cost e.g. Trinidad. The methanol is then stored and transported on a global basis to its consumers. Compared to methanol hydrogen as a gaseous product cannot be transported economically over long distances and therefore is typically produced at the location where the H_2 product is also consumed e.g. refineries or chemical complexes. However certain refineries or chemical complexes also have a demand for methanol. For those instances a co-production of methanol inside the hydrogen production plant can reduce the production cost, logistics cost and also

reduce or eliminated emissions of criteria pollutant generated during the transportation of methanol e.g. shipping via tankers.

Figure 1 illustrates a typical synthesis gas (syngas) plant for hydrogen production as known to the art. A light hydrocarbon, natural gas in this example, is fed into a reformer. A steam methane reformer is indicated in Figure 1, but the above discussed processes apply equally well, depending on the type of feedstock, desired ratio of carbon monoxide, carbon dioxide and hydrogen. Depending on the available natural gas supply pressure, a natural gas feed compressor may be needed. As the syngas is generated at a very high temperature, this gas stream may be cooled in a process gas boiler, thereby producing steam which may be useful elsewhere and thus improving the thermal efficiency of the facility.

If additional hydrogen is desired, a water gas shift reactor may be utilized. Any additional useful heat in the shifted syngas stream may then be extracted in a syngas waste heat recovery unit. As high purity hydrogen is often the desired product from such a system, a hydrogen separation device, a pressure swing adsorption unit in Figure 1, may be used to separate the hydrogen for export.

Figure 2 illustrates a combined hydrogen and methanol production facility as known to the art. (see US Pat. 6,706,770 for example) A light hydrocarbon, natural gas in this example, is fed into a reformer. A steam methane reformer is indicated in Figure 2, but the above discussed processes apply equally well, depending on the type of fuel, desired ratio of carbon dioxide and hydrogen, etc. Depending on the available natural gas supply pressure, a feed compressor may be needed. As the syngas is generated at a very high temperature, this gas stream may be cooled in a process gas boiler, thereby producing steam which may be useful elsewhere and thus improving the thermal efficiency of the facility.

In the process scheme of Figure 2, the cooled syngas is split into a first stream that is combined with process steam and enters the shift reactor (as discussed above). Then into a waste heat recovery unit, and then a hydrogen separation device, such as a pressure swing adsorption unit, to produce hydrogen for downstream use. The cooled syngas is split into a second stream that enters a second waste heat recovery unit, then is compressed and then introduced into a methanol reactor, thus producing a crude methanol stream for use downstream.

In order to utilize the synthesis gas most efficiently in the above reactions, stoichiometric amounts of hydrogen and carbon oxides are preferred. Synthesis gas with a suitable stoichiometric composition for methanol production has a value of the hydrogen-carbon oxide molar ratio of 2.0 – 2.4. Methanol is produced by reacting the synthesis gas catalytically in a pressurized reactor to yield methanol and unreacted synthesis gas, the methanol is condensed and separated from the unreacted synthesis gas, and a portion of the unreacted synthesis gas is recycled to the reactor feed to increase overall conversion. A certain percentage of the unreacted synthesis gas must be purged from the methanol reactor loop so that components who may be present the synthesis gas but not participating in the methanol synthesis e.g. N₂ and CH₄, Ar do not build up in the reactor feed gas.

Synthesis gas produced by steam reforming of light hydrocarbons generally contains excess hydrogen when used for methanol production. Thus while purging inert components out of the methanol synthesis loop a significant amount of unreacted hydrogen must be withdrawn and may be used as waste fuel. This purge gas also contains valuable carbon oxides, which become unavailable for conversion to methanol, and this loss adversely affects methanol production economics.

Several approaches to minimize the amount of purge gas or to valorize the purge gas differently have been utilized in commercial methanol production. In one approach, imported carbon dioxide is mixed with either the synthesis gas feed to the methanol reactor or the feed hydrocarbon to the steam reforming step. This gives a methanol reactor feed gas that is closer to the preferred stoichiometric composition, but is possible only when a source of carbon dioxide is readily available. In another approach, unreacted synthesis gas is separated by various methods into a stream enriched in carbon oxides and a stream enriched in hydrogen, the carbon oxide-rich stream is recycled to the reformer or the methanol reactor, and the hydrogen-enriched stream is used for fuel. Membrane systems, absorption processes, and pressure swing adsorption have been used to effect separation of the unreacted synthesis gas.

An alternative approach is to generate the synthesis gas by methods other than steam reforming wherein these methods produce a synthesis gas closer to the preferred hydrogen-carbon oxide ratio for methanol production. Known

methods to generate the preferred synthesis gas composition include the partial oxidation, autothermal reforming, and a two-stage process comprising steam reforming followed by oxygen secondary reforming. These methods all require a supply of oxygen, however, and the capital costs are higher than for simple steam reforming.

There is clearly a need in the industry for a more energy efficient and cost effective system for the co-production of hydrogen and methanol.

Summary

A method for the co-production of hydrogen and crude methanol, including; a hydrocarbon processing reforming or gasification process generating a syngas stream comprising hydrogen, carbon monoxide and carbon dioxide; introducing at least a portion of the syngas stream to a once-through methanol synthesis reactor : introducing at least a portion of the stream from methanol reactor to a separation device separating this stream into a crude methanol stream and methanol synthesis off gas stream; introducing at least a portion of the methanol synthesis off gas to a hydrogen separation device, thereby producing a pure hydrogen stream.

Brief Description of the Drawings

For a further understanding of the nature and objects for the present invention, reference should be made to the following detailed description, taken in conjunction with the accompanying drawings, in which like elements are given the same or analogous reference numbers and wherein:

- Figure 1 is a schematic representation a typical steam methane reformer hydrogen plant, as is known to the art.
- Figure 2 is a schematic representation of a typical combination of a methanol and hydrogen plant, as is known to the art.
- Figure 3 is a schematic representation of a combined methanol and hydrogen plant without syngas compression prior to admission into the methanol reactor, in accordance with one embodiment of the present invention.

- Figure 4 is a schematic representation of a combined methanol and hydrogen plant with syngas compression prior to admission into the methanol reactor, in accordance with one embodiment of the present invention.

- Figure 5 is a schematic representation indicating details of the methanol reactor system, in accordance with one embodiment of the present invention.

Description of Preferred Embodiments

Illustrative embodiments of the invention are described below. While the invention is susceptible to various modifications and alternative forms, specific embodiments thereof have been shown by way of example in the drawings and are herein described in detail. It should be understood, however, that the description herein of specific embodiments is not intended to limit the invention to the particular forms disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

Element Numbers

101 = hydrocarbon feed stream

102 = feed compressor

103 = synthesis gas reactor / generator

104 = process gas waste heat boiler

105 = water gas shift reactor

106 = waste heat recovery system

107 = hydrogen purification device (e.g. pressure swing adsorption unit (PSA))

108 = product hydrogen compressor

109 = product hydrogen stream

110 = once-through methanol reactor system

110a = once-through methanol reactor

111 = methanol purification unit with distillation column

112 = Un-reacted syngas containing gaseous methanol

113 = Un-reacted syngas containing liquid methanol

- 114 = purified methanol product stream
- 115 = process water from methanol distillation column
- 116 = crude methanol product stream
- 117 = unshifted syngas bypass stream (bypassing the water gas shift
 5 reactor)
- 118 = PSA off-gas stream
- 119 = methanol distillation off-gas stream
- 121 = hydrocarbon fuel
- 123 = steam to methanol distillation system
- 10 124 = syngas to waste heat recovery
- 125 = hydrogen stream to hydrocarbon feed stream
- 126 = methanol synthesis off gas stream to PSA
- 127 = steam to synthesis gas generation process
- 128 = high purity hydrogen stream
- 15 129 = steam export stream to the overall plant steam system
- 130 = condensate stream
- 131 = water stream to water gas shift reactor (optionally)
- 150 = gas-liquid separator device for extraction of process condensate
 from syngas
- 20 151 = gas-liquid separation device for extraction of crude methanol
- 160 = heat exchanger for syngas heating (e.g. interchanger)
- 161 = hot, wet syngas stream (prior to gas-liquid separator)
- 162 = pre-heated syngas stream (after the gas-liquid separator)
- 163 = heated syngas stream 171 = gaseous syngas stream
- 25 172 = syngas compressor
- 173 = steam import from overall plant steam system to methanol distillation
 system
- 174 = bypass stream around methanol reactor system
- 200 = heat exchanger in syngas cooling section e.g. BFW preheater
- 30 201 = Cold process stream (e.g. boiler feed water)
- 202 = Heated process stream (e.g. heated boiler feed water)
- 300 = Syngas cooler (water or air)
- 301 = Cooling stream

302 = Warmed cooling stream

310 = interchanger

320 = Methanol synthesis gas cooler (water or air)

5 It will of course be appreciated that in the development of any such actual embodiment, numerous implementation-specific decisions must be made to achieve the developer's specific goals, such as compliance with system-related and business-related constraints, which will vary from one implementation to another. Moreover, it will be appreciated that such a development effort might be
10 complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the art having the benefit of this disclosure.

 As used herein, the term "once-through methanol reactor" is defined as a low pressure reactor, where there is no recycling of gas within the methanol reactor. A non-limiting example would be where the methanol reactor comprises
15 a single adiabatic bed or two adiabatic beds with inter-cooling. Typically, such once-through methanol reactors have a conversion rate of less than 20%, or between 10% and 15%, or about 12%.

 This invention relates to a method for the co-production of methanol and hydrogen from synthesis gas obtained by reforming light hydrocarbons. In one
20 embodiment, the current invention addresses revamping an existing hydrogen plant, with a focus on avoiding any unnecessary extra equipment and minimizing process impact on the existing hydrogen plant (for example fewer tie-in points) thus making retrofitting an existing plant easier and less expensive. In another embodiment, the present invention may be applied to a new plant to co-produce
25 hydrogen and methanol. Another advantage of the instant process is that it requires only one waste heat recovery / cooling, thus requiring less capital expenditure.

 Referring now to Figure 3 and 4, one embodiment of the present invention is illustrated. A hydrocarbon feed stream **101** is introduced into synthesis gas
30 (syngas) reactor **103**. The hydrocarbon feed stream **101** may be natural gas. The syngas reactor **103** may be a methane reformer (SMR), an autothermal reformer (ATR), or a partial oxidation reformer (POX) or a combination of any of the possible reactor systems. If necessary, hydrocarbon stream **101** may need an

increase in downstream pressure, in which case feed compressor **102** may be required. If necessary, steam stream **127** may be introduced into syngas reactor **103**. Syngas reactor **103** thus produces a synthesis gas that contains hydrogen, CO, CO₂ and other impurities.

5 The syngas that exits the syngas reactor **103** is typically between 1400 °F and 3000 °F, therefore process waste gas heat boiler **104** is used to recover heat from the hot process gas. The cooled syngas may then be introduced into water gas shift reactor **105** in order to convert some of the CO to hydrogen and CO₂. An H₂O stream **131** might be introduced upstream the shift reactor **105**. Shift
10 reactor **105** may be a high temperature shift, a medium temperature shift, a low temperature shift or a combination. As used herein, the term “low temperature shift” refers to a water gas shift conversion reaction that operates at a temperature between about 350 °F and 500 °F. As used herein, the term “medium temperature shift” refers to a water gas shift conversion reaction that operates at a
15 temperature between about 400 °F and 675 °F. As used herein, the term “high temperature shift” refers to a water gas shift conversion reaction that operates at a temperature between about 600 °F and 950 °F. A bypass **117** around shift reactor **105** may be added to adjust the synthesis gas composition to a more suitable composition for producing methanol.

20 The syngas may then enter an additional steam boiler system; boiler feed water preheater **200** heating a cold BFW **201** to a warm BFW stream **202** or any other type of heat exchanger to recover the sensible heat from the syngas. Prior entering the gas-liquid separator a final cooling step using air cooler or cooling water cooler is typically foreseen.

25 The additional cooling section may vary depending on the overall plant heat integration and is represented by the unit **106**. In Figure 4, additional cooling is indicated by interchanger **160**, which cools hot, wet incoming syngas stream **161** by exchanging heat with pre-heated syngas stream **162** from which liquid has been separated in gas-liquid separator **150**. If needed, additional cooling may be
30 provided by syngas cooler **300**, which transfers heat to cooling stream **301**, thereby producing warmed cooling stream **302**. When at the proper temperature, the cooled, syngas stream is then sent to a gas-liquid separator **150** where condensed water is separated from the syngas. The condensate stream **130** can

be reused as boiler feed water or disposed to a water treatment unit. The gaseous syngas stream **171** is then sent to once-through methanol reactor **110a**. In one embodiment of the present invention, the gaseous syngas stream **171** is compressed prior to entering once-through methanol reactor system **110**. Prior
5 entering once-through methanol reactor **110** the syngas stream **171** may be reheated by interchanging heat by mean of heat exchanger **310** with the gas stream **112** coming from once-through methanol reactor **110a**. Further heating may be provided for example by heat recovery from hot syngas by using heat exchanger **160**, as discussed above.

10 Prior separating the methanol from the methanol synthesis gas further cooling may be provided by means of methanol synthesis gas cooler **320** (cooling water or air used for cooling) . Thus the contained methanol and water in the methanol synthesis gas is condensed and may be separated in gas-liquid separation device **151**. The separated crude methanol stream **116** is routed to the
15 methanol purification unit **111** to make high purity methanol stream **114** as a product. The off gas **119** from the methanol purification (with distillation column) **111** may also sent back to synthesis gas reactor **103** to be used as a fuel or feedstock.

20 The synthesis gas stream **126** from separator **151** is routed to the hydrogen purification device **107**. In the hydrogen purification device a hydrogen stream **128** and off gas stream **118** are produced. The off gas **118** from the PSA **107** may be sent back to synthesis gas reactor **103** to be used as a fuel or feedstock. The high purity hydrogen **128** may be compressed **108** and exported as a product hydrogen stream **109**, a portion **125** of the hydrogen may be sent back to the hydrocarbon
25 feed stream. A portion of this hydrogen may be used in a hydrodesulfurization (HDS) reactor (not shown) to remove sulfur from natural gas if necessary.

30 It will be understood that many additional changes in the details, materials, steps and arrangement of parts, which have been herein described in order to explain the nature of the invention, may be made by those skilled in the art within the principle and scope of the invention as expressed in the appended claims. Thus, the present invention is not intended to be limited to the specific embodiments in the examples given above.

What is claimed is:

1. A method for the co-production of hydrogen and crude methanol, comprising; a hydrocarbon processing reforming or gasification process
5 generating a syngas stream comprising hydrogen, carbon monoxide and carbon dioxide; introducing at least a portion of the syngas stream to a once-through methanol synthesis reactor : introducing at least a portion of the stream from methanol reactor to a separation device separating this stream into a crude methanol stream and methanol synthesis off gas stream; introducing at least a
10 portion of the methanol synthesis off gas to a hydrogen separation device, thereby producing a pure hydrogen stream.
2. The method of claim 1, further comprising introducing the crude methanol
15 stream into a methanol distillation device, thereby producing a pure methanol stream.
3. The method of claim 1, wherein the at least a portion of the syngas stream is introduced into the once-through methanol synthesis reactor without prior
20 compression of the syngas.
4. The method of claim 1, wherein at least a portion of the syngas stream is introduced into the once-through methanol synthesis reactor after compression of the syngas
- 25 5. The method of claim 2, wherein the hydrocarbon processing reforming or gasification process generating a syngas stream comprises a fuel gas stream, and wherein at least a portion of the methanol distillation off-gas stream is returned to the fuel gas stream.
- 30 6: The method of claim 2, wherein the hydrocarbon processing reforming or gasification process generating a syngas stream comprises a process feed stream, and wherein at least a portion of the methanol distillation off-gas stream is returned to the process feed stream.

7. The method of claim 1, wherein the hydrogen separation device is a pressure swing adsorption unit.

8. The method of claim 1, wherein the hydrogen separation device is a membrane separation unit.

9. The method of claim 1, where the hydrogen from the hydrogen purification device purifying the methanol synthesis off gas is further compressed by a hydrogen compressor.

10. The method of claim 1, where the synthesis gas generating device is an autothermal reformer or a partial oxidation reactor

11. The method of claim 1, where the synthesis gas generation device is a steam methane reformer.

12. The method of claim 1, where at least a portion of methanol off gas is utilized as fuel in the steam methane reformer or any other combustion system such as fired process heater or fired steam boilers.

13. The method of claim 1, wherein at least a portion of the produced syngas is bypassing the methanol reactor system and is directly introduced to the hydrogen purification.

14. The method of claim 1, wherein at least a fraction of the syngas stream undergoes a water gas shift reaction prior to introduction into the once-through methanol synthesis reactor.

15. The method of claim 1, wherein at least a fraction of the methanol synthesis off gas is recycled back to the feed stream of the synthesis gas reactor

16. The method of claim 1, wherein at least a fraction the methanol synthesis off gas is recycled back to the inlet of the methanol reactor system

17. The method of claim 1, wherein at least a fraction of the PSA off gas is recycled back to the feed stream of the synthesis gas reactor

18. The method of claim 1, wherein at least a fraction of the PSA off gas is recycled back to the inlet of the methanol reactor system

5

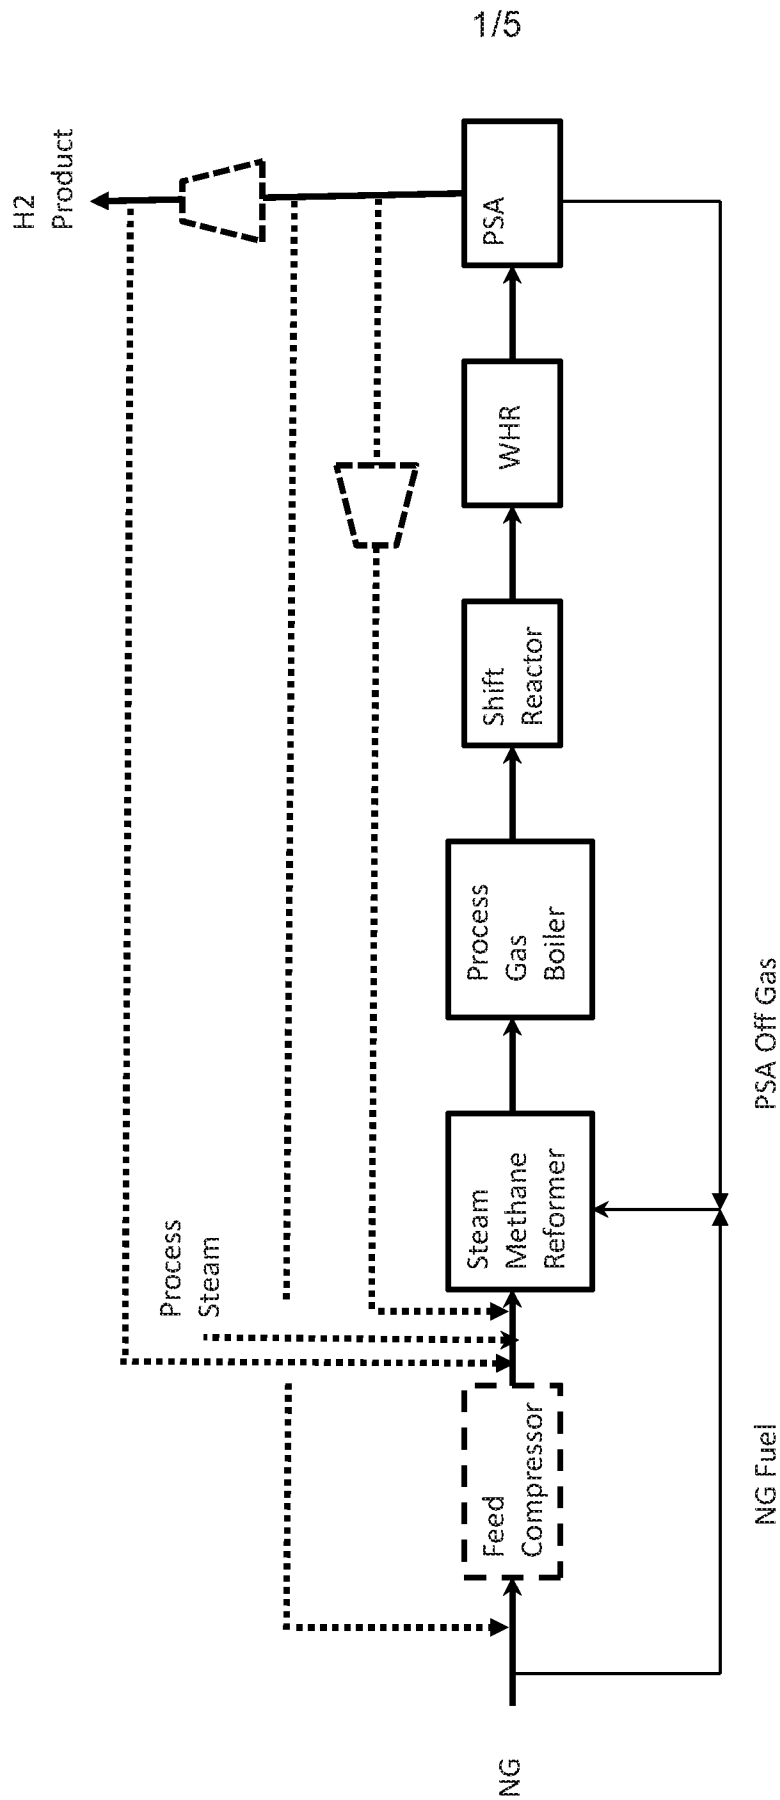


Figure 1
Prior Art

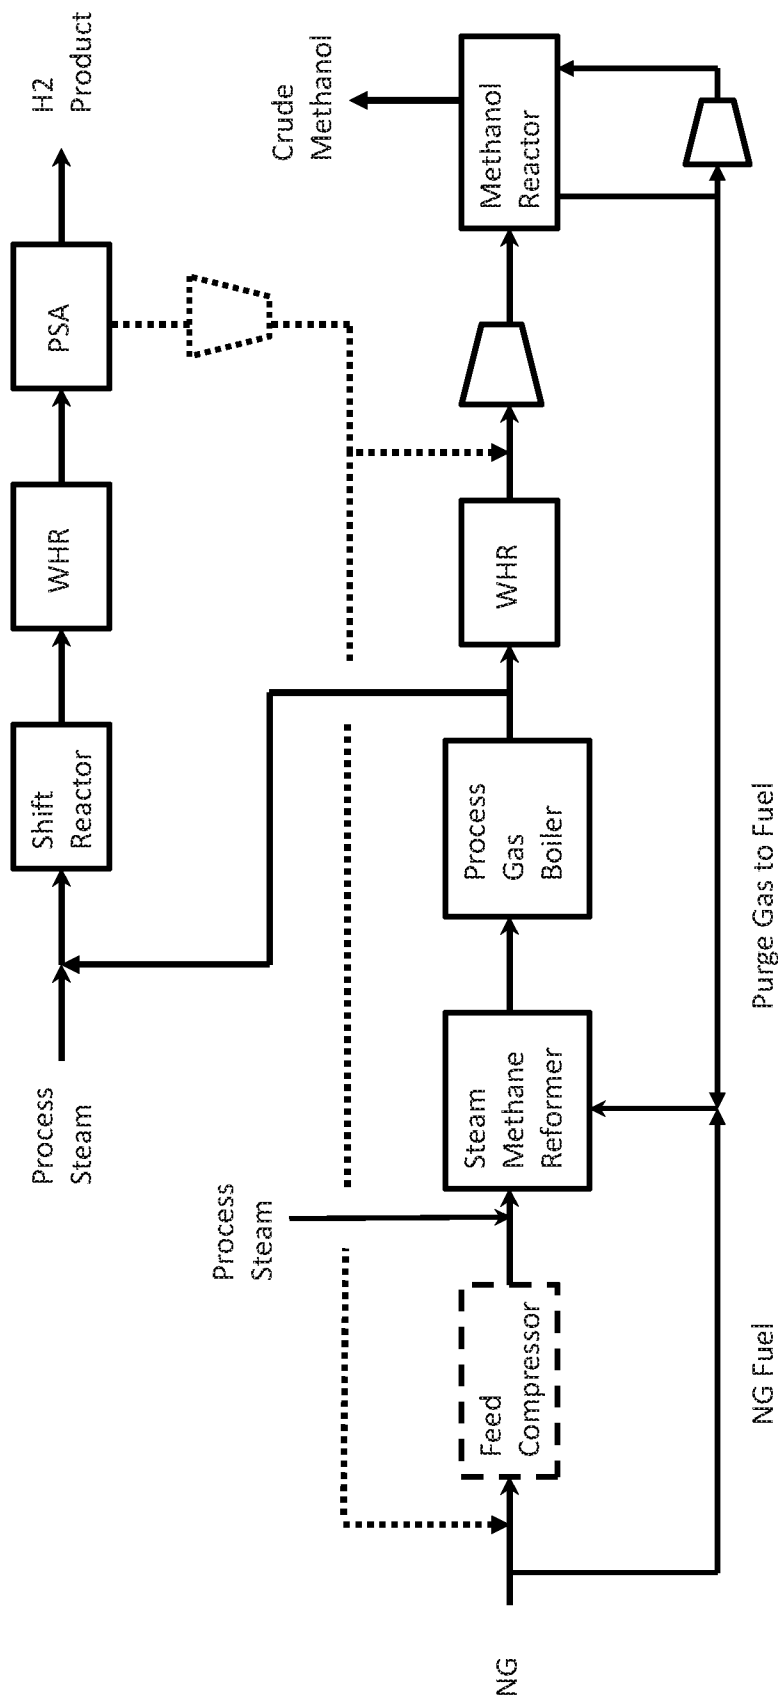


Figure 2
Prior Art

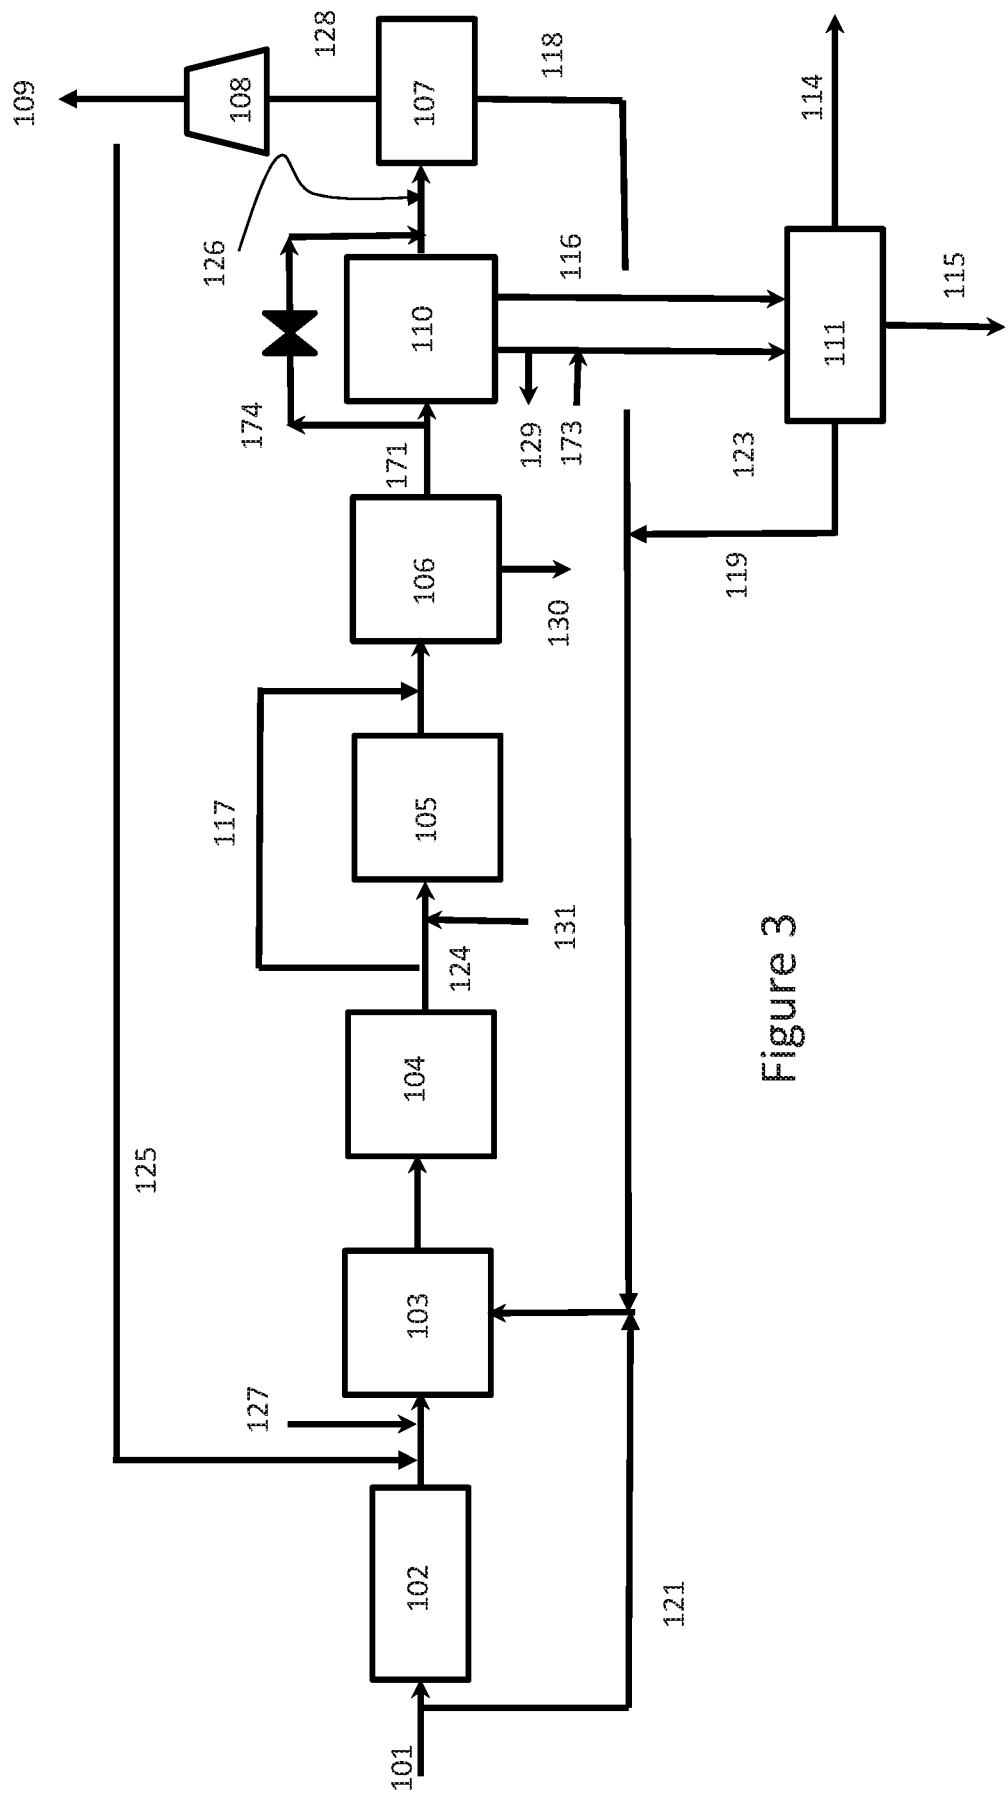


Figure 3

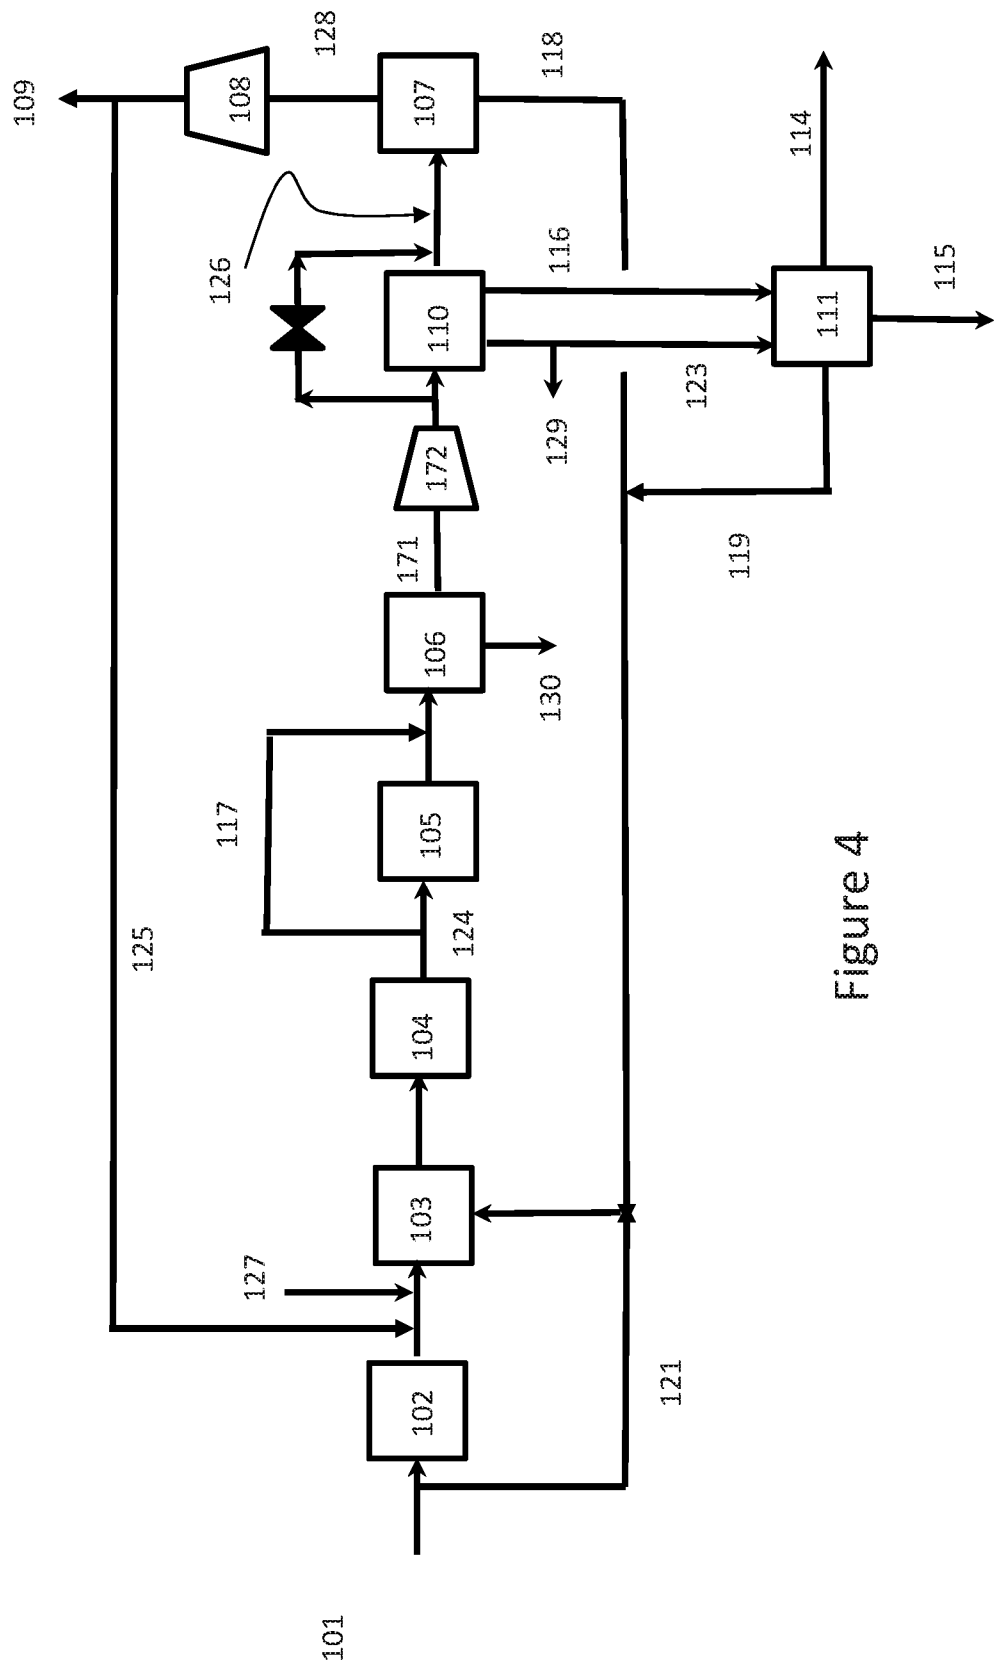


Figure 4

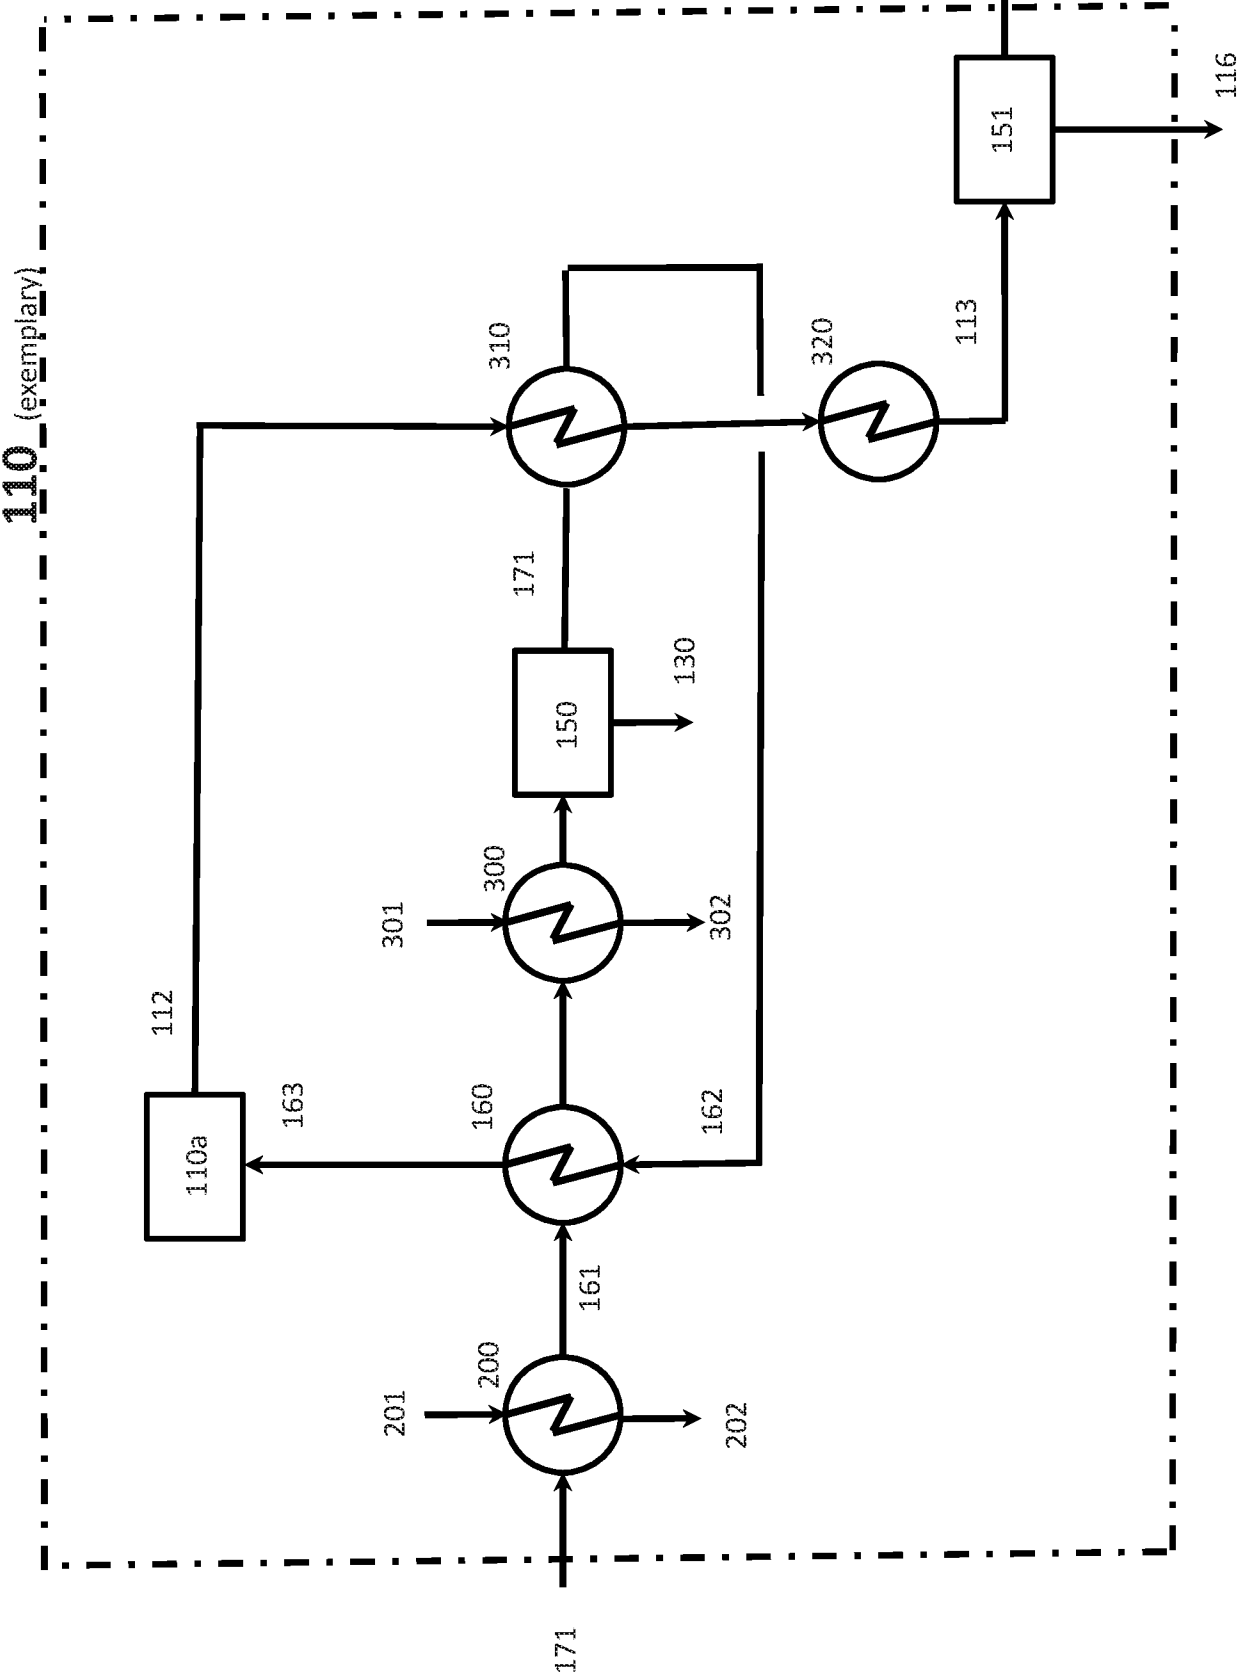


Figure 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/022114

A. CLASSIFICATION OF SUBJECT MATTER
INV. C01B3/34 C01B3/48 C01B3/50 C01B3/56 C07C29/151
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C01B C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99/03807 A1 (ICI PLC [GB]; ABBOTT PETER EDWARD JAMES [GB]) 28 January 1999 (1999-01-28) page 1, line 35 - page 2, line 9 page 4, line 22 - page 5, line 5 page 6, line 5 - page 6, line 12 page 6, line 18 - page 7, line 35; figure 1 claim 1	1-15,17
X	US 2003/191196 A1 (MADHUBHAI NITIN [US] ET AL) 9 October 2003 (2003-10-09) paragraphs [0021] - [0025]; figures 2,3	1,2,4-9, 11,13-18
A	US 2013/095029 A1 (HAN PAT A [DK]) 18 April 2013 (2013-04-18) paragraph [0056]; figure 1	1-18
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 November 2018

Date of mailing of the international search report

27/11/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Harf-Bapin, E

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/022114

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 20 24 301 A1 (METALLGESELLSCHAFT AG) 2 December 1971 (1971-12-02) the whole document -----	1-18
A	WO 2015/165818 A1 (HALDOR TOPSØE AS [DK]) 5 November 2015 (2015-11-05) the whole document -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/022114

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9903807	A1	28-01-1999	AU 8122198 A 10-02-1999
		CA 2293288 A1 28-01-1999	
		EP 0998439 A1 10-05-2000	
		JP 2001510140 A 31-07-2001	
		KR 20010021833 A 15-03-2001	
		US 6214314 B1 10-04-2001	
		WO 9903807 A1 28-01-1999	

US 2003191196	A1	09-10-2003	NONE

US 2013095029	A1	18-04-2013	AU 2011269405 A1 10-01-2013
		BR 112012032800 A2 22-11-2016	
		CA 2802941 A1 29-12-2011	
		CN 102985398 A 20-03-2013	
		EA 201390021 A1 28-06-2013	
		EP 2585425 A1 01-05-2013	
		KR 20130090397 A 13-08-2013	
		US 2013095029 A1 18-04-2013	
		WO 2011160745 A1 29-12-2011	
		ZA 201209081 B 26-02-2014	

DE 2024301	A1	02-12-1971	CS 158698 B2 25-11-1974
		DE 2024301 A1 02-12-1971	
		ES 389248 A1 16-06-1973	
		GB 1309872 A 14-03-1973	
		JP S5550931 B1 20-12-1980	

WO 2015165818	A1	05-11-2015	EA 201692175 A1 30-06-2017
		US 2017197894 A1 13-07-2017	
		WO 2015165818 A1 05-11-2015	
