



US00RE48748E

(19) **United States**
(12) **Reissued Patent**
Soroushian et al.

(10) **Patent Number:** **US RE48,748 E**
(45) **Date of Reissued Patent:** ***Sep. 21, 2021**

(54) **SYSTEMS AND METHODS FOR ESTIMATING AVAILABLE BANDWIDTH AND PERFORMING INITIAL STREAM SELECTION WHEN STREAMING CONTENT**

(71) Applicant: **DIVX, LLC**, San Diego, CA (US)

(72) Inventors: **Kourosh Soroushian**, San Diego, CA (US); **Jason A. Braness**, San Diego, CA (US)

(73) Assignee: **DIVX, LLC**, San Diego, CA (US)

(*) Notice: This patent is subject to a terminal disclaimer.

(21) Appl. No.: **15/950,988**

(22) Filed: **Apr. 11, 2018**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **9,313,249**
Issued: **Apr. 12, 2016**
Appl. No.: **14/461,674**
Filed: **Aug. 18, 2014**

U.S. Applications:

(63) Continuation of application No. 13/341,838, filed on Dec. 30, 2011, now Pat. No. 8,812,662.
(Continued)

(51) **Int. Cl.**
G06F 15/173 (2006.01)
H04L 12/26 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04L 43/0876** (2013.01); **H04L 47/12** (2013.01); **H04L 65/1069** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC ... H04L 47/12; H04L 65/607; H04L 43/0876; H04L 65/1069; H04L 65/80;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,400,401 A 3/1995 Wasilewski et al.
5,574,785 A 11/1996 Ueno et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CA 2237293 A1 7/1997
EP 1453319 A1 9/2004
(Continued)

OTHER PUBLICATIONS

International Preliminary Report on Patentability for International Application No. PCT/US2011/064684, dated Mar. 4, 2014, 5 pgs.
(Continued)


Primary Examiner — William H. Wood

(74) *Attorney, Agent, or Firm* — KPPB LLP

(57) **ABSTRACT**

Systems and methods for determining available bandwidth and performing initial stream selection when commencing adaptive bitrate streaming using Hypertext Transfer Protocol (HTTP) in accordance with embodiments of the invention are disclosed. One embodiment of the invention includes measuring network bandwidth using a playback device, determining an initial network bandwidth estimate using the network bandwidth measurements, selecting an initial stream from said plurality of streams of encoded media that are encoded at different maximum bitrates rates using the playback device based upon the maximum bitrates of the plurality of streams and the initial bandwidth estimate; and commencing streaming of encoded media by requesting portions of the encoded media from the initial streams using the playback device.

18 Claims, 6 Drawing Sheets

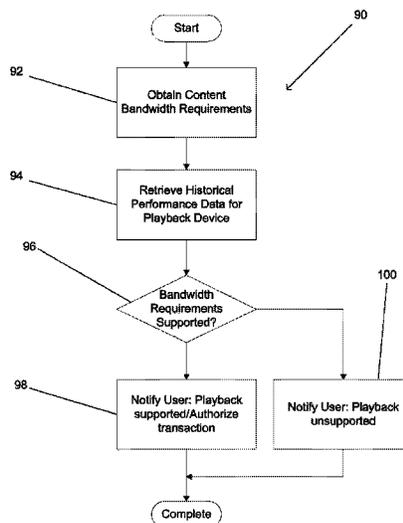

Related U.S. Application Data					
(60)	Provisional application No. 61/502,767, filed on Jun. 29, 2011.		7,212,726 B2	5/2007	Zetts
			7,242,772 B1	7/2007	Tehranchi
			7,274,861 B2	9/2007	Yahata et al.
			7,295,673 B2	11/2007	Grab et al.
			7,349,886 B2	3/2008	Morten et al.
(51)	Int. Cl.		7,352,956 B1	4/2008	Winter et al.
	<i>H04N 21/239</i> (2011.01)		7,382,879 B1	6/2008	Miller
	<i>H04N 21/2343</i> (2011.01)		7,397,853 B2	7/2008	Kwon et al.
	<i>H04N 21/442</i> (2011.01)		7,400,679 B2	7/2008	Kwon et al.
	<i>H04L 12/801</i> (2013.01)		7,418,132 B2	8/2008	Hoshuyama
	<i>H04L 29/06</i> (2006.01)		7,457,415 B2	11/2008	Reitmeier et al.
	<i>H04N 21/2662</i> (2011.01)		7,499,930 B2	3/2009	Naka et al.
	<i>H04L 1/00</i> (2006.01)		7,546,641 B2	6/2009	Robert et al.
(52)	U.S. Cl.		7,639,921 B2	12/2009	Seo et al.
	CPC <i>H04L 65/607</i> (2013.01); <i>H04L 65/80</i> (2013.01); <i>H04N 21/2393</i> (2013.01); <i>H04N 21/23439</i> (2013.01); <i>H04N 21/2662</i> (2013.01); <i>H04N 21/44209</i> (2013.01); <i>H04L 1/0002</i> (2013.01)		7,640,435 B2	12/2009	Morten
			7,711,052 B2	5/2010	Hannuksela et al.
			7,770,200 B2 *	8/2010	Brooks H04L 41/0896 725/105
			7,853,980 B2	12/2010	Pedlow, Jr. et al.
			7,864,186 B2	1/2011	Robotham et al.
			7,908,393 B2 *	3/2011	Marr H04L 47/50 709/232
(58)	Field of Classification Search		7,945,143 B2	5/2011	Yahata et al.
	CPC H04L 1/0002; H04N 21/2662; H04N 21/2393; H04N 21/23439; H04N 21/44209		7,949,775 B2 *	5/2011	Virdi H04N 21/2358 709/231
	USPC 709/224		8,009,575 B1 *	8/2011	Spain H04L 41/0896 370/252
	See application file for complete search history.		8,099,757 B2 *	1/2012	Riedl H04N 21/2385 725/116
(56)	References Cited		8,131,875 B1	3/2012	Chen
	U.S. PATENT DOCUMENTS		8,169,916 B1	5/2012	Pai et al.
	5,600,721 A 2/1997 Kitazato		8,243,924 B2	8/2012	Chen et al.
	5,621,794 A 4/1997 Matsuda et al.		8,286,213 B2	10/2012	Seo
	5,642,338 A 6/1997 Fukushima et al.		8,312,079 B2	11/2012	Newsome et al.
	5,805,700 A 9/1998 Nardone et al.		8,369,421 B2	2/2013	Kadono et al.
	5,813,010 A 9/1998 Kurano et al.		8,516,144 B2	8/2013	Hsu et al.
	5,854,873 A 12/1998 Mori et al.		8,649,669 B2	2/2014	Braness et al.
	5,907,658 A 5/1999 Murase et al.		8,683,066 B2	3/2014	Hurst et al.
	5,923,869 A 7/1999 Kashiwagi et al.		8,782,268 B2	7/2014	Pyle et al.
	6,002,834 A 12/1999 Hirabayashi et al.		8,812,662 B2	8/2014	Soroushian et al. H04L 47/12 370/241
	6,009,237 A 12/1999 Hirabayashi et al.		8,819,116 B1	8/2014	Tomay et al.
	6,016,381 A 1/2000 Taira et al.		8,832,297 B2 *	9/2014	Soroushian H04L 65/4084 709/231
	6,057,832 A 5/2000 Lev et al.		8,849,950 B2	9/2014	Stockhammer et al.
	6,065,050 A 5/2000 DeMoney		8,918,533 B2	12/2014	Chen et al.
	6,266,483 B1 7/2001 Okada et al.		8,997,160 B2	3/2015	Hunt et al.
	6,282,320 B1 8/2001 Hasegawa et al.		9,038,116 B1	5/2015	Knox et al.
	6,320,905 B1 11/2001 Konstantinides		9,088,527 B2 *	7/2015	Manor H04N 21/2385
	6,351,538 B1 2/2002 Uz		9,124,642 B2	9/2015	Choudhury et al.
	6,373,803 B2 4/2002 Ando et al.		9,313,249 B2	4/2016	Soroushian et al.
	6,385,673 B1 5/2002 Demoney		9,420,024 B2 *	8/2016	Pearson H04L 43/0858
	6,415,031 B1 7/2002 Colligan et al.		9,491,498 B2 *	11/2016	Brooks H04N 21/23439
	6,445,877 B1 9/2002 Okada et al.		9,521,178 B1	12/2016	Freeman, II et al.
	6,453,115 B1 9/2002 Boyle		9,936,267 B2	4/2018	Shivadas et al.
	6,453,116 B1 9/2002 Ando et al.		2001/0021276 A1	9/2001	Zhou
	6,504,873 B1 1/2003 Vehvilainen		2001/0052077 A1	12/2001	Fung et al.
	6,512,883 B2 1/2003 Shim et al.		2001/0052127 A1	12/2001	Seo et al.
	6,594,699 B1 7/2003 Sahai et al.		2002/0048450 A1	4/2002	Zetts
	6,654,933 B1 11/2003 Abbott et al.		2002/0067432 A1	6/2002	Kondo et al.
	6,671,408 B1 12/2003 Kaku		2002/0135607 A1	9/2002	Kato et al.
	6,690,838 B2 2/2004 Zhou		2002/0141503 A1	10/2002	Kobayashi et al.
	6,724,944 B1 4/2004 Kalevo et al.		2002/0154779 A1	10/2002	Asano et al.
	6,751,623 B1 6/2004 Basso et al.		2002/0164024 A1	11/2002	Arakawa et al.
	6,813,437 B2 11/2004 Ando et al.		2002/0169971 A1	11/2002	Asano et al.
	6,871,006 B1 3/2005 Oguz et al.		2003/0002577 A1	1/2003	Pinder
	6,912,513 B1 6/2005 Candelore		2003/0044080 A1	3/2003	Frishman et al.
	6,931,531 B1 8/2005 Takahashi		2003/0053541 A1	3/2003	Sun et al.
	6,957,350 B1 10/2005 Demos		2003/0063675 A1	4/2003	Kang et al.
	6,970,564 B1 11/2005 Kubota et al.		2003/0077071 A1	4/2003	Lin et al.
	6,983,079 B2 1/2006 Kim		2003/0135742 A1	7/2003	Evans
	7,006,757 B2 2/2006 Ando et al.		2003/0142594 A1	7/2003	Tsumagari et al.
	7,007,170 B2 2/2006 Morten		2003/0206717 A1	11/2003	Yogeshwar et al.
	7,020,287 B2 3/2006 Unger		2004/0001594 A1	1/2004	Krishnaswamy et al.
	7,047,309 B2 5/2006 Baumann et al.		2004/0022391 A1	2/2004	Obrien
	7,151,832 B1 12/2006 Fetkovich et al.		2004/0028227 A1	2/2004	Yu
	7,188,183 B1 3/2007 Paul et al.		2004/0037421 A1	2/2004	Truman
			2004/0047592 A1	3/2004	Seo et al.
			2004/0047607 A1	3/2004	Seo et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2004/0076237 A1 4/2004 Kadono et al.
 2004/0081333 A1 4/2004 Grab et al.
 2004/0093494 A1 5/2004 Nishimoto et al.
 2004/0101059 A1 5/2004 Joch et al.
 2004/0107356 A1 6/2004 Shamoon et al.
 2005/0013494 A1 1/2005 Srinivasan et al.
 2005/0063541 A1 3/2005 Candelore
 2005/0076232 A1 4/2005 Kawaguchi
 2005/0144468 A1 6/2005 Northcutt
 2005/0177741 A1 8/2005 Chen et al.
 2005/0243912 A1 11/2005 Kwon et al.
 2005/0265555 A1 12/2005 Pippuri
 2006/0002425 A1 1/2006 Mane et al.
 2006/0013568 A1 1/2006 Rodriguez
 2006/0031564 A1 2/2006 Brassil et al.
 2006/0165163 A1 7/2006 Burazerovic et al.
 2007/0047645 A1 3/2007 Takashima
 2007/0067472 A1 3/2007 Maertens et al.
 2007/0083467 A1 4/2007 Lindahl et al.
 2007/0086485 A1 4/2007 Vega-Garcia et al.
 2007/0180051 A1 8/2007 Kelly et al.
 2008/0086570 A1 4/2008 Dey et al.
 2008/0101718 A1 5/2008 Yang et al.
 2008/0137847 A1 6/2008 Candelore et al.
 2009/0010622 A1 1/2009 Yahata et al.
 2009/0013195 A1 1/2009 Ochi et al.
 2009/0077143 A1 3/2009 Macy, Jr.
 2009/0106082 A1 4/2009 Sentí et al.
 2009/0132599 A1 5/2009 Soroushian et al.
 2009/0144425 A1* 6/2009 Marr H04L 12/5693
 709/226
 2009/0178090 A1 7/2009 Oztaskent
 2009/0249081 A1 10/2009 Zayas
 2009/0282162 A1 11/2009 Mehrotra et al.
 2009/0300203 A1* 12/2009 Virdi H04N 21/44004
 709/231
 2009/0310819 A1 12/2009 Hatano
 2010/0142915 A1 6/2010 Mcdermott et al.
 2010/0235542 A1 9/2010 Visharam et al.
 2010/0306373 A1 12/2010 Wormley
 2010/0306810 A1 12/2010 Brooks et al.
 2011/0010466 A1 1/2011 Fan et al.
 2011/0058675 A1 3/2011 Brueck et al.
 2011/0066673 A1 3/2011 Outlaw
 2011/0096828 A1 4/2011 Chen et al.
 2011/0103374 A1 5/2011 Lajoie et al.
 2011/0135090 A1 6/2011 Chan et al.
 2011/0145858 A1 6/2011 Philpott et al.
 2011/0173345 A1 7/2011 Knox et al.
 2011/0179185 A1 7/2011 Wang et al.
 2011/0197261 A1 8/2011 Dong et al.
 2011/0246661 A1 10/2011 Manzari et al.
 2011/0296048 A1 12/2011 Knox et al.
 2011/0314130 A1 12/2011 Strasman
 2012/0005312 A1 1/2012 McGowan et al.
 2012/0042090 A1 2/2012 Chen et al.
 2012/0047542 A1 2/2012 Lewis et al.
 2012/0110120 A1 5/2012 Willig et al.
 2012/0141089 A1* 6/2012 Hunt H04N 21/2383
 386/239
 2012/0167132 A1 6/2012 Mathews et al.
 2012/0173751 A1 7/2012 Braness et al.
 2012/0177101 A1 7/2012 van der Schaar
 2012/0179834 A1 7/2012 van der Schaar et al.
 2012/0311174 A1 12/2012 Bichot et al.
 2012/0324519 A1 12/2012 Laughlin
 2012/0331167 A1 12/2012 Hunt
 2013/0007200 A1 1/2013 van der Schaar et al.
 2013/0007263 A1 1/2013 Soroushian et al.
 2013/0007297 A1 1/2013 Soroushian et al.
 2013/0013803 A1 1/2013 Bichot et al.
 2013/0080267 A1 3/2013 McGowan
 2014/0068096 A1 3/2014 Shivadas et al.
 2014/0140253 A1 5/2014 Lohmar et al.
 2014/0149557 A1 5/2014 Lohmar et al.

2014/0365651 A1 12/2014 Soroushian et al.
 2015/0288530 A1 10/2015 Oyman
 2018/0288498 A1 10/2018 Shivadas et al.

FOREIGN PATENT DOCUMENTS

EP 1283640 B1 10/2006
 EP 2180664 A1 4/2010
 EP 2360923 A1 8/2011
 KR 20040039852 A 5/2004
 KR 20060106250 A 10/2006
 RU 2328040 C2 6/2008
 WO 2000049762 A2 8/2000
 WO 2000049763 A1 8/2000
 WO 2003047262 A2 6/2003
 WO 2004012378 A2 2/2004
 WO 2004100158 A1 11/2004
 WO 2005008385 A2 1/2005
 WO 2005015935 A1 2/2005
 WO 2009006302 A1 1/2009
 WO 2009109976 A2 9/2009
 WO 2011087449 A1 7/2011
 WO 2011101371 A1 8/2011
 WO 2011103364 A1 8/2011
 WO 2013002828 A2 1/2013
 WO 2013002834 A1 1/2013
 WO 2013002835 A1 1/2013

OTHER PUBLICATIONS

International Preliminary Report on Patentability for International Application No. PCT/US2011/068156, Report dated Jan. 7, 2014, 9 Pgs.
 International Preliminary Report on Patentability for International Application No. PCT/US2011/068264, Search Completed Jan. 7, 2014, dated Jan. 16, 2014, 5 pgs.
 International Search Report and Written Opinion for Application PCT/US2011/068264, Search Completed Mar. 30, 2012, dated May 1, 2012, 6 pgs.
 International Search Report and Written Opinion for International Application No. PCT/US2011/068156, Search completed Apr. 7, 2012, dated May 1, 2012, 11 Pgs.
 International Search Report and Written Opinion for International Application PCT/US2011/064684, Search Completed Mar. 26, 2012, dated Apr. 10, 2012, 7 pgs.
 "MPEG-2, Part 1, ISO/IEC 13818-1", Information technology—Generic Coding of Moving Pictures and Associated Audio: Systems, Nov. 13, 1994, 161 pgs.
 "MPEG-4, Part 14, ISO/IEC 14496-14", Information technology—Coding of audio-visual objects, Nov. 15, 2003, 18 pgs.
 "Video Publishers Turning to HD Online Video to Boost Competitive Edge and Increase Revenues", Business Wire, Inc., Apr. 22, 2009, 2 pages, retrieved from <https://global.factiva.com/ga/default.aspx>.
 Begen et al., "Watching Video over the Web Part 1: Streaming Protocols", IEEE Internet Computing, Mar. 1, 2011, vol. 15, Issue 2, pp. 54-63.
 Fielding et al., "Hypertext Transfer Protocol—HTTP1.1", Network Working Group, RFC 2616, Jun. 1999, 114 pgs.
 Gannes, "The Lowdown on Apple's HTTP Adaptive Bitrate Streaming", GigaOM, Jun. 10, 2009, 12 pgs.
 Liu et al., "Rate adaptation for adaptive HTTP streaming", MMSys '11 Proceedings of the second annual ACM conference on Multimedia systems, Feb. 23-25, 2011, San Jose, CA, USA, pp. 169-174.
 Riiser et al., "Video Streaming Using a Location-based Bandwidth-Lookup Service for Bitrate Planning", ACM Transactions on Multimedia Computing, Communications, and Applications, vol. 8, Issue 3, Article No. 24, Jul. 2012, 24 pages.
 Schulzrinne, "Real Time Streaming Protocol 2.0 (RTSP): draft-ietfmmusic-rfc2326bis-27", MMUSIC Working Group of the Internet Engineering Task Force (IETF), Mar. 9, 2011, 296 page.
 Zambelli, "IIS Smooth Streaming Technical Overview", Microsoft Corporation, Mar. 2009, 17 pages.

(56)

References Cited

OTHER PUBLICATIONS

- Richardson, "H.264 and MPEG-4 Video Compression", Wiley, 2003, 306 pgs. (Presented in 2 parts).
- Sima et al., "An Efficient Architecture for Adaptive Deblocking Filter of H.264 AVC Video Coding", IEEE Transactions on Consumer Electronics, vol. 50, No. 1, Feb. 2004, pp. 292-296.
- Spanos et al., "Performance Study of a Selective Encryption Scheme for the Security of Networked, Real-Time Video", Proceedings of the Fourth International Conference on Computer Communications and Networks, IC3N'95, Sep. 20-23, 1995, Las Vegas, NV, pp. 2-10.
- Srinivasan et al., "Windows Media Video 9: overview and applications", Signal Processing: Image Communication, 2004, 25 pgs.
- Stockhammer, "Dynamic Adaptive Streaming over HTTP—Standards and Design Principles", Proceedings of the second annual ACM conference on Multimedia, Feb. 2011, pp. 133-145.
- Timmerer et al., "HTTP Streaming of MPEG Media", Proceedings of Streaming Day, 2010, 4 pgs.
- Tiphaigne et al., "A Video Package for Torch", Jun. 2004, 46 pgs.
- Trappe et al., "Key Management and Distribution for Secure Multimedia Multicast", IEEE Transaction on Multimedia, vol. 5, No. 4, Dec. 2003, pp. 544-557.
- Van Deursen et al., "On Media Delivery Protocols in the Web", 2010 IEEE International Conference on Multimedia and Expo, Jul. 19-23, 2010, 6 pgs.
- Ventura, "Streaming of Multimedia Learning Objects", AG Integrated Communication System, Mar. 2003, 101 pgs.
- Wagoner, "Compression for Great Digital Video", 2002, 184 pgs.
- Watanabem et al., "MPEG-2 decoder enables DTV trick plays", esearcher System LSI Development Lab, Fujitsu Laboratories Ltd., Kawasaki, Japan, Jun. 2001, 2 pgs.
- Wiegand, "Joint Video Team (JVT) of ISO/IEC MPEG and ITU-T VCEG", Jan. 2002, 70 pgs.
- Willig et al., U.S. Appl. No. 61/409,285, filed Nov. 2, 2010, 43 pgs.
- Yang et al., "Projection-Based Spatially Adaptive Reconstruction of Block-Transform Compressed Images", IEEE Transactions on Image Processing, vol. 4, No. 7, Jul. 1995, pp. 896-908.
- Yang et al., "Regularized Reconstruction to Reduce Blocking Artifacts of Block Discrete Cosine Transform Compressed Images", IEEE Transactions on Circuits and Systems for Video Technology, vol. 3, No. 6, Dec. 1993, pp. 421-432.
- Yu et al., "Video deblocking with fine-grained scalable complexity for embedded mobile computing", Proceedings 7th International Conference on Signal Processing, Aug. 31-Sep. 4, 2004, pp. 1173-1178.
- Zakhor, "Iterative Procedures for Reduction of Blocking Effects in Transform Image Coding", IEEE Transactions on Circuits and Systems for Video Technology, vol. 2, No. 1, Mar. 1992, pp. 91-95.
- Information Technology—MPEG Systems Technologies—Part 7: Common Encryption in ISO Base Media File Format Files (ISO/IEC 23001-7), Apr. 2015, 24 pgs.
- ISO/IEC 14496-12 Information technology—Coding of audio-visual objects—Part 12: ISO base media file format, Feb. 2004 ("MPEG-4 Part 12 Standard"), 62 pgs.
- ISO/IEC 14496-12:2008(E) Informational Technology—Coding of Audio-Visual Objects Part 12: ISO Base Media File Format, Oct. 2008, 120 pgs.
- ISO/IEC FCD 23001-6 MPEG systems technologies Part 6: Dynamic adaptive streaming over HTTP (DASH), Jan. 28, 2011, 86 pgs.
- Microsoft Corporation, Advanced Systems Format (ASF) Specification, Revision 01.20.03, Dec. 2004, 121 pgs.
- MPEG-DASH presentation at Streaming Media West 2011, Nov. 2011, 14 pgs.
- Pomelo, LLC Tech Memo, Analysis of Netflix's Security Framework for 'Watch Instantly' Service, Mar.-Apr. 2009, 18 pgs.
- Server-Side Stream Repackaging (Streaming Video Technologies Panorama, Part 2), Jul. 2011, 15 pgs.
- Text of ISO/IEC 23001-6: Dynamic adaptive streaming over HTTP (DASH), Oct. 2010, 71 pgs.
- Universal Mobile Telecommunications System (UMTS), ETSI TS 126 233 V9.1.0 (Jun. 2011) 3GPP TS 26.233 version 9.1.0 Release 9, 18 pgs.
- Universal Mobile Telecommunications Systems (UMTS); ETSI TS 126 244 V9.4.0 (May 2011) 3GPP TS 26.244 version 9.4.0 Release 9, 58 pgs.
- "Apple HTTP Live Streaming specification", Aug. 2017, 60 pgs.
- "Data Encryption Decryption using AES Algorithm, Key and Salt with Java Cryptography Extension", Available at <https://www.digizol.com/2009/10/java-encrypt-decrypt-jce-salt.html>, Oct. 2009, 6 pgs.
- "Delivering Live and On-Demand Smooth Streaming", Microsoft Silverlight, 2009, 28 pgs.
- "HTTP Based Adaptive Streaming over HSPA", Apr. 2011, 73 pgs.
- "HTTP Live Streaming", Mar. 2011, 24 pgs.
- "HTTP Live Streaming", Sep. 2011, 33 pgs.
- "Information Technology—Coding of Audio Visual Objects—Part 2: Visual", International Standard, ISO/IEC 14496-2, Third Edition, Jun. 1, 2004, pp. 1-724. (presented in three parts).
- "Java Cryptography Architecture API Specification & Reference", Available at <https://docs.oracle.com/javase/1.5.0/docs/guide/security/CryptoSpec.html>, Jul. 25, 2004, 68 pgs.
- "Java Cryptography Extension, javax.crypto.Cipher class", Available at <https://docs.oracle.com/javase/1.5.0/docs/api/javax/crypto/Cipher.html>, 2004, 24 pgs.
- "JCE Encryption—Data Encryption Standard (DES) Tutorial", Available at <https://mkyong.com/java/jce-encryption-data-encryption-standard-des-tutorial/>, Feb. 25, 2009, 2 pgs.
- "Live and On-Demand Video with Silverlight and IIS Smooth Streaming", Microsoft Silverlight, Windows Server Internet Information Services 7.0, Feb. 2010, 15 pgs.
- "Microsoft Smooth Streaming Protocol specification", Jul. 22, 2013, 56 pgs.
- "OpenDML AVI File Format Extensions Version 1.02", OpenDML AVI MJPEG File Format Subcommittee. Last revision: Feb. 28, 1996. Reformattng: Sep. 1997, 42 pgs.
- "Single-Encode Streaming for Multiple Screen Delivery", Telestream Wowza Media Systems, 2009, 6 pgs.
- "The MPEG-DASH Standard for Multimedia Streaming Over the Internet", IEEE MultiMedia, vol. 18, No. 4, 2011, 7 pgs.
- "Windows Media Player 9", Microsoft, Mar. 23, 2017, 3 pgs.
- Abomhara et al., "Enhancing Selective Encryption for H.264/AVC Using Advanced Encryption Standard", International Journal of computer Theory and Engineering, Apr. 2010, vol. 2, No. 2, pp. 223-229.
- Alattar et al., "Improved selective encryption techniques for secure transmission of MPEG video bit-streams", In Proceedings 1999 International Conference on Image Processing (Cat. 99CH36348), vol. 4, IEEE, 1999, pp. 256-260.
- Antoniou et al., "Adaptive Methods for the Transmission of Video Streams in Wireless Networks", 2015, 50 pgs.
- Apostolopoulos et al., "Secure Media Streaming and Secure Transcoding", Multimedia Security Technologies for Digital Rights Management, 2006, 33 pgs.
- Asai et al., "Essential Factors for Full-Interactive VOD Server: Video File System, Disk Scheduling, Network", Proceedings of Globecom '95, Nov. 14-16, 1995, 6 pgs.
- Beker et al., "Cipher Systems, The Protection of Communications", 1982, 40 pgs.
- Bocharov et al., "Portable Encoding of Audio-Video Objects, The Protected Interoperable File Format (PIFF)", Microsoft Corporation, First Edition Sep. 8, 2009, 30 pgs.
- Bulterman et al., "Synchronized Multimedia Integration Language (SMIL 3.0)", W3C Recommendation, Dec. 1, 2008, <https://www.w3.org/TR/2008/REC-SMIL3-20081201/>, 321 pgs. (Presented in five parts).
- Cahill et al., "Locally Adaptive Deblocking Filter for Low Bit Rate Video", Proceedings 2000 International Conference on Image Processing, Sep. 10-13, 2000, Vancouver, BC, Canada, 4 pgs.
- Candelore, U.S. Appl. No. 60/372,901, filed Apr. 16, 2002, 5 pgs.
- Chaddha et al., "A Frame-work for Live Multicast of Video Streams over the Internet", Proceedings of 3rd IEEE International Conference on Image Processing, Sep. 19, 1996, Lausanne, Switzerland, 4 pgs.

(56)

References Cited

OTHER PUBLICATIONS

Cheng, "Partial Encryption for Image and Video Communication", Thesis, Fall 1998, 95 pgs.

Cheng et al., "Partial encryption of compressed images and videos", IEEE Transactions on Signal Processing, vol. 48, No. 8, Aug. 2000, 13 pgs.

Cheung et al., "On the Use of Destination Set Grouping to Improve Fairness in Multicast Video Distribution", Proceedings of IEEE INFOCOM'96, Conference on Computer Communications, vol. 2, IEEE, 1996, 23 pgs.

Collet, "Delivering Protected Content, An Approach for Next Generation Mobile Technologies", Thesis, 2010, 84 pgs.

Diamantis et al., "Real Time Video Distribution using Publication through a Database", Proceedings SIBGRAP'98. International Symposium on Computer Graphics, Image Processing, and Vision (Cat. No. 98EX237), Oct. 1990, 8 pgs.

Dworkin, "Recommendation for Block Cipher Modes of Operation: Methods and Techniques", NIST Special Publication 800-38A, 2001, 66 pgs.

Fang et al., "Real-time deblocking filter for MPEG-4 systems", Asia-Pacific Conference on Circuits and Systems, Oct. 28-31, 2002, Bail, Indonesia, 4 pgs.

Fecheyr-Lippens, "A Review of HTTP Live Streaming", Jan. 2010, 38 pgs.

Fukuda et al., "Reduction of Blocking Artifacts by Adaptive DCT Coefficient Estimation in Block-Based Video Coding", Proceedings 2000 International Conference on Image Processing, Sep. 10-13, 2000, Vancouver, BC, Canada, 4 pgs.

Huang, U.S. Pat. No. 7,729,426, U.S. Appl. No. 11/230,794, filed Sep. 20, 2005, 143 pgs.

Huang et al., "Adaptive MLP post-processing for block-based coded images", IEEE Proceedings—Vision, Image and Signal Processing, vol. 147, No. 5, Oct. 2000, pp. 463-473.

Huang et al., "Architecture Design for Deblocking Filter in H.264/JVT/AVC", 2003 International Conference on Multimedia and Expo., Jul. 6-9, 2003, Baltimore, MD, 4 pgs.

Jain et al., U.S. Appl. No. 61/522,623, filed Aug. 11, 2011, 44 pgs.

Jung et al., "Design and Implementation of an Enhanced Personal Video Recorder for DTV", IEEE Transactions on Consumer Electronics, vol. 47, No. 4, Nov. 2001, 6 pgs.

Kalva, "Delivering MPEG-4 Based Audio-Visual Services", 2001, 113 pgs.

Kang et al., "Access Emulation and Buffering Techniques for Steaming of Non-Stream Format Video Files", IEEE Transactions on Consumer Electronics, vol. 43, No. 3, Aug. 2001, 7 pgs.

Kim et al., "A Deblocking Filter with Two Separate Modes in Block-based Video Coding", IEEE transactions on circuits and systems for video technology, vol. 9, No. 1, 1999, pp. 156-160.

Kim et al., "Tree-Based Group Key Agreement", Feb. 2004, 37 pgs. Laukens, "Adaptive Streaming—A Brief Tutorial", EBU Technical Review, 2011, 6 pgs.

Legault et al., "Professional Video Under 32-bit Windows Operating Systems", SMPTE Journal, vol. 105, No. 12, Dec. 1996, 8 pgs.

Li et al., "Layered Video Multicast with Retransmission (LVMR): Evaluation of Hierarchical Rate Control", Proceedings of IEEE INFOCOM'98, the Conference on Computer Communications. Seventeenth Annual Joint Conference of the IEEE Computer and Communications Societies. Gateway to the 21st Century, Cat. No. 98, vol. 3, 1998, 26 pgs.

List et al., "Adaptive deblocking filter", IEEE transactions on circuits and systems for video technology, vol. 13, No. 7, Jul. 2003, pp. 614-619.

Massoudi et al., "Overview on Selective Encryption of Image and Video: Challenges and Perspectives", EURASIP Journal on Information Security, Nov. 2008, 18 pgs.

McCanne et al., "Receiver-driven Layered Multicast", Conference proceedings on Applications, technologies, architectures, and protocols for computer communications, Aug. 1996, 14 pgs.

Meier, "Reduction of Blocking Artifacts in Image and Video Coding", IEEE Transactions on Circuits and Systems for Video Technology, vol. 9, No. 3, Apr. 1999, pp. 490-500.

Nelson, "Smooth Streaming Deployment Guide", Microsoft Expression Encoder, Aug. 2010, 66 pgs.

Newton et al., "Preserving Privacy by De-identifying Facial Images", Carnegie Mellon University School of Computer Science, Technical Report, CMU-CS-03-119, Mar. 2003, 26 pgs.

O'Brien, U.S. Appl. No. 60/399,846, filed Jul. 30, 2002, 27 pgs.

O'Rourke, "Improved Image Decompression for Reduced Transform Coding Artifacts", IEEE Transactions on Circuits and Systems for Video Technology, vol. 5, No. 6, Dec. 1995, pp. 490-499.

Park et al., "A postprocessing method for reducing quantization effects in low bit-rate moving picture coding", IEEE Transactions on Circuits and Systems for Video Technology, vol. 9, No. 1, Feb. 1999, pp. 161-171.

* cited by examiner

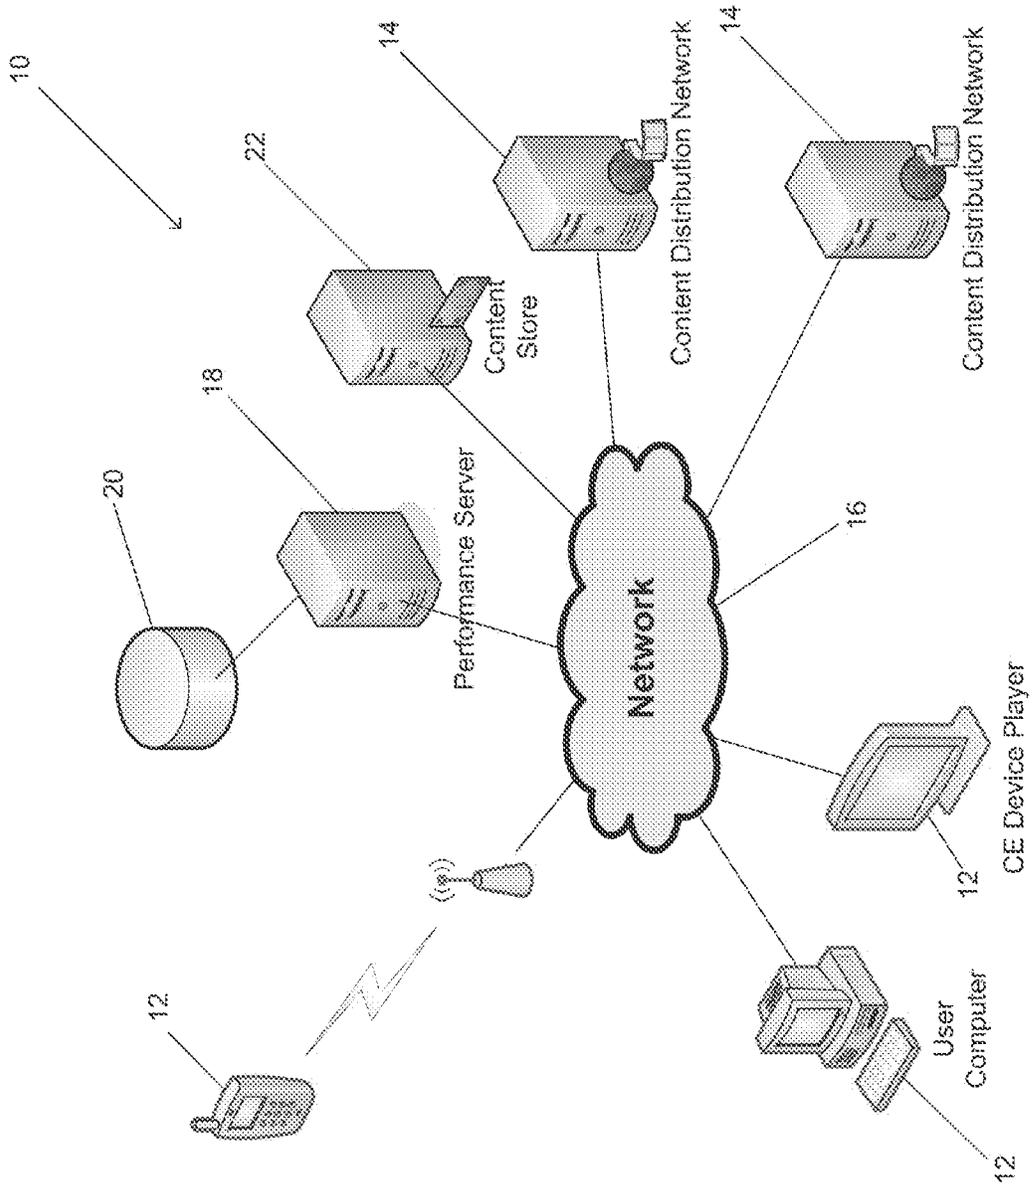


FIG. 1

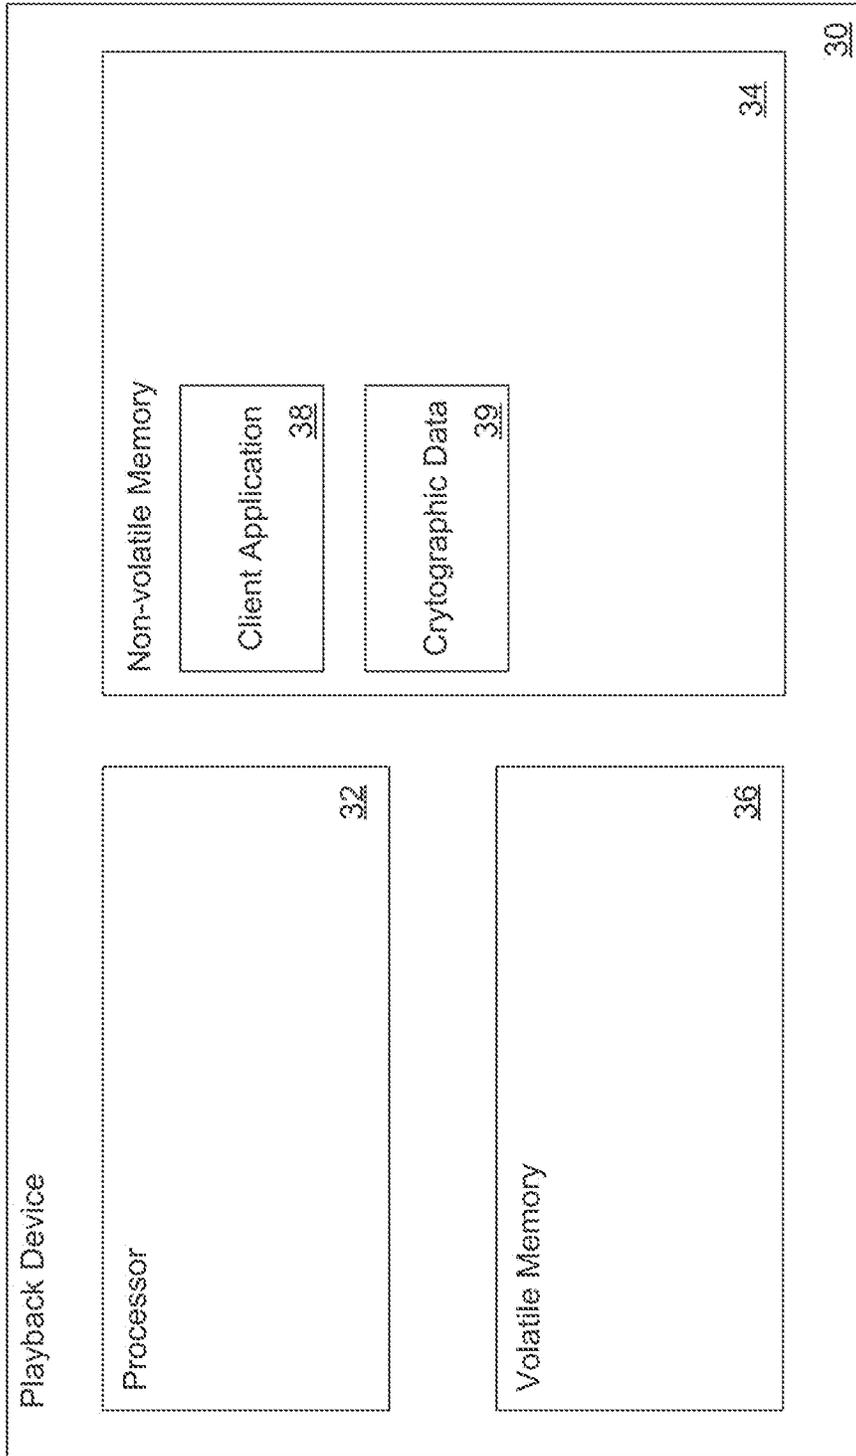


FIG. 2

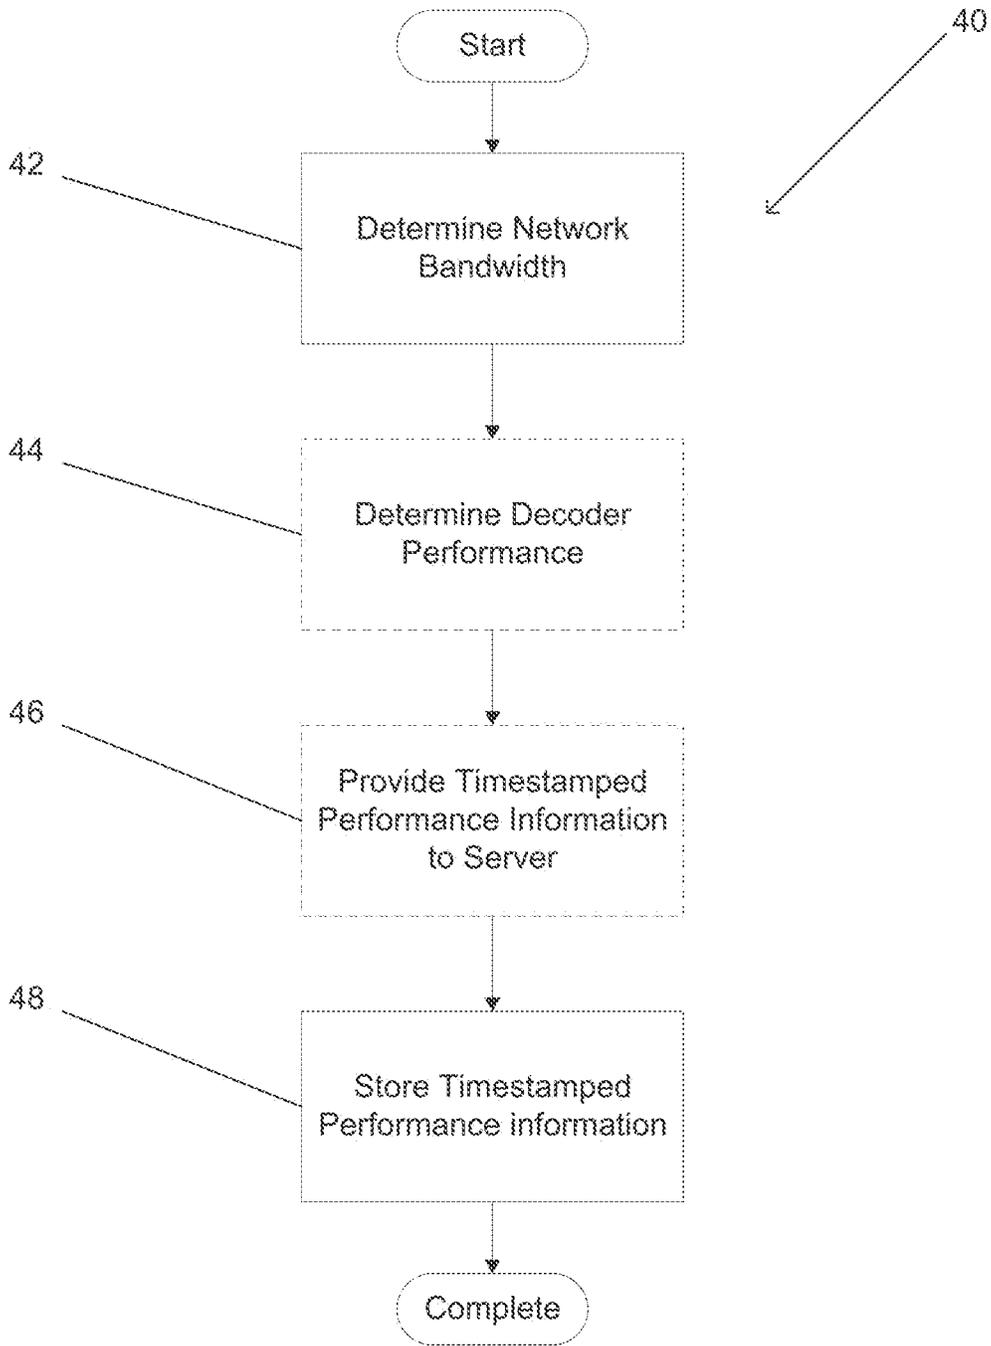


FIG. 3

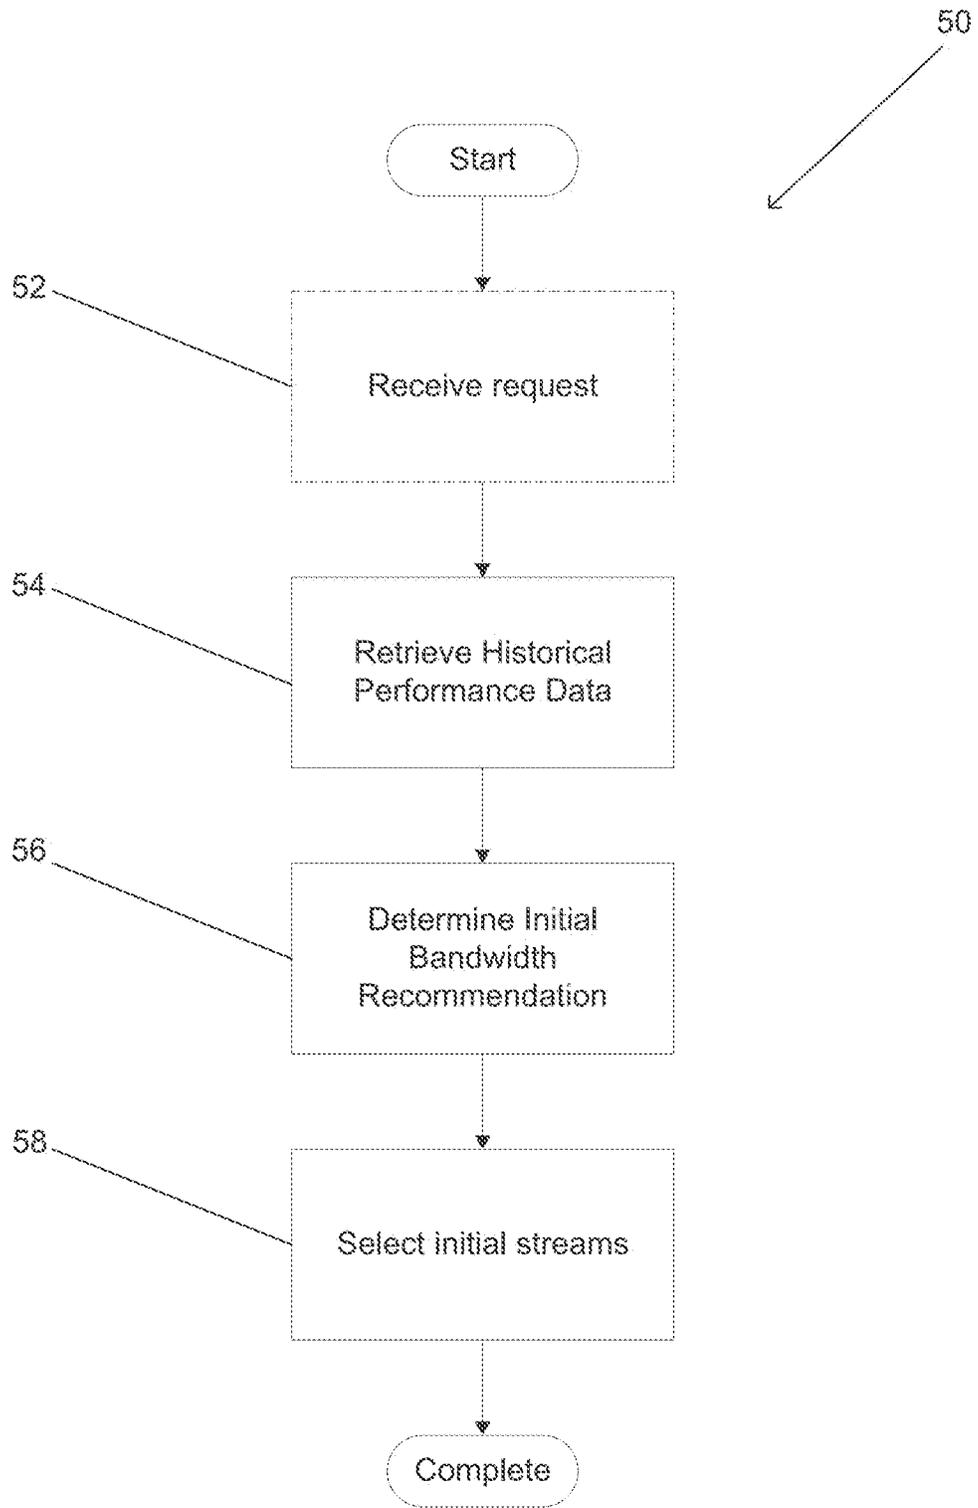


FIG. 4

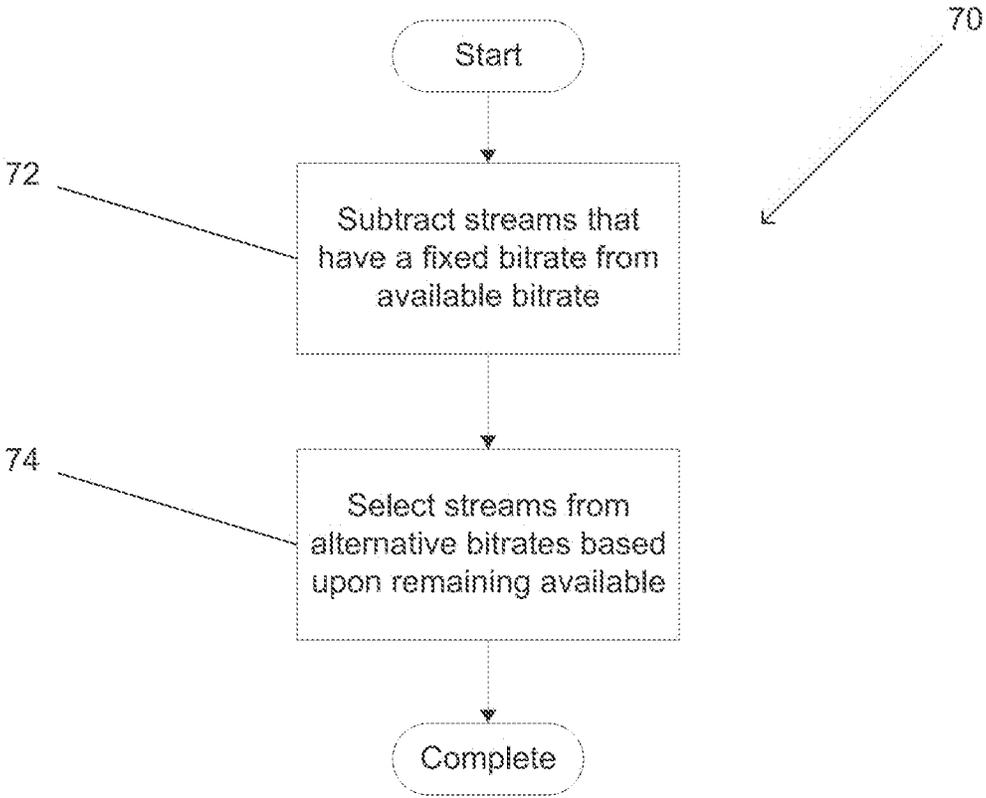


FIG. 5

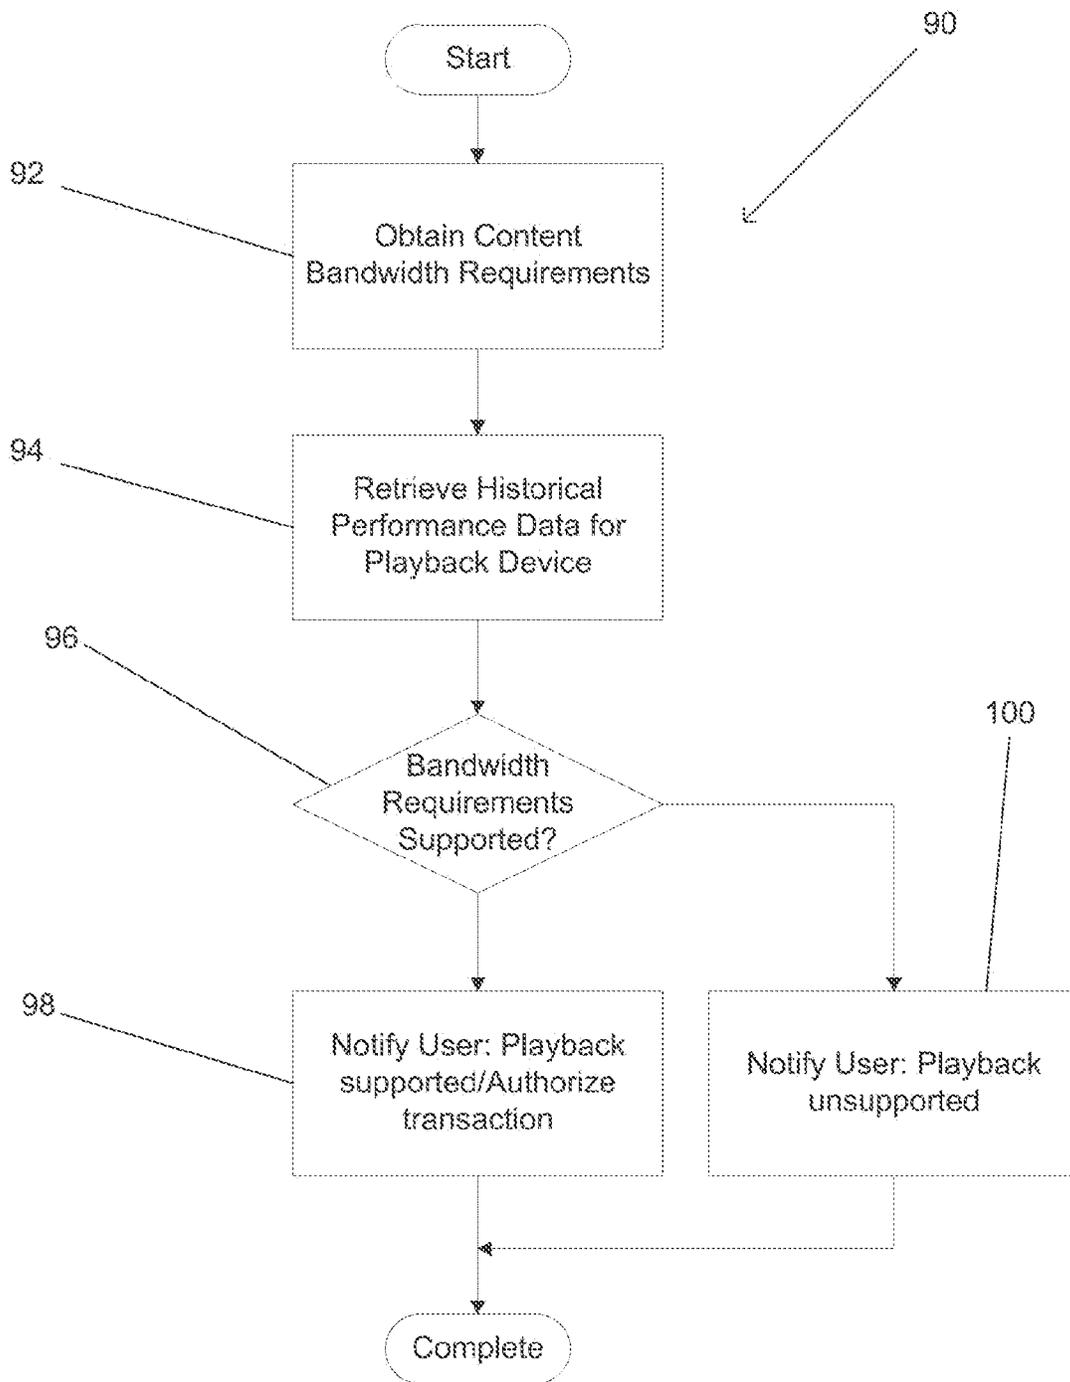


FIG. 6

**SYSTEMS AND METHODS FOR
ESTIMATING AVAILABLE BANDWIDTH
AND PERFORMING INITIAL STREAM
SELECTION WHEN STREAMING CONTENT**

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS REFERENCE TO RELATED
APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 13/341,838, filed Dec. 30, 2011, which claimed priority to U.S. Provisional Application Ser. No. 61/502,767, entitled "Client-Server Bandwidth Hinting for Adaptive Streaming Enhancements", filed Jun. 29, 2011, the entirety of which are incorporated herein by reference.

FIELD OF THE INVENTION

The present invention generally relates to streaming media and more specifically to selecting an initial stream from a number of streams encoded with different maximum bitrates.

BACKGROUND

The term streaming media describes the playback of media on a playback device, where the media is stored on a server and continuously sent to the playback device over a network during playback. Typically, the playback device stores a sufficient quantity of media in a buffer at any given time during playback to prevent disruption of playback due to the playback device completing playback of all the buffered media prior to receipt of the next portion of media. Adaptive bit rate streaming or adaptive streaming involves detecting the present streaming conditions (e.g. the user's network bandwidth and CPU capacity) in real time and adjusting the quality of the streamed media accordingly. Typically, the source media is encoded at multiple bit rates and the playback device or client switches between streaming the different encodings depending on available resources. When a playback device commences adaptive bitrate streaming, the playback device typically starts by requesting portions of media from the lowest bitrate streams (where alternative streams are available). As the playback device downloads the requested media, the playback device can measure the available bandwidth. In the event that there is additional bandwidth available, the playback device can

Witch to higher bitrate streams. Adaptive streaming solutions typically utilize Hypertext Transfer Protocol (HTTP), published by the Internet Engineering Task Force and the World Wide Web Consortium as RFC 2616, to stream media between a server and a playback device. HTTP is a stateless protocol that enables a playback device to request a byte range within a file, HTTP is described as stateless, because the server is not required to record information concerning the state of the playback device requesting information or the byte ranges requested by the playback device in order to respond to requests received from the playback device.

In adaptive streaming systems, the source media is typically stored on a media server as a top level index file pointing to a number of alternate streams that contain the actual video and audio data. Each stream is typically stored in one or more container files. Different adaptive streaming solutions typically utilize different index and media containers. The Synchronized Multimedia Integration language (SMIL) developed by the World Wide Web Consortium is utilized to create indexes in several adaptive streaming solutions including IIS Smooth Streaming developed by Microsoft Corporation of Redmond, Wash., and Flash Dynamic Streaming developed by Adobe Systems incorporated of San Jose, Calif. HTTP Adaptive Bitrate Streaming developed by Apple Computer Incorporated of Cupertino, Calif. implements index files using an extended M3U playlist file (.M3U8), which is a text file containing a list of URIs that typically identify a media container file. The most commonly used media container formats are the MP4 container format specified in MPEG-4 Part 14 (i.e. ISO/IEC 14496-14) and the MPEG transport stream (TS) container specified in MPEG-2 Part 1 (i.e. ISO/IEC Standard 13818-1). The MP4 container format is utilized in IIS Smooth Streaming and Flash Dynamic Streaming. The TS container is used in HTTP Adaptive Bitrate Streaming.

SUMMARY OF THE INVENTION

Systems and methods in accordance with embodiments of the invention estimate available bandwidth and perform initial stream selection when commencing streaming of media. One embodiment of the method of the invention includes measuring network bandwidth using a playback device, determining an initial network bandwidth estimate using the network bandwidth measurements, selecting an initial stream from said plurality of streams of encoded media that are encoded at different maximum bitrates rates using the playback device based upon the maximum bitrates of the plurality of streams and the initial bandwidth estimate; and commencing streaming of encoded media by requesting portions of the encoded media from the initial streams using the playback device.

In a further embodiment of the method of the invention, the playback device performs the initial bandwidth estimate using the network bandwidth measurements.

Another embodiment of the method of the invention also includes providing the network bandwidth measurements to a performance server. In addition, the performance server determines the initial bandwidth estimate using the network bandwidth measurements.

In a still further embodiment of the method of the invention, measuring network bandwidth includes requesting a block of data and measuring the time taken to download the data.

In still another embodiment of the method of the invention, measuring network bandwidth includes associating a timestamp with the network bandwidth measurement.

In a yet further embodiment of the method of the invention, measuring network bandwidth includes associating a content distribution network identifier with the network bandwidth measurement.

In yet another embodiment of the method of the invention, measuring network bandwidth includes associating a server IP address with the network bandwidth measurement.

In a further embodiment again of the method of the invention, measuring network bandwidth includes associating a server hostname with the network bandwidth measurement.

In another embodiment again of the method of the invention, measuring bandwidth includes associating a video maximum bitrate with the network bandwidth measurement.

In a further additional embodiment of the method of the invention, determining an initial network bandwidth estimate using the network bandwidth measurements includes determining an average network bandwidth using the network bandwidth measurements.

In another additional embodiment of tile method of the invention, the average network bandwidth is determined by filtering the network bandwidth measurements based upon at least one piece of information associated with the network bandwidth measurements selected from the group consisting of time of day, day of week, content distribution network, server, and maximum bitrate.

In a still yet further embodiment of the method of the invention, determining an initial network bandwidth estimate using the network bandwidth measurements further includes determining the accuracy of the initial bandwidth estimate.

In still yet another embodiment of the method of the invention, the initial stream is selected for use in the adaptive bitrate streaming of the encoded media.

In a still further embodiment again of the method of the invention, the initial stream is selected by initially allocating available bandwidth to streams which have no alternative and allocating the remaining bandwidth to the selection from the plurality of streams of encoded media that are encoded at different maximum bitrates rates.

Still another embodiment again of the method of the invention, also includes selecting a stream from each of a number of sets of streams of encoded media that are encoded at different maximum bitrates.

In a still further additional embodiment, the user can instruct the playback device concerning allocation of bandwidth to at least one of the selections subject to the remaining available bandwidth.

A further embodiment of the invention includes a processor configured, via a client application, to request portions of files from a remote server. In addition, the client application further configures the processor to measure network bandwidth using a playback device, obtain an initial network bandwidth estimate using the network bandwidth measurements, select an initial stream from said plurality of streams of encoded media that are encoded at different maximum bitrates rates using, the playback device based upon the maximum bitrates of the plurality of streams and the initial bandwidth estimate, and commence streaming of encoded media by requesting portions of the encoded media from the initial streams using the playback device.

In another embodiment, the client application further configures the processor to measure network bandwidth by requesting a block of data and measuring the time taken to download the data.

In a still further embodiment, the client application further configures the processor to associate a time stamp with the network bandwidth measurement.

In still another embodiment, the client application further configures the processor to associate a content distribution network identifier with the network bandwidth measurement.

In a yet further embodiment, the client application further configures the processor to associate a server IP address with the network bandwidth measurement.

In yet another embodiment, the client application further configures the processor to associate a server host name with the network bandwidth measurement.

In a further embodiment again, the client application further configures the processor to associate a video maximum bitrate with the network bandwidth measurement.

In another embodiment again, the client application further configures the processor to associate the playback device IP address with the network bandwidth measurement.

In a further additional embodiment, the client application further configures the processor to perform an initial bandwidth estimate using the network bandwidth measurements.

In another additional embodiment, the client application further configures the processor to determine an initial network bandwidth estimate using the network bandwidth measurements by determining an average network bandwidth using the network bandwidth measurements.

In a still further embodiment, the client application further configures the processor to determine the average network bandwidth by filtering the network bandwidth measurements based upon at least one piece of information associated with the network bandwidth measurements selected from the group consisting of time of day, day of week, content distribution network, server and maximum bitrate.

In still another embodiment, the client application further configures the processor to determine the accuracy of the initial bandwidth estimate.

In a yet further embodiment, the client application further configures the processor to provide the network bandwidth measurements to a performance server, and receive an initial bandwidth estimate from the performance server.

In yet another embodiment, the initial stream is selected for use in the adaptive bitrate streaming of the encoded media.

In a further embodiment again, the client application farther configures the processor to select the initial stream by initially allocating available bandwidth to streams which have no alternative and allocating the remaining bandwidth to the selection from the plurality of streams of encoded media that are encoded at different maximum bitrates rates.

In another embodiment again, the client application further configures the processor to select a stream from each of a number of sets of streams of encoded media that are encoded at different maximum bitrates.

A further additional embodiment includes a machine readable medium containing processor instructions, where execution of the instructions by a processor causes the processor to perform a process including measuring network bandwidth using a playback device, obtaining an initial network bandwidth estimate using the network bandwidth measurements, selecting an initial stream from said plurality of streams of encoded media that are encoded at different maximum bitrates rates using the playback device based upon the maximum bitrates of the plurality of streams and the initial bandwidth estimate, and commencing streaming of encoded media by requesting portions of the encoded media from the initial streams using the playback device.

In a still yet further embodiment, execution of the instructions by a processor causes the process to obtain an initial network bandwidth estimate by calculating an initial bandwidth estimate using the network bandwidth measurements.

In still yet another embodiment, execution of the instructions by a processor causes the process to obtain an initial network bandwidth estimate by transmitting the network bandwidth measurements to a server, and receiving an initial so bandwidth estimate from the server.

Another further embodiment of the invention includes recording performance data concerning playback of streamed content by a playback device, obtaining a maximum bitrate of a piece of content, comparing the maximum

5

bitrate of the piece of content to recorded performance data for playback of streamed content by the playback device, and verify that the playback device can support playback of content based upon the comparison of the maximum bitrate of the piece of content and the recorded performance data for playback of streamed content by the playback device.

In still another further embodiment, the performance data includes information concerning the amount of time spent buffering streamed content.

In yet another further embodiment, comparing the maximum bitrate of the piece of content to recorded performance data for playback of streamed content by the playback device includes comparing an amount of time spent buffering streamed content encoded at a maximum bitrate corresponding to the maximum bitrate of the piece of content to a predetermined threshold.

In another further embodiment again, the performance data includes information concerning the amount of time spent streaming content streams encoded at different maximum bitrates during adaptive bitrate streaming.

In another further additional embodiment, comparing the maximum bitrate of the piece of content to recorded performance data for playback of streamed content by the playback device includes comparing the proportion of time spent streaming content streams encoded at a maximum bitrate corresponding to the maximum bitrate of the piece of content to a predetermined threshold.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a network diagram of a media streaming system including a performance server in accordance with an embodiment of the invention.

FIG. 2 is a system diagram of a playback device in accordance with an embodiment of the invention.

FIG. 3 is a flow chart illustrating a process for measuring network bandwidth in accordance with an embodiment of the invention.

FIG. 4 is a flow chart illustrating a process for estimating network bandwidth using historical network bandwidth measurements in accordance with an embodiment of the invention.

FIG. 5 is a flow chart illustrating a process or performing initial stream selection.

FIG. 6 is a flow chart illustrating a process for determining whether a playback device can support playback of a particular piece of content based upon the maximum bitrate at which the piece of content is encoded in accordance with an embodiment of the invention.

DETAILED DISCLOSURE OF THE INVENTION

Turning now to the drawings, systems and methods for estimating available bandwidth and performing initial stream selection when commencing streaming of media in accordance with embodiments of the invention are illustrated. In many embodiments, playback devices record performance information during the streaming session. When a playback device initiates a new streaming session, previously recorded performance information can be utilized to estimate available bandwidth. The bandwidth estimate can then be used to select between streams encoded at different maximum bitrates for commencement of conventional or adaptive bitrate streaming. Where audio and/or subtitle tracks are only available at a single bitrate, the bitrate of any audio and/or subtitle streams is subtracted from the bandwidth estimate. Where a specific stream such as (but not

6

limited to) a video stream is selected from a number of alternative streams encoded at different maximum bitrates, a video stream is selected having a maximum bitrate equal to or less than the estimated remaining available bandwidth.

Where alternative audio and video stream combinations are available, the system can default or rely on user selections to choose either a higher bitrate audio stream or a higher bitrate video stream.

In many embodiments, the historical performance information is utilized to estimate available bandwidth using a technique appropriate to a specific application. In a number of embodiments, the last network bandwidth measurement recorded by a playback device is utilized to generate a bandwidth estimate. In several embodiments, the network bandwidth measurements recorded by a playback device over a predetermined time period are utilized to generate a bandwidth estimate. In many embodiments, correlation between the time of day and the network bandwidth measurements recorded by the playback device can be utilized in determining an initial bandwidth estimate.

In various embodiments, the process of determining a bandwidth estimate also includes providing information concerning the accuracy of the estimate. In many embodiments, one or more accuracy factors are generated that can be utilized in selection of initial streams based upon a bandwidth estimate. Depending on the accuracy factor(s), a playback device can determine the margin to allow between the bandwidth requirements of selected streams and the estimated available bandwidth. In many embodiments, the accuracy factor is determined based upon the correlation between bandwidth estimates made with respect to the playback device and the actual streaming conditions subsequently experienced by the playback device.

In a number of embodiments, playback devices report network bandwidth measurements to a performance server and, the performance server makes recommendations concerning initial stream selection. In several embodiments, the playback devices can report back the identity of the content distribution network and/or specific server from which content was streaming at the time the network bandwidth measurement was taken. In addition to providing stream selection recommendations, the performance server can also provide recommendations concerning the specific content distribution network and/or servers from which to stream content to the playback device to achieve the best network performance. By aggregating network performance measurements from multiple playback devices, a performance server in accordance with embodiments of the invention can perform bandwidth estimations and recommendations concerning content distribution networks and/or servers utilizing bandwidth measurements taken from multiple playback devices within a geographic area that utilize the same Internet Service Provider (ISP).

The availability of network bandwidth measurements on a performance server can also enable other possible functionality. In several embodiments, playback devices can purchase content for streaming from online content stores and the price for the same content at different resolutions may vary. In a number of embodiments, the performance server utilizes recorded network bandwidth measurements to determine whether the playback device is likely to experience network bandwidth performance capable of supporting the streaming of the content at a specific resolution. In this way, the recorded performance information can be utilized to make recommendations concerning the purchase of content at different resolutions. In several embodiments, the recommendation can also include an indication of the

accuracy or likelihood that the recommendation is correct. In a number of embodiments, an accuracy factor can be generated based upon the total time spent rebuffering content streamed at the recommended level during previous streaming sessions. In many embodiments, an accuracy factor can be generated with respect to an adaptive bitrate streaming system based upon the proportion of time spent streaming below the recommended level during previous streaming sessions. In other embodiments, any of a variety of accuracy metrics can be utilized as appropriate to the requirements of a specific application.

In other embodiments, the performance server can the network bandwidth measurements in any of a variety of ways appropriate to a specific application including but not limited to enabling online content stores to offer premium content not only based upon resolution, but also based upon distribution from a specific content distribution network that has historically achieved higher network performance with respect to a specific playback device. Performance servers and processes for collecting network bandwidth measurements and estimating network bandwidth performance in accordance with embodiments of the invention are discussed further below.

Streaming System Architecture

Streaming systems in accordance with many embodiments of the invention include a server on which content is stored, playback devices that request streaming of content and that perform bandwidth measurements, and a performance server configured to aggregate network bandwidth measurements and to provide bandwidth estimates. A streaming system in accordance with an embodiment of the invention is illustrated in FIG. 1. The streaming system 10 includes a number of playback devices 12 configured to request streaming of content from remote servers within content distribution networks 14 via a network 14 such as the Internet. In, many embodiments, the playback devices can select between alternative streams when requesting content. Alternative streams are streams that encode the same media content in different ways. In many instances, alternative streams encode media content (such as but not limited to video) at different maximum bitrates. In a number of embodiments, the alternative streams are encoded with different resolutions and/or at different frame rates. The playback device can select one or more streams for conventional streaming or can switch between alternative streams to perform adaptive bitrate streaming.

During streaming of content, the playback devices 12 perform network bandwidth or data rate measurements. Each network bandwidth measurement can be timestamped and stored locally and/or sent to a performance server 18 that can store the network bandwidth measurement in a database 20. In many embodiments, the playback device sends network bandwidth measurements to the performance server continuously. In a number of embodiments, the playback device sends network bandwidth measurements to the performance server in batches.

When a playback device 12 initiates a new streaming session, previous measurements of network bandwidth made by a playback device can be utilized to estimate the available network bandwidth. Any of a variety of techniques appropriate to a specific application can be utilized to generate a network bandwidth estimate in accordance with embodiments of the invention. The generation of network bandwidth estimates is discussed further below. Based upon the network bandwidth estimate, the playback device can determine the initial streams from which to commence requesting portions of encoded media based upon the maximum bitrates

of the available streams. In several embodiments, the network performance server 18 generates the network bandwidth estimate and provides the network bandwidth estimate to the playback device. In a number of embodiments, the network performance server 18 generates a network bandwidth estimate and uses the estimate to provide initial stream selection recommendations to a playback device 12. In many embodiments, the playback device 12 generates the network bandwidth estimate based upon locally stored network bandwidth measurements. As is discussed further below, the process of generating a network bandwidth estimate can also include determining the accuracy of the network bandwidth estimate. In a number of embodiments, the accuracy of a network bandwidth estimate is considered during the initial stream selection.

In several embodiments, playback devices 12 are able to purchase content for streaming via one or more online content stores 22. In many instances, the online content store will provide different pricing for content encoded at different resolutions. For example, a content store can charge a premium for content encoded at high definition resolution relative to content encoded at standard definition resolution. If insufficient network bandwidth is available to a playback device to stream the high definition content, the playback device may prefer to purchase the lower resolution content. In the context of conventional streaming, the playback device will experience frequent buffering interruptions by purchasing the premium content. In the context of adaptive bitrate streaming, the majority of the content received by the playback device likely will be at the lower resolution irrespective of whether the playback device purchases the premium content. In order to reduce the likelihood that a playback device 12 purchases premium content that cannot be supported by the available network bandwidth, the bandwidth available to the playback device can be estimated using the recorded network performance measurements and recommendations provided to the user concerning whether the premium content can be supported. In several embodiments, the process of generating a recommendation also involves determining the likelihood that the recommendation is correct. In a number of embodiments, the servers of the online content store 22 communicate with the performance server 18 to obtain a network performance estimate. In other embodiments, the playback device 12 generates the network performance estimate based upon locally stored records of past network bandwidth measurements.

Although a specific streaming system is illustrated in FIG. 1, performance servers can be incorporated into any of a variety of streaming system architectures where playback devices perform network bandwidth measurements in accordance with embodiments of the invention. In addition, individual playback devices can store network bandwidth measurements and perform network bandwidth estimates in accordance with embodiments of the invention. Playback devices that can be utilized to perform network bandwidth measurements during a streaming session in accordance with embodiments of the invention are discussed further below.

Playback Devices

In the embodiment illustrated in FIG. 1, playback devices include personal computers, CE players, and mobile phones. In other embodiments, playback devices can include consumer electronics devices such as DVD players, Blu-ray players, televisions, set top boxes, video game consoles, tablets, and other devices that are capable of connecting to a server and playing back encoded media. The basic architecture of a playback device in accordance with an embodi-

ment of the invention is illustrated in FIG. 2. The playback device 30 includes a processor 32 in communication with non-volatile memory 34 and volatile memory 36. In the illustrated embodiment, the non-volatile memory includes a client application 38 that configures the processor and the playback device to stream content from a remote server. The nonvolatile memory 34 also includes cryptographic data 39 that can be utilized in accessing encrypted content. During operation, the client application can configure the playback device to measure network bandwidth. In many embodiments, the time taken to receive a requested block of data is used to measure network bandwidth. Network bandwidth measurements can be performed throughout a streaming session and can include information concerning the content distribution network and/or server from which the playback device requested the block of content. In many embodiments, the client application configures the playback device to record the specific stream requested. The client application can configure the playback device to store the network bandwidth measurements in the volatile or non-volatile memory of the playback device. In addition, the client application can configure the playback device to transmit the network bandwidth measurements to a performance server. The playback device can transmit network bandwidth measurements to a performance server as they are made and/or the playback device can buffer network bandwidth measurements and send them in batches to the performance server. Where bandwidth measurements are locally stored, the client application 38 can utilize the bandwidth measurements in making an initial stream selection(s). Where bandwidth measurements are provided to a performance server, the client application 38 configures the playback device to request an initial bandwidth estimate and/or accuracy information from the performance server.

In a number of embodiments, the playback device is configured to perform adaptive bitrate streaming. In several embodiments, a top level index file is stored and/or generated by a server within the content distribution network 14 or a server associated with the online content store 22. The top level index file specifies the alternative streams available to the playback device and the maximum bitrate of each stream. Therefore, a performance server and/or a playback device can utilize the index file to perform initial stream selections based upon a bandwidth estimate generated in accordance with embodiments of the invention. Examples of adaptive bitrate streaming systems that can be utilized in accordance with embodiments of the invention include but are not limited to the adaptive bitrate streaming systems disclosed in U.S. Provisional Patent Application Ser. No. 61/430,110, "Systems and Methods For Adaptive Bitrate Streaming of Media Stored in Matroska Files Using Hypertext Transfer Protocol", filed Jan. 5, 2011, the entirety of which is incorporated herein by reference.

Although a specific playback device architecture is illustrated in FIG. 2, any of a variety of architectures including architectures where the client application is located on disk or some other form of storage and is loaded into volatile memory at runtime can be utilized to implement playback devices for use in multiphase adaptive bitrate streaming systems in accordance with embodiments of the invention. Furthermore, any of a variety of system architectures including (but not limited) to the system architecture illustrated in FIG. 1 can be utilized to measure network bandwidth and utilize the network bandwidth measurements to estimate network bandwidth when a playback device initiates a streaming session in accordance with embodiments of the invention.

Measuring Network Bandwidth

Any of a variety of processes can be utilized to measure network bandwidth and decoder performance. A process for measuring network performance in accordance with an embodiment of the invention is illustrated in FIG. 3. The process 40 includes determining (42) network bandwidth. As discussed above, one process for determining network bandwidth or data rate is to request a block of data and to measure the time taken to download the data. In other embodiments, any of a variety of techniques for measuring network bandwidth can be utilized. In several embodiments, decoder performance is also measured (44). Decoder performance can be measured in any of a variety of different ways including measuring the time it takes to decode a frame of video, the average time taken to decode a frame of video, and/or CPU load. When the playback device performing the bandwidth measurements provides the bandwidth measurements to a performance server, the playback device can send (46) the timestamped information to the performance server and can include additional information including (but not limited to) the IP address or host name of the server from which the stream was received, the size of the data downloaded, and/or the maximum bitrate at which the stream is encoded. The timestamped performance information can then be stored (48) for retrieval and use in the estimation of available bandwidth.

Although a specific process for estimating network bandwidth is illustrated in FIG. 3, any of a variety of processes appropriate to a specific application can be utilized in accordance with embodiments of the invention. Once the network bandwidth measurements are collected, estimation of available bandwidth can be performed either at the playback device or using a performance server. Processes for estimating available bandwidth in accordance with embodiments of the invention are discussed below.

Estimating Network Bandwidth

Historical network bandwidth measurements can be utilized to select one or more initial streams when streaming content. A process for generating a bandwidth estimate using historical network bandwidth measurements in accordance with embodiments of the invention is illustrated in FIG. 4. The process 50 can be performed using a playback device, a performance server or a combination of a playback device and a performance server. When a performance server is utilized in the process, the process commences with the receipt (52) of a network bandwidth estimate request. The network bandwidth estimate is determined by retrieving (54) historical performance data and using the historical performance data to generate (56) an initial bandwidth recommendation. In a number of embodiments, the initial bandwidth recommendation is generated by averaging network bandwidth measurements included in the performance data. In several embodiments, network bandwidth measurements collected over a predetermined time period are averaged. In many embodiments, the network bandwidth measurements that occurred within a corresponding time of day and/or day of the week are averaged. In certain embodiments, network bandwidth measurements taken when content was streamed from a specific content distribution network and/or server are averaged. In other embodiments, the network bandwidth measurements and associated data can be filtered in any of a variety of ways to determine an initial bandwidth estimate. In a number of embodiments, the process of generating an initial bandwidth estimate also includes generating an estimate of the accuracy of the bandwidth estimate. In several embodiments, the accuracy of the bandwidth estimate can be determined as the ratio of previous bandwidth estimates to

actual bandwidth or as a statistical measure such as (but not limited to) the standard deviation of the network bandwidth measurements utilized to generate the initial bandwidth estimate. In other embodiments, any of a variety of techniques can be utilized to determine the accuracy of an initial bandwidth estimate including (but not limited to) looking at trends for certain times of day. When the initial bandwidth estimate has been obtained, initial stream(s) are selected (58).

Although a specific process is illustrated in FIG. 4, any of a variety of processes for generating an initial bandwidth estimate and selecting streams can be utilized in accordance with embodiments of the invention. Processes for performing stream selection based upon an initial bandwidth estimate in accordance with embodiments of the invention are discussed further below.

Selecting initial Streams

When an estimate of the available bandwidth or bitrate has been obtained, a playback device can select one or more initial streams and commence streaming of the encoded content. A process for selecting initial stream(s) in accordance with an embodiment of the invention is illustrated in FIG. 5. When encoding content for adaptive bitrate streaming or conventional streaming at different resolutions, the source video is typically encoded as a number of alternative streams. Other portions of the source content, however, may simply be provided as a single stream (e.g. a specific audio track or a specific subtitle track). In the illustrated embodiment, the process 70 involves initially allocating bandwidth (72) to streams for which there are no alternatives. In many embodiments, bandwidth is initially allocated to streams for which there is no alternative and so the maximum bitrate is a fixed value. The total bitrate allocated to these fixed streams is then subtracted from the estimated available bitrate to obtain the remaining available bitrate for use by other streams. A selection (74) can then be made concerning alternative streams based upon the remaining available bandwidth. Where there are multiple sets of alternative streams from which selections can be made (e.g. multiple video streams encoded at different bitrates and multiple audio streams encoded at different bitrates), a tradeoff occurs between which stream will be allocated the greater share of the available bandwidth. In a number of embodiments, the playback device makes a predetermined selection. In many embodiments, the predetermined selection is made based upon the available bandwidth and the maximum bitrates of the streams within the two sets of alternative streams. In several embodiments, the user can force the selection of a higher bitrate stream (e.g. the user can choose to force the selection of a higher rate video stream or a higher rate audio stream). Once the initial streams are selected, the playback device can commence requesting portions of encoded media from the initial streams and, in adaptive bitrate systems, can adjust the stream selections based upon the streaming conditions experienced by the playback device.

Although a specific process for selecting initial streams based upon an initial bandwidth estimate is discussed above with respect to FIG. 5, any of a variety of processes can be utilized to select initial streams based upon an initial bandwidth estimate in accordance with embodiments of the invention. In many embodiments, the initial bandwidth estimate is used as a conservative estimate and an adjustment factor can be applied to the initial bandwidth estimate. In several embodiments, the adjustment factor is a function of the accuracy of the initial bandwidth estimate. In other embodiments, any of a variety of techniques can be utilized to apply an adjustment factor to the initial bandwidth

estimate. Indeed, in many embodiments an adjustment is made during the process of determining the initial bandwidth estimate.

Premium Content Recommendations

Many content distribution systems charge a premium for higher resolution content, which is typically encoded at a higher maximum bitrate relative to lower resolution content. At the time of purchase, however, information is typically not available concerning the data rate of a network connection that can be established between the content distribution system and a playback device. In many instances, purchase of higher resolution content may result in an inferior playback experience due to repeated interruptions to buffer content. In adaptive bitrate streaming systems, insufficient network bandwidth may cause the majority of the video streamed to a playback device to be at a lower resolution than the resolution paid for by a user. Initial bandwidth estimates generated using stored network bandwidth measurements can be utilized to make recommendations concerning whether a user's playback device and network connection can support playback at a specific resolution.

A process for determining whether a playback device can support playback of a piece of content at a specific resolution in accordance with an embodiment of the invention is illustrated in FIG. 6. the process 90 can be performed using a performance server or using a playback device. The process 90 commences by obtaining (92) the bandwidth requirements of a specific piece of content. Historical network bandwidth measurements are retrieved (94) and a determination made concerning whether playback is supported. The determination concerning whether playback is supported can be made in any of a variety of ways. Where a specific stream of content is concerned, a determination can be made based upon the proportion of time spent buffering content during playback of content encoded at a similar maximum bitrate. In several embodiments, network bandwidth measurements can be reviewed to estimate the bandwidth throughout playback to estimate the proportion of time that is likely to be spent buffering content. In a number of embodiments, modifications can be made to the amount of content that is buffered before playback commences based upon the bandwidth estimates to reduce the amount of time spent buffering during playback. In adaptive bitrate streaming systems, a determination can be made based upon the proportion of time spent streaming at or above the maximum bitrate of the content. Estimates of the network bandwidth for the duration of the content can also be utilized to estimate the proportion of time content at the specified resolution will be streamed.

As is the case with the initial bandwidth estimates discussed above, the network bandwidth measurements utilized to determine whether the bandwidth requirements of the content are supported can be filtered based upon one or more pieces of additional information associated with the network measurements including (but not limited to) time of day, date, and the content distribution network and/or server streaming the content. In many embodiments, the determination concerning whether the network bandwidth requirements are supported can be accompanied by a confidence factor or accuracy metric. In several embodiments, the confidence factor or accuracy metric can represent the proportion of time that is likely to be spent buffering or streaming at a lower resolution or reflect variation in the network bandwidth measurement data utilized to determine whether the network bandwidth requirements of the content can be supported. When the network bandwidth requirements can be met, the process 90 can involve generating (98)

a user notification that the playback requirements can be met and/or authorizing the transaction. In embodiments Where a performance server makes the determination, the determination can be integrated within the user interface of a content distribution system and/or the determination can be integrated into the purchase process. In the event a determination is made that the network bandwidth requirements of a specific content resolution exceed the data rate that is likely to be available to a playback device, then a notification is generated (100) informing the user that they should not proceed with purchasing and/or streaming the content.

Although a specific process is illustrated in FIG. 6, any of a variety of processes for determining whether to stream and/or purchase a specific piece of content encoded with specific maximum bandwidth requirements including processes that utilize network bandwidth measurements collected by multiple playback devices from a similar geographic region and that utilize the same Internet service provider can be performed in accordance with embodiments. In several embodiments, a similar process is utilized to generate the number of interruptions and the amount of time spent buffering during playback, which can be displayed accompanying content selections. In adaptive bitrate streaming systems, similar processes can be used to estimate the proportion of time the content will be streamed at the displayed resolution. In both instances these estimates can be qualified by high end and low end estimates representing a predetermined confidence interval. In addition to making determinations concerning whether to purchase and/or stream a specific piece of content, network bandwidth measurements can be utilized in a variety of additional ways related to the purchase of content discussed below.

Content Distribution Network Recommendations

The data rate of a network connection experienced by a specific playback device can vary depending upon the content distribution network utilized to distribute content. In a number of embodiments, a content distribution system can offer premium content based not just on the resolution of the content but the content distribution network utilized to deliver the content. In many embodiments, a streaming system can provide a performance metric such as (but not limited to) an estimate of the amount of time the playback device will spend buffering during playback from different content distribution networks and can charge a premium based the higher playback performance anticipated when streaming from a premium content distribution network. In several embodiments, an adaptive bitrate streaming system can display a performance metric such as (but not limited to) an estimate of the proportion of time that a playback device will receive content encoded at the highest available resolution and charge a premium based upon the higher playback performance anticipated when streaming from a premium content distribution network.

Although the present invention has been described in certain specific aspects, many additional modifications and variations would be apparent to those skilled in the art. It is therefore to be understood that the present invention may be practiced otherwise than specifically described, including various changes in the implementation such as utilizing encoders and decoders that support features beyond those specified within a particular standard with which they comply, without departing from the scope and spirit of the present invention. Thus, embodiments of the present invention should be considered in all respects as illustrative and not restrictive.

What is claimed:

1. A method of selecting an initial stream of encoded media from a plurality of streams of encoded media that are encoded at different maximum bitrates rates, the method comprising:

retrieving historical network performance data comprising a plurality of network bandwidth measurements from a memory of a playback device;

filtering the plurality of network bandwidth measurements based upon at least one piece of information associated with the network bandwidth measurements selected from the group consisting of time of day and day of week;

determining, using the playback device and prior to commencing streaming of encoded media, an initial network bandwidth estimate using the *filtered* network bandwidth measurements, wherein the initial network bandwidth estimate is determined by performing statistical analysis using the *filtered* network bandwidth measurements;

generating, using the playback device, an estimate of the accuracy of the initial network bandwidth estimate by (i) determining a ratio of previous bandwidth estimates to actual bandwidth or (ii) computing a standard deviation of the *filtered* network bandwidth measurements utilized to generate the initial bandwidth estimate;

selecting an initial stream from said plurality of streams of encoded media that are encoded at different maximum bitrates rates using the playback device for commencing streaming of encoded media based upon the maximum bitrates of the plurality of streams, the initial network bandwidth estimate, and the accuracy of the initial network bandwidth estimate; and

commencing streaming of encoded media by requesting portions of the encoded media from the initial streams using the playback device.

2. The method of claim 1, wherein the statistical analysis comprises averaging the *filtered* network bandwidth measurements.

3. The method of claim 2, wherein the network bandwidth measurements are for content streamed from a particular content distribution network.

[4. The method of claim 2, wherein the network bandwidth measurements occurred within a predetermined time period.]

[5. The method of claim 1, wherein the network bandwidth measurements occurred within a time of day or day of week.]

[6. The method of claim 1, wherein the initial network bandwidth estimate is determined by filtering the network bandwidth measurements based upon at least one piece of information associated with the network bandwidth measurements selected from the group consisting of time of day, day of week, content distribution network, server, and maximum bitrate.]

7. A method of selecting an initial stream of encoded media from a plurality of streams of encoded media that are encoded at different maximum bitrates rates, the method comprising:

retrieving historical network performance data comprising a plurality of network bandwidth measurements from a memory of a playback device;

determining, using the playback device and prior to commencing streaming of encoded media, an initial network bandwidth estimate using the network bandwidth measurements, wherein the initial network bandwidth estimate is determined by performing statistical analysis using the network bandwidth measurements;

15

selecting an initial stream from said plurality of streams of encoded media that are encoded at different maximum bitrates rates using the playback device for commencing streaming of encoded media based upon the maximum bitrates of the plurality of streams and the initial network bandwidth estimate, wherein the initial stream is selected by initially allocating available bandwidth to [streams] at least one secondary stream which [have] has no alternative and [allocating the remaining bandwidth to the selection] selecting the initial stream from the plurality of streams of encoded media that are encoded at different maximum bitrates based on the remaining bandwidth, wherein the at least one secondary stream is at least one selected from the group consisting of an audio stream and a subtitle stream; and commencing streaming of encoded media by requesting portions of the encoded media from the initial streams using the playback device.

8. The method of claim 1, wherein the playback device performs the initial network bandwidth estimate using the filtered network bandwidth measurements.

9. The method of claim 1, further comprising: providing the network bandwidth measurements to a performance server; wherein filtering the network bandwidth measurements is performed by the performance server and the performance server determines the initial network bandwidth estimate using the network bandwidth measurements.

10. The method of claim 1, wherein the initial stream is selected for use in the adaptive bitrate streaming of the encoded media.

11. The method of claim 1, further comprising selecting a stream from each of a number of sets of streams of encoded media that are encoded at different maximum bitrates.

12. The method of claim 1, further comprising measuring current network bandwidth using the playback device.

13. The method of claim 12, further comprising determining the initial network bandwidth estimate using the measured current network bandwidth measurements.

14. A non-transitory machine readable medium containing processor instructions, where execution of the instructions by a processor causes the processor to perform a process comprising:

retrieving historical network performance data comprising a plurality of network bandwidth measurements; filtering the plurality of network bandwidth measurements based upon at least one piece of information associated with the network bandwidth measurements selected from the group consisting of time of day and day of week;

determining, prior to commencing streaming of encoded media, an initial network bandwidth estimate using the filtered network bandwidth measurements, wherein the initial network bandwidth estimate is determined by performing statistical analysis using the filtered network bandwidth measurements;

generating an estimate of the accuracy of the initial network bandwidth estimate by (i) determining a ratio of previous bandwidth estimates to actual bandwidth or (ii) computing a standard deviation of the filtered network bandwidth measurements utilized to generate the initial bandwidth estimate

selecting an initial stream from said plurality of streams of encoded media that are encoded at different maximum bitrates rates for commencing streaming of encoded media based upon the maximum bitrates of the plurality

16

of streams, the initial network bandwidth estimate and the estimate of the accuracy of the initial network bandwidth estimate; and

commencing streaming of encoded media by requesting portions of the encoded media from the initial streams.

15. The non-transitory machine readable medium of claim 14, wherein performing the statistical analysis comprises averaging the filtered network bandwidth measurements.

16. The non-transitory machine readable medium of claim 14, wherein the network bandwidth measurements are for content streamed from a particular content distribution network.

[17. The non-transitory machine readable medium of claim 14, wherein the network bandwidth measurements occurred within a predetermined time period.]

[18. The non-transitory machine readable medium of claim 14, wherein the network bandwidth measurements occurred within a time of day or day of week.]

19. The method of claim 7, further comprising generating an estimate of the accuracy of the initial network bandwidth estimate by (i) determining a ratio of previous bandwidth estimates to actual bandwidth or (ii) computing a standard deviation of the network bandwidth measurements utilized to generate the initial bandwidth estimate.

20. The method of claim 7, wherein the initial network bandwidth estimate is determined by filtering the network bandwidth measurements based upon at least one piece of information associated with the network bandwidth measurements selected from the group consisting of time of day, day of week, content distribution network, server, and maximum bitrate.

21. A method of selecting an initial stream of encoded media from a plurality of streams of encoded media that are encoded at different maximum bitrates, the method comprising:

retrieving historical network performance data comprising a plurality of network bandwidth measurements; filtering the plurality of network bandwidth measurements based upon at least one piece of information associated with the network bandwidth measurements selected from the group consisting of time of day and day of week to identify at least one network bandwidth measurement;

determining, using the playback device and prior to commencing streaming of encoded media, an initial network bandwidth estimate using the at least one network bandwidth measurement;

generating, using the playback device, an estimate of the accuracy of the initial network bandwidth estimate by (i) determining a ratio of the bandwidth estimate to actual bandwidth or (ii) when the at least one network bandwidth measurement comprises a filtered plurality of network bandwidth measurements, computing a standard deviation of the filtered plurality of network bandwidth measurements utilized to generate the initial bandwidth estimate;

selecting an initial stream from said plurality of streams of encoded media that are encoded at different maximum bitrates rates using the playback device for commencing streaming of encoded media based upon the maximum bitrates of the plurality of streams, the initial network bandwidth estimate, and the accuracy of the initial network bandwidth estimate; and

commencing streaming of encoded media by requesting portions of the encoded media from the initial streams using the playback device.

17

22. A non-transitory machine readable medium containing processor instructions, where execution of the instructions by a processor causes the processor to perform a process comprising:

retrieving historical network performance data comprising a plurality of network bandwidth measurements; filtering the plurality of network bandwidth measurements based upon at least one piece of information associated with the network bandwidth measurements selected from the group consisting of time of day and day of week to identify at least one network bandwidth measurement;

determining, using the playback device and prior to commencing streaming of encoded media, an initial network bandwidth estimate using the at least one network bandwidth measurement;

generating, using the playback device, an estimate of the accuracy of the initial network bandwidth estimate by (i) determining a ratio of the bandwidth estimate to actual bandwidth or (ii) when the at least one network bandwidth measurement comprises a filtered plurality of bandwidth measurements, computing a standard deviation of the filtered plurality of network bandwidth measurements utilized to generate the initial bandwidth estimate;

selecting an initial stream from said plurality of streams of encoded media that are encoded at different maximum bitrates using the playback device for commencing streaming of encoded media based upon the maximum bitrates of the plurality of streams, the initial network bandwidth estimate, and the accuracy of the initial network bandwidth estimate; and

commencing streaming of encoded media by requesting portions of the encoded media from the initial streams using the playback device.

18

23. A method of selecting an initial stream of encoded media from a plurality of streams of encoded media that are encoded at different maximum bitrates rates, the method comprising:

retrieving historical network performance data comprising at least one network bandwidth measurement from a memory of a playback device;

determining, using the playback device and prior to commencing streaming of encoded media, an initial network bandwidth estimate using the at least one network bandwidth measurement, wherein the initial network bandwidth estimate is determined by performing statistical analysis using the at least one network bandwidth measurement;

selecting an initial stream from said plurality of streams of encoded media that are encoded at different maximum bitrates rates using the playback device for commencing streaming of encoded media based upon the maximum bitrates of the plurality of streams and the initial network bandwidth estimate, wherein the initial stream is selected by initially allocating available bandwidth to at least one secondary stream which has no alternative and selecting the initial stream from the plurality of streams of encoded media that are encoded at different maximum bitrates based on the remaining bandwidth, wherein the at least one secondary stream is at least one selected from the group consisting of an audio stream and a subtitle stream; and

commencing streaming of encoded media by requesting portions of the encoded media from the initial streams using the playback device.

* * * * *