




(86) Date de dépôt PCT/PCT Filing Date: 2004/06/03
 (87) Date publication PCT/PCT Publication Date: 2004/12/23
 (45) Date de délivrance/Issue Date: 2012/11/13
 (85) Entrée phase nationale/National Entry: 2005/11/23
 (86) N° demande PCT/PCT Application No.: EP 2004/006044
 (87) N° publication PCT/PCT Publication No.: 2004/111282
 (30) Priorité/Priority: 2003/06/06 (EP03076779.2)

(51) Cl.Int./Int.Cl. *C22C 21/16* (2006.01)
 (72) Inventeurs/Inventors:
 HARGARTER, HINRICH JOHANNES WILHELM, NL;
 BENEDICTUS, RINZE, NL;
 KEIDEL, CHRISTIAN JOACHIM, DE;
 HEINZ, ALFRED LUDWIG, DE
 (73) Propriétaire/Owner:
 CORUS ALUMINIUM WALZPRODUKTE GMBH, DE
 (74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : ALLIAGE D'ALUMINIUM PRESENTANT UNE HAUTE TOLERANCE AUX DOMMAGES CONVENANT EN PARTICULIER POUR LES APPLICATIONS AEROSPATIALES
 (54) Title: HIGH-DAMAGE TOLERANT ALUMINIUM ALLOY PRODUCT IN PARTICULAR FOR AEROSPACE APPLICATIONS

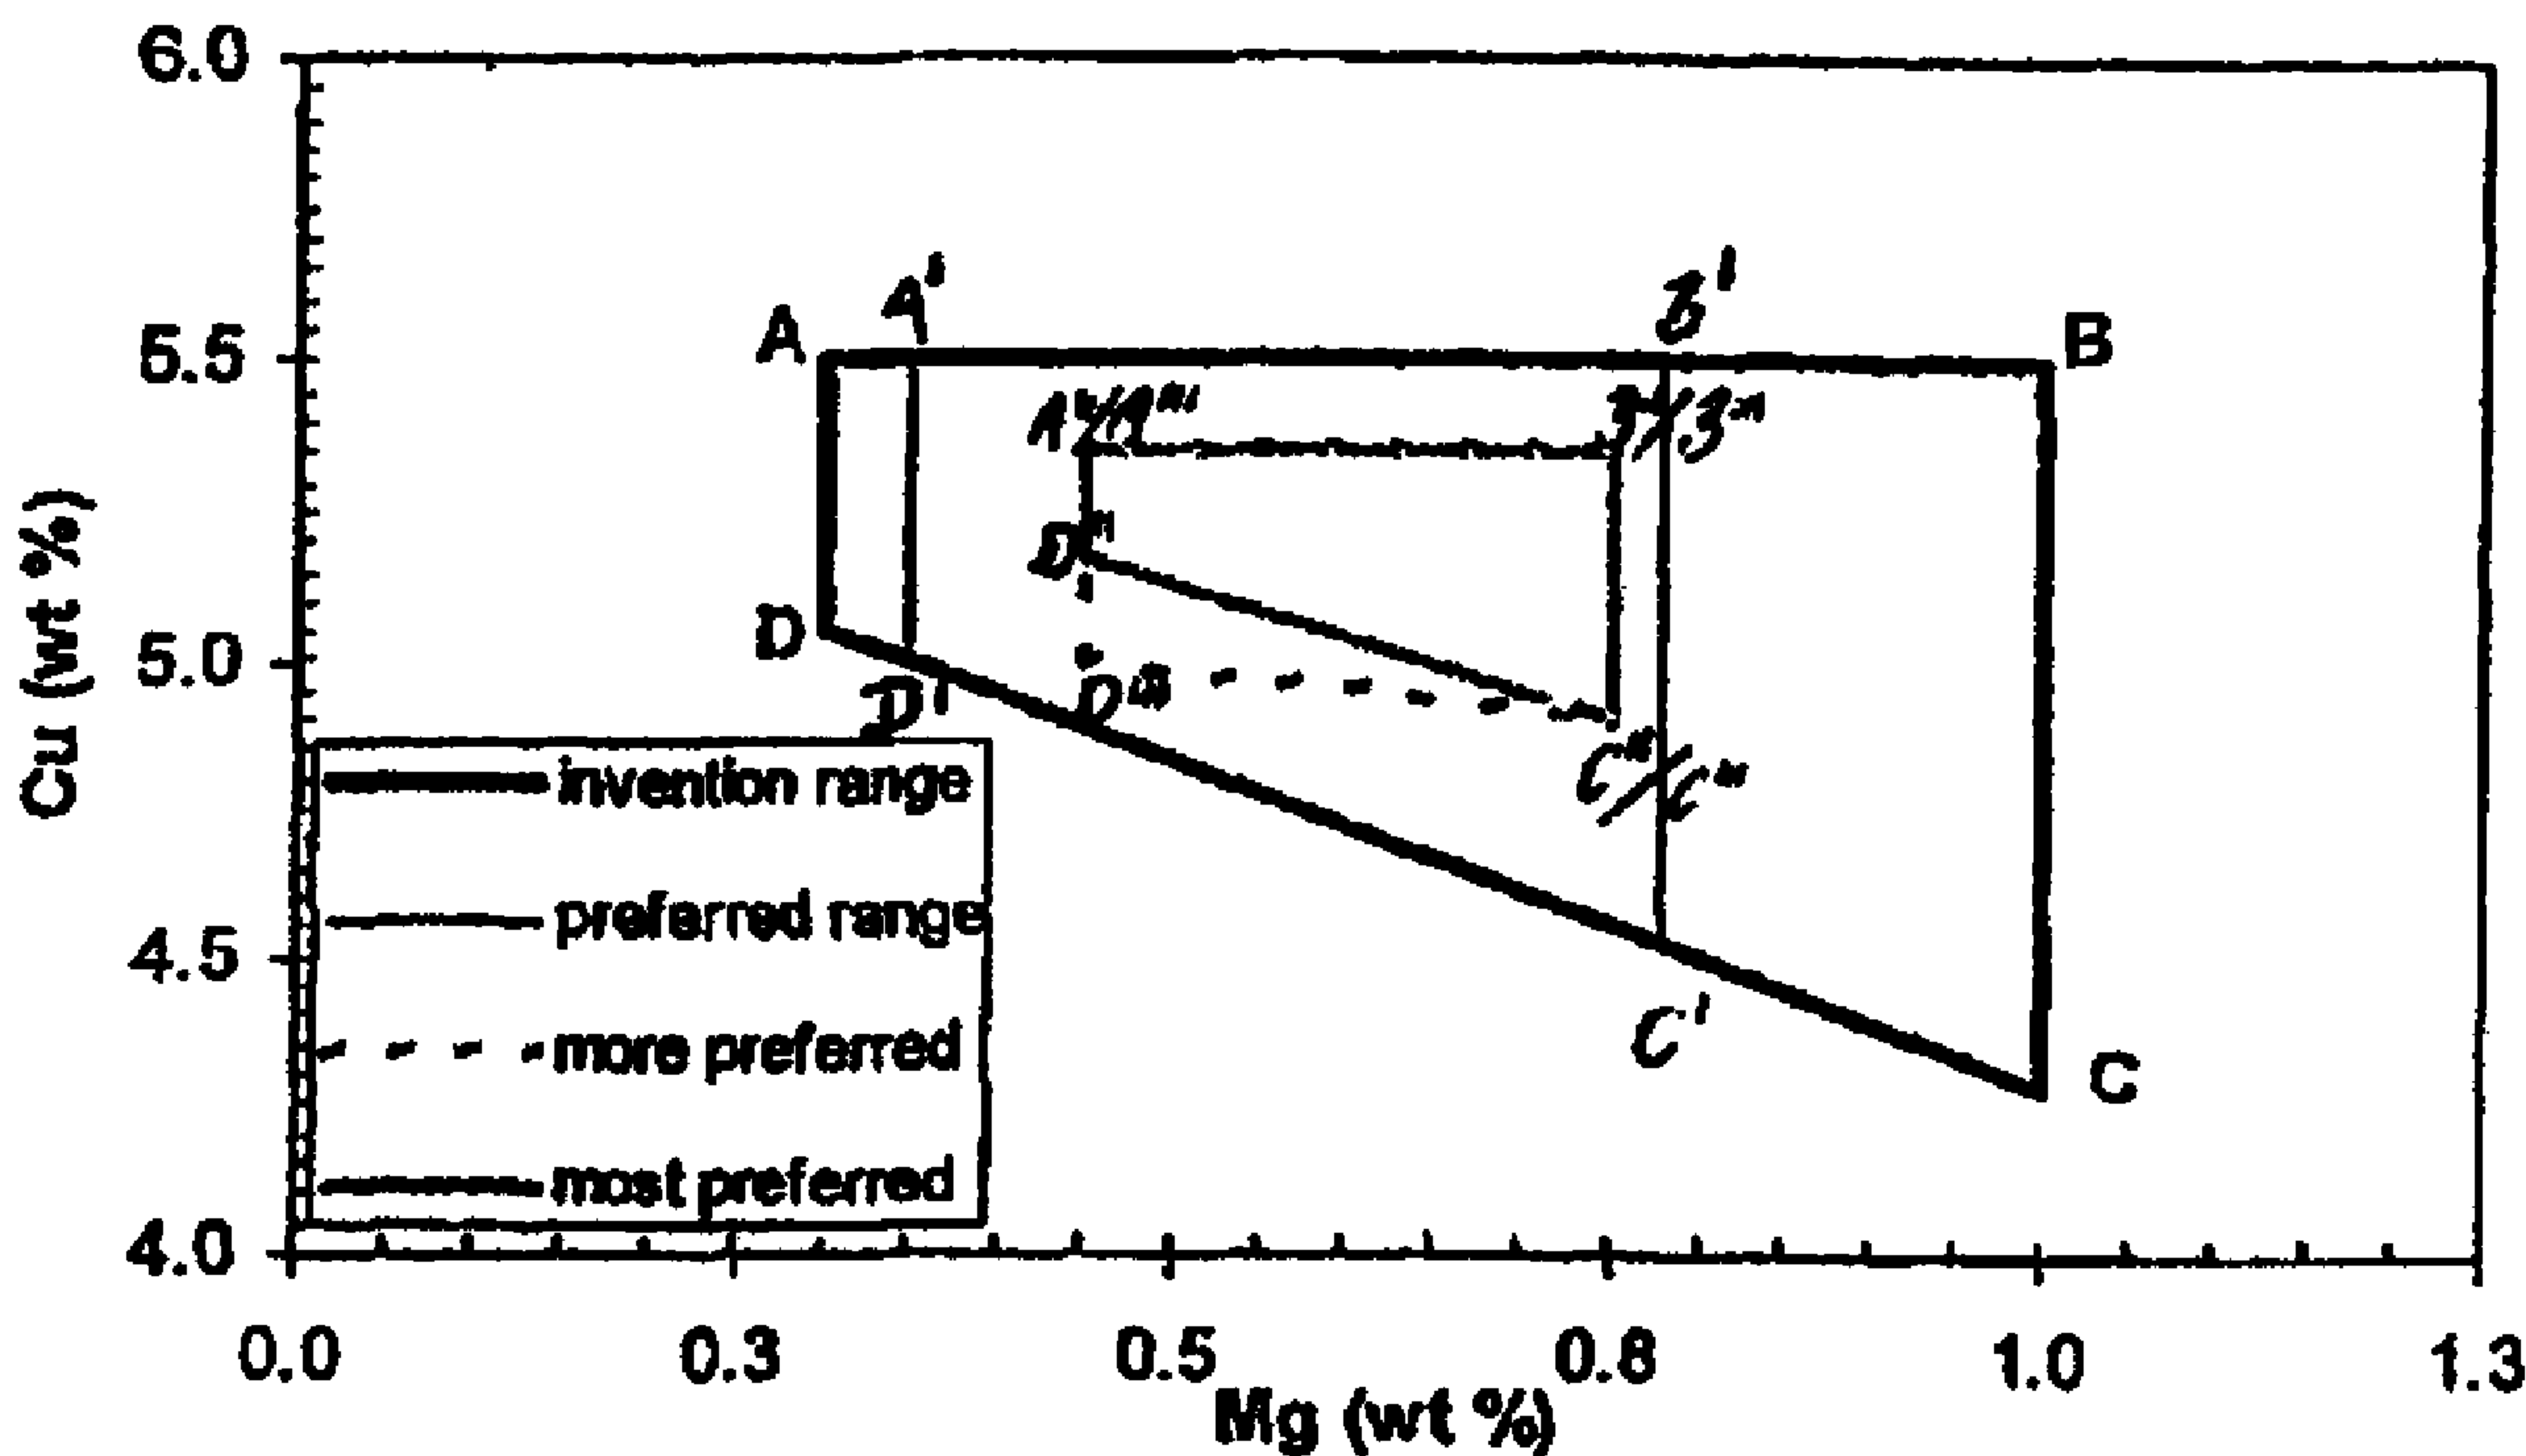

(57) Abrégé/Abstract:

The invention relates to an aluminium alloy wrought product with high strength and fracture toughness and high fatigue resistance and low fatigue crack growth rate, and having a composition of (in wt.%): 0.3 to 1.0 % Mg, 4.4 to 5.5% Cu, 0 to 0.20% Fe, 0 to 0.20% Si, 0 to 0.40% Zn, and Mn in a range 0.15 to 0.8 as dispersoids forming element in combination with one or more of dispersoids forming elements selected from the group consisting of: Zr, Sc, Cr, Hf, Ag, Ti, V, the balance being aluminium (Al) and other incidental elements, and whereby there is a limitation of the Cu-Mg content such that: $-1.1[Mg]+5.38 \leq [Cu] \leq 5.5$. The invention further relates to a method of manufacturing such a product.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 December 2004 (23.12.2004)

PCT

(10) International Publication Number
WO 2004/111282 A1

(51) International Patent Classification⁷: C22C 21/16

(21) International Application Number:
PCT/EP2004/006044

(22) International Filing Date: 3 June 2004 (03.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03076779.2 6 June 2003 (06.06.2003) EP

(71) Applicant (for all designated States except US): **CORUS ALUMINIUM WALZPRODUKTE GMBH** [DE/DE]; Carl-Spaeter-Strasse 10, 56070 Koblenz (DE).

(72) Inventor: **HARGARTER, Hinrich, Johannes, Wilhelm**; Haydnlaan 7, NL-1817 GN Alkmaar (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BENEDICTUS,**

Rinze [NL/NL]; Dr. Schaepmansstraat 5, NL-2612 PJ Delft (NL). **KEIDEL, Christian, Joachim** [DE/DE]; Burgstrasse 9, 56410 Montabaur (DE). **HEINZ, Alfred, Ludwig** [DE/DE]; Im Heidenhof 6, 56414 Niederahr (DE).


(74) Agent: **VAN DER DONK, Henricus, Matheus**; Corus Technology BV, P.O. Box 10000, NL-1970 CA Ijmuiden (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: HIGH-DAMAGE TOLERANT ALUMINIUM ALLOY PRODUCT IN PARTICULAR FOR AEROSPACE APPLICATIONS

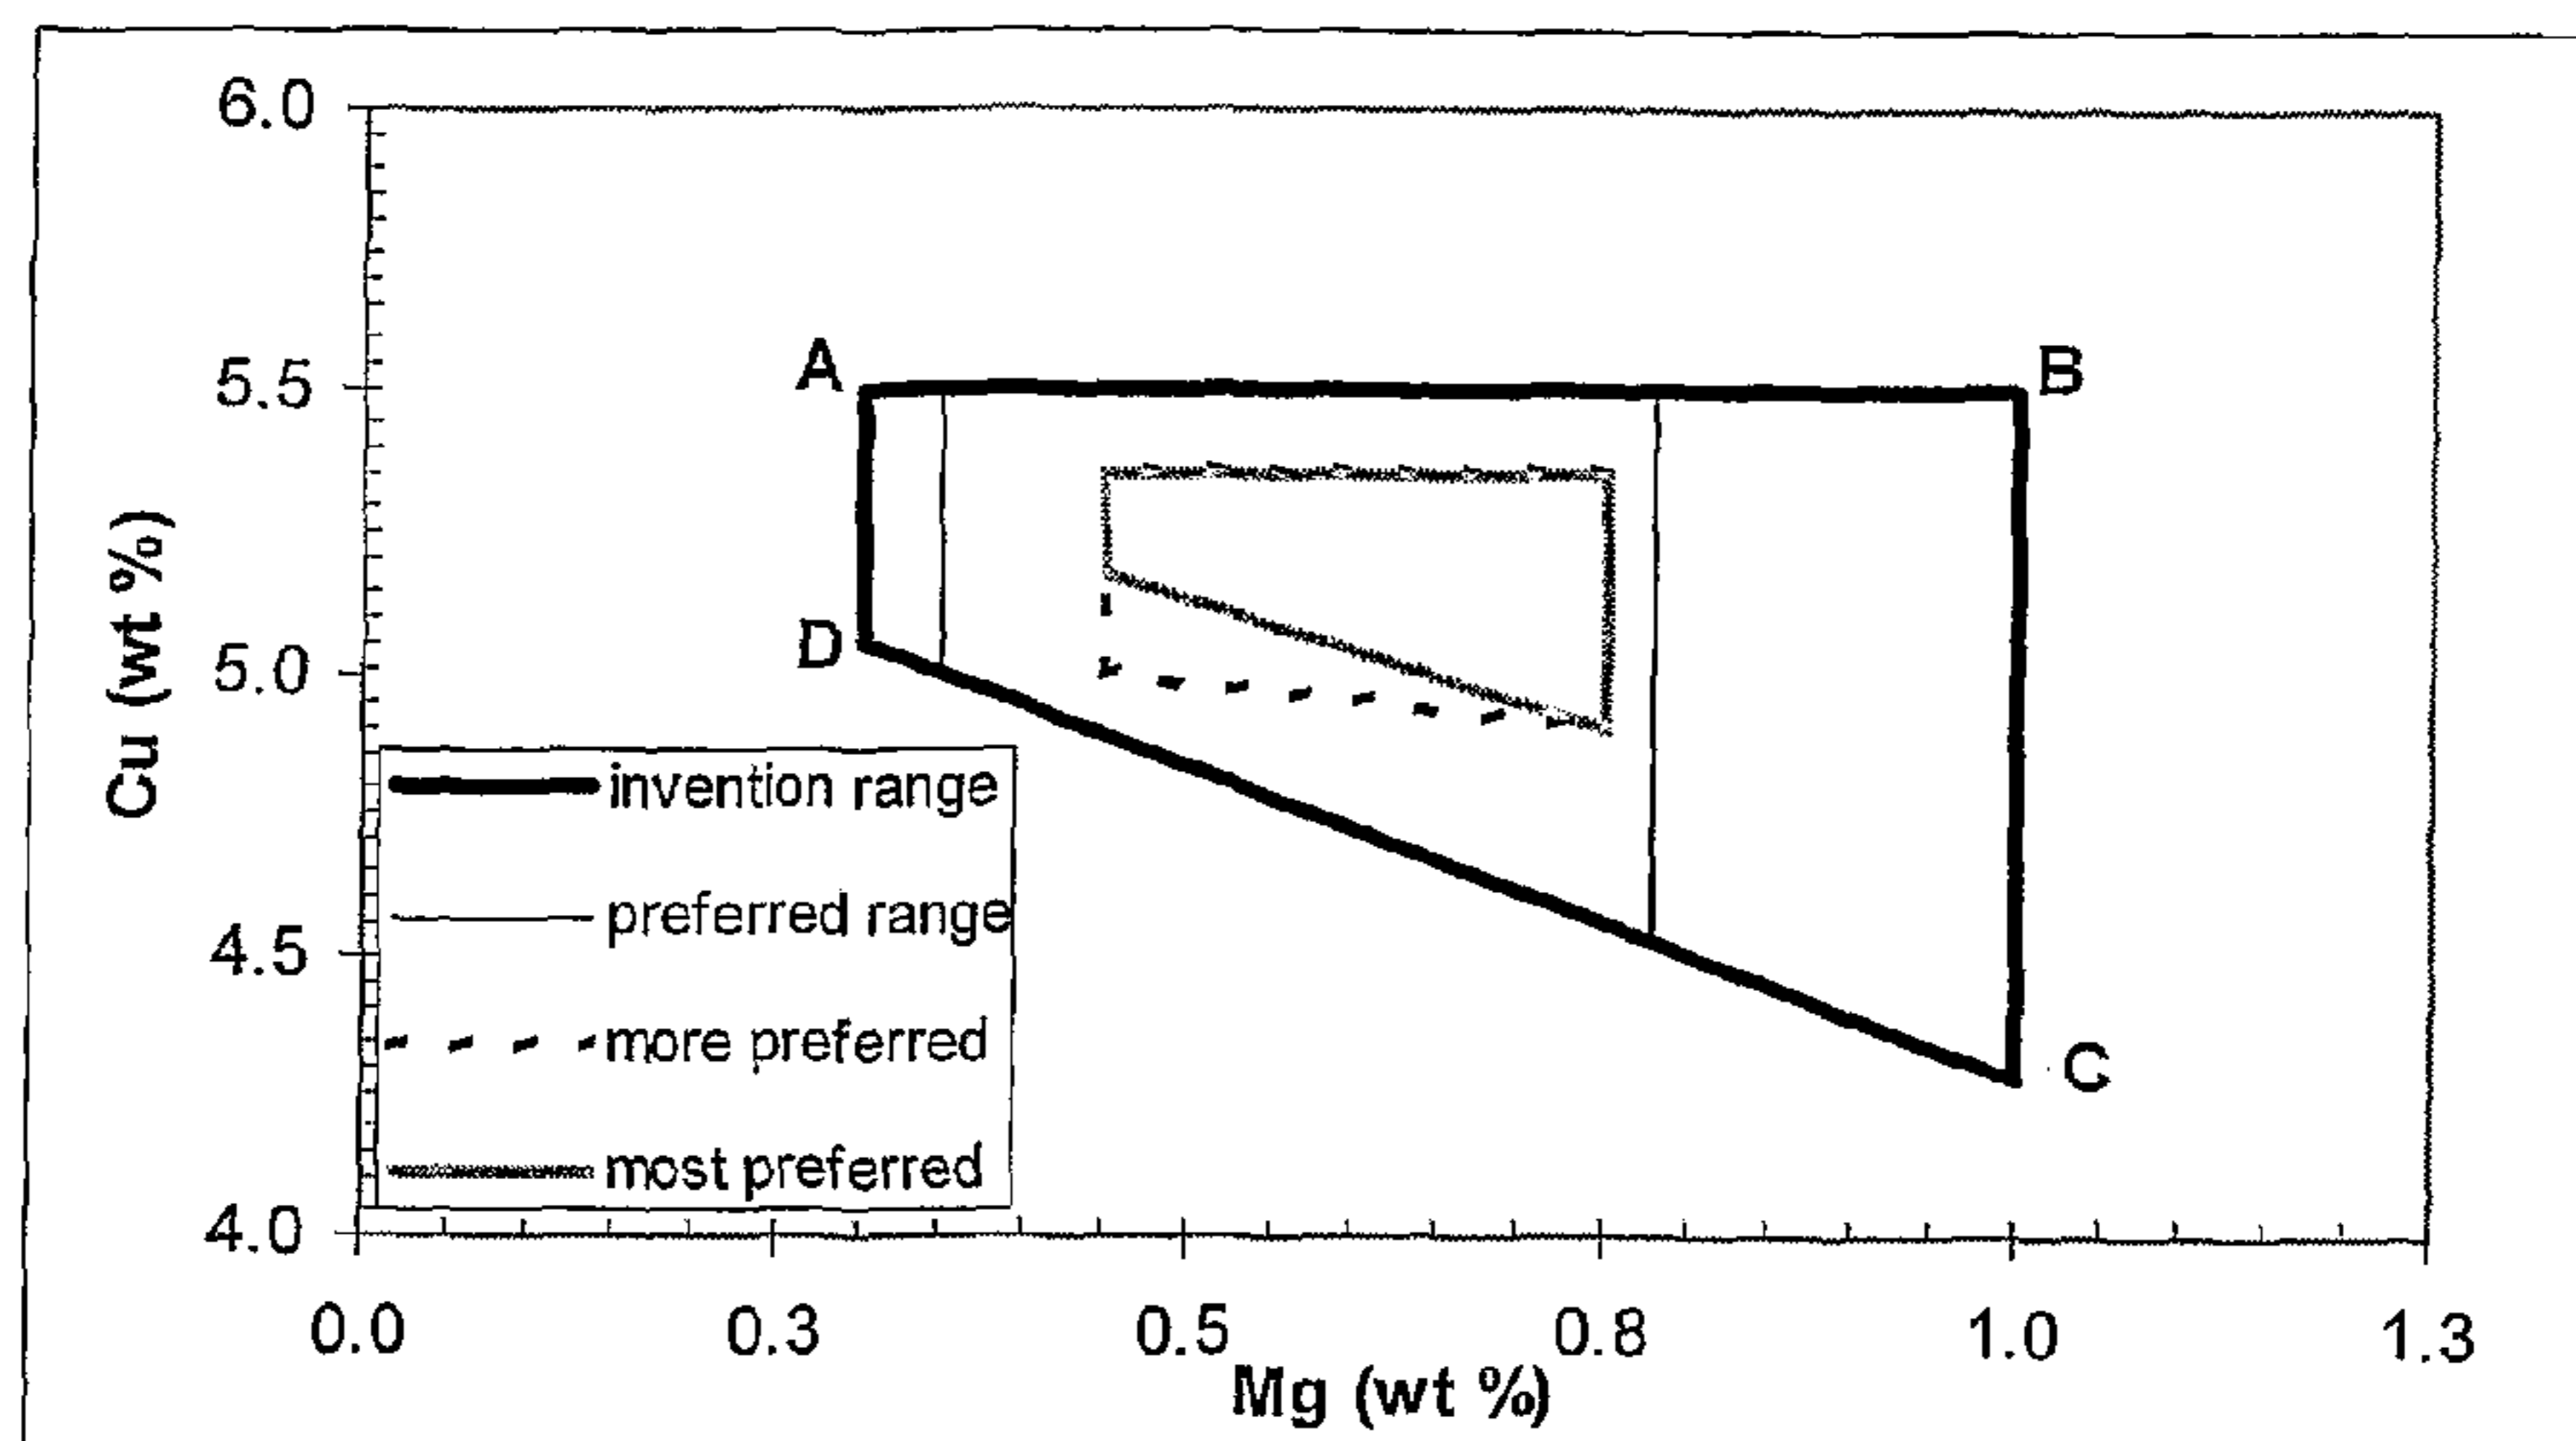

(57) Abstract: The invention relates to an aluminium alloy wrought product with high strength and fracture toughness and high fatigue resistance and low fatigue crack growth rate, and having a composition of (in wt.%): 0.3 to 1.0 % Mg, 4.4 to 5.5% Cu, 0 to 0.20% Fe, 0 to 0.20% Si, 0 to 0.40% Zn, and Mn in a range 0.15 to 0.8 as dispersoids forming element in combination with one or more of dispersoids forming elements selected from the group consisting of: Zr, Sc, Cr, Hf, Ag, Ti, V, the balance being aluminium (Al) and other incidental elements, and whereby there is a limitation of the Cu-Mg content such that: $-1.1[\text{Mg}] + 5.38 \leq [\text{Cu}] \leq 5.5$. The invention further relates to a method of manufacturing such a product.

WO 2004/111282 A1

WO 2004/111282 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

HIGH-DAMAGE TOLERANT ALUMINUM ALLOY PRODUCT IN PARTICULAR FOR AEROSPACE APPLICATIONS

FIELD OF THE INVENTION

5 The invention relates to an aluminium alloy, particular an Al-Cu-Mg type (or 2000-series aluminium alloys as designated by the Aluminum Association). More specifically, the present invention is related to an age-hardenable, high strength, high fracture toughness and low crack growth propagation aluminium alloy and products of that alloy. Products made from this alloy are very suitable for aerospace applications, but not limited to that. The alloy can be processed to various product forms (e.g. sheet, thin plate, thick plate or extruded or forged products). The aluminium alloy can be uncoated or coated or plated with another aluminium alloy in order to improve even further the properties, for example corrosion resistance.

15 BACKGROUND OF THE INVENTION

 Designers and manufacturers in the aerospace industry are constantly trying to improve fuel efficiency, product performance and constantly trying to reduce the manufacturing and service costs. Efficiency can be improved by further weight reduction. One way of obtaining this is by improving the relevant material properties, so that the structure made from that alloy can be designed more effectively or will have overall a better performance. By having better material properties, also the service cost can be significant reduced by longer inspection intervals of the aeroplane. Lower wing plates are typically made from AA2324 in the T39 temper. For fuselage skin, typically AA2024 in the T351 temper was used. This because these alloy in these temper showed the requested material properties under tensile loading, i.e. acceptable strength levels, high toughness and low crack growth propagation. Nowadays, new more efficient aeroplanes are designed, leading to wish for improved material properties.

 US-5,652,063 discloses an AA2000-series alloy with a Cu/Mg ratio between 5 and 9 and strength of more than 531 MPa. The alloy can be used both for lower wing plate and for fuselage skin. This alloy is particularly intended for supersonic aircraft.

 US-5,593,516 discloses an AA2000-series alloy wherein the copper (Cu) and magnesium (Mg) levels are kept preferable below the solubility limit. Preferably, $[Cu] = 5.2 - 0.91[Mg]$. In US-5,376,192 and US-5,512,112, originating from the same initial US patent application, the addition of silver (Ag) levels of 0.1 – 1.0 weight % has been disclosed.

US-patent application US2001/0006082 discloses an AA2000-series alloy especially suitable for the lower wing, without dispersoid forming elements like Zr, Cr or V. It is mentioned also that the advantages are achieved by a mandatory Cu/Mg ratio of above 10.

5 For new designed aeroplanes, there is a wish for even better properties than the above-described alloys have, in order to design more cost and environmental effective aeroplanes. Accordingly, a need exist for an aluminium alloy capable of achieving the improved proper property balance in the relevant product form.

10 SUMMARY OF INVENTION

It is an object of the present invention to provide an aluminium alloy wrought product, in particular suitable for aerospace application, within the AA2000-series alloys and having a balance of high strength and fracture toughness and high fatigue resistance and low fatigue crack growth rate, which is at least comparable to those of
15 AA2024-HDT.

It is yet another object of the present invention to provide a method of manufacturing such an aluminium alloy wrought product.

The present invention is directed to an AA2000-series aluminium alloy having the capability of achieving a property balance in any relevant product that is better than
20 property balance of the variety of commercial aluminium AA2000-series alloys nowadays used for those products or aluminium AA2000 disclosed so far.

The object is achieved by provided a preferred composition for the alloy of the present invention consists essentially of, in weight %, 0.3 to 1.0 % magnesium (Mg), 4.4 to 5.5% copper (Cu), 0 to 0.20% iron (Fe), 0 to 0.20% silicon (Si), 0 to 0.40% zinc
25 (Zn), and Mn in a range 0.15 to 0.8 as dispersoids forming element in combination with one or more of dispersoids forming elements selected from the group consisting of: (Zr, Sc, Cr, Hf, Ag, Ti, V), in ranges of: 0 to 0.5% zirconium, 0 to 0.7% scandium, 0 to 0.4% chromium, 0 to 0.3% hafnium, 0 to 0.4% titanium, 0 to 1.0% silver, the balance being aluminium and other incidental elements, and whereby there is a limitation of the
30 Cu-Mg content such that: $-1.1[\text{Mg}] + 5.38 \leq [\text{Cu}] \leq 5.5$.

In a preferred embodiment the ranges of Cu and Mg are selected such that:

Cu 4.4 to 5.5,

Mg 0.35 to 0.78,

and wherein $-1.1[\text{Mg}] + 5.38 \leq [\text{Cu}] \leq 5.5$.

35 In a more preferred embodiment the ranges of Cu and Mg are selected such that:
that: Cu 4.4 to 5.35,

Mg 0.45 to 0.75,
and wherein $-0.33[\text{Mg}] + 5.15 \leq [\text{Cu}] \leq 5.35$.

In a more preferred embodiment the ranges of Cu and Mg are selected such that:

Cu 4.4 to 5.5, and more preferably 4.4 to 5.35,

Mg 0.45 to 0.75,

and wherein $-0.9[\text{Mg}] + 5.58 \leq [\text{Cu}] \leq 5.5$,

and more preferably $-0.90[\text{Mg}] + 5.60 \leq [\text{Cu}] \leq 5.35$

Much to our surprise we found that the dispersoid forming elements are as critical for the property balance as are the Cu and Mg levels on itself. Zn may be present in the alloy of this invention. In order to get optimised properties, the Mn levels have to be chosen very carefully with respect to the Ag level. When Ag is present in the alloy, the Mn level should not be too high, preferable below 0.4 wt%. Zr should also not be too high. We found that Cr, believed to have a negative effect on the property balance, does actually have a positive effect, but then preferable no Zr is present in the alloy. When this dispersoid-effect is taken into account, the optimised Cu and Mg levels are different from what has been used so far. Surprisingly, the property balance of the present alloy does outperform the existing alloys.

Iron can be present in a range of up to 0.20%, and preferably is kept to a maximum of 0.10%. A typical preferred iron level would be in the range of 0.03 to 0.08%.

Silicon can be present in a range of up to 0.20%, and preferably is kept to a maximum of 0.10%. A typical preferred silicon level would as low a possible, and would typically be for practical reasons in a range of 0.02 to 0.07%.

Zinc can be present in the alloy according to the invention in an amount of up to 0.40%. More preferably it is present in a range of 0.10 to 0.25%.

Impurity elements and incidental elements can be present according to the standard AA rules, namely each up to 0.05%, total 0.15%.

For the purpose of this invention with "substantially free" and "essentially free" we mean that no purposeful addition of such alloying element was made to the composition, but that due to impurities and/or leaching from contact with manufacturing equipment, trace quantities of such element may, nevertheless, find their way into the final alloy product.

Mn addition is important in the alloy according to the invention as dispersoid forming element, and should be in a range of 0.15 to 0.8%. A preferred maximum for the Mn addition less than 0.40%. A more suitable range for the Mn addition is in the

range of 0.15 to <0.40%, and more preferably of 0.20 to 0.35%, and most preferably of 0.25 to 0.35%.

If added the Zr addition should not exceed 0.5%. A preferred maximum for the Zr level is 0.18%. And a more suitable range of the Zr level is a range of 0.06 to
5 0.15%.

In an embodiment the alloy is essentially or substantially Zr free, but would in that case contain Cr, and typically Cr in a range of 0.05 to 0.30%, and preferably in a range of 0.06 to 0.15%.

If added the Ag addition should not exceed 1.0%, and a preferred lower limit is
10 0.1%. A preferred range for the Ag addition is 0.20-0.8%. A more suitable range for the Ag addition is in the range of 0.20 to 0.60%, and more preferably of 0.25 to 0.50%, and most preferably in a range of 0.32 to 0.48%.

Furthermore, the dispersoids forming elements Sc, Hf, Ti and V can be used in the given ranges. In a more preferred embodiment the alloy product according to the
15 invention is essentially or substantially free from V, e.g. at a levels of <0.005% and more preferably absent. The Ti can be added also to obtain a grain refining effect during the casting operation at levels known in the art.

In a particular embodiment of the wrought alloy product according to this invention, the alloy consists essentially of, in weight percent:

20 Mg 0.45 to 0.75, and typically about 0.58
Cu 4.5 to 5.35, and typically about 5.12
Zr 0.0 to 0.18, and typically about 0.14
Mn 0.15 to 0.40, and typically about 0.3
Ag 0.20 to 0.50, and typically about 0.4
25 Zn 0 to 0.25, and typically about 0.12
Si < 0.07, and typically about 0.04
Fe < 0.08, and typically about 0.06
Ti < 0.02, and typically about 0.01

balance aluminium and unavoidable impurities.

30 In another particular embodiment of the wrought alloy product according to this invention, the alloy consists essentially of, in weight percent:

Mg 0.45 to 0.75, and typically about 0.62
Cu 4.5 to 5.35, and typically about 5.1
essentially Zr free, typically less than 0.01
35 Cr 0.05 to 0.28, and typically about 0.12
Mn 0.15 to 0.40, and typically about 0.3

Ag 0.20 to 0.50, and typically about 0.4

Zn 0 to 0.25, and typically about 0.2

Si < 0.07, and typically about 0.04

Fe < 0.08, and typically about 0.06

5 Ti < 0.02, and typically about 0.01

balance aluminium and unavoidable impurities.

In another particular embodiment of the wrought alloy product according to this invention, the product is preferably processed to a T8 temper, and the alloy consists essentially of, in weight percent:

10 Mg 0.65 to 1.1, and typically about 0.98

Cu 4.5 to 5.35, and typically about 4.8

Zr 0.0 to 0.18, and typically about 0.14

Mn 0.15 to 0.40, and typically 0.3

Ag 0.20 to 0.50, and typically 0.4

15 Zn 0 to 0.25, and typically about 0.2

Si < 0.07, and typically about 0.04

Fe < 0.08, and typically about 0.06

Ti < 0.02, and typically about 0.01

balance aluminium and unavoidable impurities.

20 The alloy according to the invention can be prepared by conventionally melting and may be cast into suitable ingot form, e.g. by means of direct chill, D.C.-casting. Grain refiners based on Ti, such as for example titanium boride or titanium carbide may also be used. After scalping and possible homogenisation, the ingots are further processed by, for example extrusion or forging or hot rolling in one or more stages. This
25 processing may be interrupted for an inter-anneal. Further processing may be cold working, which may be cold rolling or stretching. The product is solution heat treated and quenched by immersion in or spraying with cold water or fast cooling to a temperature lower than 95°C. The product can be further processed, for example rolling or stretching, for example up to 12%, or may be stress relieved by stretching or
30 compression and/or aged to a final or intermediate temper. The product may be shaped or machined to the final or intermediate structure, before or after the final ageing or even before solution heat treatment.

DETAILED DESCRIPTION OF THE INVENTION

35 The design of commercial aircraft requires different sets of properties for different types of structural parts. The important material properties for a fuselage

sheet product are the damage tolerant properties under tensile loads (i.e. FCGR, fracture toughness and corrosion resistance).

The important material properties for a lower wing skin in a high capacity and commercial jet aircraft are similar to those for a fuselage sheet product, but typically a
5 higher tensile strength is desired by the aircraft manufactures. Also fatigue life becomes a major material property for this application.

The important material properties for machined parts from thick plate depends on the final machined part. But, in general, the gradient in material properties through thickness must be small and the engineering properties like strength, fracture
10 toughness, fatigue and corrosion resistance must be a high level.

The present invention is directed to an alloy composition when processed to a variety of products, such as, but not limited to, sheet, plate, thick plate etc, will meet or exceed the currently desired material properties. The property balance of the product will out-perform the property balance of the product made from nowadays
15 commercially used alloys for this type of application, in particular those of standard AA2024 and AA2024-HDT. It has been found very surprisingly a chemistry window within the AA2000 window that does fulfil this unique capability.

The present invention resulted from an investigation on the effect of dispersoid levels and types (e.g. Zr, Cr, Sc, Mn), and combined with Cu and Mg on the phases
20 and microstructure formed during processing. Some of these alloys were processed to sheet and plate and tested on tensile, Kahn-tear toughness and corrosion resistance. Interpretations of these results lead to the surprising insight that an aluminium alloy produced with a chemical composition within a certain window, will exhibit excellent damage tolerant properties as well as for sheet as for plate as for thick plate as for
25 extrusions as for forgings, allowing it to be a multi-purpose alloy product. The alloy product has good weldability characteristics also.

The invention also consists in that the alloy wrought product of this invention may be provided on one or both sides with a cladding or coating. Such clad or coated products utilise a core of the aluminium base alloy of the invention and a cladding of
30 usually higher purity which in particular corrosion protects the core, which of particular advantage in aerospace applications. The cladding includes, but is not limited to, essentially unalloyed aluminium or aluminium containing not more than 0.1 or 1% of all other elements. Aluminium alloys herein designated 1xxx-type series include all Aluminium Association (AA) alloys, including the sub-classes of the 1000-type, 1100-
35 type, 1200-type and 1300-type. Thus, the cladding on the core may be selected from various Aluminium Association alloys such as 1060, 1045, 1100, 1200, 1230, 1135,

1235, 1435, 1145, 1345, 1250, 1350, 1170, 1175, 1180, 1185, 1285, 1188, 1199, or 7072. In addition, alloys of the AA7000-series alloys, such as 7072 containing zinc (0.8 to 1.3%) or a modified version thereof with 0.4 to 0.9 wt.% zinc, can serve as the cladding and alloys of the AA6000series alloys, such as 6003 or 6253, which contain typically more than 1% of alloying additions, can serve as cladding. Other alloys could also be useful as cladding as long as they provide in particular sufficient overall corrosion protection to the core alloy. The cladding can also be an aluminium alloy selected from the AA4000-series, and may serve for corrosion protection and can also be of assistance in a welding operation, e.g. as disclosed in US 6,153,854 where the use of additional filler wire can be omitted. The clad layer or layers are usually much thinner than the core, each constituting 1 to 15% or 20% or possibly 25% of the total composite thickness. A cladding or coating layer more typically constitutes around 1 to 11% of the total composite thickness.

In another aspect of the invention there is provided a preferred method of manufacturing the aluminium alloy product according to the invention into a structure element. The method of manufacturing a high-strength, high-toughness and low fatigue crack growth rate AA2000-series alloy product having a good corrosion resistance, comprising the processing steps of:

- a.) casting an ingot having a composition as set out in the description and claims;
- b.) homogenising and/or pre-heating the ingot after casting;
- c.) hot working the ingot into a pre-worked product;
- d.) optional reheating the pre-worked product and either,
- e.) hot working and/or cold working to a desired workpiece form;
- f.) solution heat treating said formed workpiece at a temperature and time sufficient to place into solid solution essentially all soluble constituents in the alloy;
- g.) quenching the solution heat treated workpiece by one of spray quenching or immersion quenching in water or other quenching media;
- h.) optionally stretching or compressing of the quenched work piece or otherwise cold worked to relieve stresses, for example levelling of sheet products;
- i.) optionally ageing the quenched and optionally stretched or/and compressed workpiece to achieve a desired temper, for example, the tempers T3, T351, T36, T3x, T4, T6, T6x, T651, T87, T89, T8x.
- j.) optionally followed by machining of the product formed until the final shape of the structure element.

The alloy products of the present invention are conventionally prepared by melting and may be direct chill (D.C.) cast into ingots or other suitable casting techniques. Homogenisation treatment is typically carried out in one or multi steps, each step having a temperature in the range of 460 to 535°C. The pre-heat temperature involves heating the rolling ingot to the hot-mill entry temperature, which is typically in a temperature range of 400 to 460°C. Hot working the alloy product can be done by one of rolling, extruding or forging. For the current alloy hot rolling is being preferred. Solution heat-treatment is typically carried out within the same temperature range as used for homogenisation, although the soaking times can be chosen somewhat shorter.

A surprisingly excellent property balance is being obtained over a wide range of thickness. In the sheet thickness range of up to 0.5 inch (12.5 mm) the properties will be excellent for fuselage sheet. In the thin plate thickness range of 0.7 to 3 inch (17.7 to 76 mm) the properties will be excellent for wing plate, e.g. lower wing plate. The thin plate thickness range can be used also for stringers or to form an integral wing panel and stringer for use in an aircraft wing structure. When processed to thicker gauges of more than 2.5 inch (63 mm) up to about 11 inch (280 mm) excellent properties have been obtained for integral part machined from plates, or to form an integral spar for use in an aircraft wing structure, or in the form of a rib for use in an aircraft wing structure. The thicker gauge products can be used also as tooling plate, e.g. moulds for manufacturing formed plastic products, for example via die-casting or injection moulding. The alloy products according to the invention can also be provided in the form of a stepped extrusion or extruded spar for use in an aircraft structure, or in the form of a forged spar for use in an aircraft wing structure.

25 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an Mg-Cu diagram setting out the Cu-Mg range for the alloy according to this invention, together with narrower preferred ranges;

Figures 2(a) and 2(b) show a graph of toughness versus the tensile (yield) strength in two test directions for the alloy according to this invention in a T651 temper in comparison with prior art 2024 alloys;

Figures 3(a) and 3(b) show a diagram of toughness versus tensile (yield) strength in two test directions for the alloy according to this invention in a T89 temper in comparison with prior art 2024 alloys;

Figure 4 shows the diagram of toughness versus tensile (yield) strength in two alloys according to this invention as function of the Cr- and Zr-content;

Figure 5 shows the notched toughness versus the yield strength of the alloy according to this invention for two test directions in various tempers in comparison with known prior art 2024 alloys;

Figure 6 shows the FCGR of the alloy according to this invention in two tempers in comparison with the prior art alloy HDT-AA2024-T351.

Fig. 1 shows schematically the ranges for the Cu and Mg for the alloy according to the present invention in their various embodiments as set out in dependent claims. The ranges can also be identified by using the corner-points A, B, C, and D of a box. Preferred ranges are identified by A' to D', and more preferred ranges by A'' to D'', and most preferred ranges by A''' to D'''. The coordinates are listed in Table 1.

Table 1. Coordinates (in wt.%) for the corner-points of the Cu-Mg ranges for the preferred ranges of the alloy product according to the invention.

Corner point	(Mg, cu) wide range of claim 1	Corner point	(Mg, Cu) preferred range
A	0.3, 5.50	A'	0.35, 5.50
B	1.0, 5.50	B'	0.78, 5.50
C	1.0, 4.28	C'	0.78, 4.99
D	0.3, 5.05	D'	0.35, 4.52

15

Corner point	(Mg, cu) more preferred	Corner point	(Mg, Cu) most preferred
A''	0.45, 5.35	A'''	0.45, 5.35
B''	0.75, 5.35	B'''	0.75, 5.35
C''	0.75, 4.90	C'''	0.75, 4.92
D''	0.45, 5.00	D'''	0.45, 5.20

EXAMPLES

EXAMPLE 1

On a laboratory scale 18 alloys were cast to proof the principle of the current invention and processed to 4.0 mm sheet. The alloy compositions are listed in Table 2, for all ingots Fe=0.07, Si=0.05, Ti=0.02, balance aluminium. Rolling blocks of approximately 80 by 80 by 100mm (height x width x length) were sawn from lab cast ingots of about

20

12kg. The ingots were homogenised with a two-step homogenisation treatment, i.e about 10 hrs at 520°C followed by 10 hrs at 525-530°C. The heating to the homogenisation temperature was done slowly. After the homogenisation treatment the blocks were consequently slowly air cooled to mimic an industrial homogenisation process. The rolling ingots were pre-heated for about 6 hours at 460±5°C. At an intermediate thickness range of about 40 to 50 mm the blocks were re-heated at 460±5°C. The blocks were hot rolled to the final gauge of 4.0mm. During the whole hot-rolling process, care was taken to mimic an industrial scale hot rolling. The hot-rolled products were solution heat treated and quenched. The sheets were processed to the appropriate temper. Stretching level was between 0 to 9%, depending on the final temper. The final products were peak aged or near peak aged strength (e.g. T6x or T8x temper respectively).

Tensile properties have been tested according EN10.002. The tensile specimens from the 4 mm thick sheet were flat EURO-NORM specimen with 4 mm thickness. The tensile test results in Table 3 and 4 are from the L- and LT-direction. The Kahn-tear toughness is tested according ASTM B871-96, and the test direction of the results on Table 3 and 4 is the T-L and L-T direction. The so-called notch-toughness can be obtained by dividing the tear-strength, obtained by the Kahn-tear test, by the tensile yield strength ("TS/Rp"). This typical result from the Kahn-tear test is known in the art to be a good indicator for true fracture toughness. The unit propagation energy ("UPE"), also obtained by the Kahn-tear test, is the energy needed for crack growth. It is commonly believed that the higher the UPE, the more difficult to grow the crack, which is a desired feature of the material.

The alloys from Table 2 have processed to sheet according the above-described processing route. Finally the alloys were aged to the T651 (stretched 1.5% and aged for 12h/175°C). The results are shown in Table 3 and in Figure 2a, 2b.

In Figure 2a, 2b the results of standard AA2024 are given as a reference. The tensile versus toughness of commercial available AA2024 for fuselage application and the tensile versus toughness of high damage tolerant ("HDT") AA2024 (e.g. AA2524) are given as reference. The closed individual points are alloys according to the invention, whereas the open individual points are alloys not according to this invention. Our invention shows in the L versus L-T at least a 15% improvement in toughness over the HDT-AA2024, and the best results even a 20% or more improvement. The skilled person will immediately recognize that the values for the 2024-commercial and 2024-HDT at the top left hand represent typically values for the T3 tempers, whereas the bottom right hand side represent values for the T6 and T8 tempers.

From the results it can also be seen that with carefully balancing the Ag level, the dispersoids levels and the Cu and Mg levels a unprecedented improvement in the toughness versus tensile properties can be obtained.

5 Sheets from the same alloy were also produced to the T8 temper. In Table 4 and Figure 3a, 3b the results of the T89 temper are shown in a similar manner as for Figure 2a and 2b. In Figure 3a, 3b the results of AA2024 are given again as a reference. The tensile versus toughness of commercial available AA2024 for fuselage application and the tensile versus toughness of high damage tolerant (HDT) AA2024 (e.g. AA2524) are given as reference. Our inventions show in the L versus L-T at least
10 a 15% improvement in toughness over the HDT-AA2024, and the best results even 20% or more improvement.

From the results it can also be seen that with carefully balancing the Ag level, the dispersoids levels and the Cu and Mg levels a unprecedented improvement in the toughness versus tensile properties can be obtained.

15 Note that alloy 16 in the T8 temper show an impressive tensile versus toughness balance, whereas in the T6 temper this alloy was a close, but just below the target of 20% improvement. It is believed that the slightly less performance of this alloy in the T6 temper is the resultant of experimental scatter in the laboratory scale experiment.

20 **Table 2:** Chemistry of alloys cast on a laboratory scale.
Each with 0.06 wt.% Fe and 0.04 wt.% Si and 0.02 wt.% Ti.

Specimen number	Invention Alloy (yes/no)	Cu (wt%)	Mg (wt%)	Mn (wt%)	Ag (wt%)	Zn (wt%)	Zr (wt%)	Other (wt%)
1	no	5.6	0.45	0.30	0.44	0.41	0.13	-
2	yes	5.1	0.55	0.30	0.40	<0.01	0.15	-
3	yes	5.1	0.55	0.29	0.40	0.38	0.15	-
4	no	5.2	0.56	0.31	<0.01	0.61	0.15	-
5	yes	5.1	0.55	0.30	0.40	0.20	0.16	-
6	yes	4.9	0.62	0.30	0.39	0.20	0.14	-
7	yes	5.0	0.61	0.30	0.40	0.11	0.15	-
8	yes	5.1	0.63	0.31	0.25	0.21	0.15	-
9	yes	5.0	0.61	0.30	0.40	0.21	<0.01	0.12Cr
10	yes	5.0	0.63	<0.01	0.40	0.21	0.15	-
11	no	5.0	0.64	<0.01	<0.01	0.21	<0.01	0.12Cr
12	yes	5.0	0.42	0.31	0.40	0.21	0.15	-
13	yes	5.0	0.83	0.28	0.41	0.21	0.15	-
14	no	5.3	0.22	0.31	0.39	0.21	0.15	-
15	yes	5.4	0.62	0.30	0.40	0.21	0.15	-
16	yes	4.8	0.98	0.28	0.40	0.21	0.15	-
17	yes	4.6	0.80	0.30	0.39	0.20	0.15	-
18	no	5.2	0.62	0.30	<0.01	<0.01	0.14	0.20 Ge

Table 3. Mechanical properties of the alloys tested in the T651 temper, ("--" means "not measured").

Specimen number	Invention Alloy (yes/no)	L			L-T			LT			T-L					
		Rm (MPa)	Rp (MPa)	ELONG. A5 (%)	TS/Rp	UPE (kJ/m ²)	Rm (MPa)	Rp (MPa)	ELONG. A5 (%)	TS/Rp	UPE (kJ/m ²)	Rm (MPa)	Rp (MPa)	ELONG. A5 (%)	TS/Rp	UPE (kJ/m ²)
1	No	507	461	13	1.37	126	507	461	13	1.37	126	507	461	13	1.37	126
2	Yes	517	480	9	1.61	351	503	456	11	1.61	351	503	456	11	1.59	176
3	Yes	517	484	11	1.61	314	505	460	9	1.61	314	505	460	9	1.63	147
4	No	462	384	16	1.82	302	462	376	16	1.82	302	462	376	16	1.86	210
5	Yes	512	474	13	1.55	333	501	454	11	1.55	333	501	454	11	1.65	132
6	Yes	509	470	10	1.68	378	500	456	10	1.68	378	500	456	10	1.64	196
7	Yes	507	466	12	1.62	328	493	447	8	1.62	328	493	447	8	1.68	152
8	Yes	509	461	12	1.70	334	493	443	8	1.70	334	493	443	8	--	--
9	Yes	505	467	12	1.55	311	490	434	12	1.55	311	490	434	12	1.70	204
10	Yes	503	462	9	1.71	303	501	454	12	1.71	303	501	454	12	1.59	165
11	No	450	382	13	1.67	206	451	371	12	1.67	206	451	371	12	1.77	206
12	Yes	469	421	12	1.79	398	479	418	12	1.79	398	479	418	12	1.73	210
13	Yes	518	478	12	1.53	225	518	466	11	1.53	225	518	466	11	1.52	129
14	No	441	366	15	1.84	311	440	355	11	1.84	311	440	355	11	1.89	190
15	Yes	527	484	13	1.50	236	516	480	10	1.50	236	516	480	10	1.39	100
16	Yes	500	452	13	1.56	257	490	432	12	1.56	257	490	432	12	--	--
17	Yes	496	452	13	1.52	306	484	430	12	1.52	306	484	430	12	1.53	161
18	No	450	367	18	1.80	408	444	345	14	1.80	408	444	345	14	1.95	205

Table 4. Mechanical properties of the alloys tested in the T89 temper, ("--" means "not measured").

Specimen number	Invention Alloy (yes/no)	L			L-T		LT			T-L	
		Rm (MPa)	Rp (MPa)	ELONG. A5 (%)	TS/Rp	UPE (kJ/m ²)	Rm (MPa)	Rp (MPa)	ELONG. A5 (%)	TS/Rp	UPE (kJ/m ²)
1	no	511	469	13	1.32	78	511	469	13	1.32	78
2	yes	509	475	12	1.68	403	513	477	5	1.58	201
3	yes	515	490	11	1.50	341	519	480	5	1.53	141
4	no	499	468	14	1.50	333	496	453	7	1.51	155
5	yes	508	478	12	1.67	310	514	477	6	1.57	141
6	yes	504	477	13	1.55	380	507	470	5	1.55	205
7	yes	505	478	10	1.55	312	509	455	5	1.53	143
8	yes	510	487	10	1.56	263	512	482	5	1.49	139
9	yes	516	486	12	1.54	308	523	486	6	1.52	170
10	yes	519	492	13	1.52	271	518	484	5	1.51	168
11	no	506	474	8	1.40	143	486	452	6	1.36	93
12	yes	488	458	14	1.58	302	496	453	6	--	--
13	yes	536	507	9	1.30	238	541	499	5	1.42	116
14	no	473	416	15	1.72	332	477	417	7	1.63	195
15	yes	531	504	12	1.36	144	531	494	6	1.37	110
16	yes	534	517	10	1.40	152	531	494	6	1.52	117
17	yes	526	503	9	1.42	129	512	473	6	1.45	115
18	no	469	426	15	1.59	291	463	409	7	1.72	195

Example 2

Two further alloys have been cast and processed and tested as given in Example 1. The chemistry of the two alloys is shown in Table 5. The final gauge was 4.0 mm. The sheets from these alloys have been aged to T651 and T89 temper. The tensile and Kahn-tear samples have been machined from two sides to a final thickness of 2.0 mm before testing. The test results of these sheets are given in Table 6 and Figure 4.

Example 2 demonstrates that a Cr containing alloy, in contrast to general believe, can have very high toughness as well. Surprisingly, the Cr-containing alloy 20 does outperform alloy the Zr-containing alloy 19.

Table 5. Chemical composition (in wt.%) of two alloys according this invention, and each with Fe=0.06, Si = 0.04, Ti=0.02.

Specimen number	Invention alloy (yes/no)	Cu	Mg	Mn	Ag	Zn	Zr	Other
19	yes	5.05	0.62	0.38	0.47	0.21	0.15	-
20	yes	5.09	0.62	0.29	0.42	0.21	<0.01	0.12 Cr

Table 6. Properties of alloy 20 and 21 of Table 5 in the LT (T-L) direction.

Specimen number	Temper	Rm (MPa)	Rp (MPa)	Elongation (%)	TS/Rp	UPE (kJ/m ²)
19	T651	499	450	10	1.54	160
	T89	524	492	4	1.40	112
20	T651	493	448	12	1.64	204
	T89	525	489	6	1.51	170

Example 3

Full-size rolling ingots with a thickness of 440 mm were produced on an industrial scale by DC-casting and having the chemical composition (in wt.%): 0.58% Mg, 5.12% Cu, 0.14% Zr, 0.29% Mn, 0.41% Ag, 0.12% Zn, 0.01% Ti, 0.04% Si and 0.06% Fe, balance aluminium and unavoidable impurities. One of these ingots was scalped, homogenised at 2 to 6hrs/490°C + 24hrs/520°C + air cooled to ambient temperature. The ingot was then pre-heated at 6hrs/460°C and then hot rolled to about 5 mm. The plate was further cold rolled to 4.0 mm. The plate was then cut in several pieces. The plates were then solutionised at 525°C for 45min and consequently water quenched. The plates were 1.5% (T351 and T651) or 6% (T36) or 9% (T89) stretched to obtain the desired temper. The artificial aged tempers (T651 and T89) were aged for 12hrs at 175°C.

The tensile and Kahn-tear sample were taken from the middle of the plate and tested according the specification as given in Example 1. The FCGR has been measured on 100 mm C(T) specimens according ASTM E647. The R-ratio was 0.1 and the testing was done with constant load.

Open hole fatigue ($K_t=3.0$) and flat notched fatigue ($K_t=1.2$) performance was measured according ASTM E466. The specimen were taken from mid-thickness of the plate and machined to a thickness of 2.5 mm. The applied stress was 138 MPa (gross section stress basis) for the open hole specimen and 207 MPa (net section at notch root stress basis) for the flat-notched specimens. The test frequency did not exceed 15 Hz. The R-ratio was 0.1. A minimum of 5 specimens per alloy/temper was measured. The tests were terminated when 1,500,000 cycles were achieved. This is commonly called "run-out". A high damage tolerant AA2024-T351 was added as a reference. Results are shown in Table 7 and Figure 5. From Figure 5 it can be seen that the high toughness found in the laboratory scale experiments can also be obtained through industrial scale processing.

The fatigue performance of this alloy in the T36 and T89 temper are shown in Table 8. It can be clearly seen that the inventive alloy significantly out-performs the reference HDT 2024-T351.

The FCGR can be seen in Figure 6. The inventive alloy performs similar to high damage tolerant AA2024-T351 used as a reference.

Table 7: Property test results of Example 3.

Property(direction)	T351	T651	T89	T36	REF
Rp(L), in MPa	319	494	514	421	360
Rp(LT), in MPa	297	486	518	416	332
Rm(L), in MPa	458	534	518	474	471
Rm(LT), in MPa	458	531	539	470	452
Elong(L), in %	24	10	11	17	18
Elong(LT), in %	24	10	10	18	18
TS/Rp (L-T)	1.96	1.37	1.29	1.69	1.72
TS/Rp (L-L)	2.24	1.27	1.21	1.66	-

Table 8: The fatigue performance of the alloy (L-T direction) according this invention in two tempers versus AA2024-HDT as a reference.

	T89	T36	REF
Kt=3.0	Run-out	Run-out	1.2×10^5
Kt=1.2	-	2.8×10^5	1.2×10^5

Having now fully described the invention, it will be apparent to one of ordinary skill in the art that many changes and modifications can be made without departing from the spirit or scope of the invention as herein described.

CLAIMS:

1. An aluminium alloy wrought product with high strength and fracture toughness and high fatigue resistance and low fatigue crack growth rate, said alloy comprising, in weight percent based on the alloy:

Cu and Mg in a range which falls within the box defined by the corner points:

Corner point	(Mg, Cu)
A	0.45, 5.35
B	0.75, 5.35
C	0.75, 4.92
D	0.45, 5.20

10

Fe <0.20

Si <0.20

0.10 ≤ Zn ≤ 0.4,

Ag 0.32 to 0.48

15 and Mn in a range from 0.15 to less than 0.4 and Cr in a range of 0.05 to 0.30 as dispersoid forming elements, and optionally one or more dispersoid forming elements selected from the group consisting of:

Sc <0.7

20

Hf <0.3

Ti <0.4

V <0.4,

and the balance being aluminium and other impurities or incidental elements, wherein the alloy is substantially free of Zr.

25

2. An aluminium alloy wrought product according to claim 1, wherein the Mn-content is in a range of 0.20 to 0.35 wt. %.

3. An aluminium alloy wrought product according to any one of claims 1 or 2, wherein the Cr-content is in a range of 0.05 to 0.15 wt.%.

5

4. An aluminium alloy wrought product according to any one of claims 1 to 3, wherein the Zn-content is in a range of 0.10 to 0.25 wt.%.

10

5. An aluminium alloy wrought product according to any one of claims 1 to 4, wherein the alloy is essentially free of V.

15

6. An aluminium alloy wrought product according to any one of claims 1 to 5, wherein the product is in the form of a sheet, plate, forging or extrusion for use in an aircraft structure.

20

7. An aluminium alloy wrought product according to any one of claims 1 to 6, wherein the product is fuselage sheet, upper wing plate, lower wing plate, thick plate for machined parts, forging or thin sheet for stringers.

25

8. An aluminium alloy wrought product according to any one of claims 1 to 7, wherein the product is in the form of a plate product, having a thickness in a range of 12 to 76 mm.

30

9. Method of producing a high-strength, high-toughness AA2000-series alloy product having a good damage tolerance performance, comprising the processing steps of:

a) casting an ingot having a composition according to any one of claims 1 to 5;

b) homogenizing and/or preheating the ingot after casting;

35

c) hot working the ingot into a pre-worked product;
d) optionally reheating the pre-worked product,
e) optionally hot working and/or cold working to a
desired workpiece form;

5 f) solution heat treating said formed workpiece at a
temperature and time sufficient to place into solid solution
essentially all soluble constituents in the alloy;

g) quenching the solution heat treated workpiece by
one spray quenching or immersion quenching in water or water
10 quenching media;

h) optionally stretching or compressing of the
quenched workpiece;

i) ageing the quenched and optionally stretched or
compressed workpiece to achieve a desired temper.

15

10. Method of producing according to claim 9, wherein the
alloy product is aged to a temper selected from the group
consisting of T3, T351, T352, T36, T3x, T4, T6, T61, T62,
T6x, T651, T652, T87, T89 and T8x.

20

11. Method of producing according to claim 9 or 10, wherein
the alloy product has been processed to fuselage sheet of an
aircraft.

25

12. Method of producing according to claim 9 or 10, wherein
the alloy product has been processed to a lower wing plate
of an aircraft.

30

13. Method of producing according to claim 9 or 10, wherein
the alloy product has been processed to an upper wing plate
of an aircraft.

35

14. Method of producing according to claim 9 or 10, wherein
the alloy product has been processed to thick plate having a
thickness up to 280 mm for machined structures.

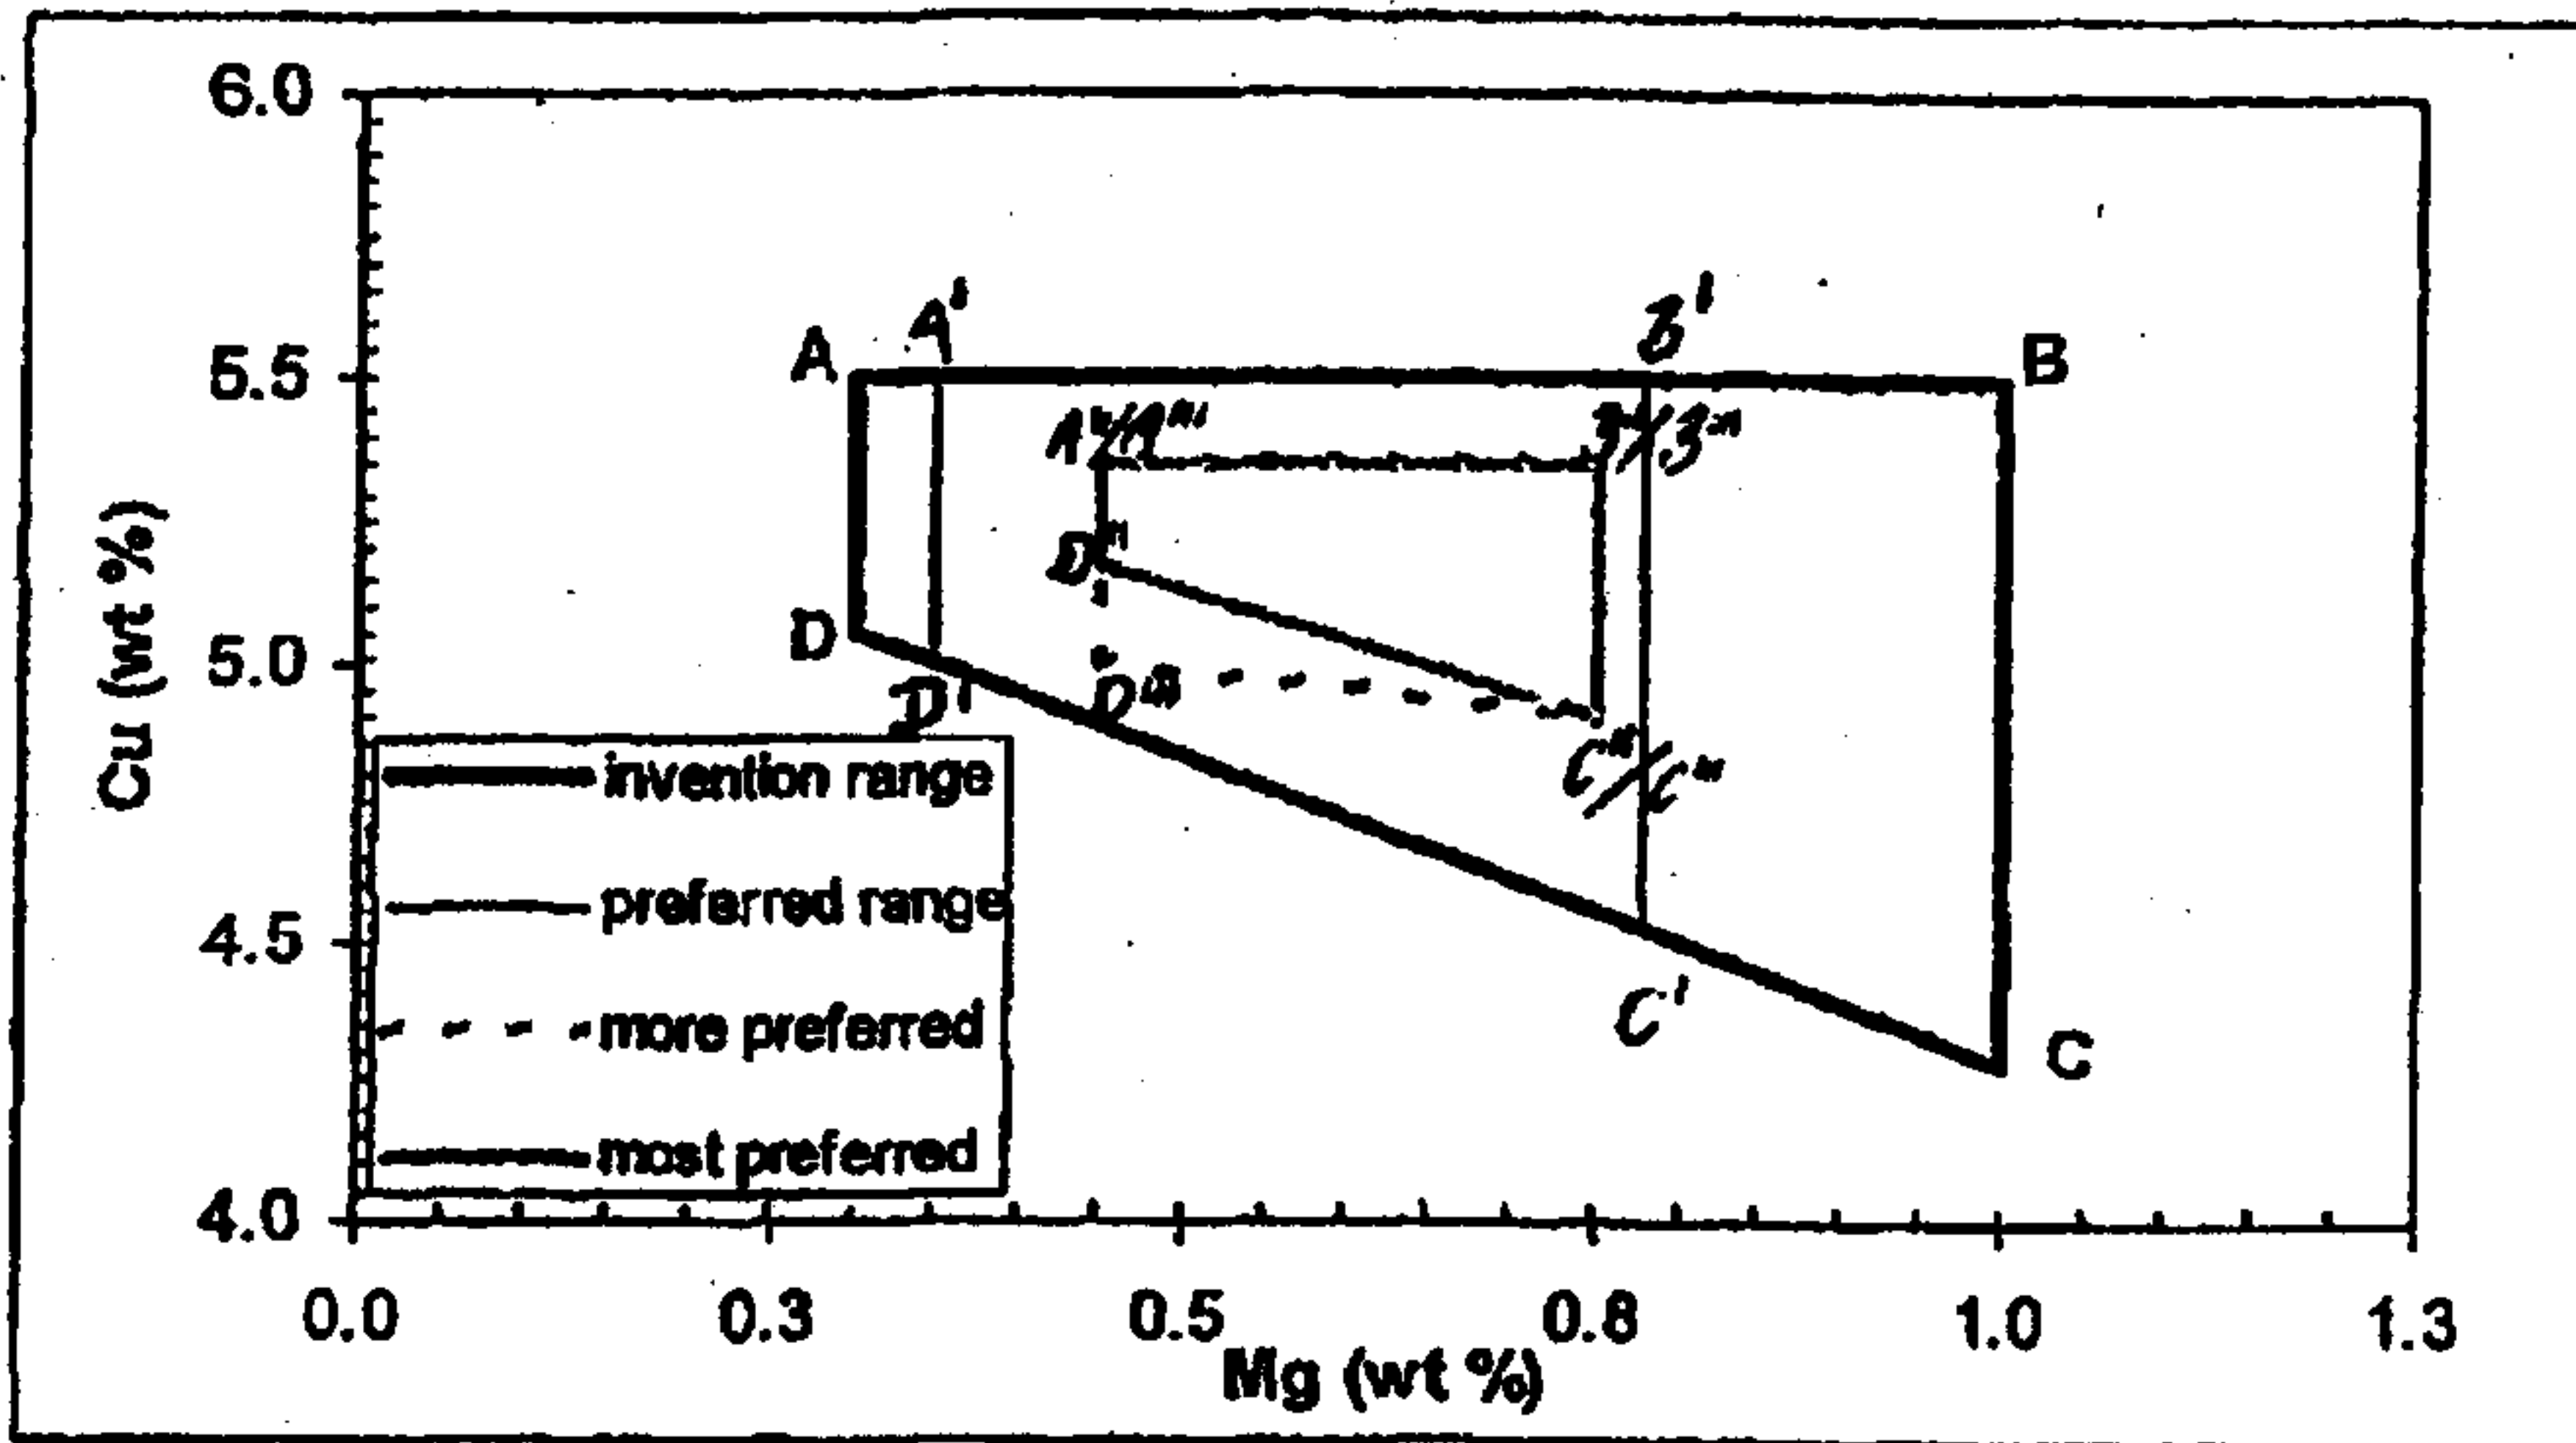


Figure 1

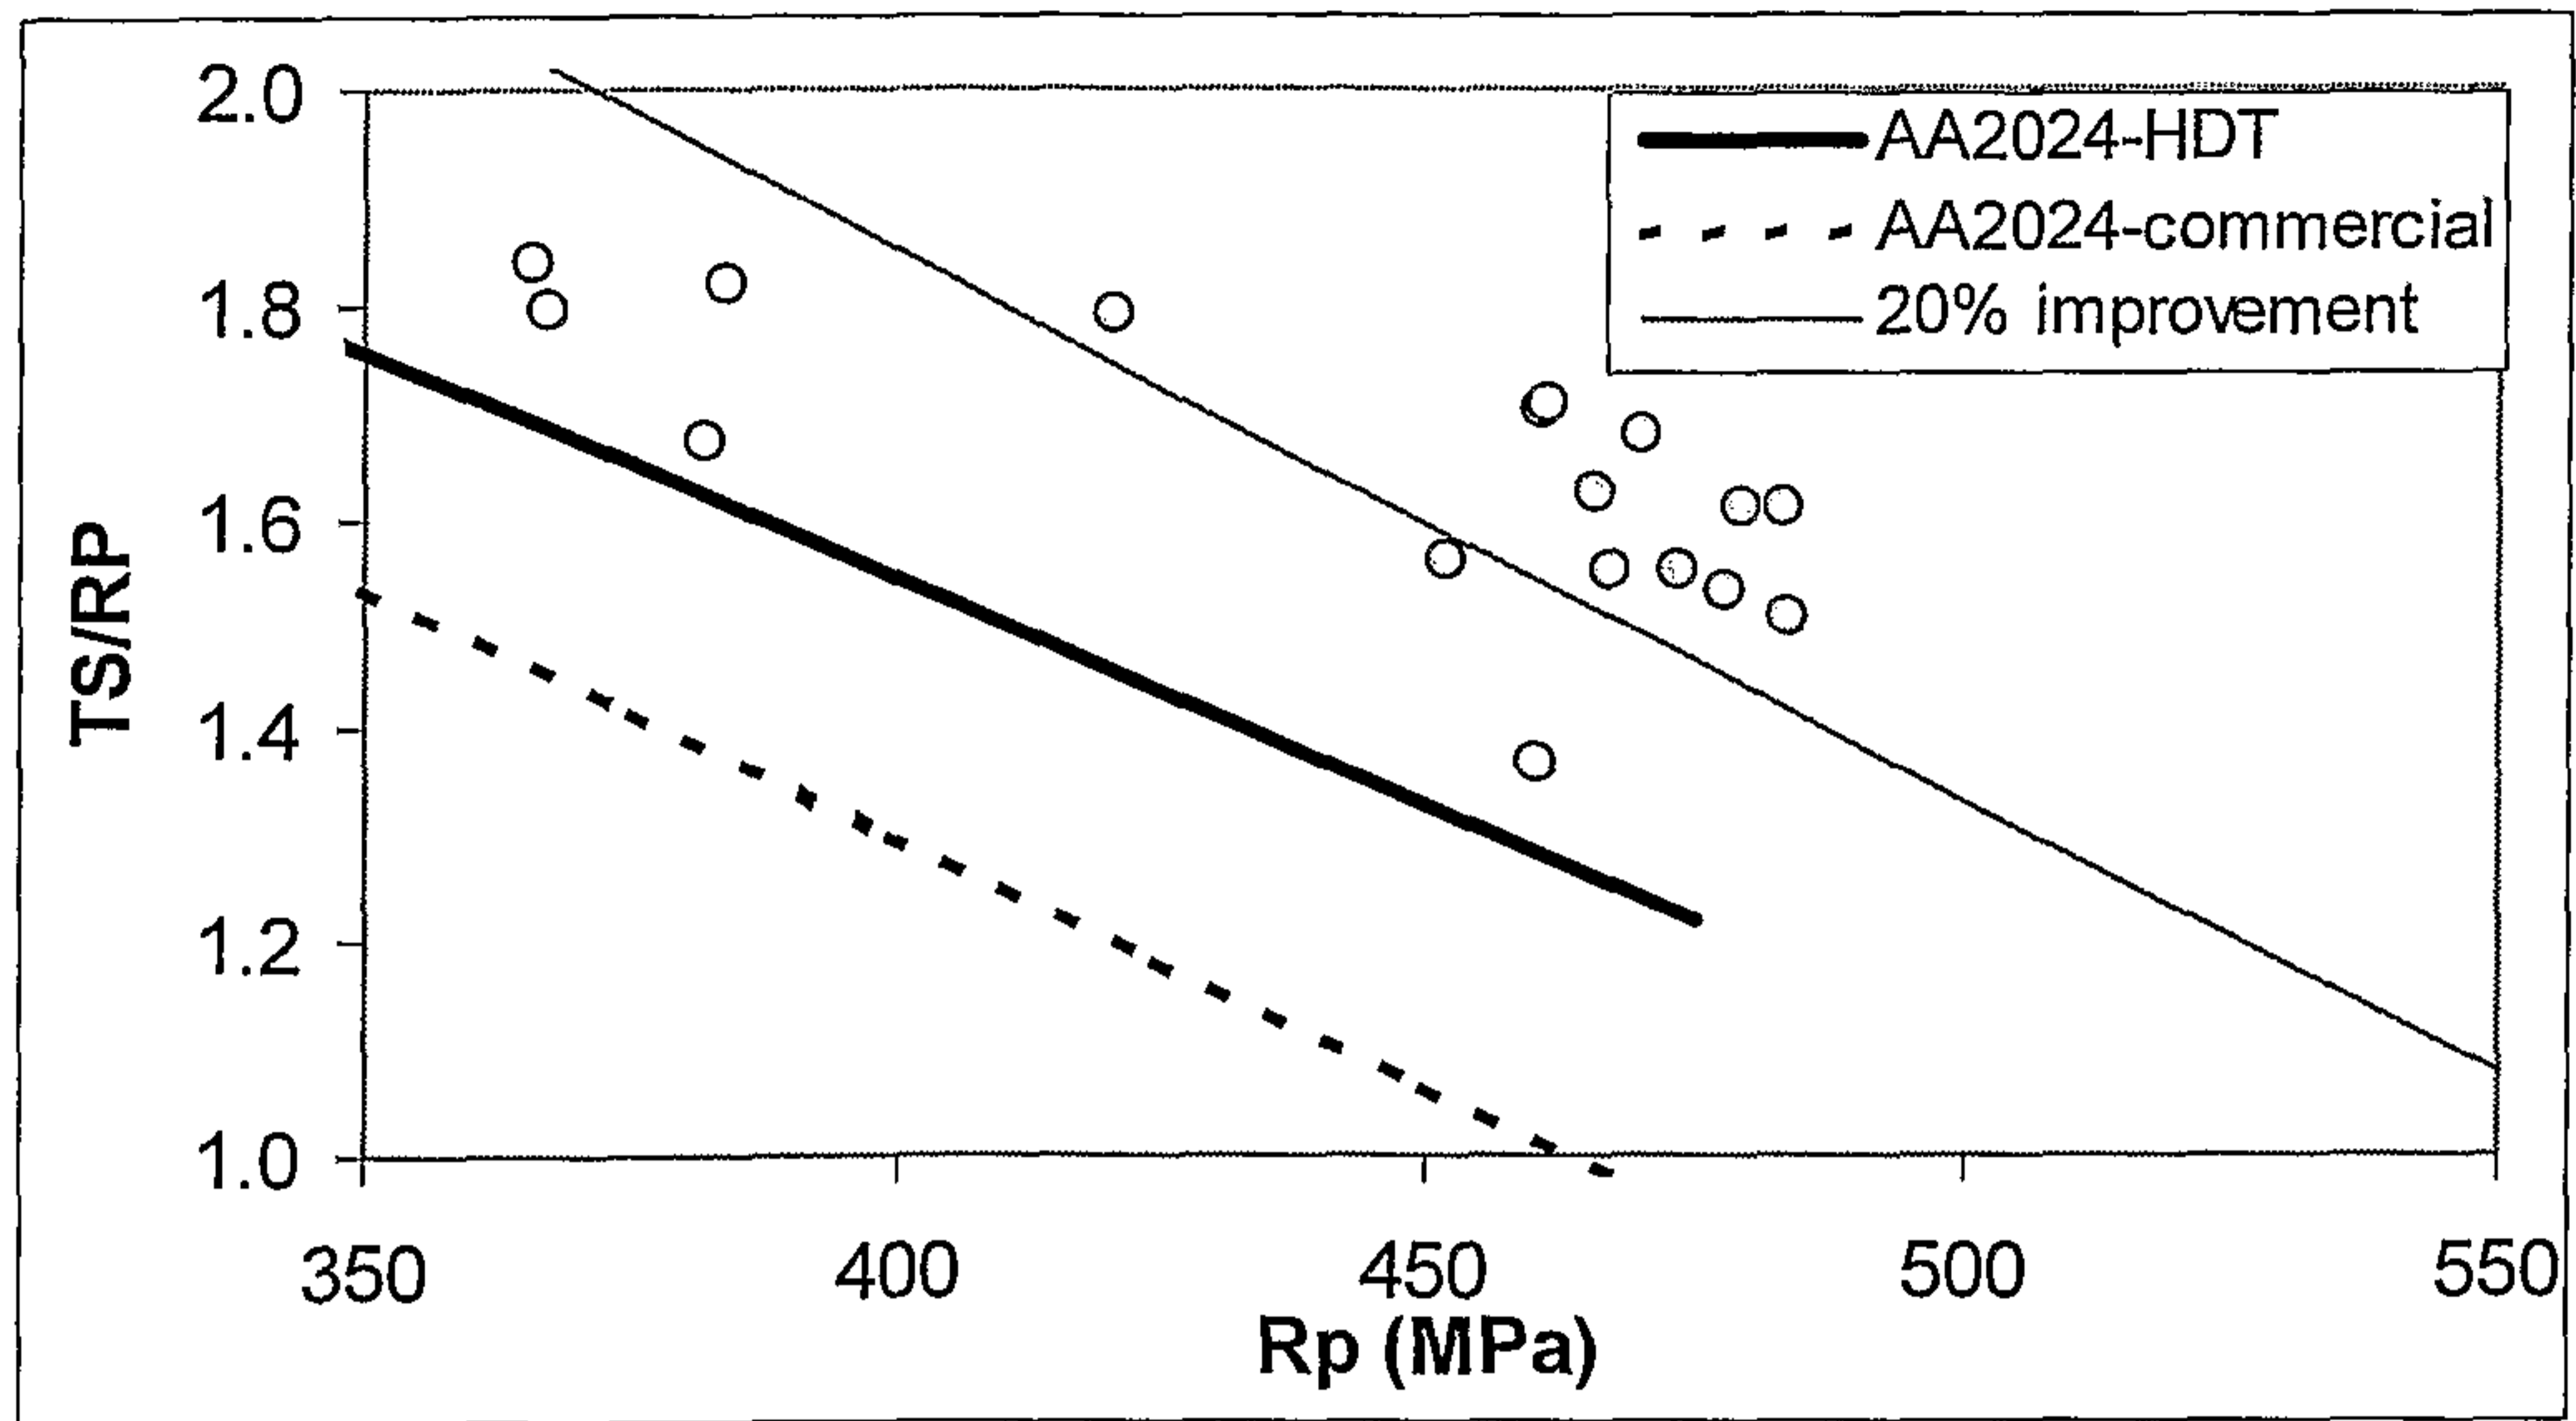


Figure 2a

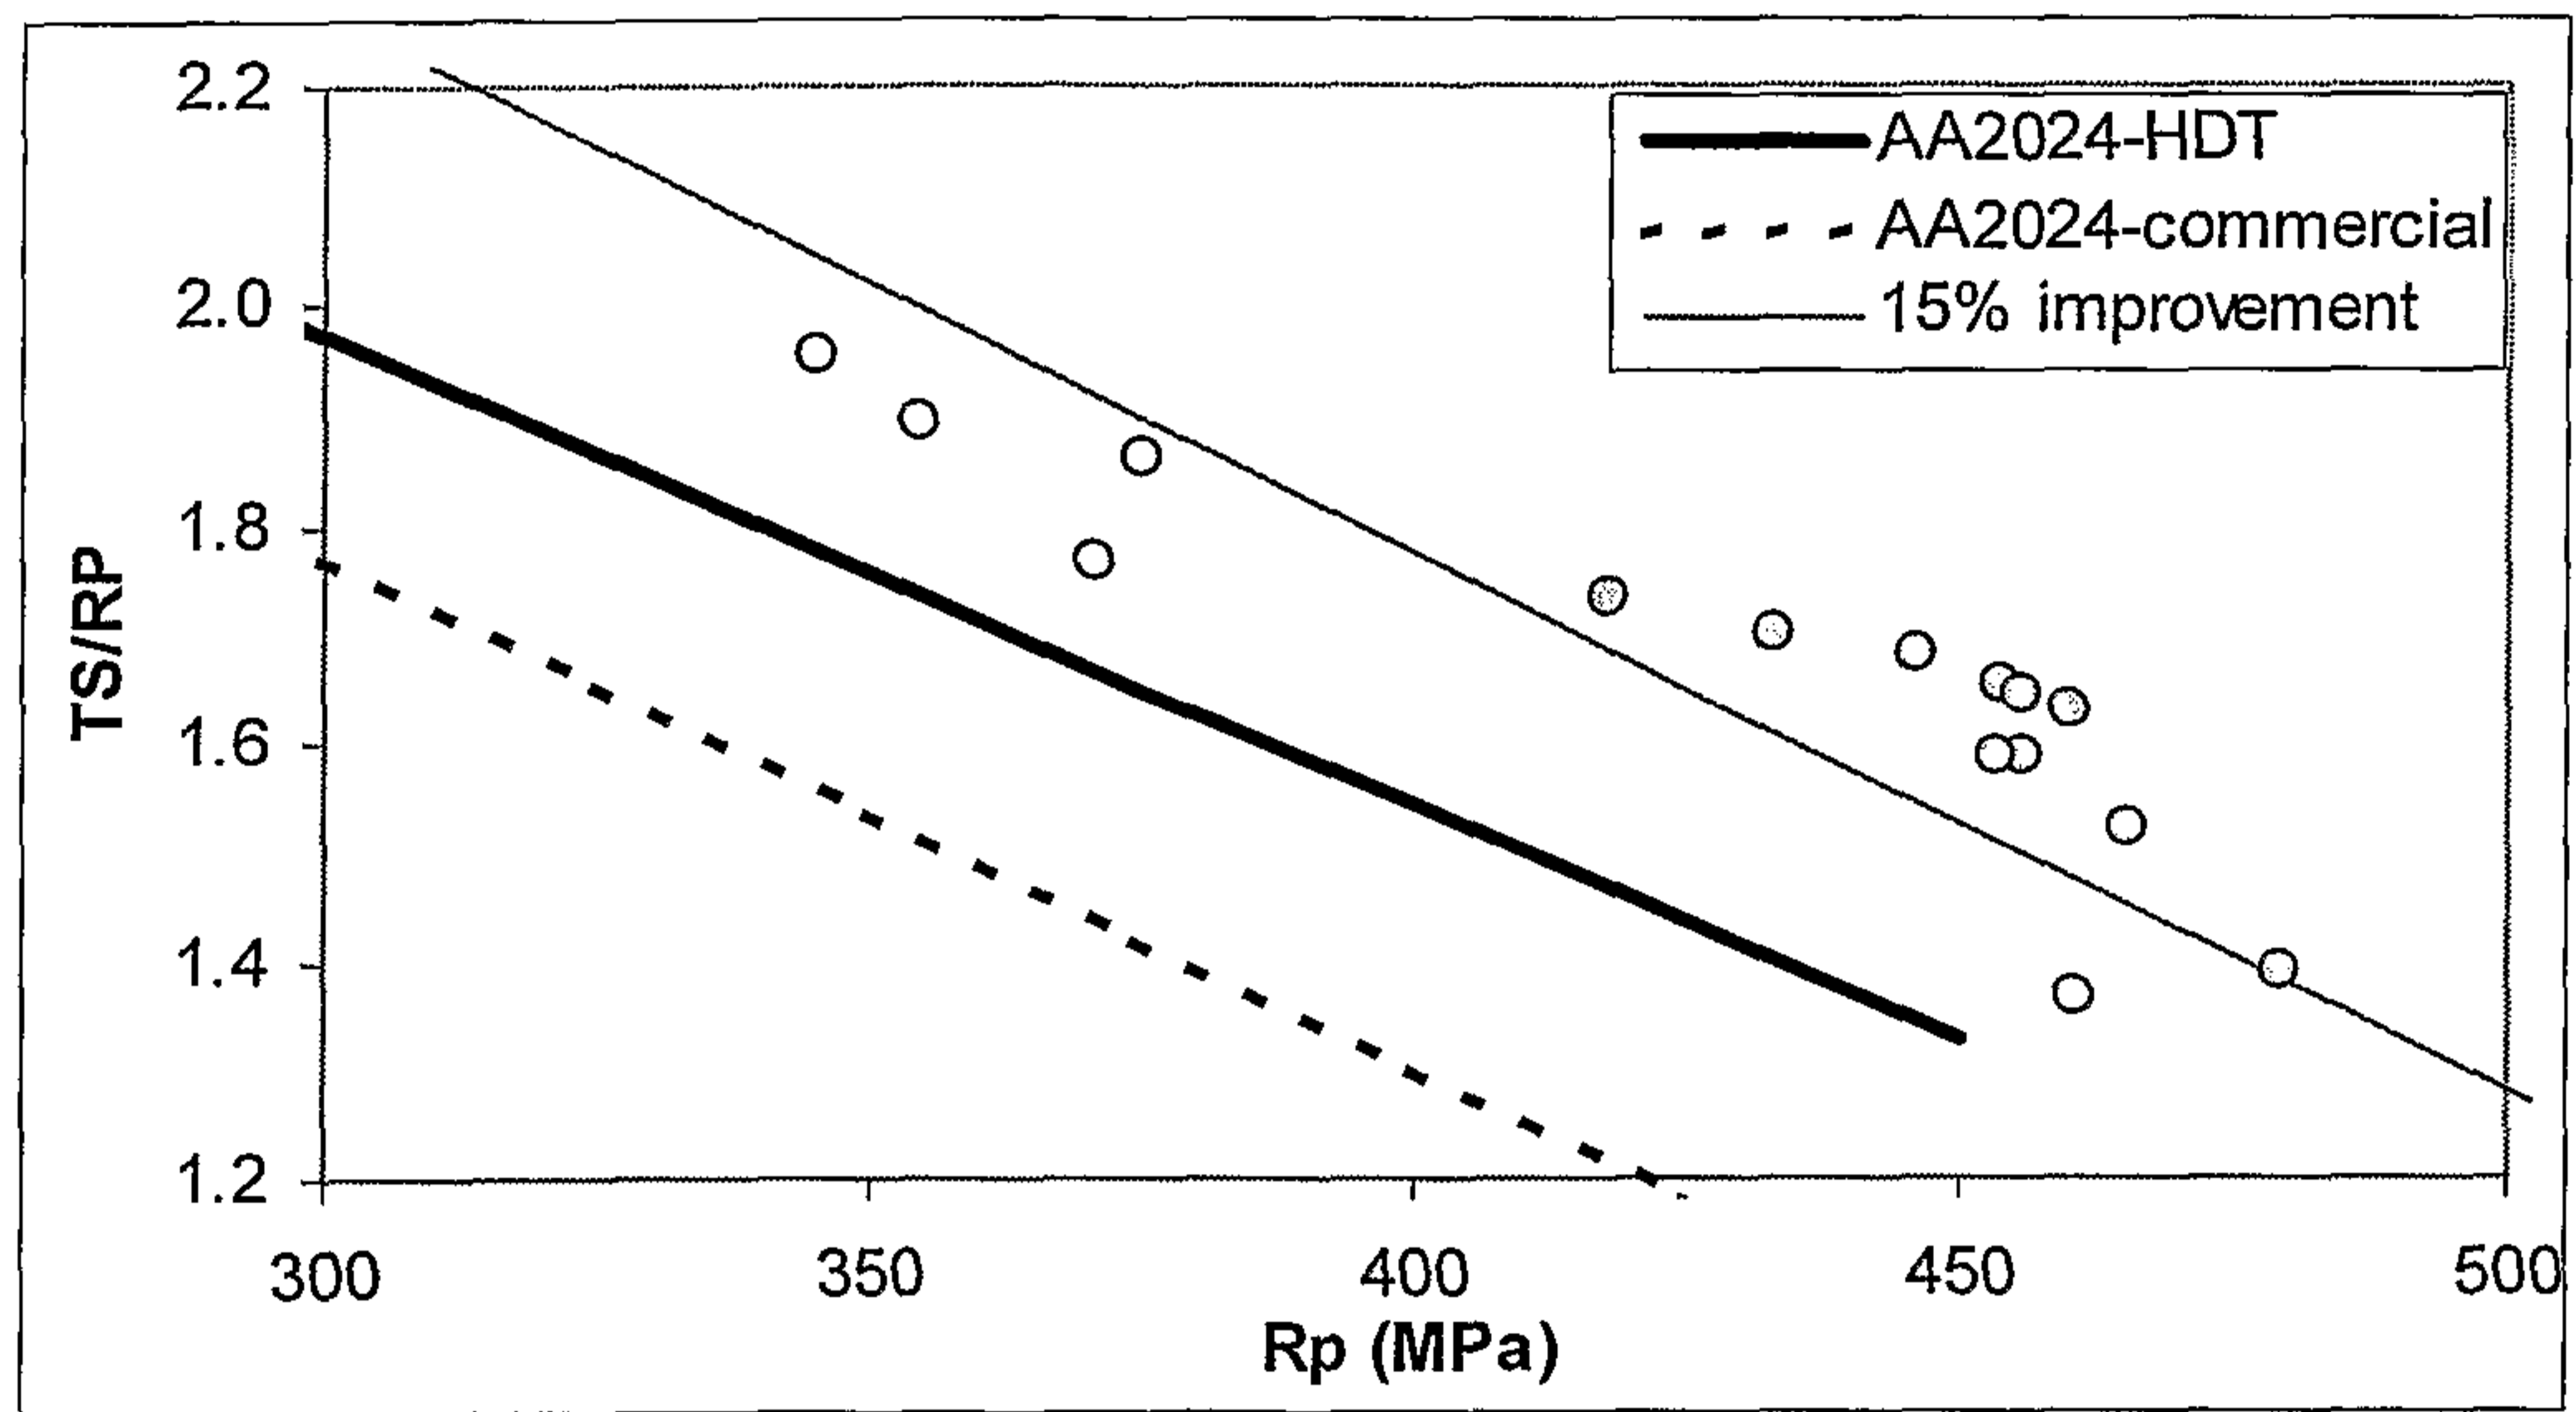


Figure 2b

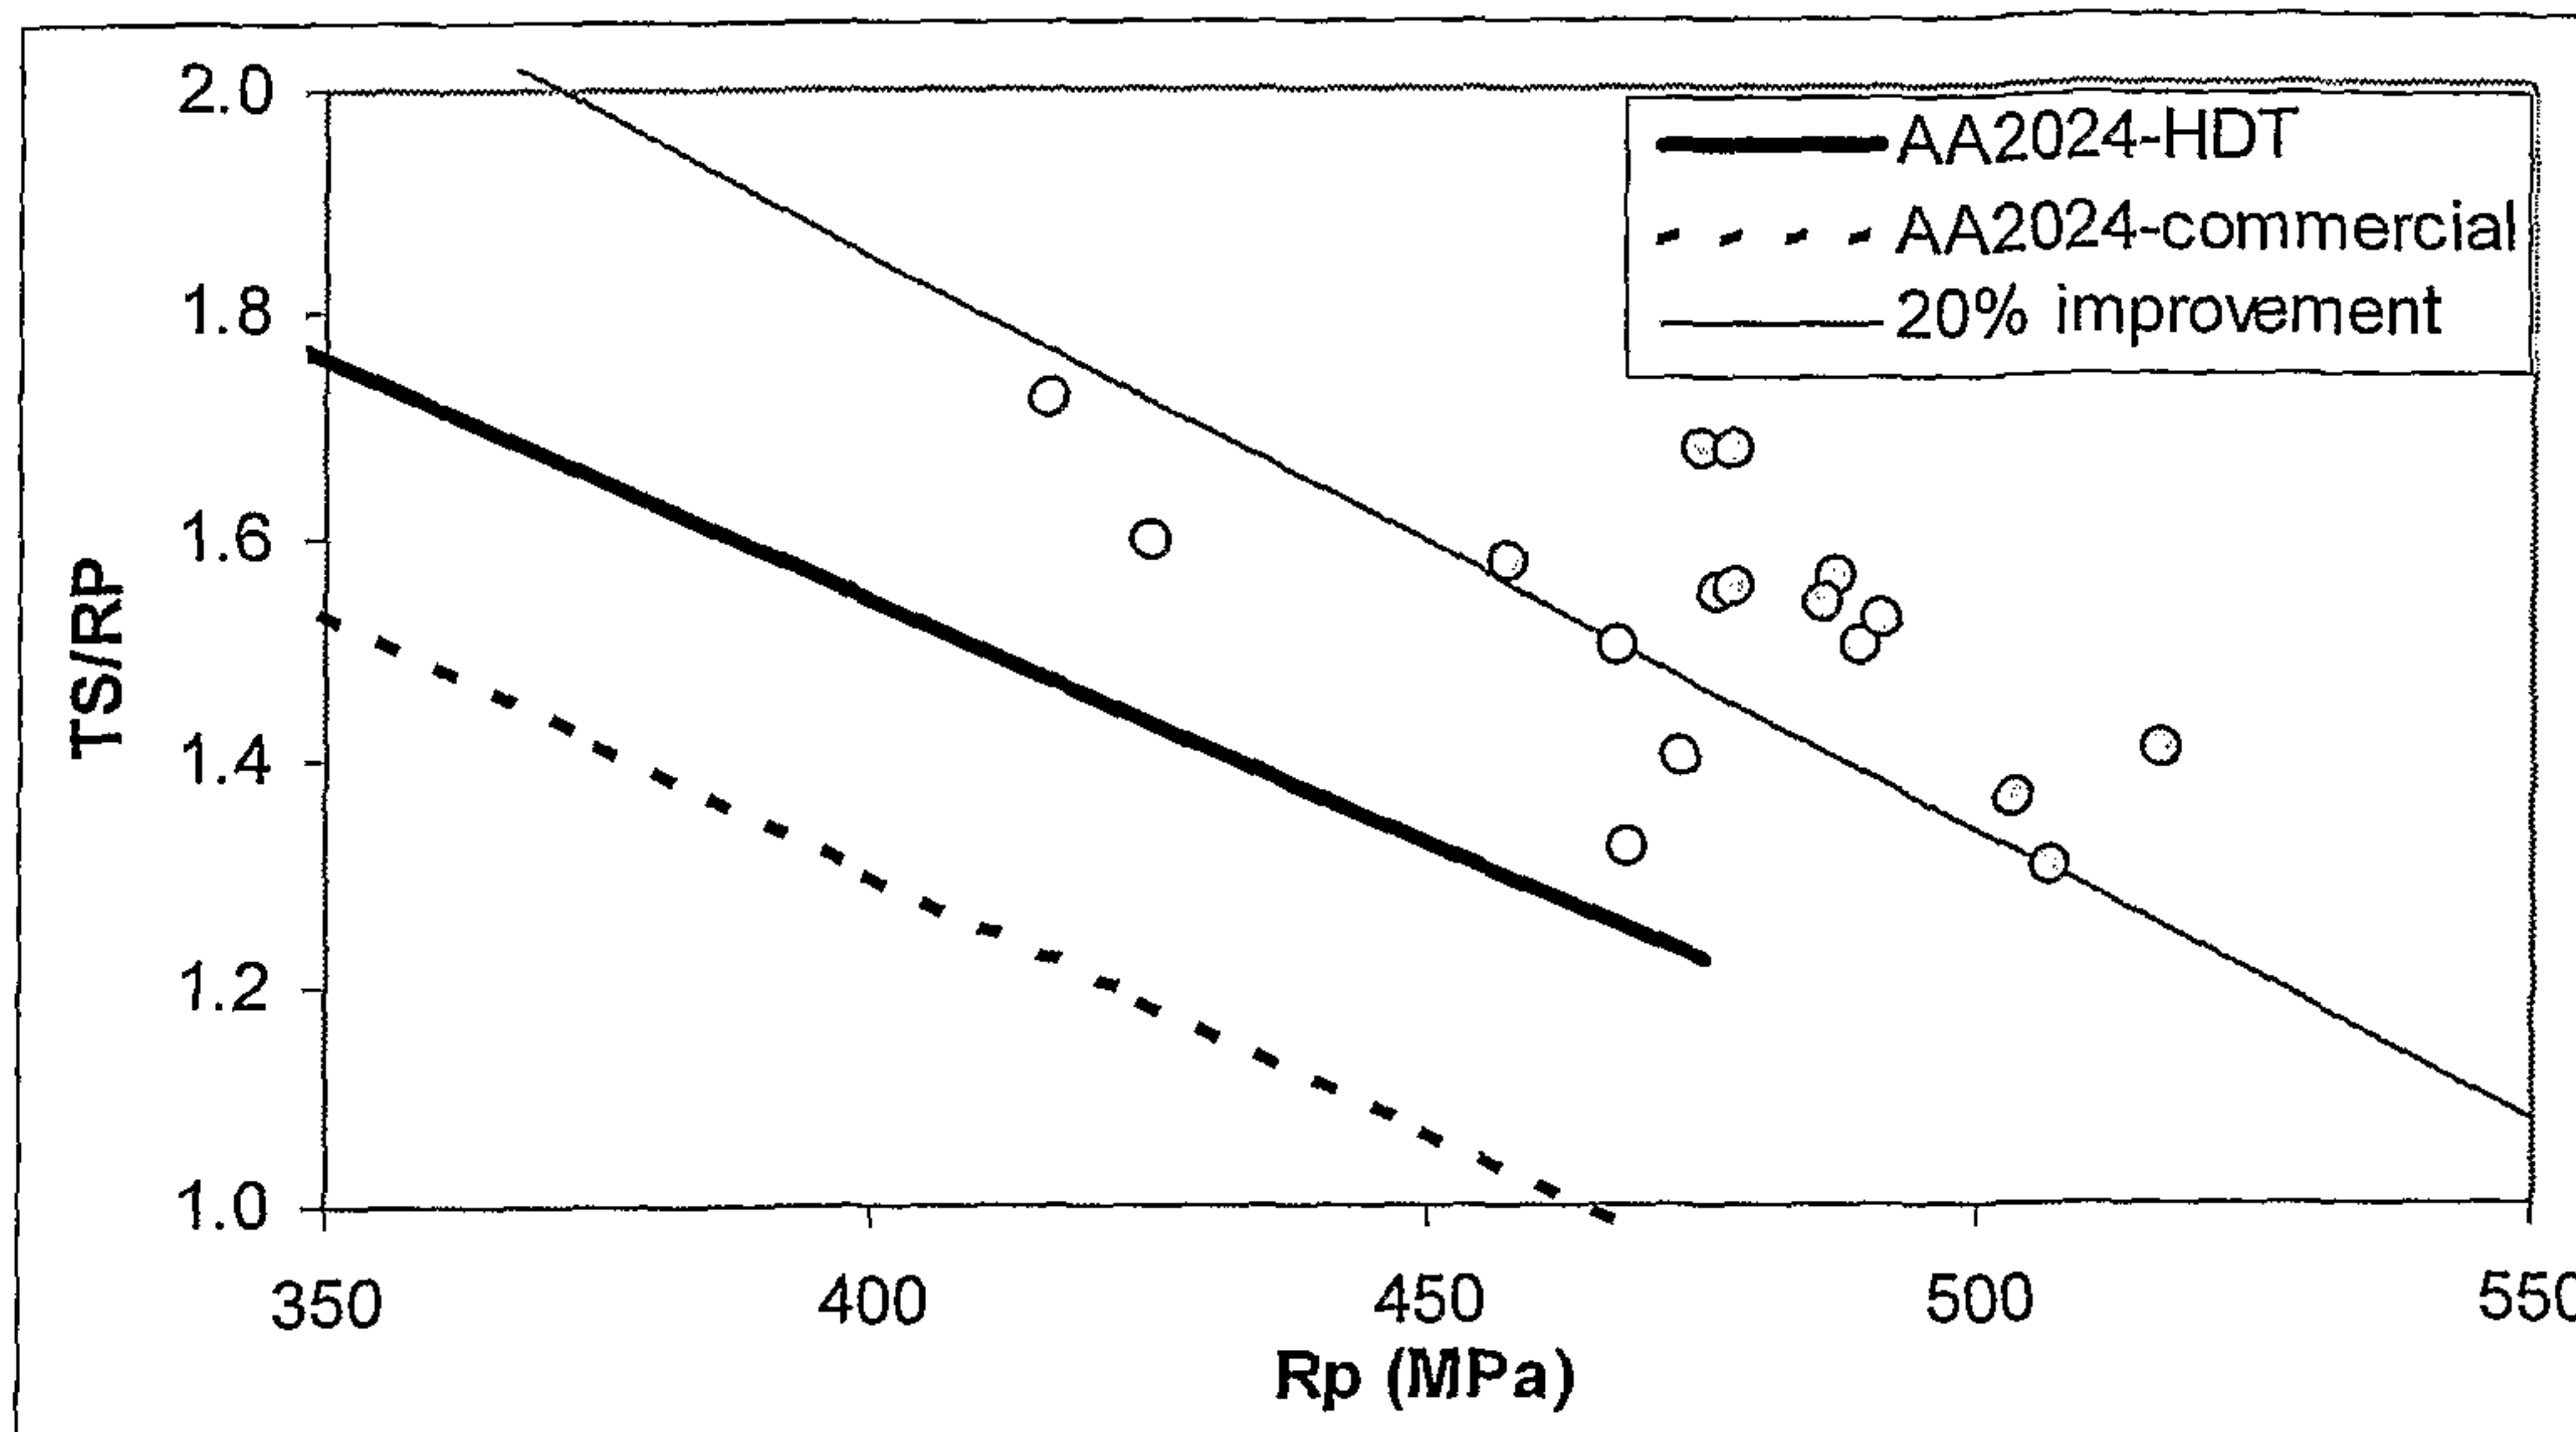


Figure 3a

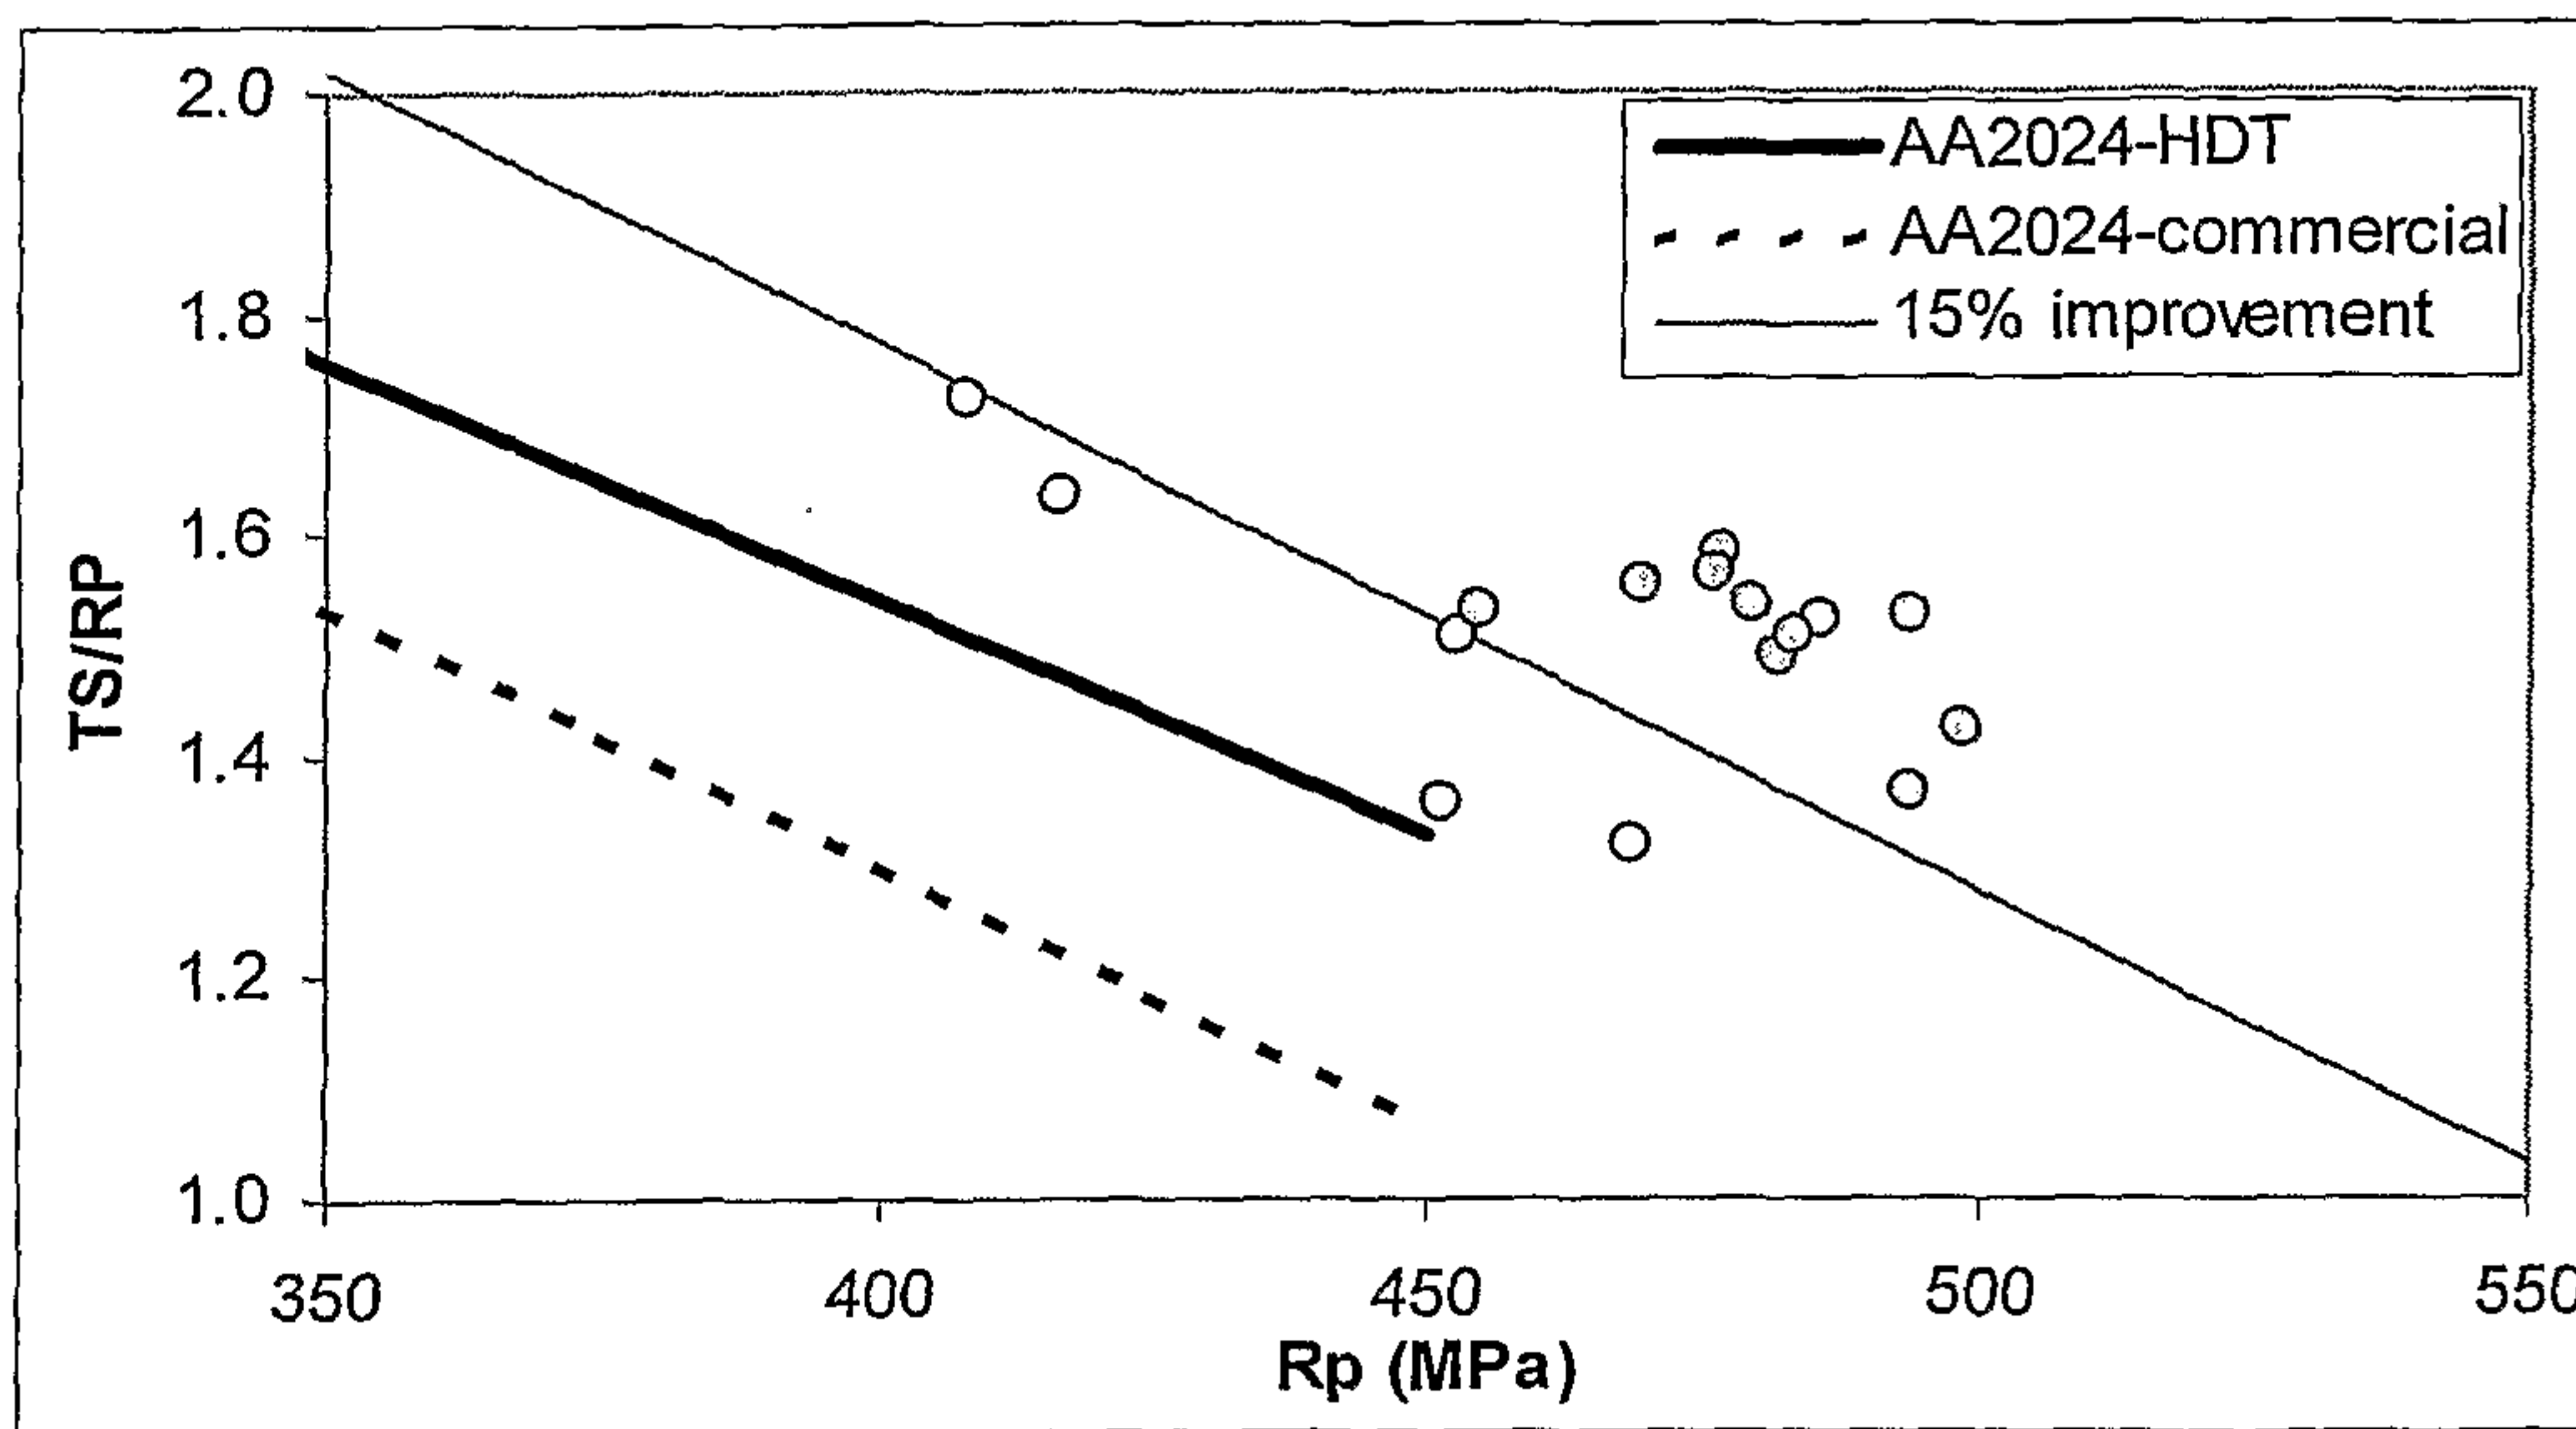


Figure 3b

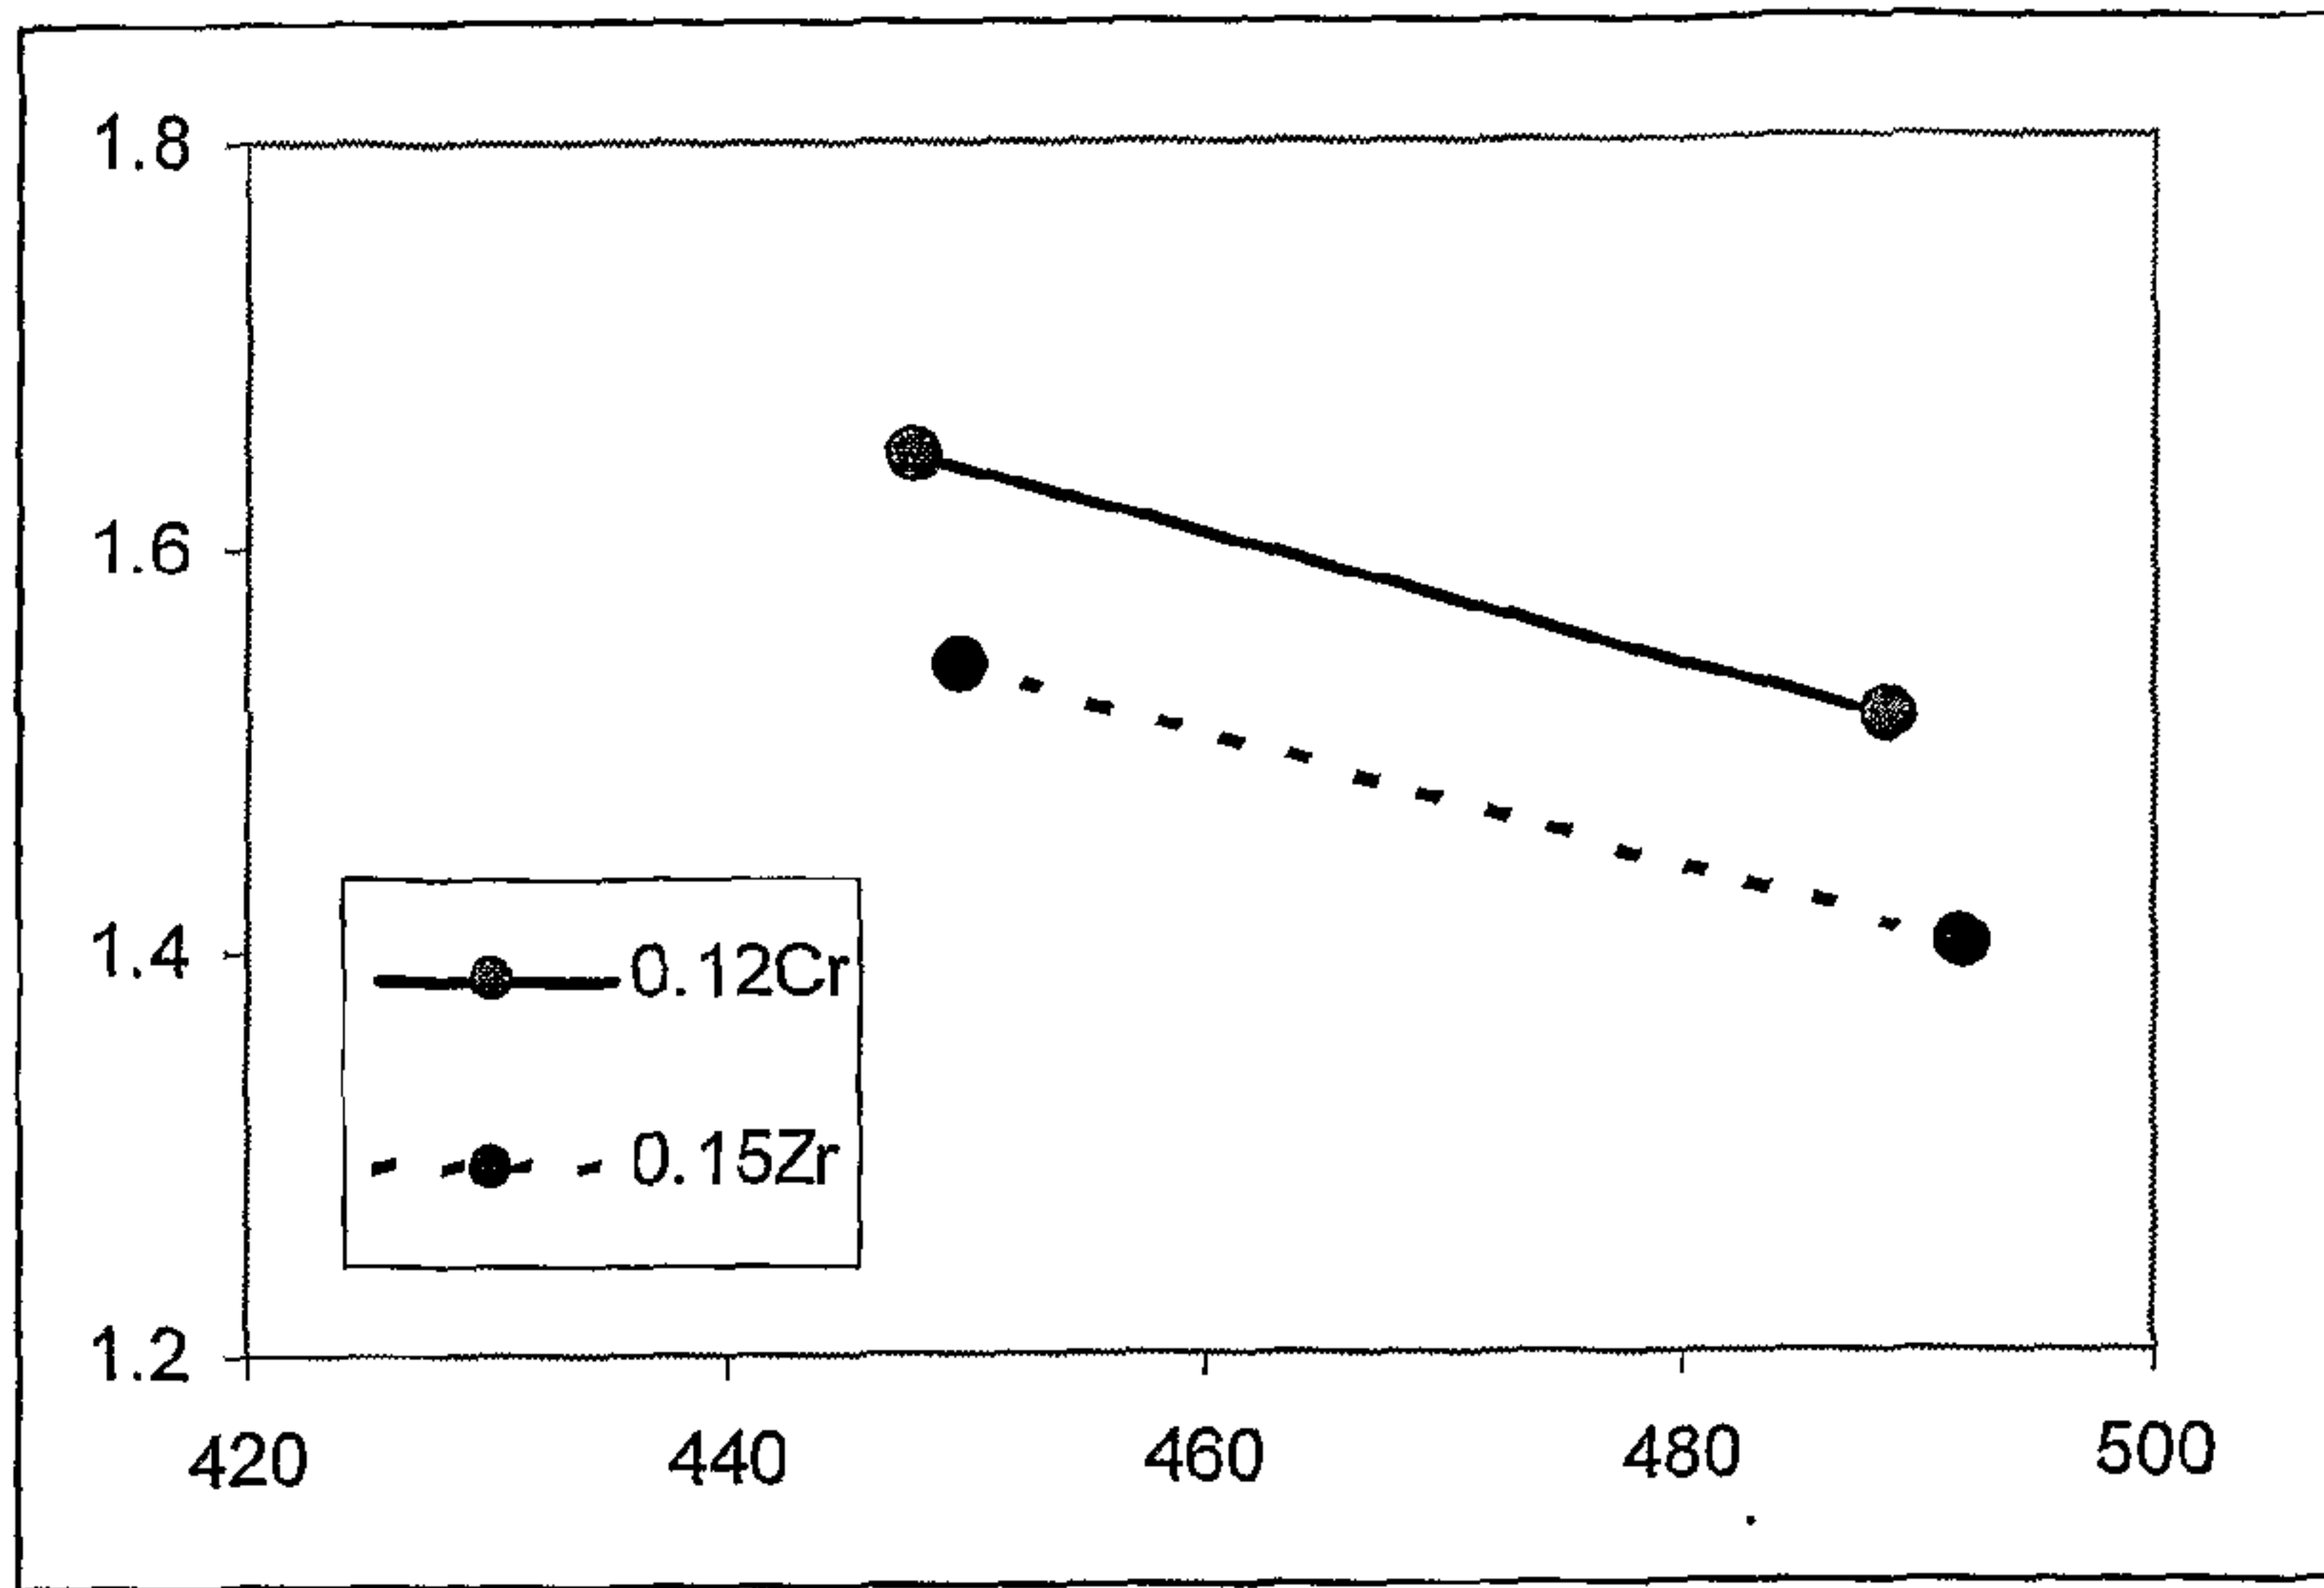


Figure 4

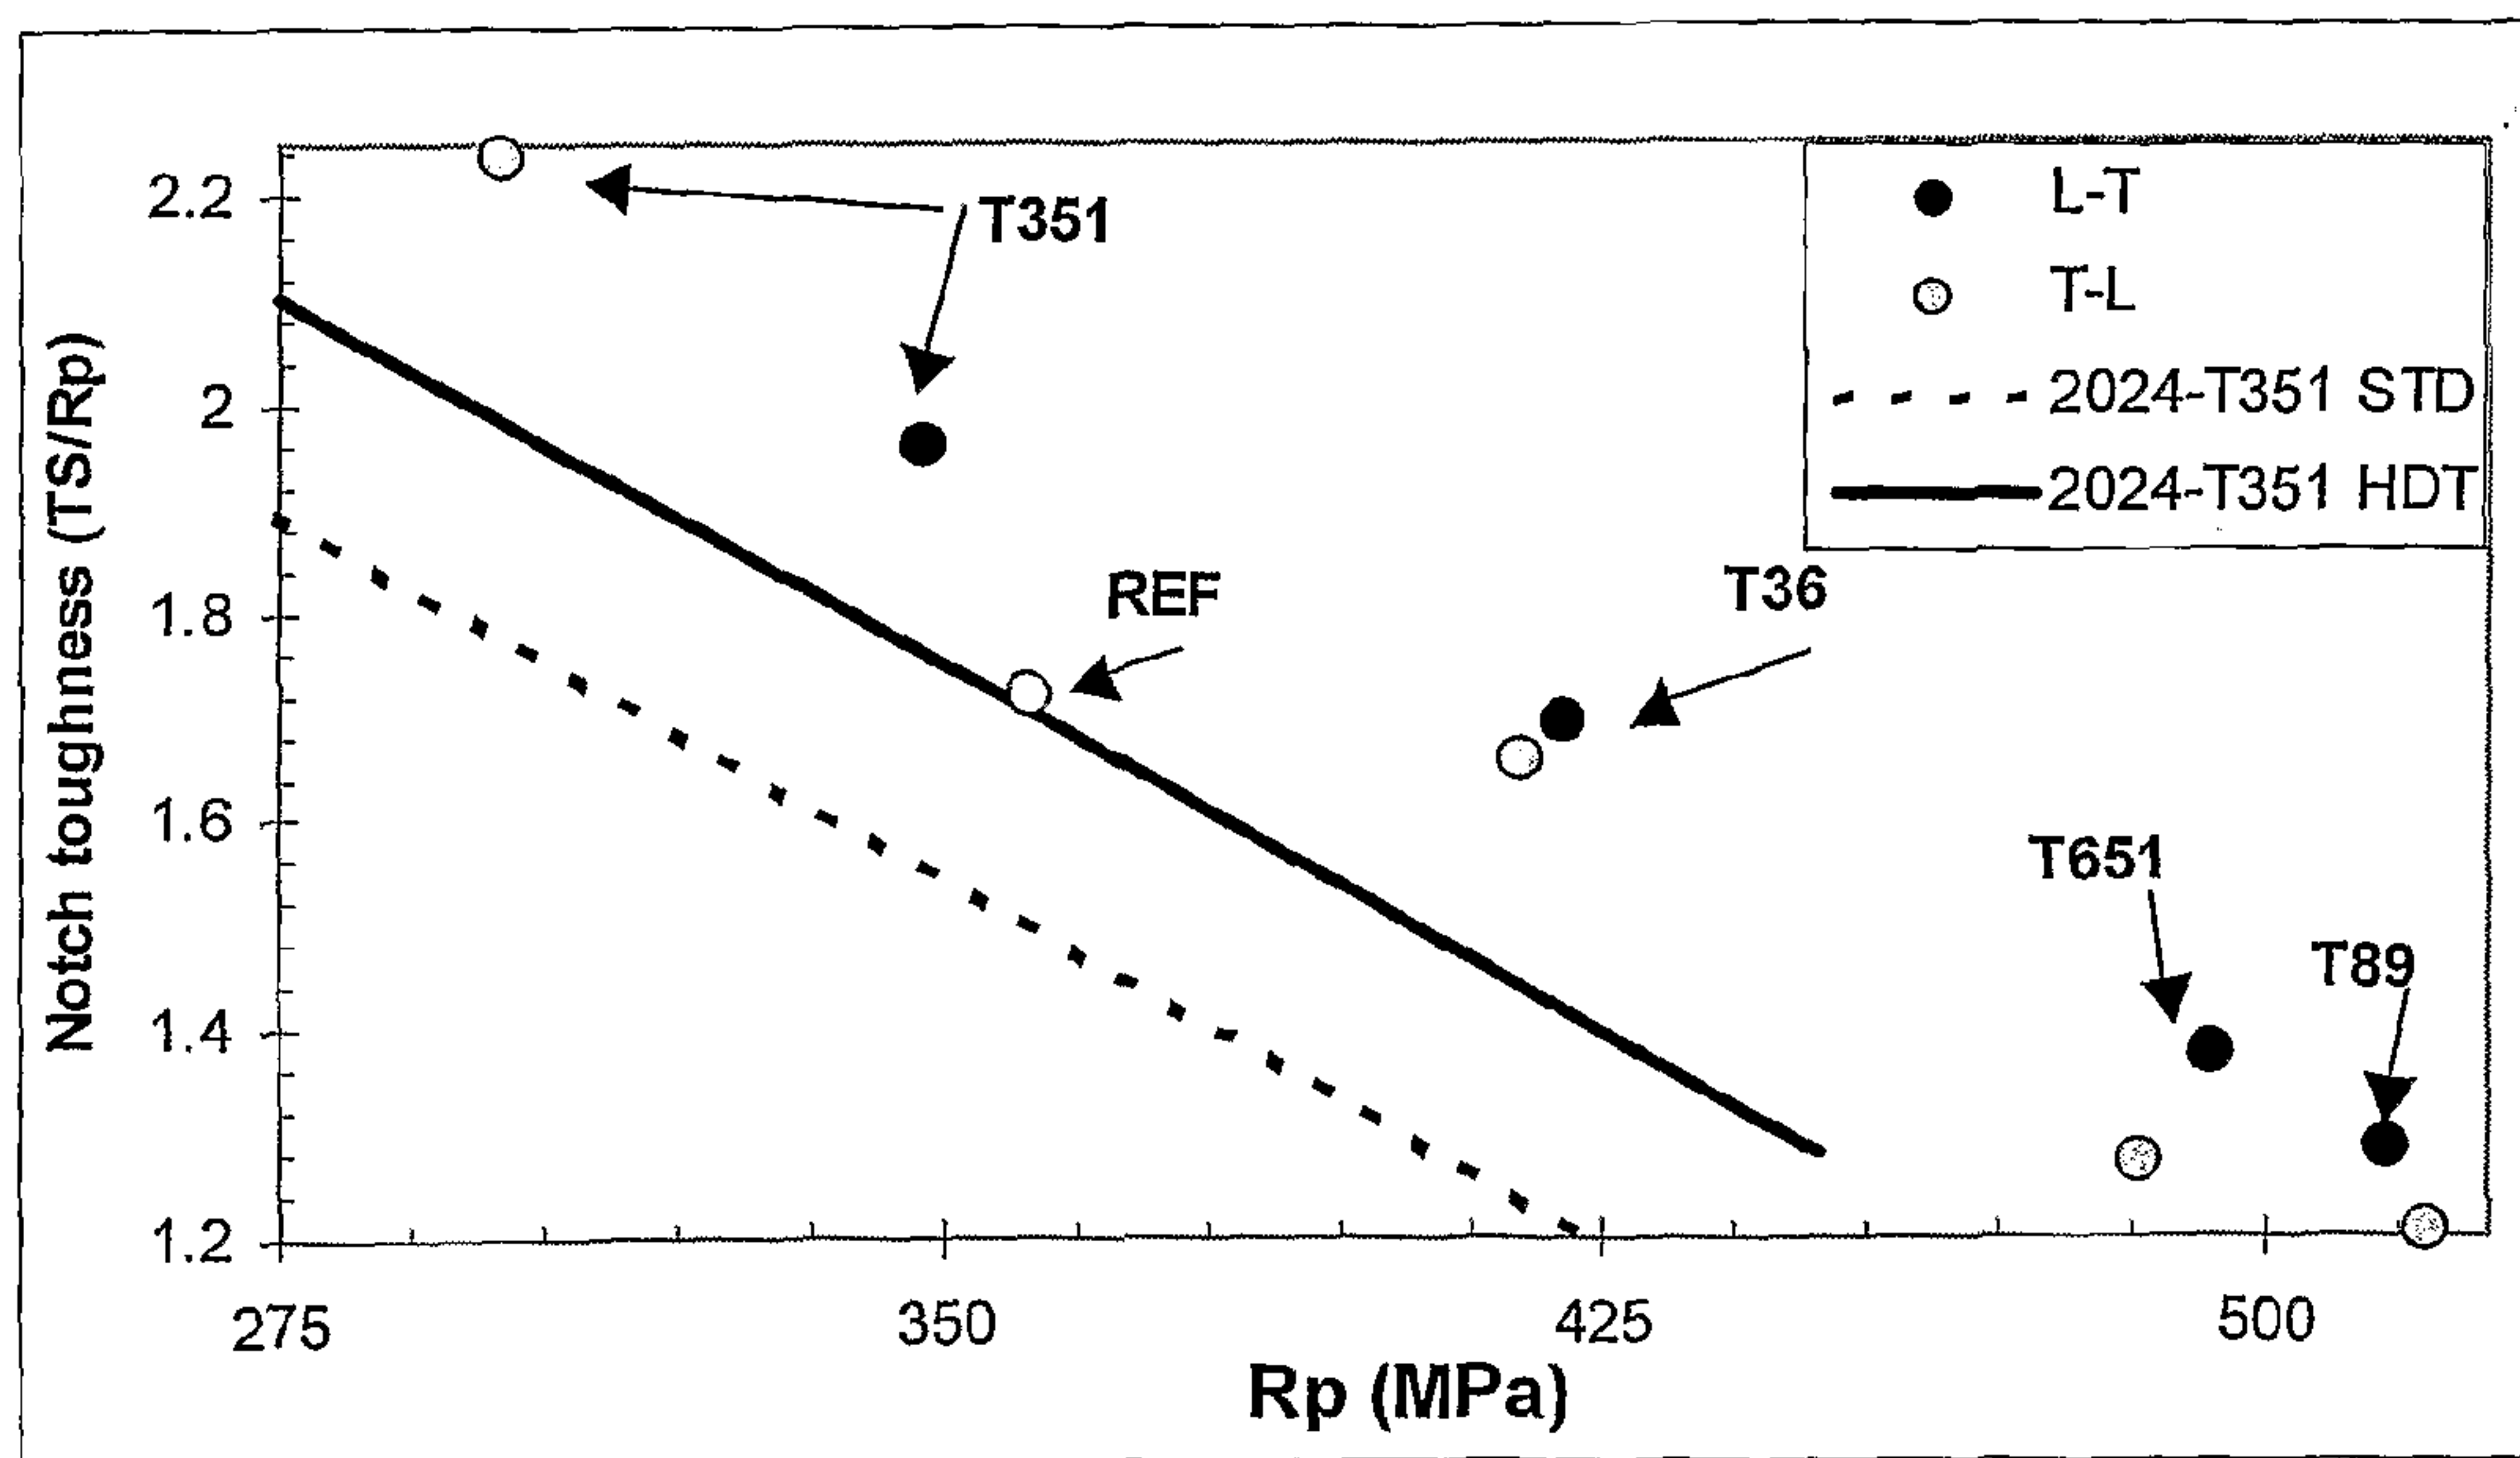


Figure 5

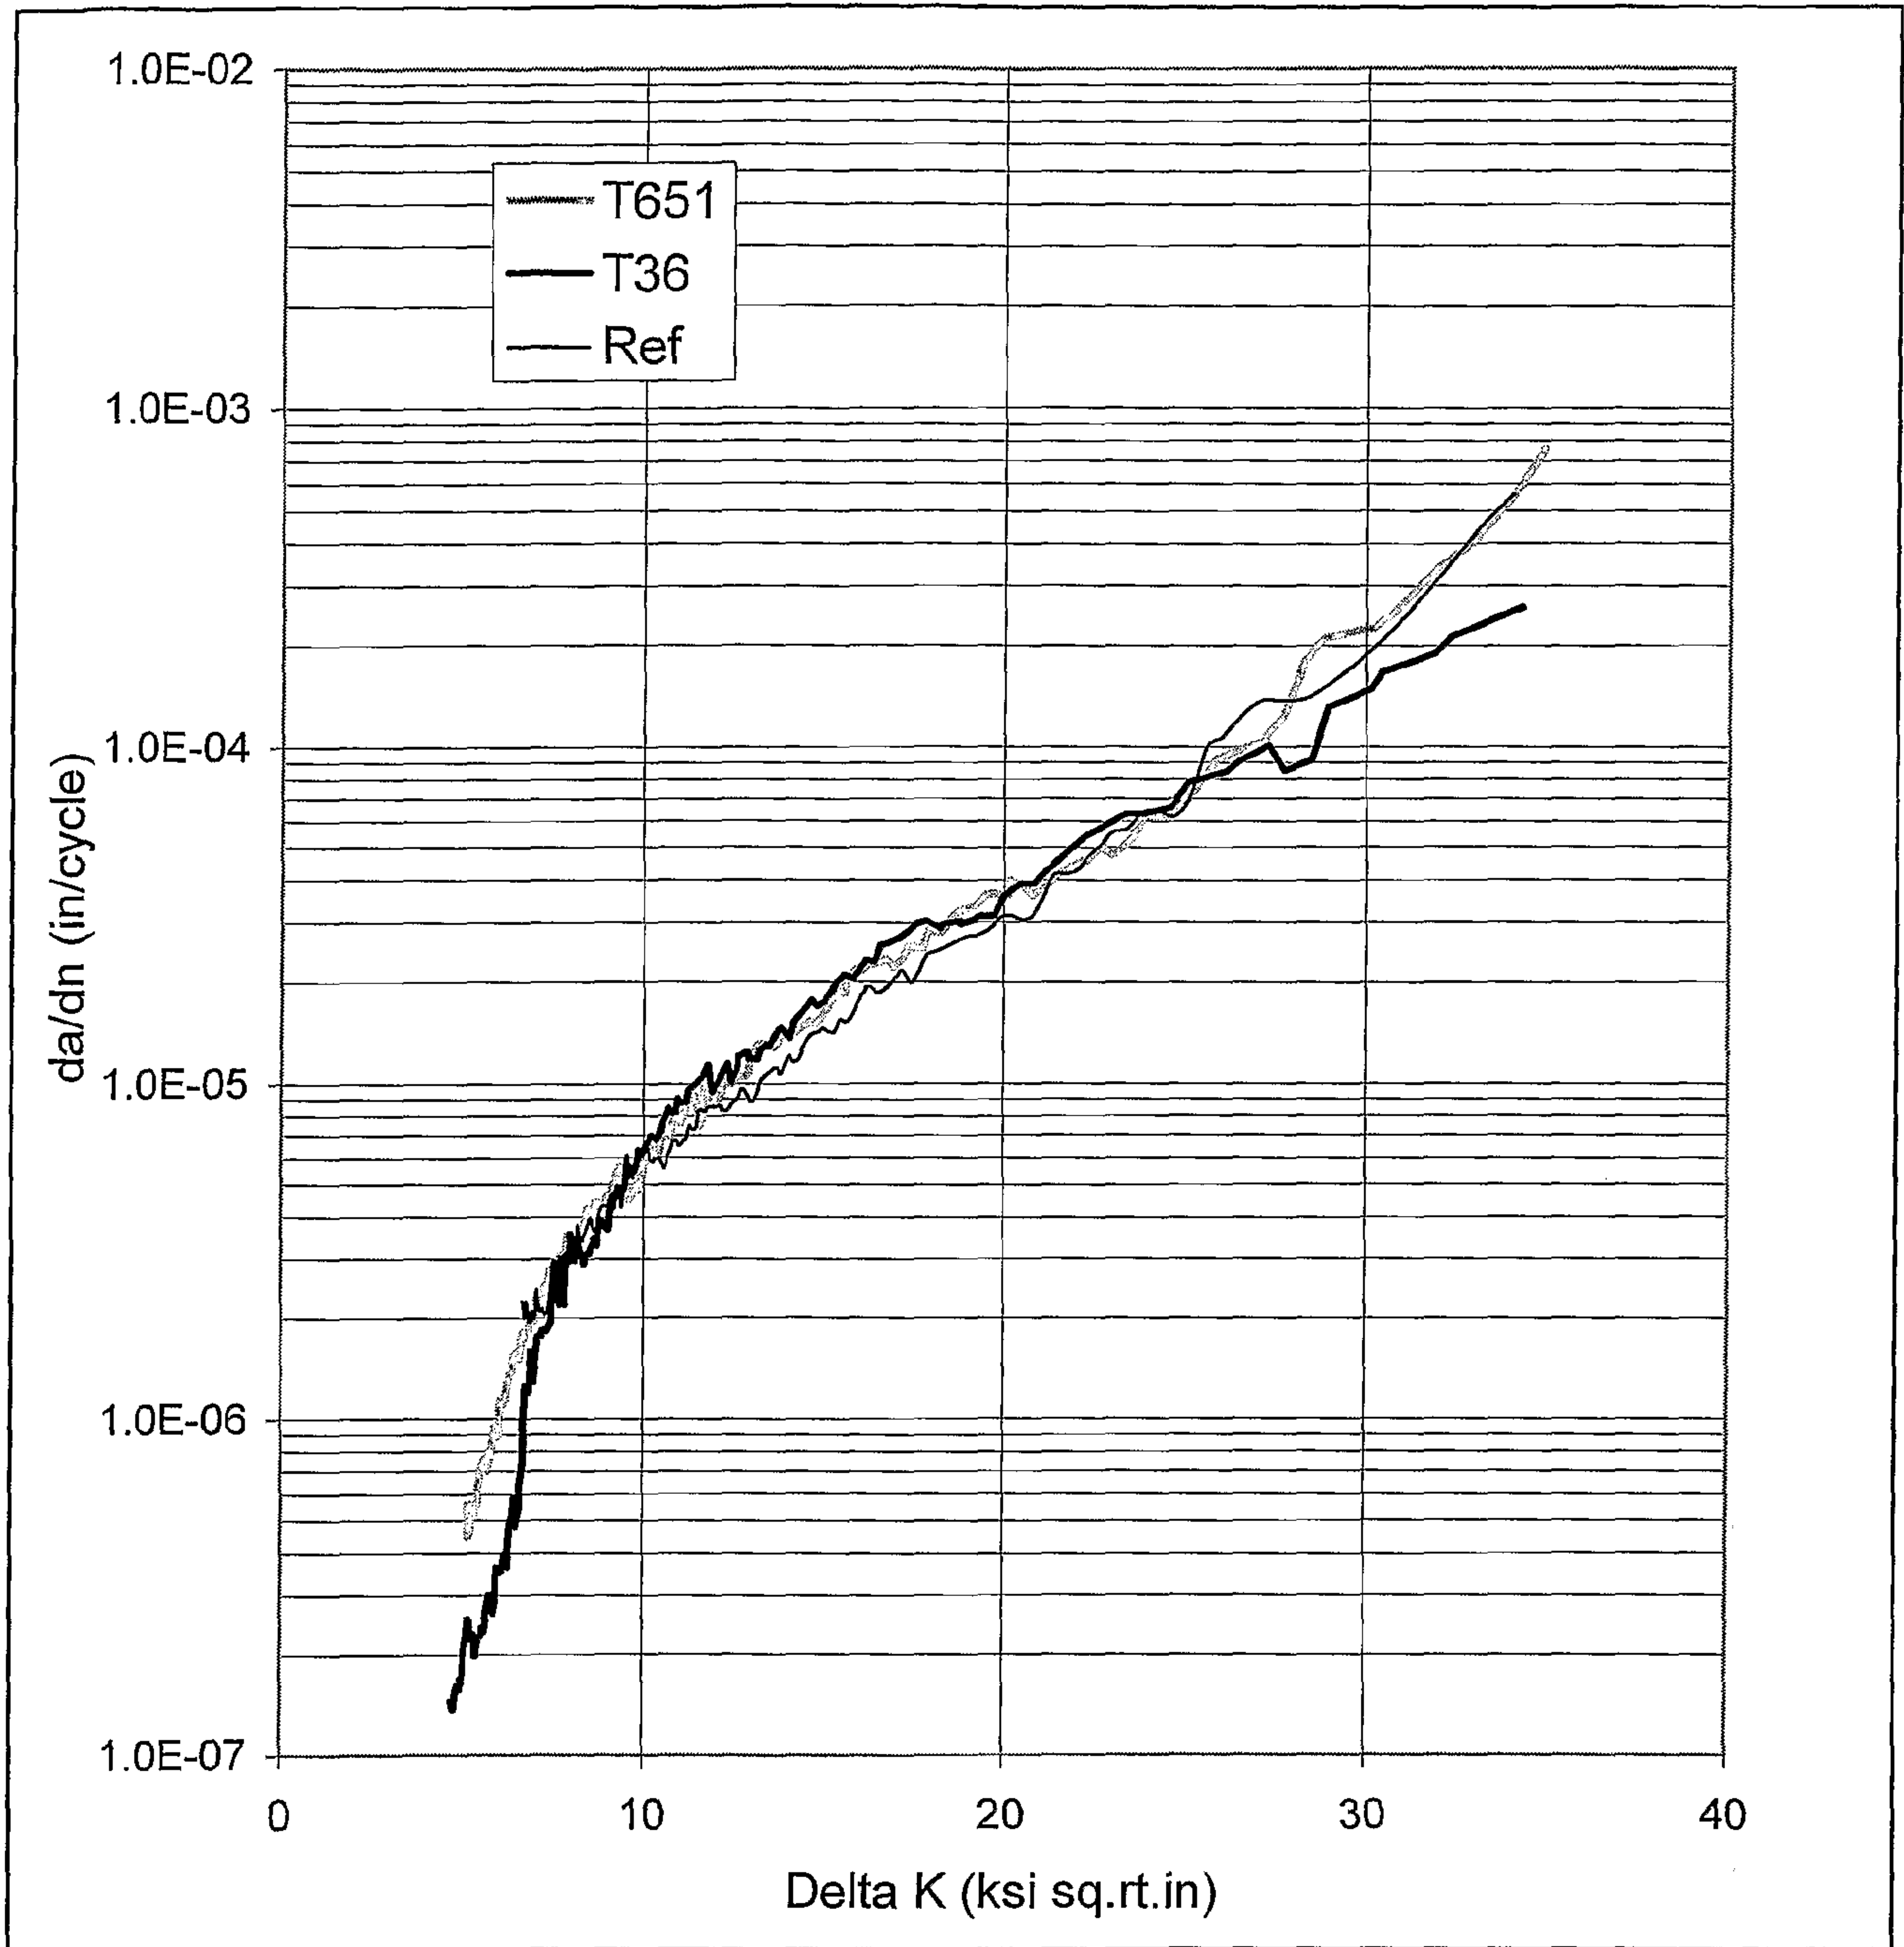


Figure 6

