




(86) Date de dépôt PCT/PCT Filing Date: 2000/03/24
 (87) Date publication PCT/PCT Publication Date: 2000/10/05
 (45) Date de délivrance/Issue Date: 2009/11/17
 (85) Entrée phase nationale/National Entry: 2001/09/25
 (86) N° demande PCT/PCT Application No.: FR 2000/000751
 (87) N° publication PCT/PCT Publication No.: 2000/058763
 (30) Priorité/Priority: 1999/03/26 (FR99/03980)

(51) Cl.Int./Int.Cl. *G02B 3/14* (2006.01),
B01L 3/00 (2006.01), *G02B 26/02* (2006.01)
 (72) Inventeur/Inventor:
BERGE, BRUNO, FR
 (73) Propriétaire/Owner:
VARIOPTIC, FR
 (74) Agent: OGILVY RENAULT LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : DISPOSITIF DE CENTRAGE D'UNE GOUTTE
 (54) Title: DROP CENTERING DEVICE

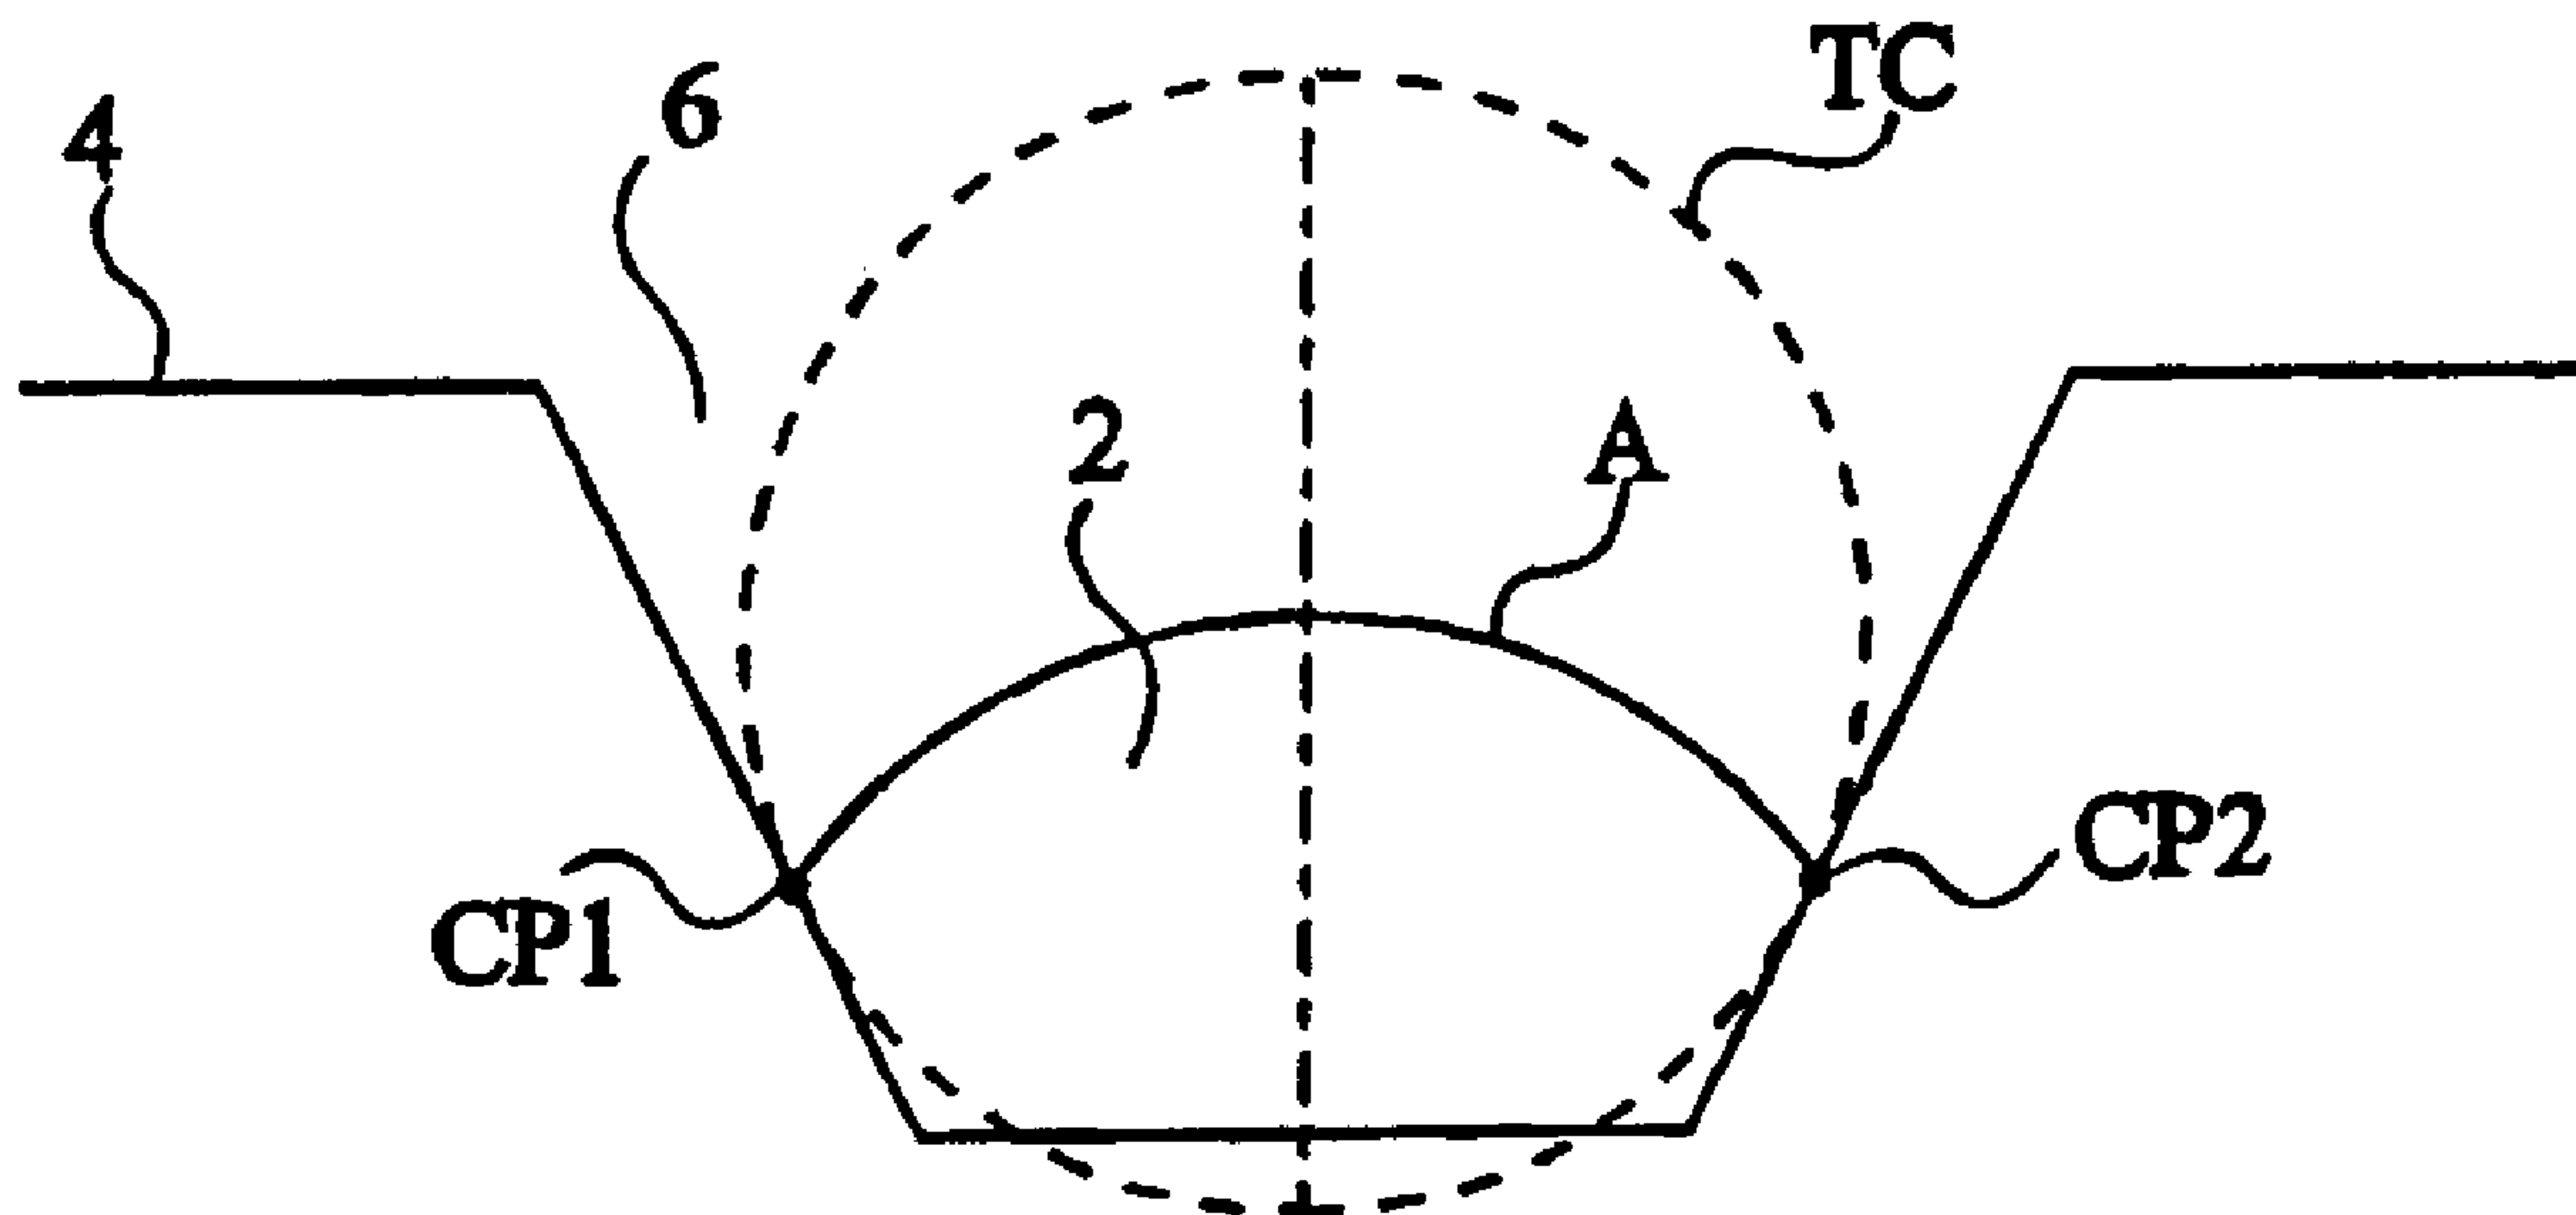

(57) Abrégé/Abstract:

A method for centering a drop of liquid (2) on a given point on a surface (4). The inventive method consists in forming a bell-mouthed recess (6), whereby said recess has a curvature at any point at the limit of contact between the drop and the recess that is lower than or opposite to the curvature of a circle (TC) that is tangent to the surface of the recess to said point and at a symmetrical point (CP2) of said surface.

PCTORGANISATION MONDIALE DE LA PROPRIÉTÉ INTELLECTUELLE
Bureau international

DEMANDE INTERNATIONALE PUBLIÉE EN VERTU DU TRAITE DE COOPERATION EN MATIÈRE DE BREVETS (PCT)

(51) Classification internationale des brevets ⁷ : G02B 3/14, 26/02	A1	(11) Numéro de publication internationale: WO 00/58763 (43) Date de publication internationale: 5 octobre 2000 (05.10.00)
<p>(21) Numéro de la demande internationale: PCT/FR00/00751</p> <p>(22) Date de dépôt international: 24 mars 2000 (24.03.00)</p> <p>(30) Données relatives à la priorité: 99/03980 26 mars 1999 (26.03.99) FR</p> <p>(71) Déposant (pour tous les Etats désignés sauf US): UNIVERSITE JOSEPH FOURIER [FR/FR]; 621, avenue Centrale, Boîte postale 53, F-38041 Grenoble Cedex 9 (FR).</p> <p>(72) Inventeur; et (75) Inventeur/Déposant (US seulement): BERGE, Bruno [FR/FR]; 155, route du Château, F-38140 Reaumont (FR).</p> <p>(74) Mandataire: DE BEAUMONT, Michel; Cabinet Conseil, 1, rue Champollion, F-38000 Grenoble (FR).</p>	<p>(81) Etats désignés: AU, CA, JP, US, brevet européen (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Publiée Avec rapport de recherche internationale.</p>	

(54) Title: DROP CENTERING DEVICE


(54) Titre: DISPOSITIF DE CENTRAGE D'UNE GOUTTE

(57) Abstract

A method for centering a drop of liquid (2) on a given point on a surface (4). The inventive method consists in forming a bell-mouthed recess (6), whereby said recess has a curvature at any point at the limit of contact between the drop and the recess that is lower than or opposite to the curvature of a circle (TC) that is tangent to the surface of the recess to said point and at a symmetrical point (CP2) of said surface.

(57) Abrégé

Procédé de centrage d'une goutte de liquide (2) à un emplacement donné d'une surface (4), qui consiste à former à cet emplacement un évidement évasé (6) tel que, en tout point (CP1) de la limite de contact entre la goutte et l'évidement, celui-ci à une courbure inférieure ou opposée à celle d'un cercle (TC) tangent à la surface de l'évidement audit point et en un point symétrique (CP2) de cette surface.

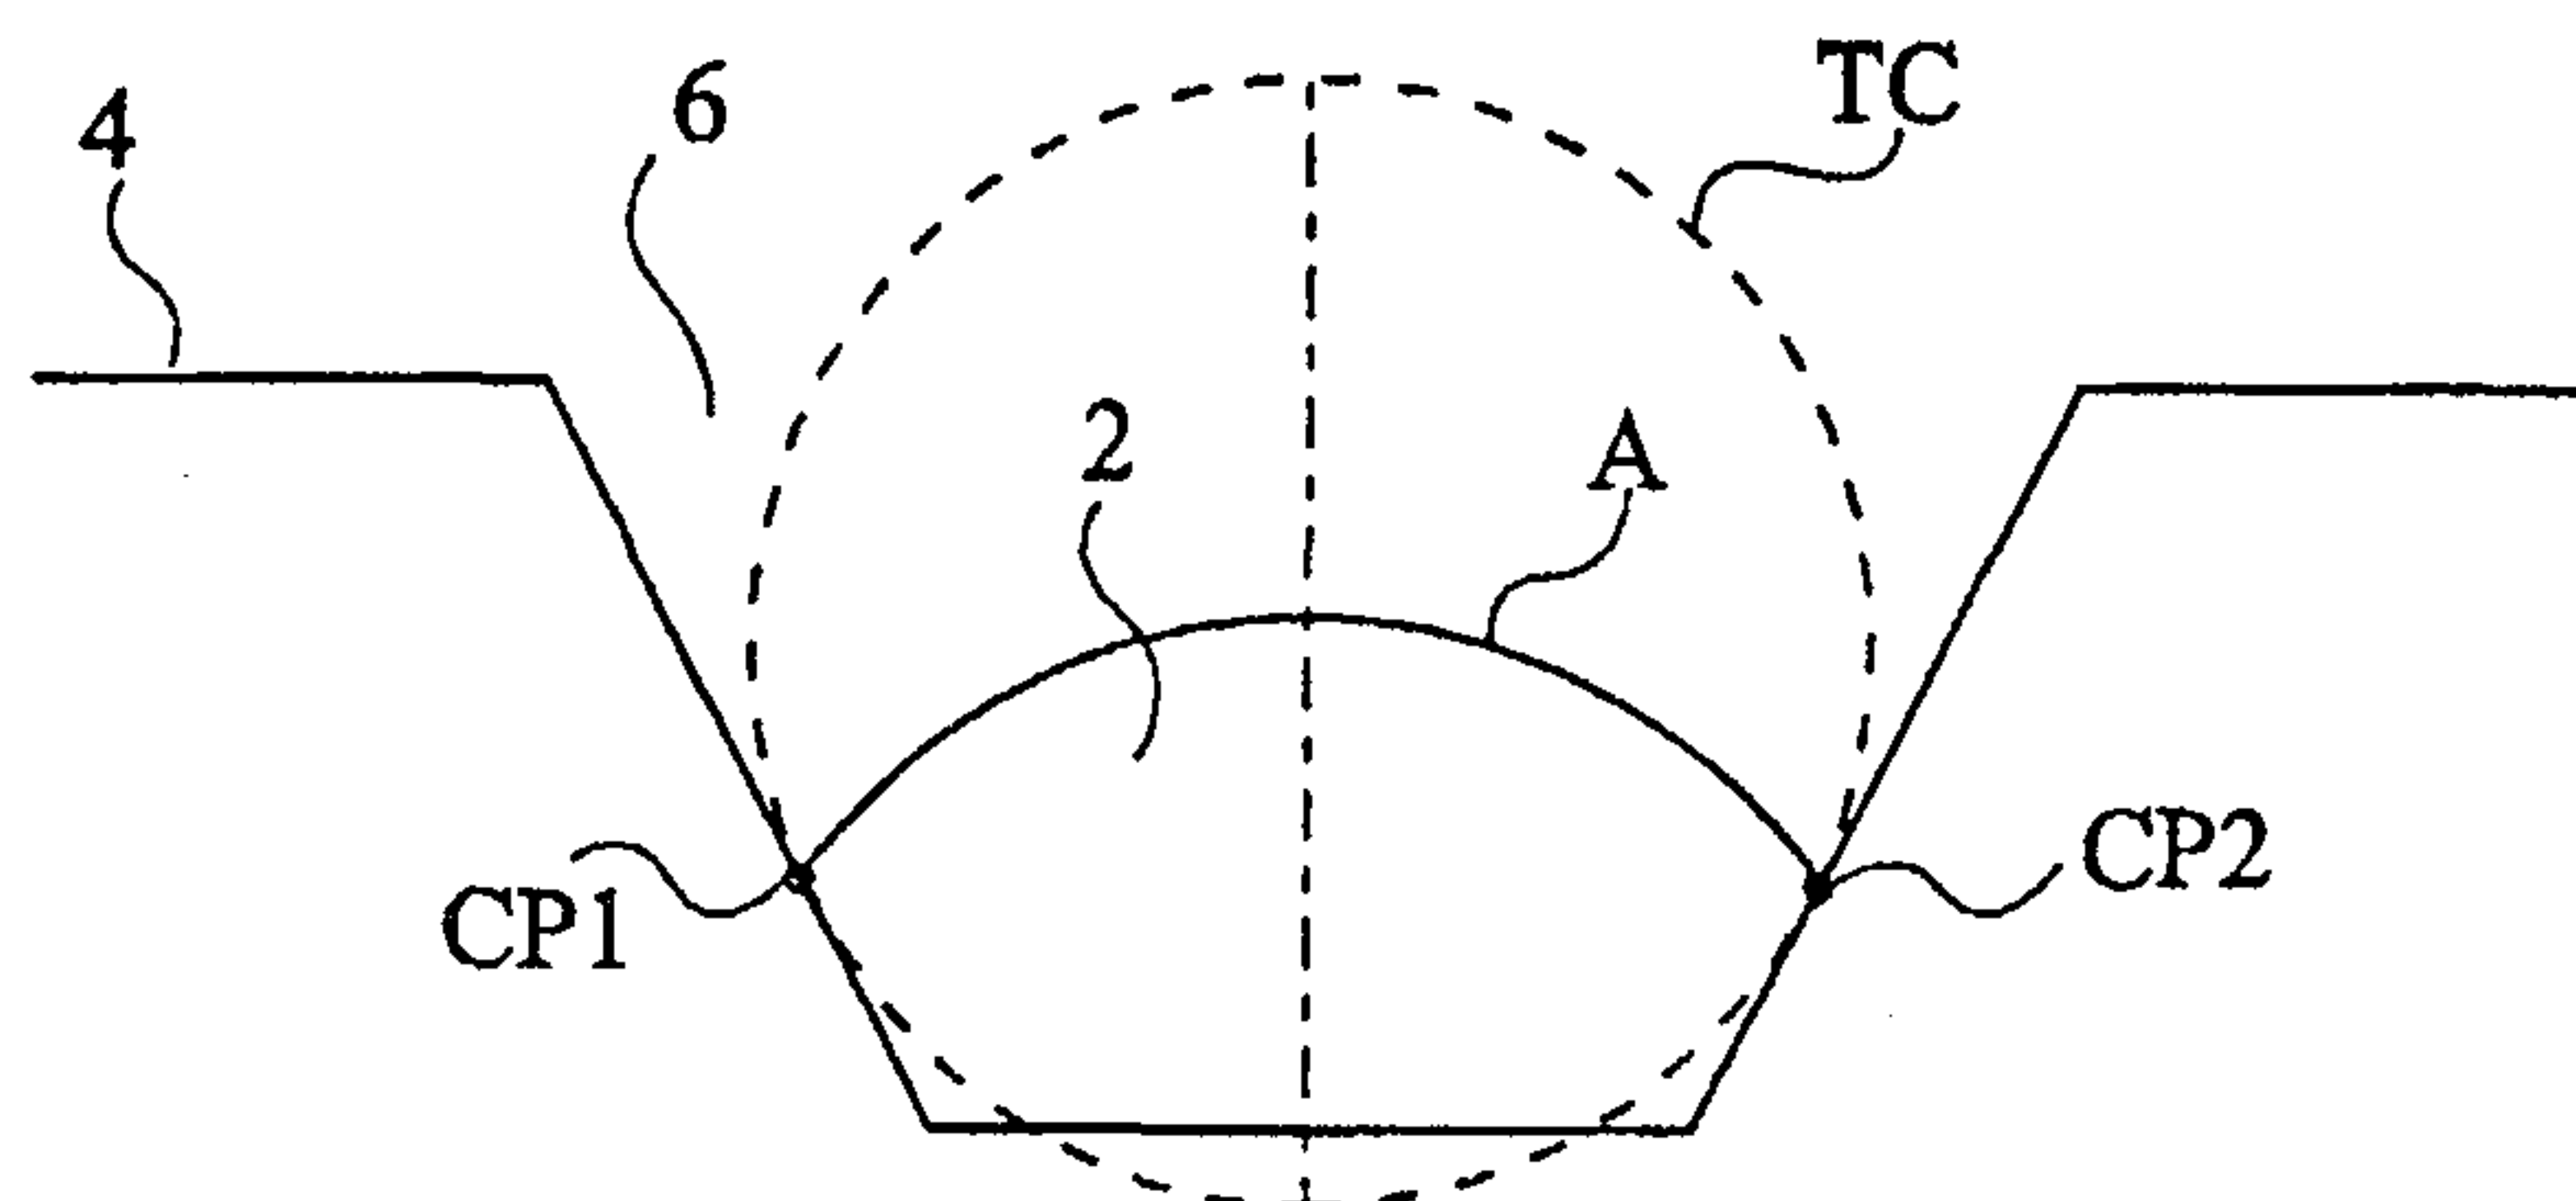

DROP CENTERING DEVICE

The present invention relates to the maintaining of a liquid drop in a predetermined position on a solid surface, and more specifically to the centering of such a drop.

5 For various reasons, it may be desired to maintain a drop laid on a surface, accurately centered on a predetermined axis. A known way consists of modifying around this axis the surface wettability with respect to the drop liquid.

10 Fig. 1 shows a side cross-section view of a liquid drop 2 laid on a surface 4. Surface 4 has been processed in a circular area C1 centered on an axis O. The processing of area C1 is such that its wettability with respect to the liquid of drop 2 is strong. Thus, capillarity forces maintain drop 2 centered on axis O.

15 An improvement, not shown, of such a surface processing consists of creating around axis O several concentric circular areas. The processing of these areas then is such that the closer an area is to axis O, the more its wettability with respect to the liquid of drop 2 is strong. Such an improvement enables centering drop 2 for different contact angles. This is particularly advantageous when a way of changing said angle is available, for example by means of an electric voltage. Such surface processings may
20 however be difficult and expensive to implement.

An object of the present invention is to center a drop laid on a surface without using a modification of the surface wetability.

To achieve this object, the present invention provides a method for centering a liquid drop at a given location of a surface, comprising forming at this location a flared hollow such that, at any point of the contact limit between the drop and the hollow, said hollow has a curvature smaller than or opposite to that of a circle tangent to the hollow surface at said point and at a symmetrical point of this surface.

According to an embodiment of the present invention, the flared hollow has the shape of a truncated cone with an axis perpendicular to said surface.

According to an embodiment of the present invention, the flared hollow has the shape of the upper central portion of a torus having an axis perpendicular to the surface.

The present invention also provides a method for centering a liquid drop on the external surface of a convex surface, comprising giving this surface at any point of the contact limit with the drop a shape such that this surface has a curvature greater than that of a circle tangent to this surface at this point and at a symmetrical point of this surface.

According to an embodiment of the present invention, the convex surface is formed by revolution against said axis of an arc of a circle having a radius smaller than that of said tangent circle.

The present invention also provides a variable-focus lens implementing the above-mentioned method, which includes a wall made of an insulating material, a drop of a first insulating liquid arranged on an area of a first

surface of the wall, a second conductive liquid covering the first surface and the drop, the first and second liquids being non-miscible, having different optical indexes and substantially the same density, and means for
5 applying an electric voltage between the conductive liquid and an electrode arranged on the second surface of said wall, the drop being placed in a flared hollow of the wall.

According to an embodiment of the present invention,
10 tion, the electrode is a sheet metal, the flared hollow is a truncated cone formed by embossing said sheet metal, centered on an axis perpendicular to the first surface, and the bottom of which is pierced with a centered hole, and the insulating material wall is a transparent plastic
15 film flattened against the electrode and the walls of the hollow, and which covers said hole.

According to an embodiment of the present invention, the electrode is a sheet metal, the flared hollow is a truncated cone formed by machining said sheet metal,
20 centered on an axis perpendicular to the first surface, and the bottom of which is pierced with a centered hole, and the insulating material wall is a transparent plastic film flattened against the electrode and the walls of the hollow, and which covers said hole.

25 The present invention provides a method of varying the focal length of a lens, comprising providing a lens structure comprising an insulating drop on a surface, the surface having at least one sidewall, the shape of the surface being such that, at any point of the
30 contact limit between the drop and the surface, said surface has a curvature smaller than or opposite to that of a circle tangent to the surface at said point and at a symmetrical point of the surface, for centering the drop,

a conducting liquid covering the insulating drop, and an electrode, and changing a voltage applied between the electrode and the conducting liquid to thereby change the area of the surface which the insulating liquid contacts.

5 The present invention further provides a variable-focus lens comprising a wall made of an insulating material, a drop of an insulating liquid arranged on an area of a first surface of the wall, a conductive liquid covering the first surface and the drop, the insulating and conductive liquids being non-miscible, having
10 different optical indexes and substantially the same density, and an electrode arranged on a second surface of said wall, wherein the drop is centered in a truncated cone centered on an axis perpendicular to the first
15 surface, the bottom of which is pierced with a centered hole, and the insulating material wall is transparent and covers said hole.

The foregoing objects, features and advantages of the present invention, will be discussed in detail in
20 the following non-limiting description of specific embodiments in connection with the accompanying drawings.

Fig. 1, previously described, shows a side cross-section view of a drop-centering means according to prior art;

25 Fig. 2 shows a side cross-section view of a liquid drop laid on a planar surface;

Figs. 3 to 7 are side cross-section views of a liquid drop placed in a flared hollow of a surface;

30 Figs. 8 to 10 are side cross-section views of a liquid drop located at one end of a drop-grasping rod;

Fig. 11 shows a side cross-section view of an application of the present invention to the centering of a transparent liquid drop used as a lens; and

4a

Fig. 12 shows a side cross-section view of an alternative of Fig. 11.

Same elements have been designated with same references in the following drawings. In particular, reference 2 will designate a liquid drop of small dimensions, having its position on a surface essentially defined by the capillarity forces (the surface tension). Reference 4 will designate a surface, the wettability of which is constant with respect to the liquid of drop 2.

Fig. 2 shows a planar surface 4 cut by an axis 0 perpendicular to this surface. If a liquid drop is desired to be placed at a position A centered on axis 0, for example, by being deposited from a drop-grasping rod, the chances of achieving this with precision are small, the drop remaining where it has been laid, for example, at a position B.

As illustrated in Fig. 3, to solve the problem of the centering of a drop 2 with respect to an axis 0, the present inventor has first thought of placing drop 2 in a hollow formed in surface 4, this hollow having the shape of a spherical cap symmetrical with respect to axis 0. However, any position of drop 2 in hollow 6 has appeared to be a stable position. Thus, as in the case of a planar surface 4, if drop 2 is desired to be placed at a position A centered on axis 0, the chances of achieving this with precision are small since the drop will remain where it has been laid, for example, at a position B.

First, the present inventor has thus abandoned the idea of centering a drop by means of a hollow. Thus, the French patent application published under number 2769375 deposited by the present applicant describes a variable-focus liquid lens formed by a liquid drop laid at the surface of a solid, centered on an axis by the

4b

means described in relation with Fig. 1. This application further describes electromagnetic means for deforming the drop while maintaining it centered on the axis.

On the other hand, this patent application
5 describes a variable-focus liquid lens formed by a liquid drop contained in a tube and maintained centered on the tube axis by capillarity. There thus appears that a drop 2 can be centered on an axis 0 by being placed in a cylindrical hollow of surface 4, centered on this axis.
10 However, it is difficult to place a liquid drop in

such a cylindrical hollow while avoiding for a bubble to remain at the drop basis.

The present inventor has then systematically searched which type of hollow centered on an axis 0 enables easy centering
5 of a liquid drop on this axis.

Figs. 4 to 7 each represent a side cross-section view of a liquid drop 2 placed in a flared hollow 6 centered on an axis 0 and formed in a surface 4. For a position A of drop 2, centered on axis 0, CP1 designates any point of the contact limit
10 between drop 2 and the surface of hollow 6. The circle having its center located on axis 0, and which is tangent to the surface of the hollow both at point CP1 and at a symmetrical point CP2, is called the tangent circle TC.

Fig. 4 represents a liquid drop 2 placed in a hollow 6
15 formed by the revolution around axis 0 of an arc of a circle having a radius smaller than that of previous circle TC. Thus, at any point CP1 of the contact limit between the hollow surface and the drop, the surface curvature of the hollow is greater than that of circle TC.

Fig. 5 shows a liquid drop 2 placed in a hollow 6
20 formed by revolution of a segment around axis 0. Hollow 6 is a truncated cone. Thus, at any point CP1 of the contact limit with the drop, the surface curvature of hollow 6 is null, smaller than that of tangent circle TC.

Fig. 6 shows a liquid drop 2 placed in a hollow 6
25 formed by revolution around axis 0 of an arc of a circle greater than that of previous circle TC. Thus, at any point CP1 of the contact limit with the drop, the surface curvature of the hollow is smaller than that of tangent circle TC.

Fig. 7 shows a liquid drop 2 placed in a hollow 6
30 formed by revolution around axis 0 of an arc of a circle having a curvature opposite to that of tangent circle TC. Hollow 6 corresponds to the central upper portion of a torus. At any point CP1 of the contact limit with the drop, the surface curvature of
35 hollow 6 is opposite to that of tangent circle TC.

The present inventor has shown that, for a drop 2 placed in a flared hollow 6 centered on an axis O, the surface curvature of hollow 6 at any point CP1 of the contact limit with the drop determines whether a position A of the drop centered on axis O is a position of equilibrium or not.

Thus, when, as in Figs. 5, 6, and 7, the curvature at any point CP1 is smaller than or inverse to that of tangent circle TC, a drop placed in such a hollow naturally takes a position A centered on axis O.

On the other hand, when, as in Fig. 4, the curvature at any point CP1 is greater than that of tangent circle TC, a position A of the drop, centered on axis O, is particularly unstable and will not be able to be maintained. A drop placed in such a hollow naturally takes an out-of-center position B with respect to axis O.

Finally, when, as in Fig. 3, the curvature at any point CP1 is equal to that of tangent circle TC, any position of the drop is stable, and a drop placed in such a hollow at a position B brought out of center will keep this position.

Thus, the present invention provides a method for centering a drop at a given location of a surface consisting of forming at this location a flared hollow such that, at any point CP1 of the contact limit with the drop, this hollow has a curvature smaller than or opposite to that of tangent circle TC.

It should be noted that only the contact limit between the drop and the hollow surface counts. The shape of the hollow has no importance and it may be flat, convex, or concave.

According to another aspect of the present invention, a convex surface of uniform wettability centered on an axis O is considered, on which is laid a liquid drop, in a position A centered on axis O. The previously-described point CP1 and tangent circle TC are considered again.

Figs. 8 to 10 are side cross-section views of a liquid drop 14 placed on a convex surface 16 centered on an axis O.

Fig. 8 shows the case where the convex surface is spherical. The surface of sphere 16 at any point CP1 of the contact limit with drop 14 is always confounded with tangent circle TC.

5 In the case of Fig. 9, the convex surface is conical. The "curvature" of conical surface 16 at any point CP1 of the contact limit with drop 14 is always smaller than that of tangent circle TC.

10 In the case of Fig. 10, the convex surface is formed by revolution around axis O of an arc of a circle having a radius smaller than that of tangent circle TC. The surface curvature at any point CP1 of the contact limit with drop 14 is always greater than that of tangent circle TC.

15 The present inventor has shown that, for a drop 14 placed on a convex surface 16 centered on an axis O, the curvature at any point CP1 of the contact limit with the drop determines whether a position A of the drop, centered on axis O, is a position of equilibrium or not.

20 Thus, when, as in Fig. 10, the curvature at any point CP1 is greater than that of tangent circle TC, a drop placed on such a surface naturally takes a position A centered on axis O.

25 However, as in Fig. 9, the curvature at any point CP1 is smaller than that of tangent circle TC, a position A of the drop, centered on axis O, is unstable. A drop placed on such a surface naturally takes a position B brought out of center with respect to axis O.

30 Finally, when, as in Fig. 8, the curvature at any point CP1 is equal to that of tangent circle TC, any position of the drop is stable, and a drop placed at an out-of-center position B will keep this position.

Thus, the present invention provides a method for centering a drop on a convex surface which consists, at any point CP1 of the contact limit with the drop, of giving the surface a curvature greater than that of tangent circle TC.

According to an application of this method, convex surface 16 forms the end of a rod 18 for grasping a drop 14. Indeed, for certain chemical or biological handling operations, it is desirable to have drop-grasping rods which enable precisely and reliably handling liquid drops. A drop-grasping rod, the end of which is formed according to the present invention, enables conveying definitely centered drops.

An application of the present invention to the forming of a means for centering a liquid drop used as an optical lens will now be described.

Fig. 11 shows a simplified cross-section view of such a variable-focus liquid lens, formed in a dielectric enclosure 4 filled with a conductive liquid 8. Dielectric enclosure 4 naturally has a low wettability with respect to conductive liquid 8. A lower surface of a wall of enclosure 4 includes a hollow 6, centered around an axis 0 perpendicular to this wall. Hollow 6 is a truncated cone according to the present invention, such as that shown in Fig. 5. A drop of an insulating liquid 2 is placed in hollow 6. As seen previously, insulating liquid drop 2 naturally takes a position A centered on axis 0. Insulating liquid 2 and conductive liquid 8 are both transparent, non-miscible, they have different optical indexes and have substantially the same density. The dioptre formed between liquids 8 and 2 forms a surface of a liquid lens, the optical axis of which is axis 0 and the other surface of which corresponds to the contact between the drop and the bottom of the hollow. An electrode 10, including a hole 11 in the vicinity of axis 0, is placed on the external surface of dielectric enclosure 4. An electrode 12 is in contact with conductive liquid 8. Electrode 12 may be immersed in liquid 8, or be a conduc-

tive deposition performed on an internal wall of enclosure 4. A voltage source (not shown) enables applying a voltage V between electrodes 10 and 12.

Voltage V may be increased from 0 volt to a maximum voltage, which depends on the used materials. When the voltage increases, insulating liquid drop 2 deforms to reach a limiting position (designated with reference B). While drop 2 deforms from its position A to its position B, the focus of the liquid lens varies.

It should be noted that, drop 2 being an insulating liquid, no microdrops occur at its periphery when voltage V is high, conversely to what would occur if the drop was a conductive liquid.

The conical shape of hollow 6 is such that, whatever the shape of drop 2 that it contains, the curvature of its surface at any contact point between the limit of the drop and the surface is smaller than that of a tangent circle TC crossing this point. Thus, according to an aspect of the present invention, hollow 6 is such that, all along its deformation from its position A to its position B, liquid drop 2 is continuously maintained centered on axis 0. A liquid lens with an accurately fixed optical axis and with a focus varying with voltage B is thus available.

It should be noted that a hollow 6 according to the present invention, which ensures the continuous centering of liquid drop 2, is relatively simple to implement and that it advantageously replaces the electromagnetic centering means or the surface processing centering means described in the above-mentioned French patent application.

An A.C. voltage will preferably be used for voltage V , to avoid the accumulation of electric loads

across the thickness of material 4, from the surface on which is laid drop 2.

As an example, water charged with salts (mineral or others) or any liquid, organic or not, which is
5 conductive or made such by addition of ionic components may be used as a conductive liquid 8. For insulating liquid 2, oil, alkane or a mixture of alkanes, possibly halogenated, or any other insulating liquid non miscible with conductive liquid 8 may be used. Dielectric wall 4
10 may be a glass plate or a superposition of fluorinated polymer, epoxy resin, polyethylene. Electrode 10 may be a metal deposition.

Fig. 12 shows a simplified cross-section view of an alternative embodiment of the variable-focus liquid
15 lens of Fig. 11. Same references designate same elements in Figs. 11 and 12. In this embodiment, electrode 10 may be a metal sheet in which hollow 6 is formed by embossing. It may also be a metal wall in which hollow 6 has been formed by machining, then polishing. Wall 4 then is,
20 for example, a thin transparent plastic film flattened against electrode 10 and which covers hole 11. This plastic film may for example be flattened by thermoforming.

In the example of application of Fig. 12, drop 2 has an idle diameter of approximately 1 to 5 mm. Conductive liquid 8 and the insulating liquid of drop 2 being
25 substantially of same density, drop 2 has the shape of a spherical cap. When idle (position A), the edge of drop 2 makes an angle of approximately 45 degrees with the surface of hollow 6, if the latter is a cone having a 45-degree slope. In its limiting position (position B),
30

the edge of drop 2 makes an angle of approximately 90 degrees with the surface of enclosure 4. The described device, using as a conductive liquid 8 salt water having an optical index 1.35 and, as the insulating liquid of drop 2, oil with optical index 1.45, enable obtaining approximately 30 diopters of focus variation for an applied voltage of 250V and a dissipated electric power of a few mW. The frequency of the A.C. voltage ranges in this case between 100 and 10,000 Hz, its period being much smaller than the system response time of approximately a few hundredths of a second.

The variable-focus lens according to the present invention may have a size ranging between a few hundreds of μm and a few tens of mm and may in particular be applied to the field of optoelectronic, endoscopy, imaging and vision systems.

Of course, the present invention is likely to have various alternatives and modifications which will occur to those skilled in the art. In particular, the present description has been made in relation with hollows having a circular cross-section, that is, formed by rotation around an axis 0. However,

elongated hollows having the shape of a channel may for example be provided. In this case, Figs. 5 to 7 will be considered as describing the cross-section view of a channel, and axis 0 will represent the symmetry plane of said channel.

5 On the other hand, a hollow 6 with a flat bottom has been shown in Fig. 11, which results in a plano-convex lens. Now, it has been seen that the shape of the bottom of hollow 6 does not influence its properties of centering of drop 2. Thus, bi-convex or meniscus lenses may easily be formed by modifying the
10 curvature of the bottom of hollow 6.

On the other hand, also, an embodiment of a variable-focus lens using a conical hollow such as in Fig. 5 has been shown in Figs. 11 and 12, but the present invention will easily be adapted to a variable-focus lens using another shape of hollow
15 according to the present invention.

Finally, a device including a network formed of groups of three separately-controlled variable-focus lenses, red-, green- and blue-colored, operating for example in all or nothing, enabling letting through or stopping the light coming from a
20 single white light source may be formed, thus forming an illuminated color screen that can be very large and of low cost.

CLAIMS:

1. A method for centering a liquid drop at a given location of a surface, comprising forming at this location a flared hollow such that, at any point of the contact limit between the drop and the hollow, said hollow has a curvature smaller than or opposite to that of a circle tangent to the hollow surface at said point and at a symmetrical point of this surface.

2. The method of claim 1, wherein the flared hollow has the shape of a truncated cone with an axis perpendicular to said surface.

3. The method of claim 1, wherein the flared hollow has the shape of the upper central portion of a torus having an axis perpendicular to the surface.

4. A method for centering a liquid drop on the external surface of a convex surface, comprising giving this surface at any point of the contact limit with the drop a shape such that this surface has a curvature greater than that of a circle tangent to this surface at this point and at a symmetrical point of this surface.

5. The method of claim 4, comprising forming the convex surface by revolution against said axis of an arc of a circle having a radius smaller than that of said tangent circle.

6. A variable-focus lens, comprising a wall made of an insulating material, a drop of a first insulating liquid arranged on an area of a first surface of the wall, a second conductive liquid covering the first surface and the drop, the first and second liquids being non-miscible, having different optical indexes and

substantially the same density, and means for applying an electric voltage between the conductive liquid and an electrode arranged on the second surface of said wall, wherein the drop is placed in a flared hollow of the wall according to the method of claim 1.

7. The variable-focus lens of claim 6, wherein the electrode is a sheet metal, the flared hollow is a truncated cone formed by embossing said sheet metal, centered on an axis perpendicular to the first surface, and the bottom of which is pierced with a centered hole, and the insulating material wall is a transparent plastic film flattened against the electrode and the walls of the hollow, and which covers said hole.

8. The variable-focus lens of claim 6, wherein the electrode is a sheet metal, the flared hollow is a truncated cone formed by machining said sheet metal, centered on an axis perpendicular to the first surface, and the bottom of which is pierced with a centered hole, and the insulating material wall is a transparent plastic film flattened against the electrode and the walls of the hollow, and which covers said hole.

9. A method of varying the focal length of a lens, comprising:

providing a lens structure comprising an insulating drop on a surface, the surface having at least one sidewall, the shape of the surface being such that, at any point of the contact limit between the drop and the surface, said surface has a curvature smaller than or opposite to that of a circle tangent to the surface at said point and at a symmetrical point of the surface, for centering the drop, a conducting liquid covering the insulating drop, and an electrode; and

changing a voltage applied between the electrode and the conducting liquid to thereby change the area of the surface which the insulating liquid contacts.

10. The method of claim 9, wherein the surface has a rotational symmetry about an axis perpendicular to the surface.

11. A variable-focus lens comprising a wall made of an insulating material, a drop of an insulating liquid arranged on an area of a first surface of the wall, a conductive liquid covering the first surface and the drop, the insulating and conductive liquids being non-miscible, having different optical indexes and substantially the same density, and an electrode arranged on a second surface of said wall, wherein the drop is centered in a truncated cone centered on an axis perpendicular to the first surface, the bottom of which is pierced with a centered hole, and the insulating material wall is transparent and covers said hole.

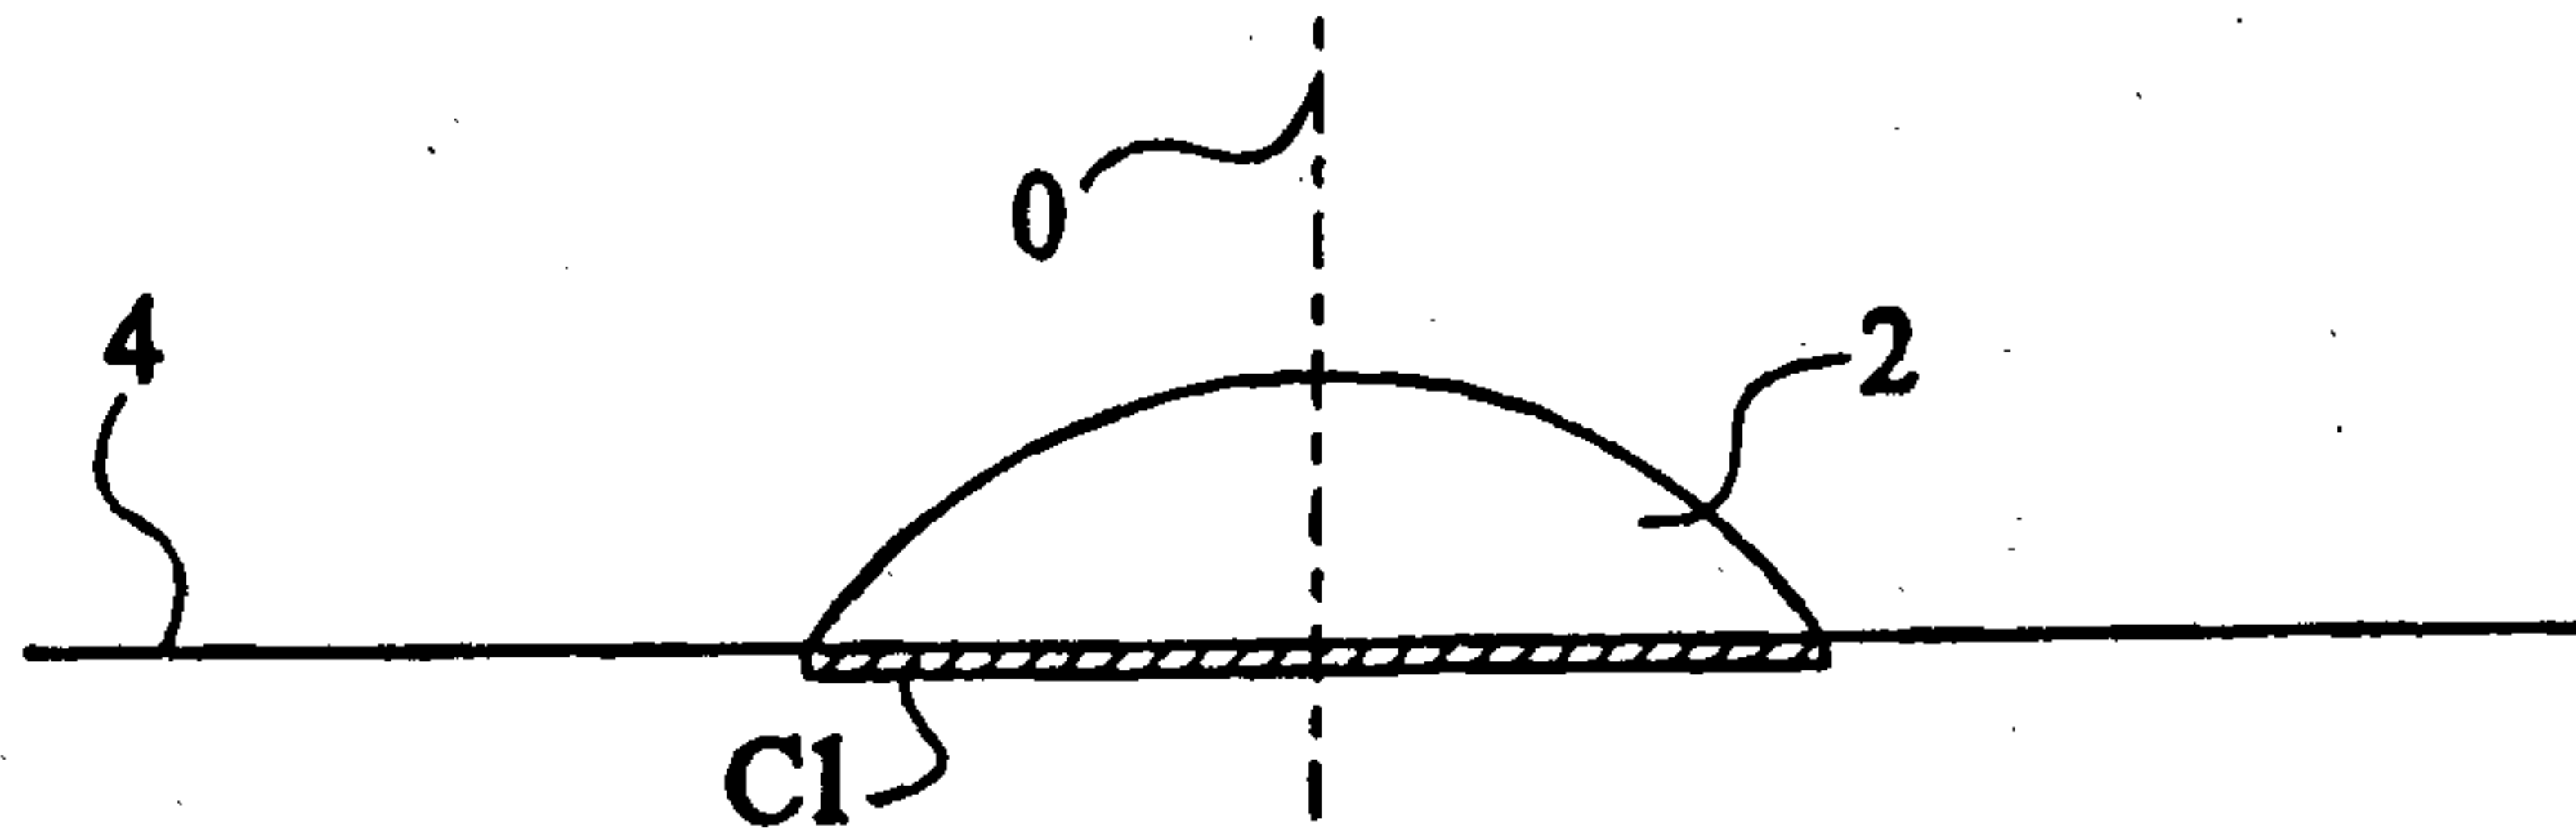


Fig 1 (Prior Art)

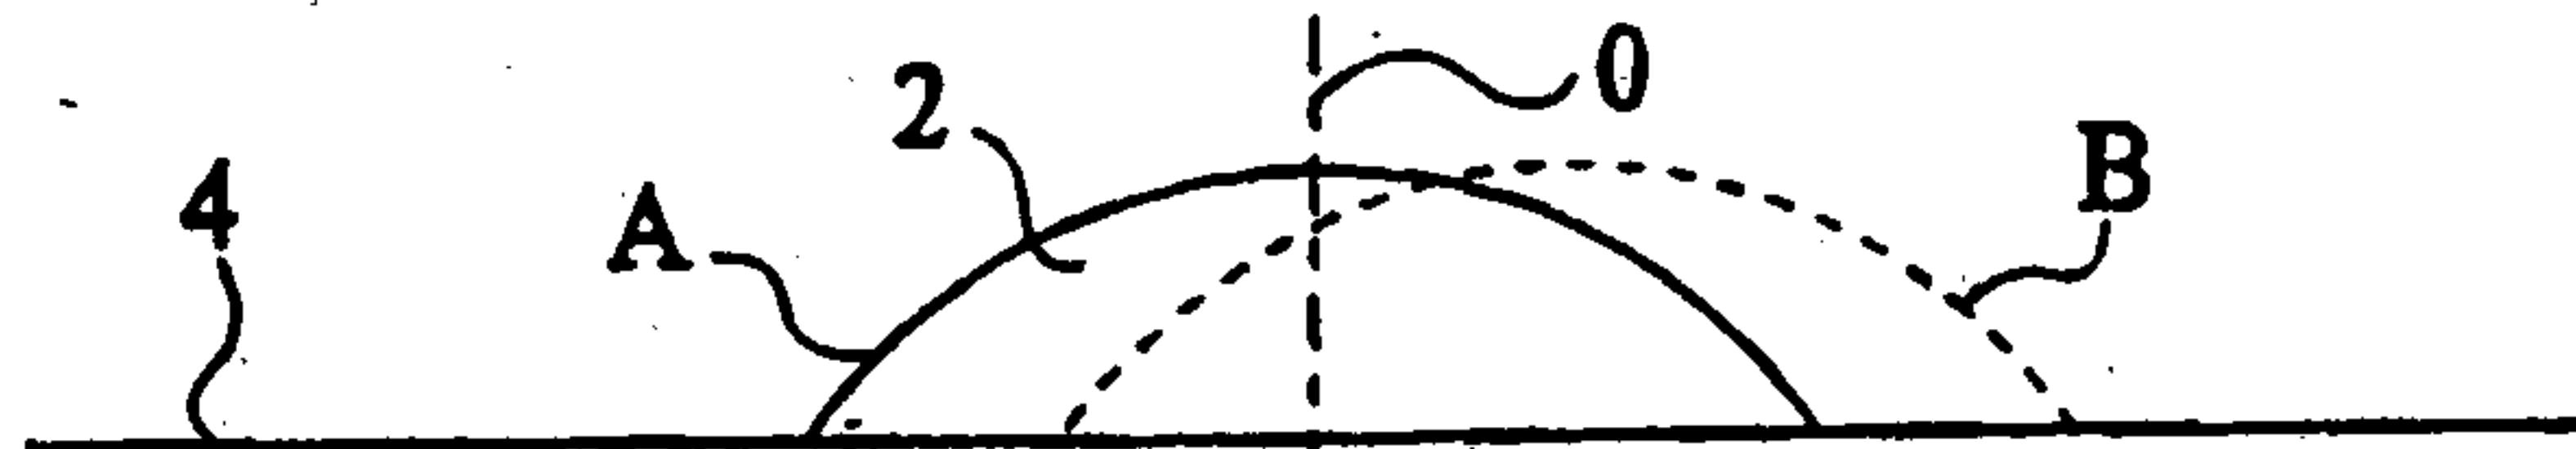


Fig 2

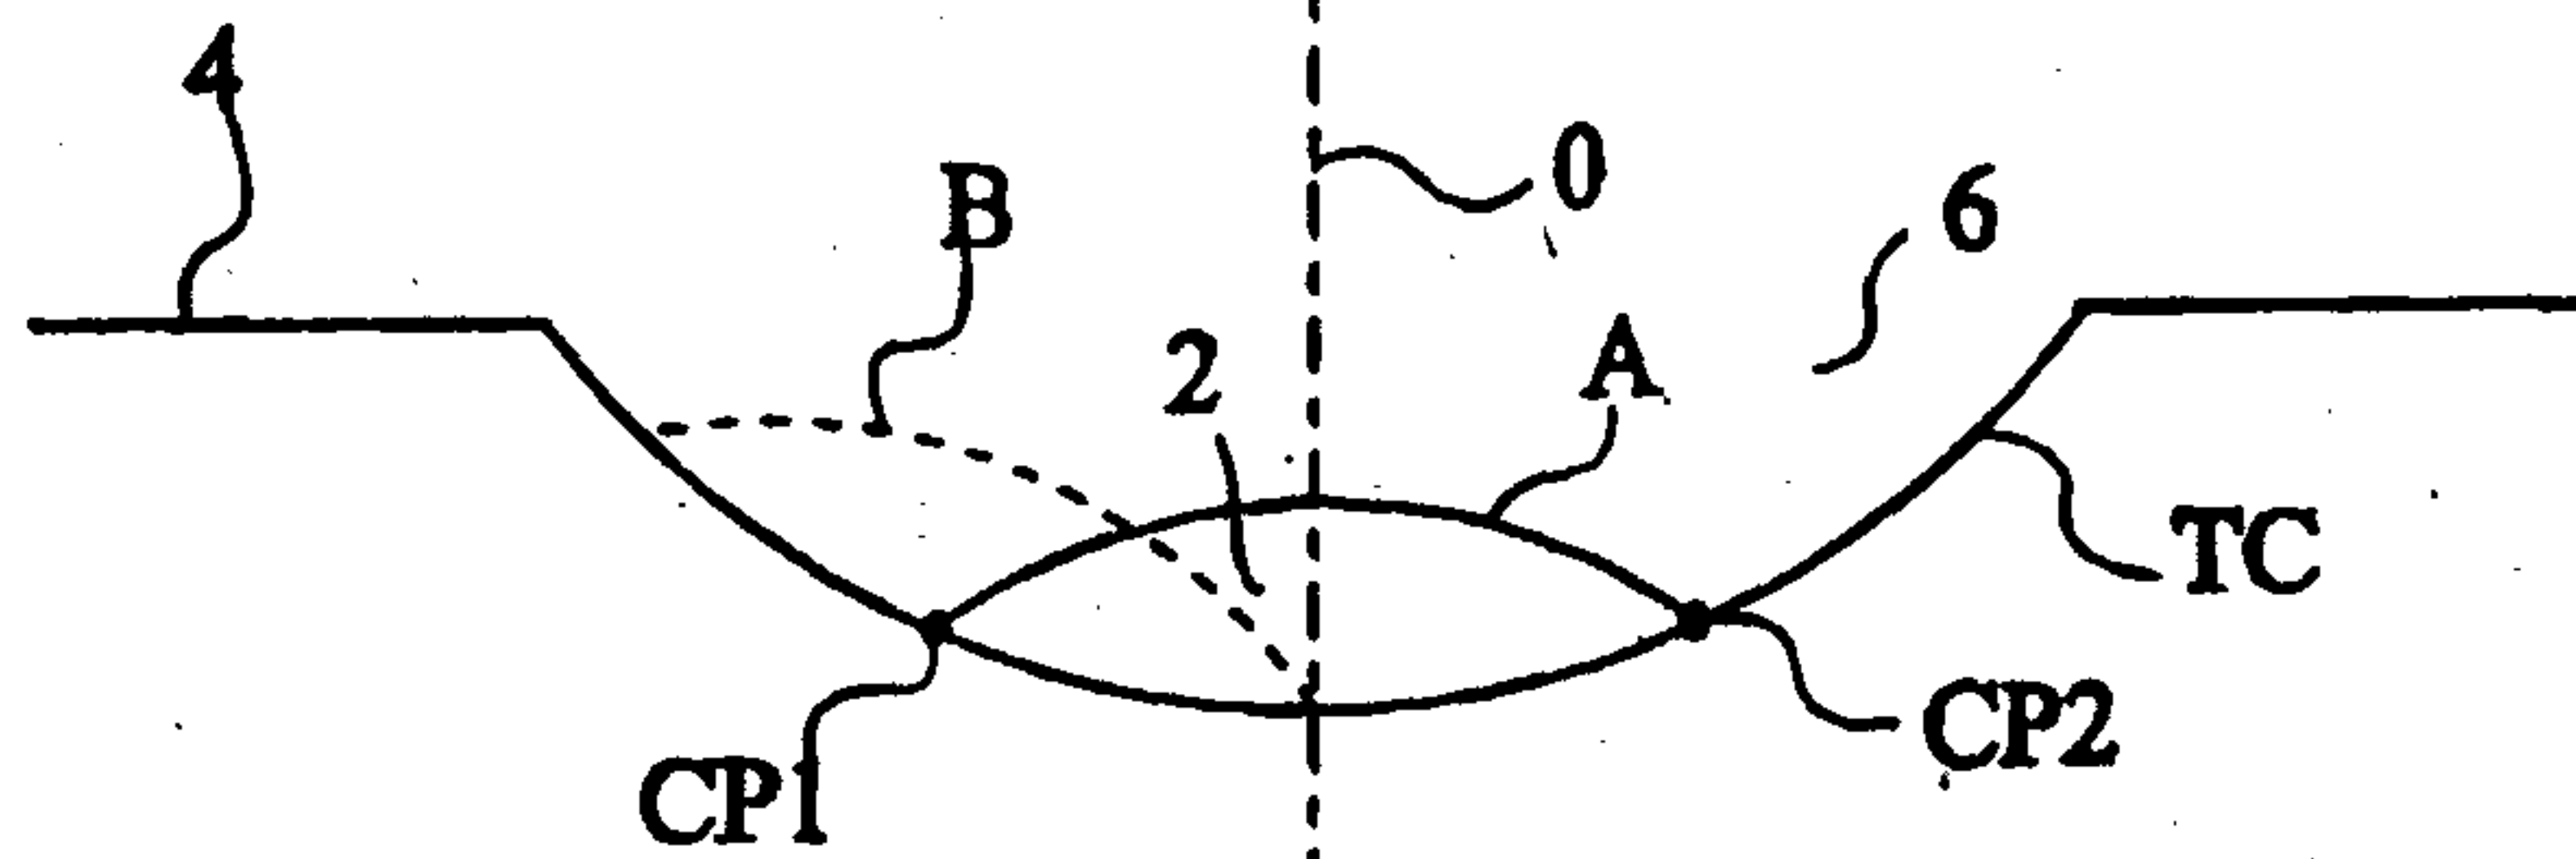


Fig 3

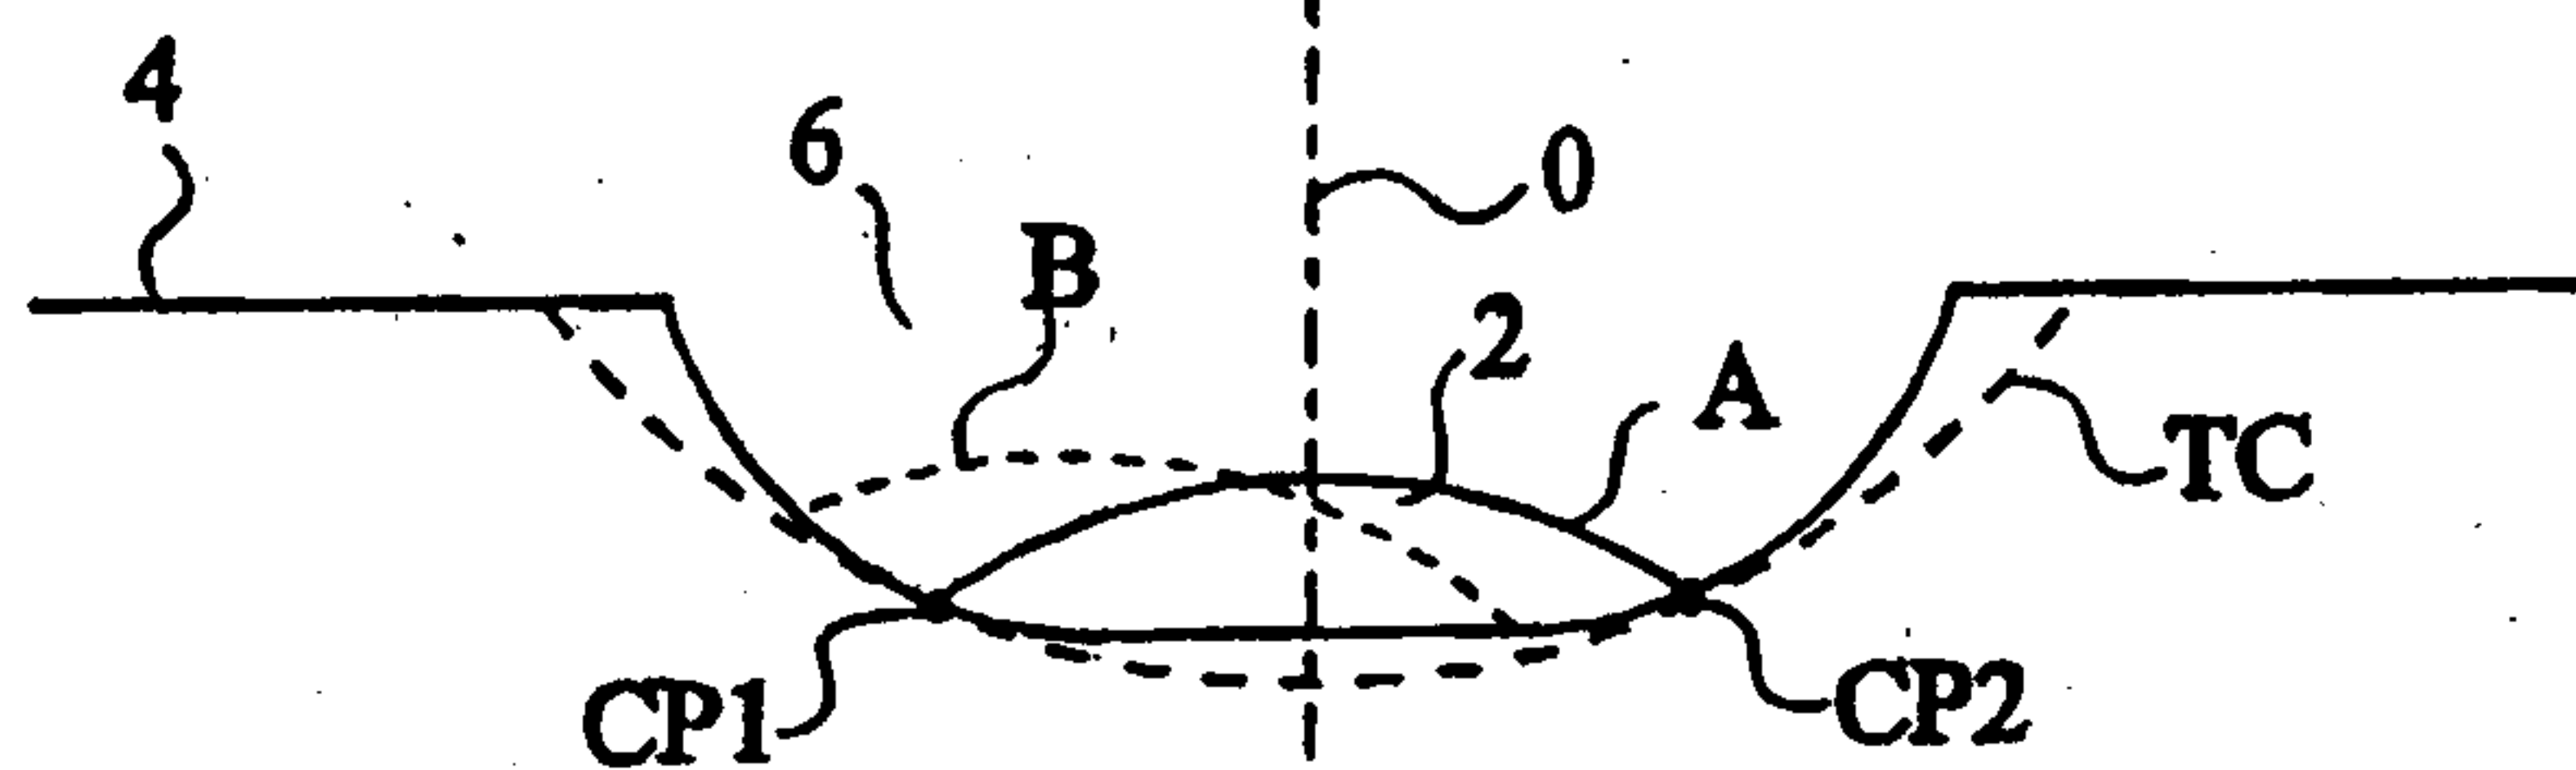


Fig 4

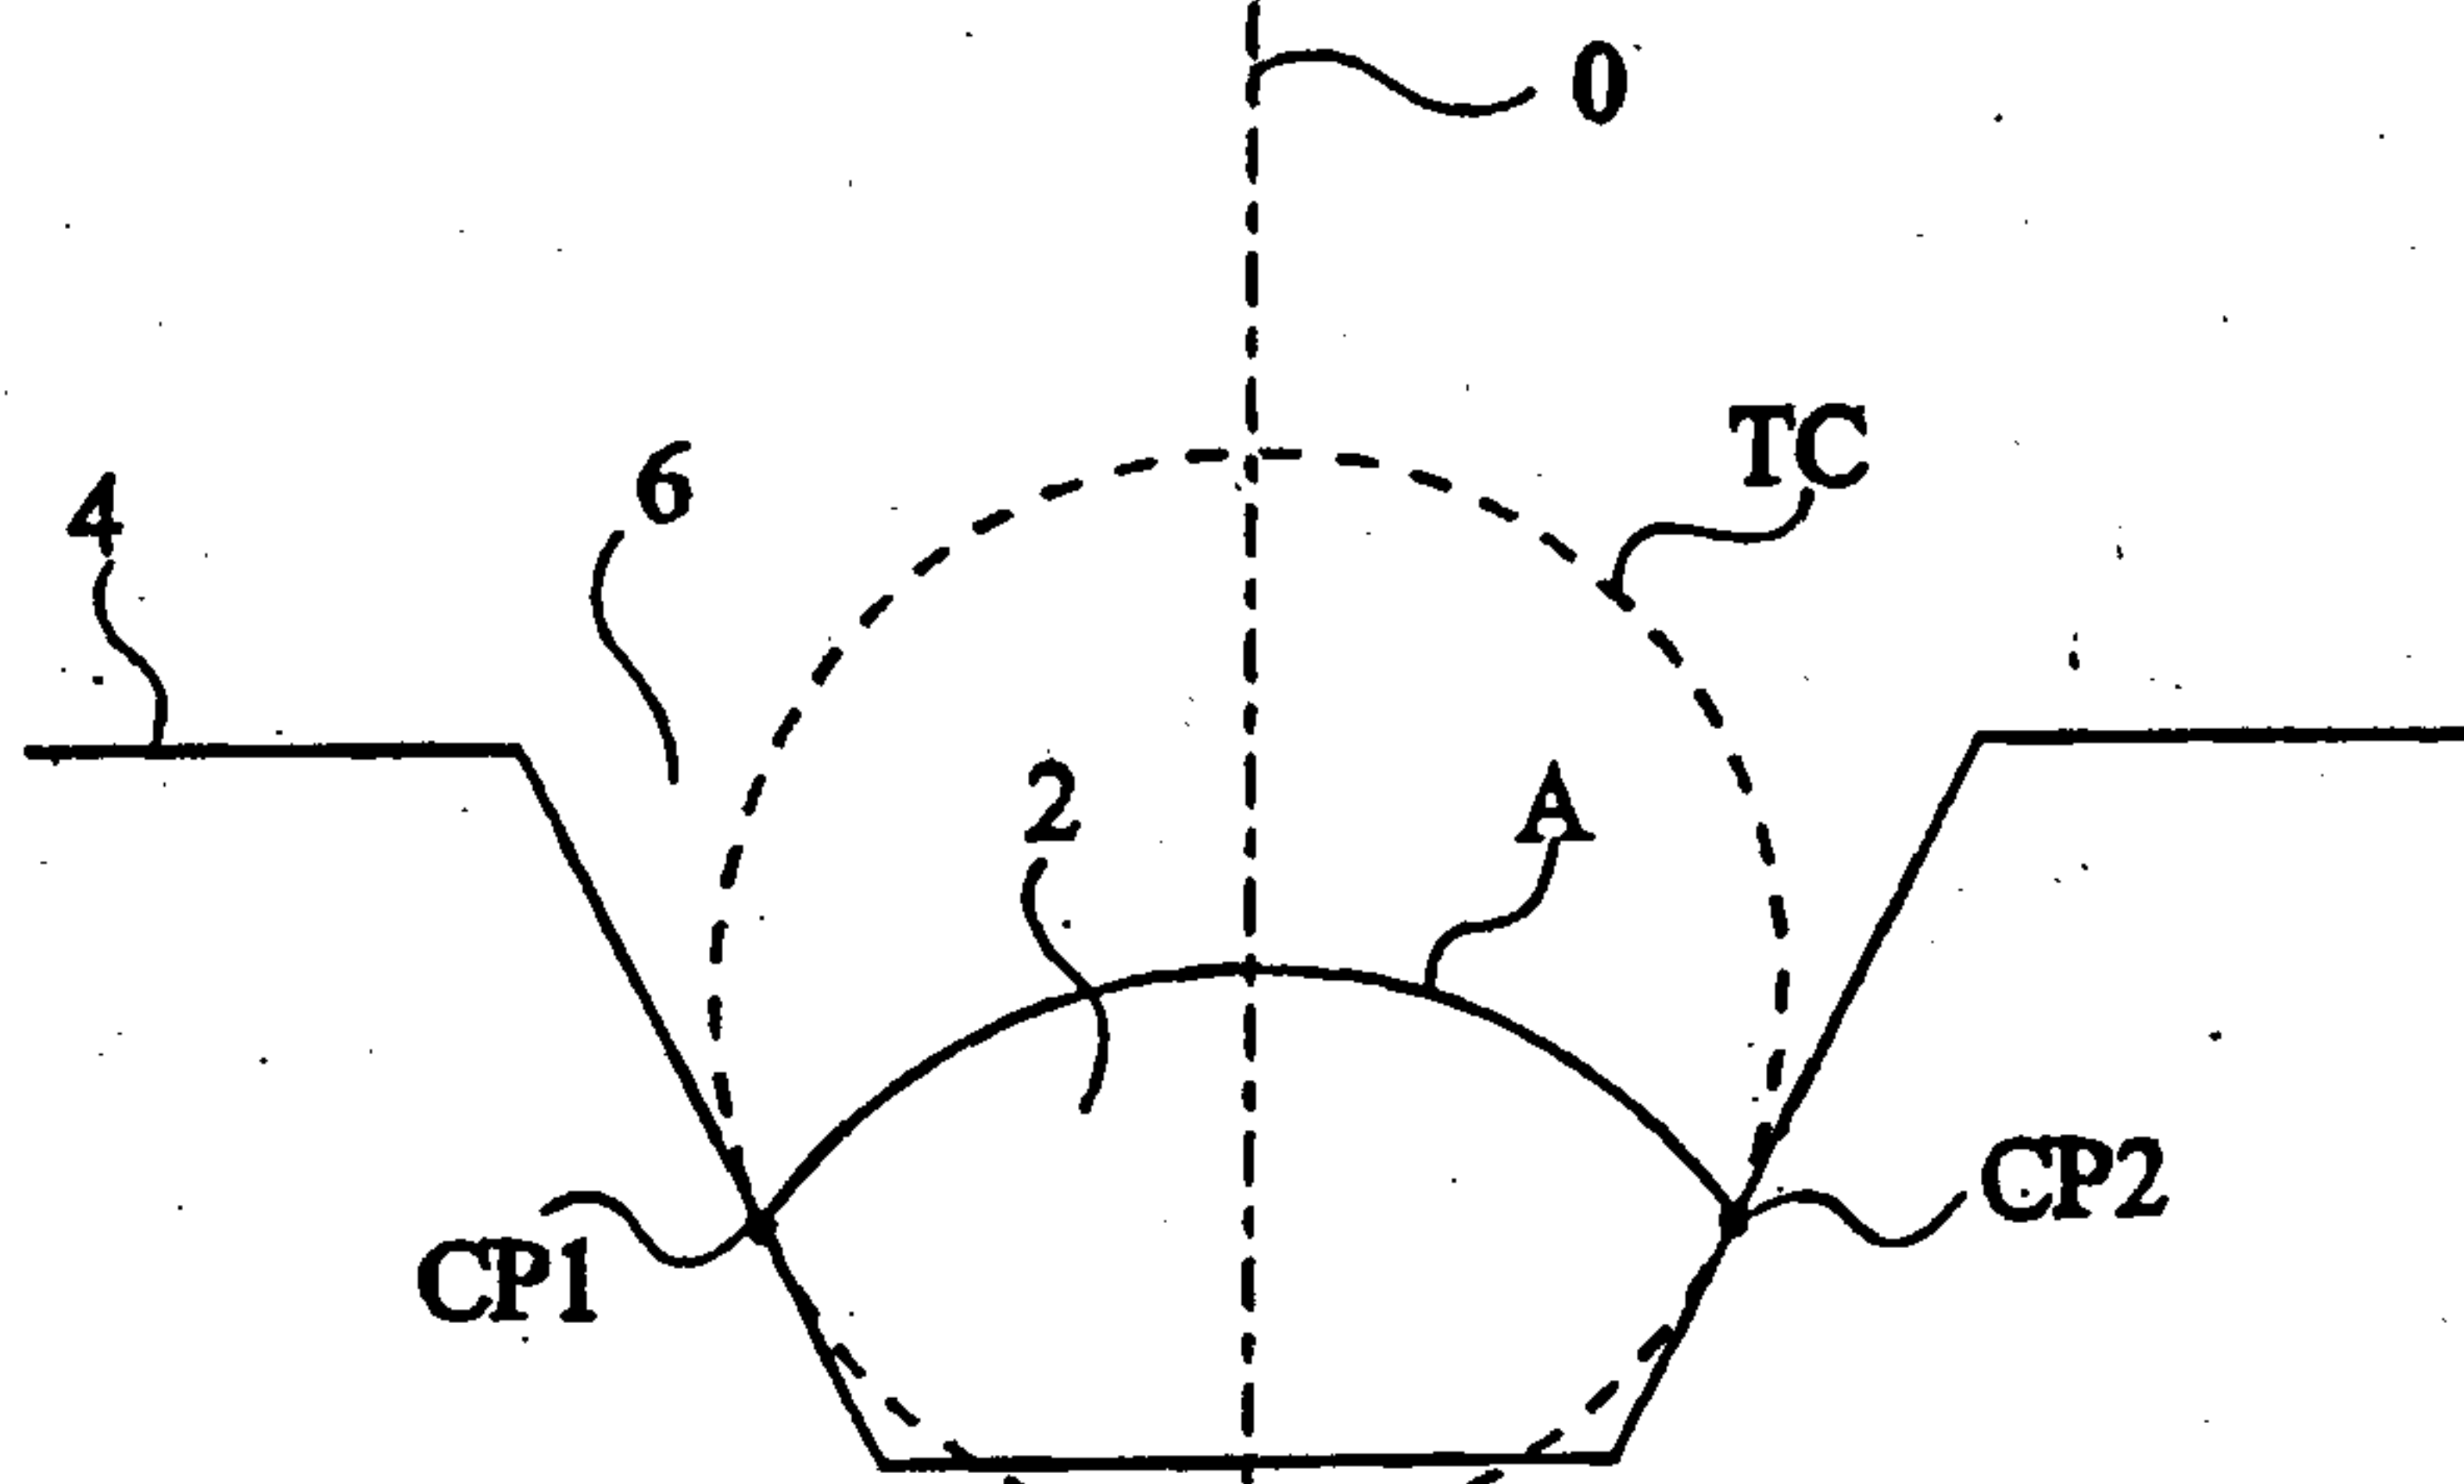


Fig 5

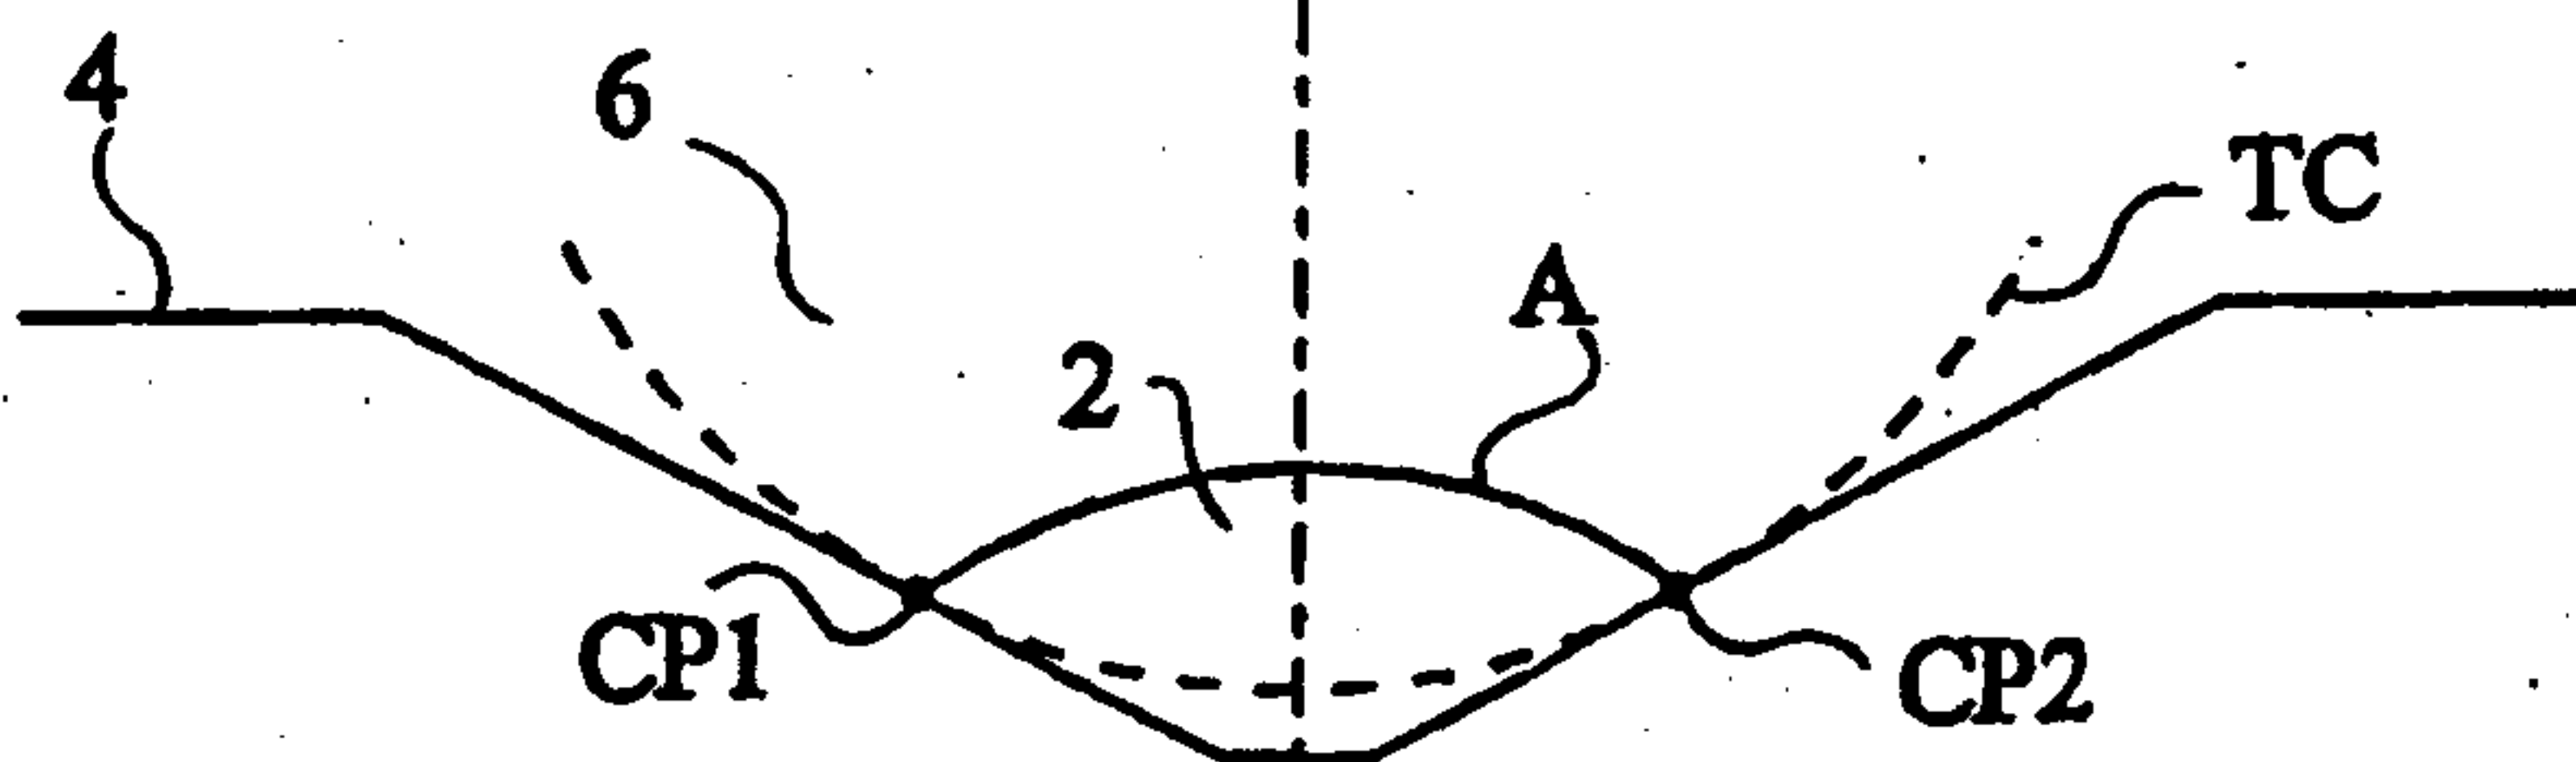


Fig 6

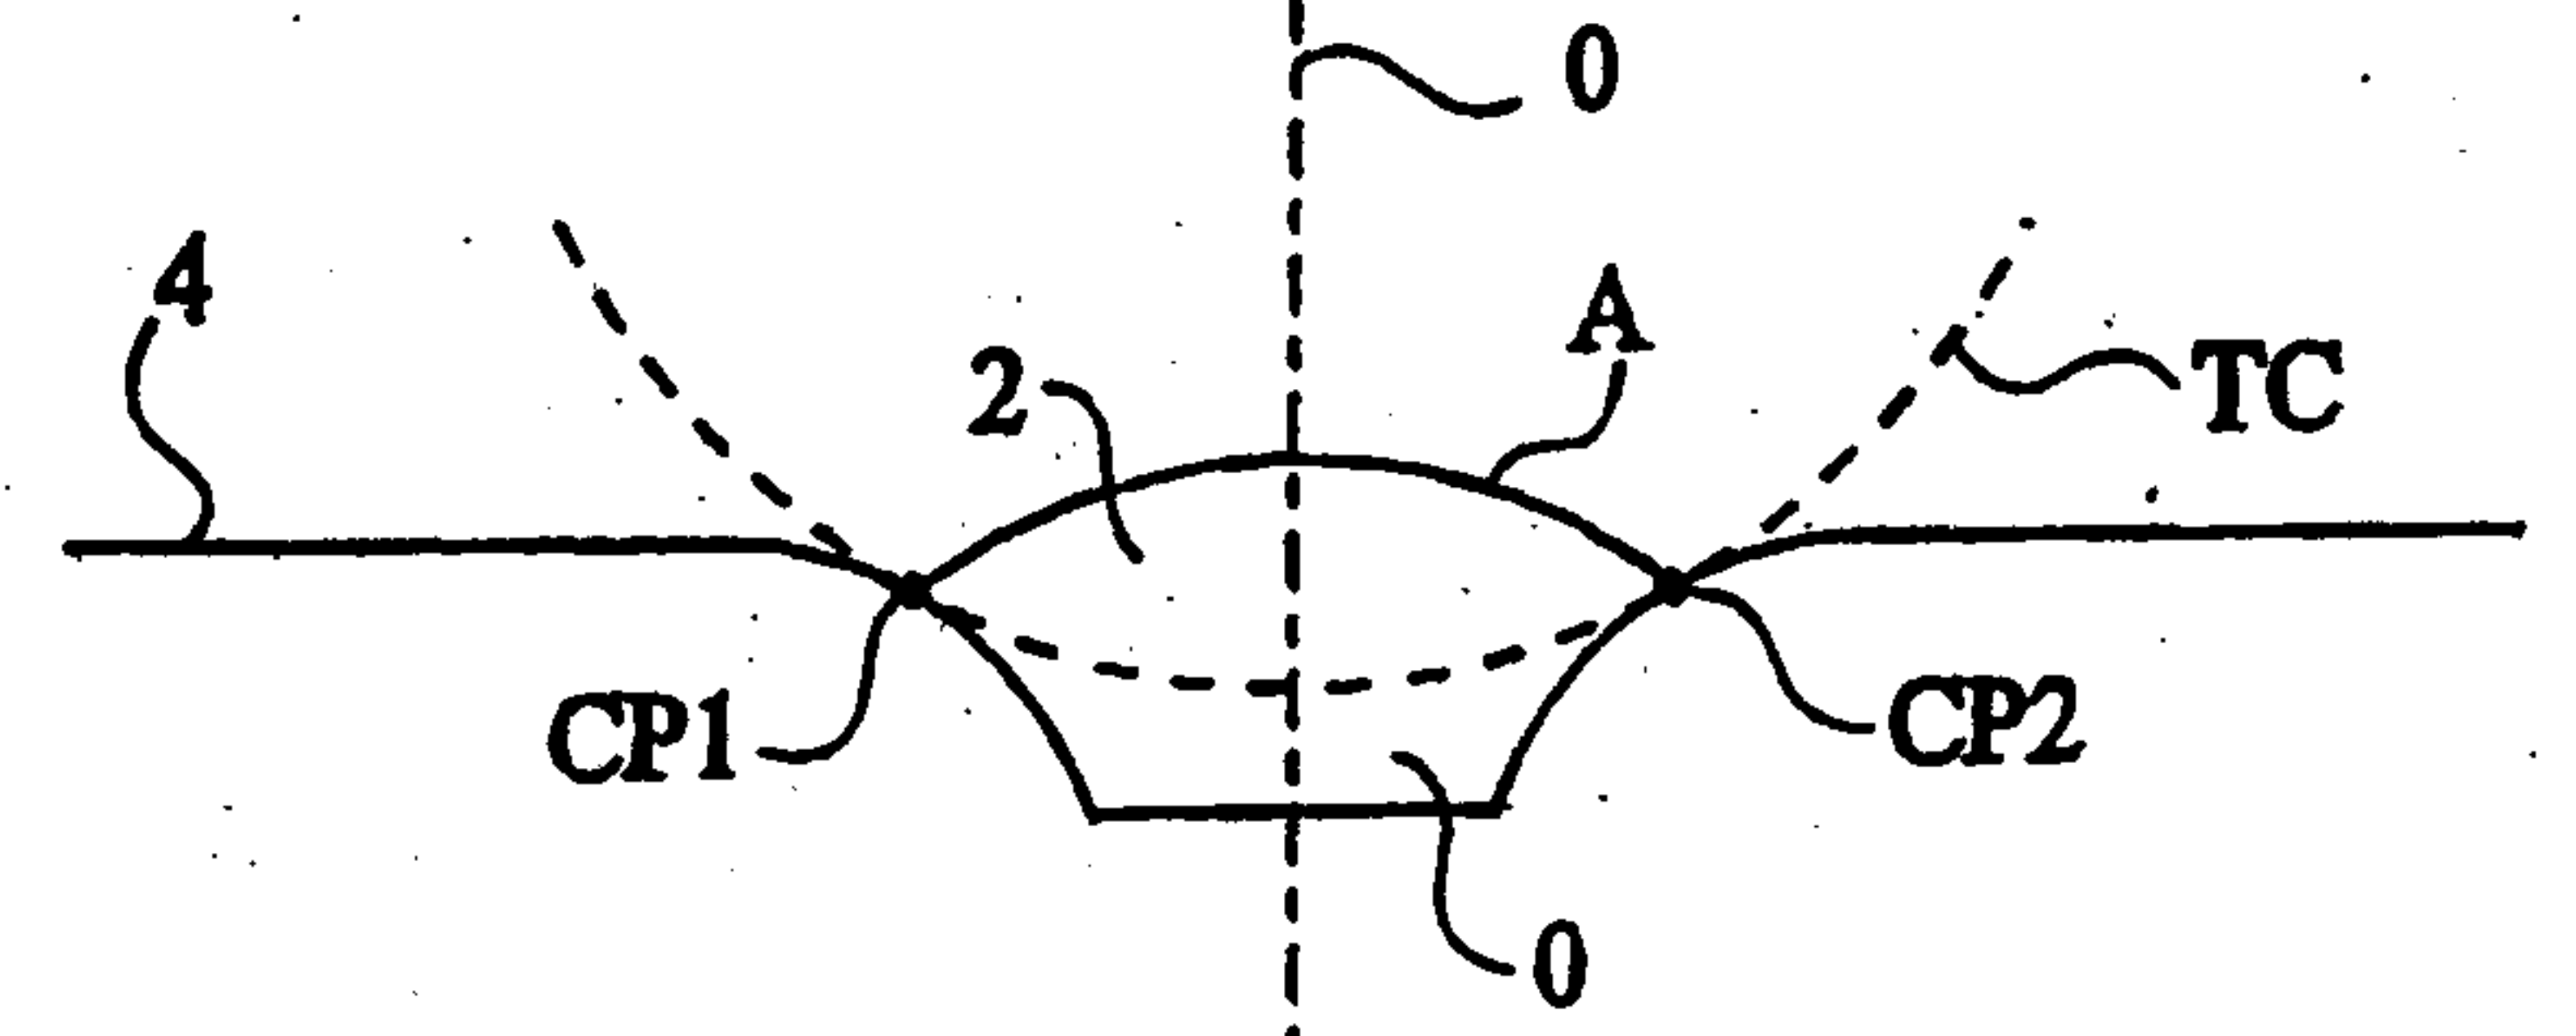


Fig 7

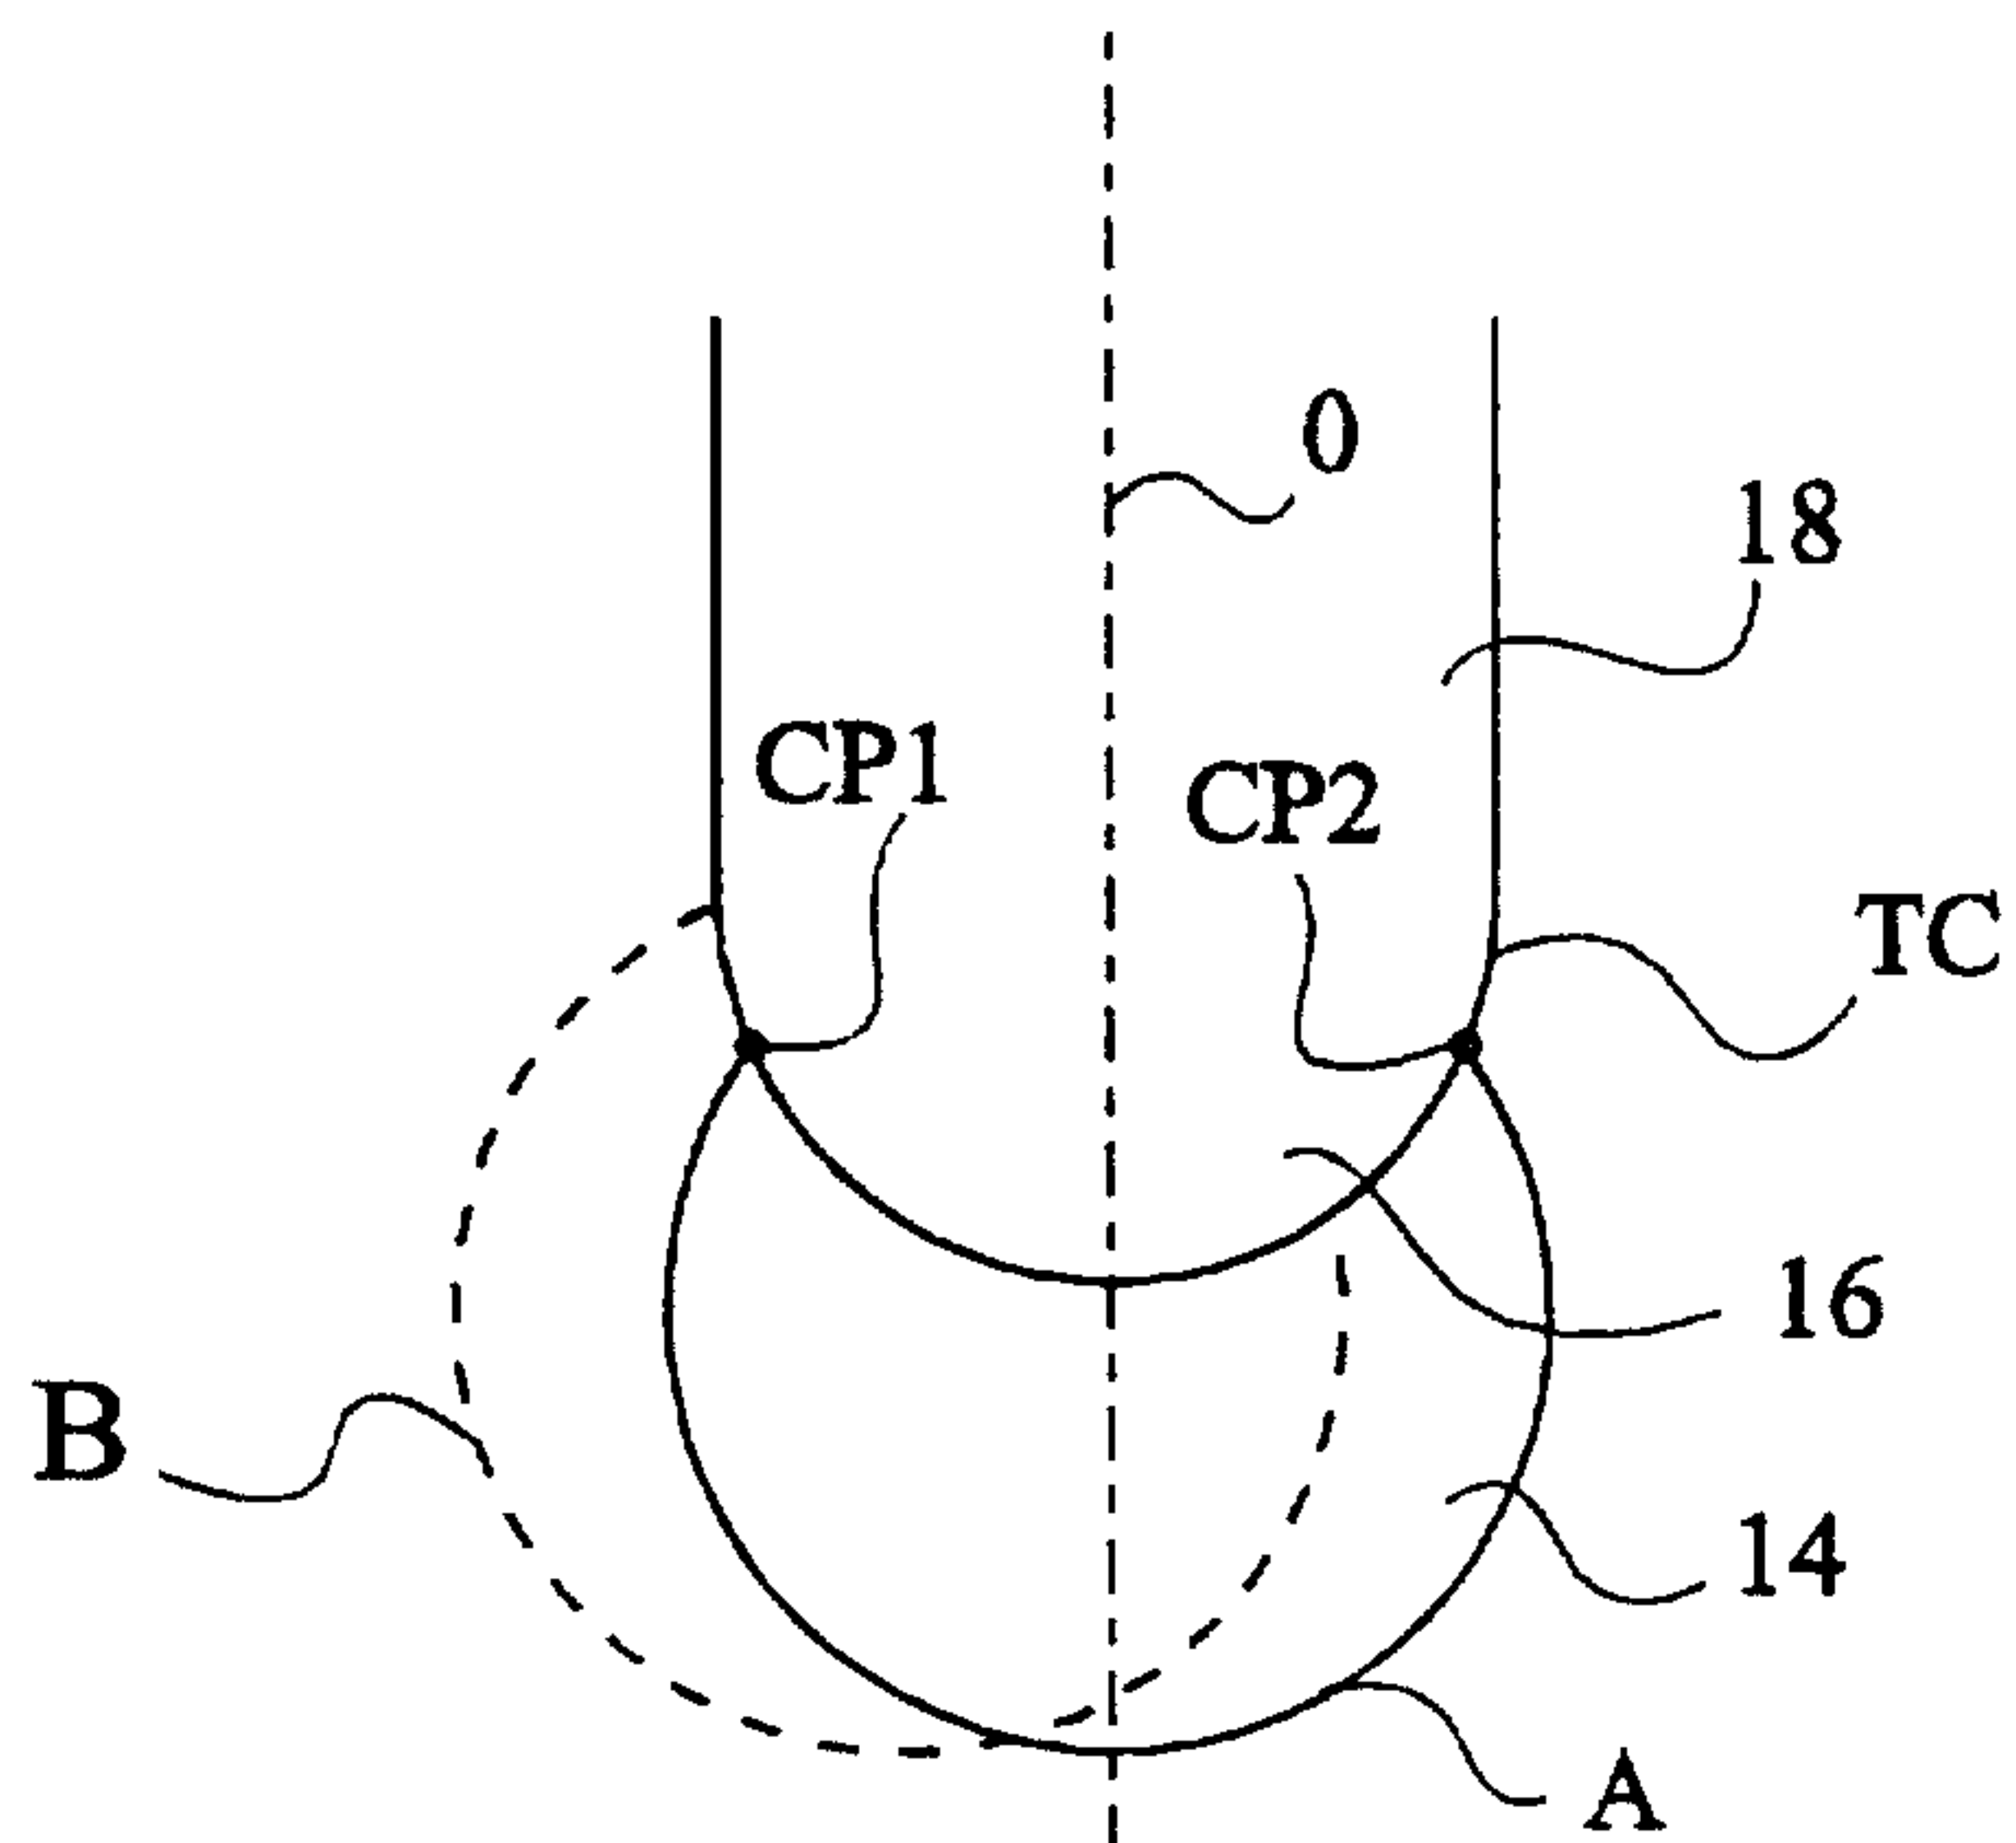


Fig 8

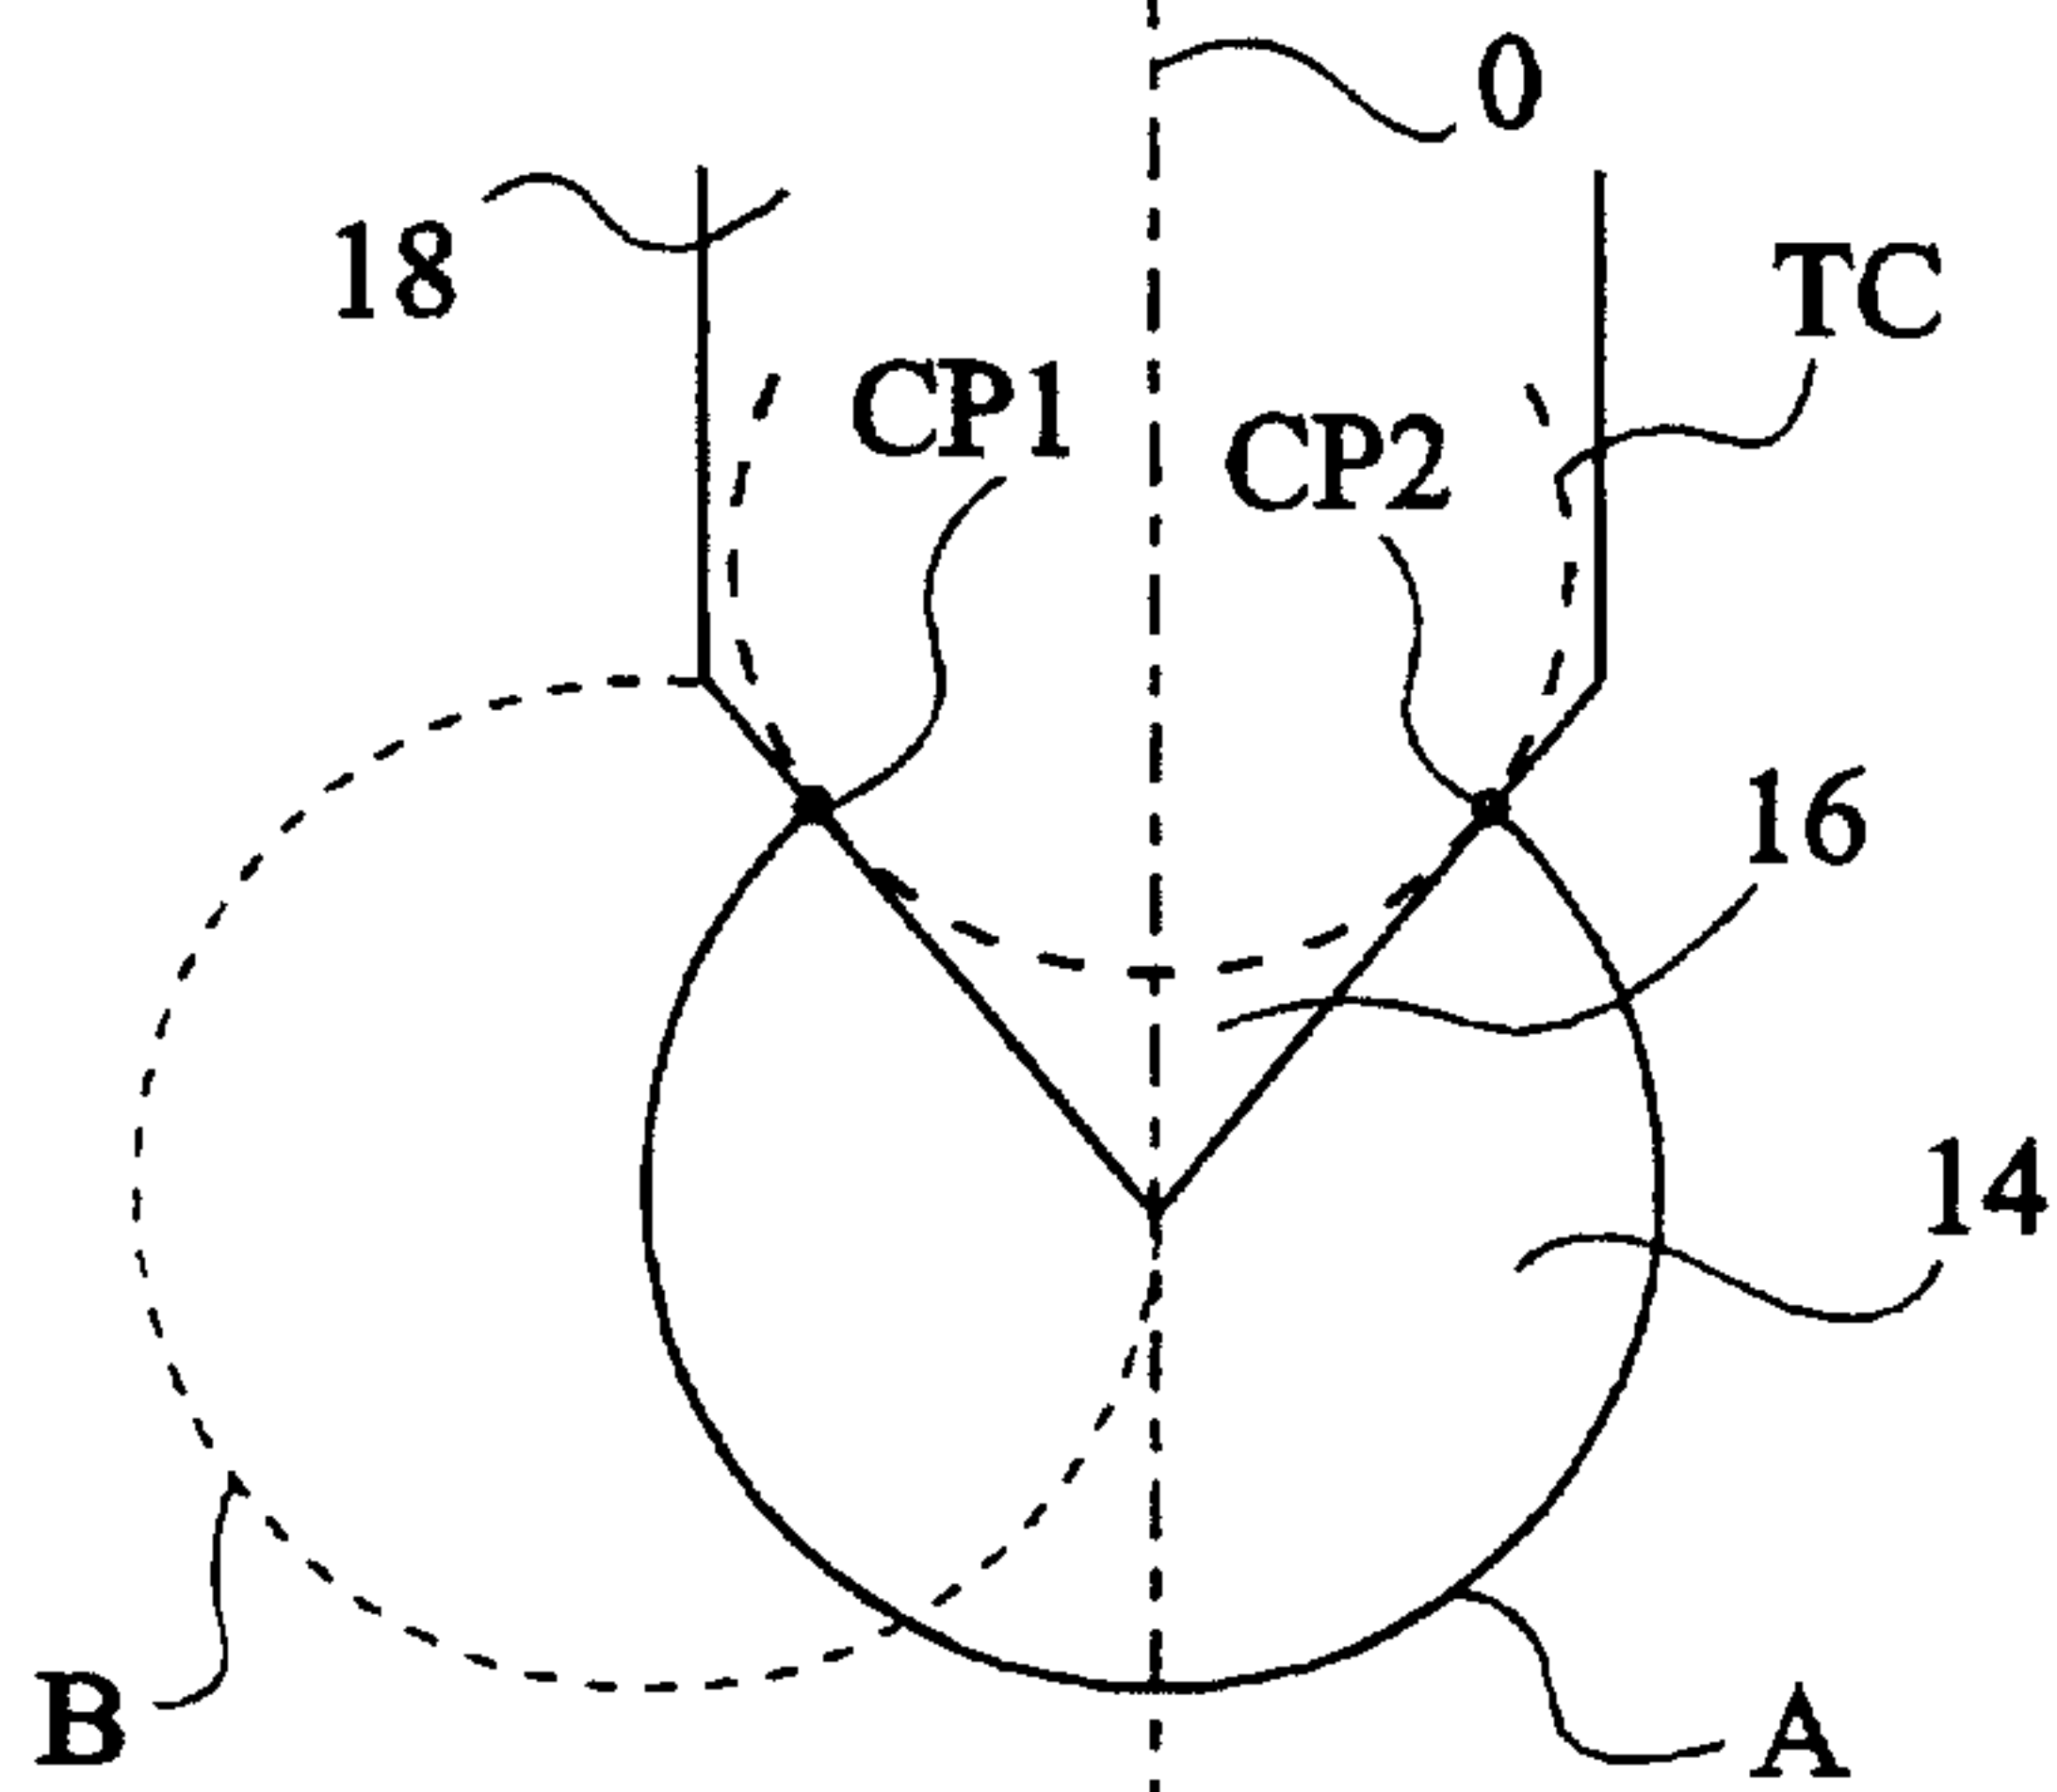


Fig 9

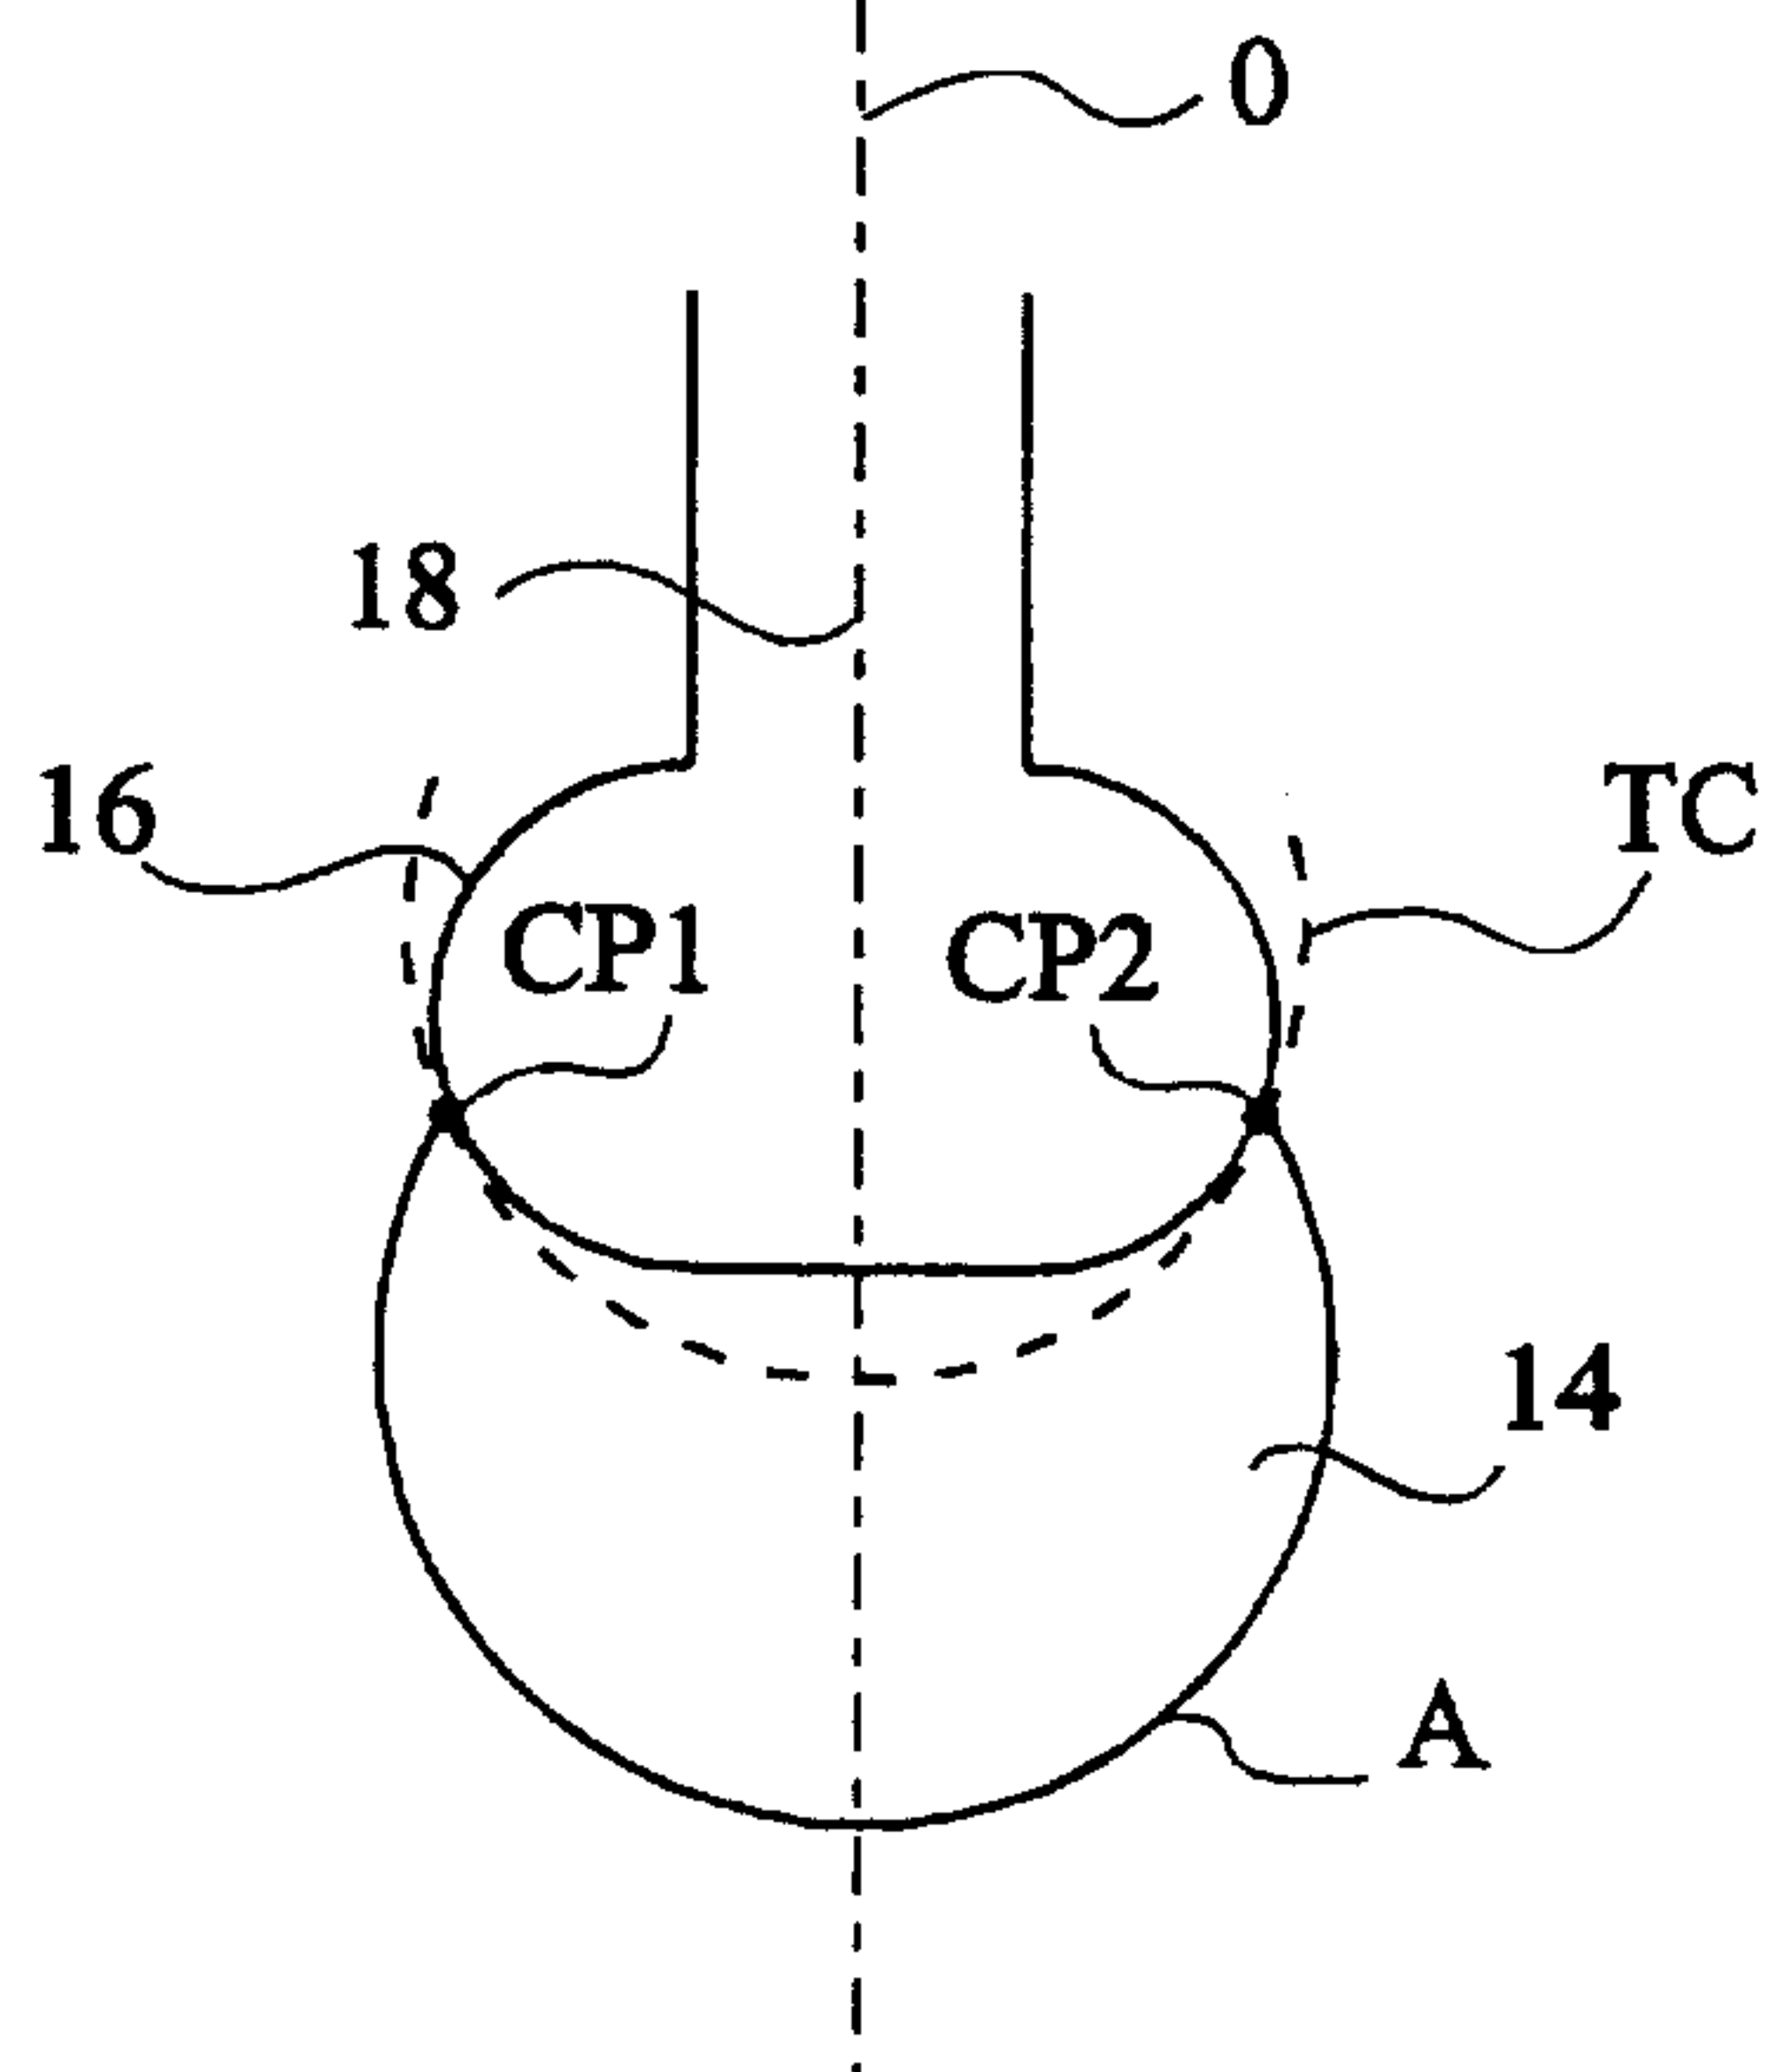


Fig 10

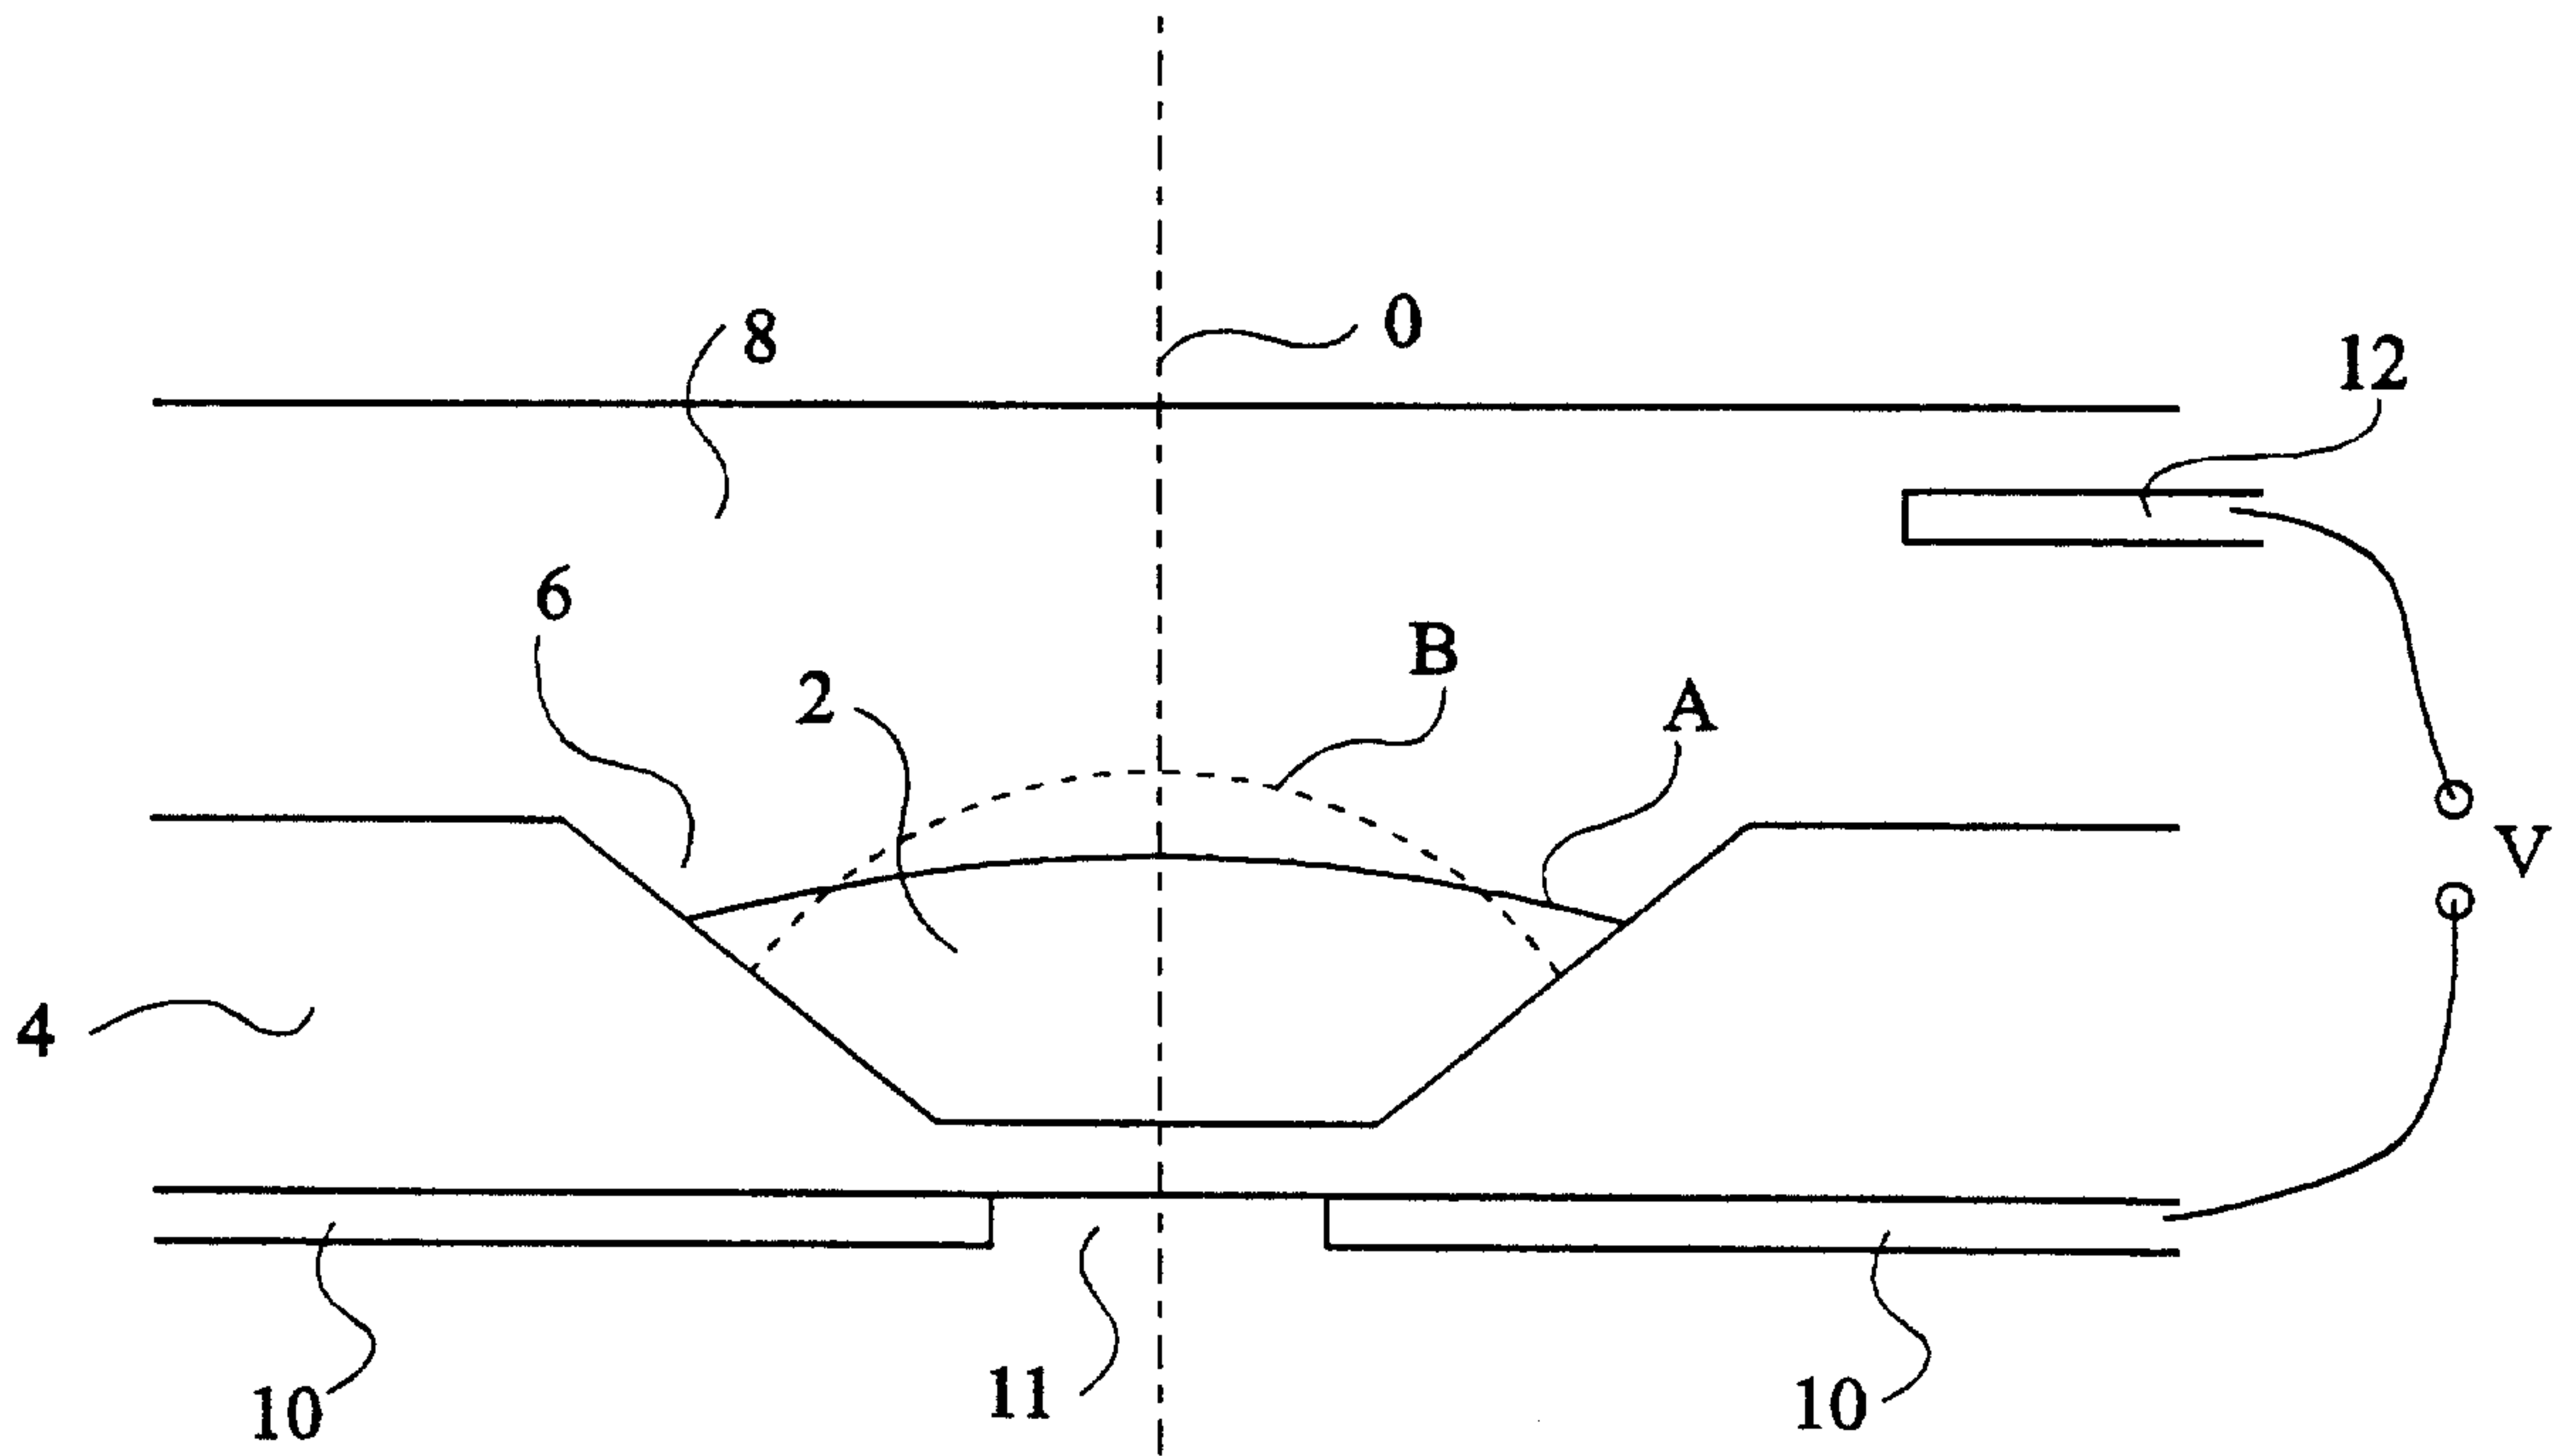


Fig 11

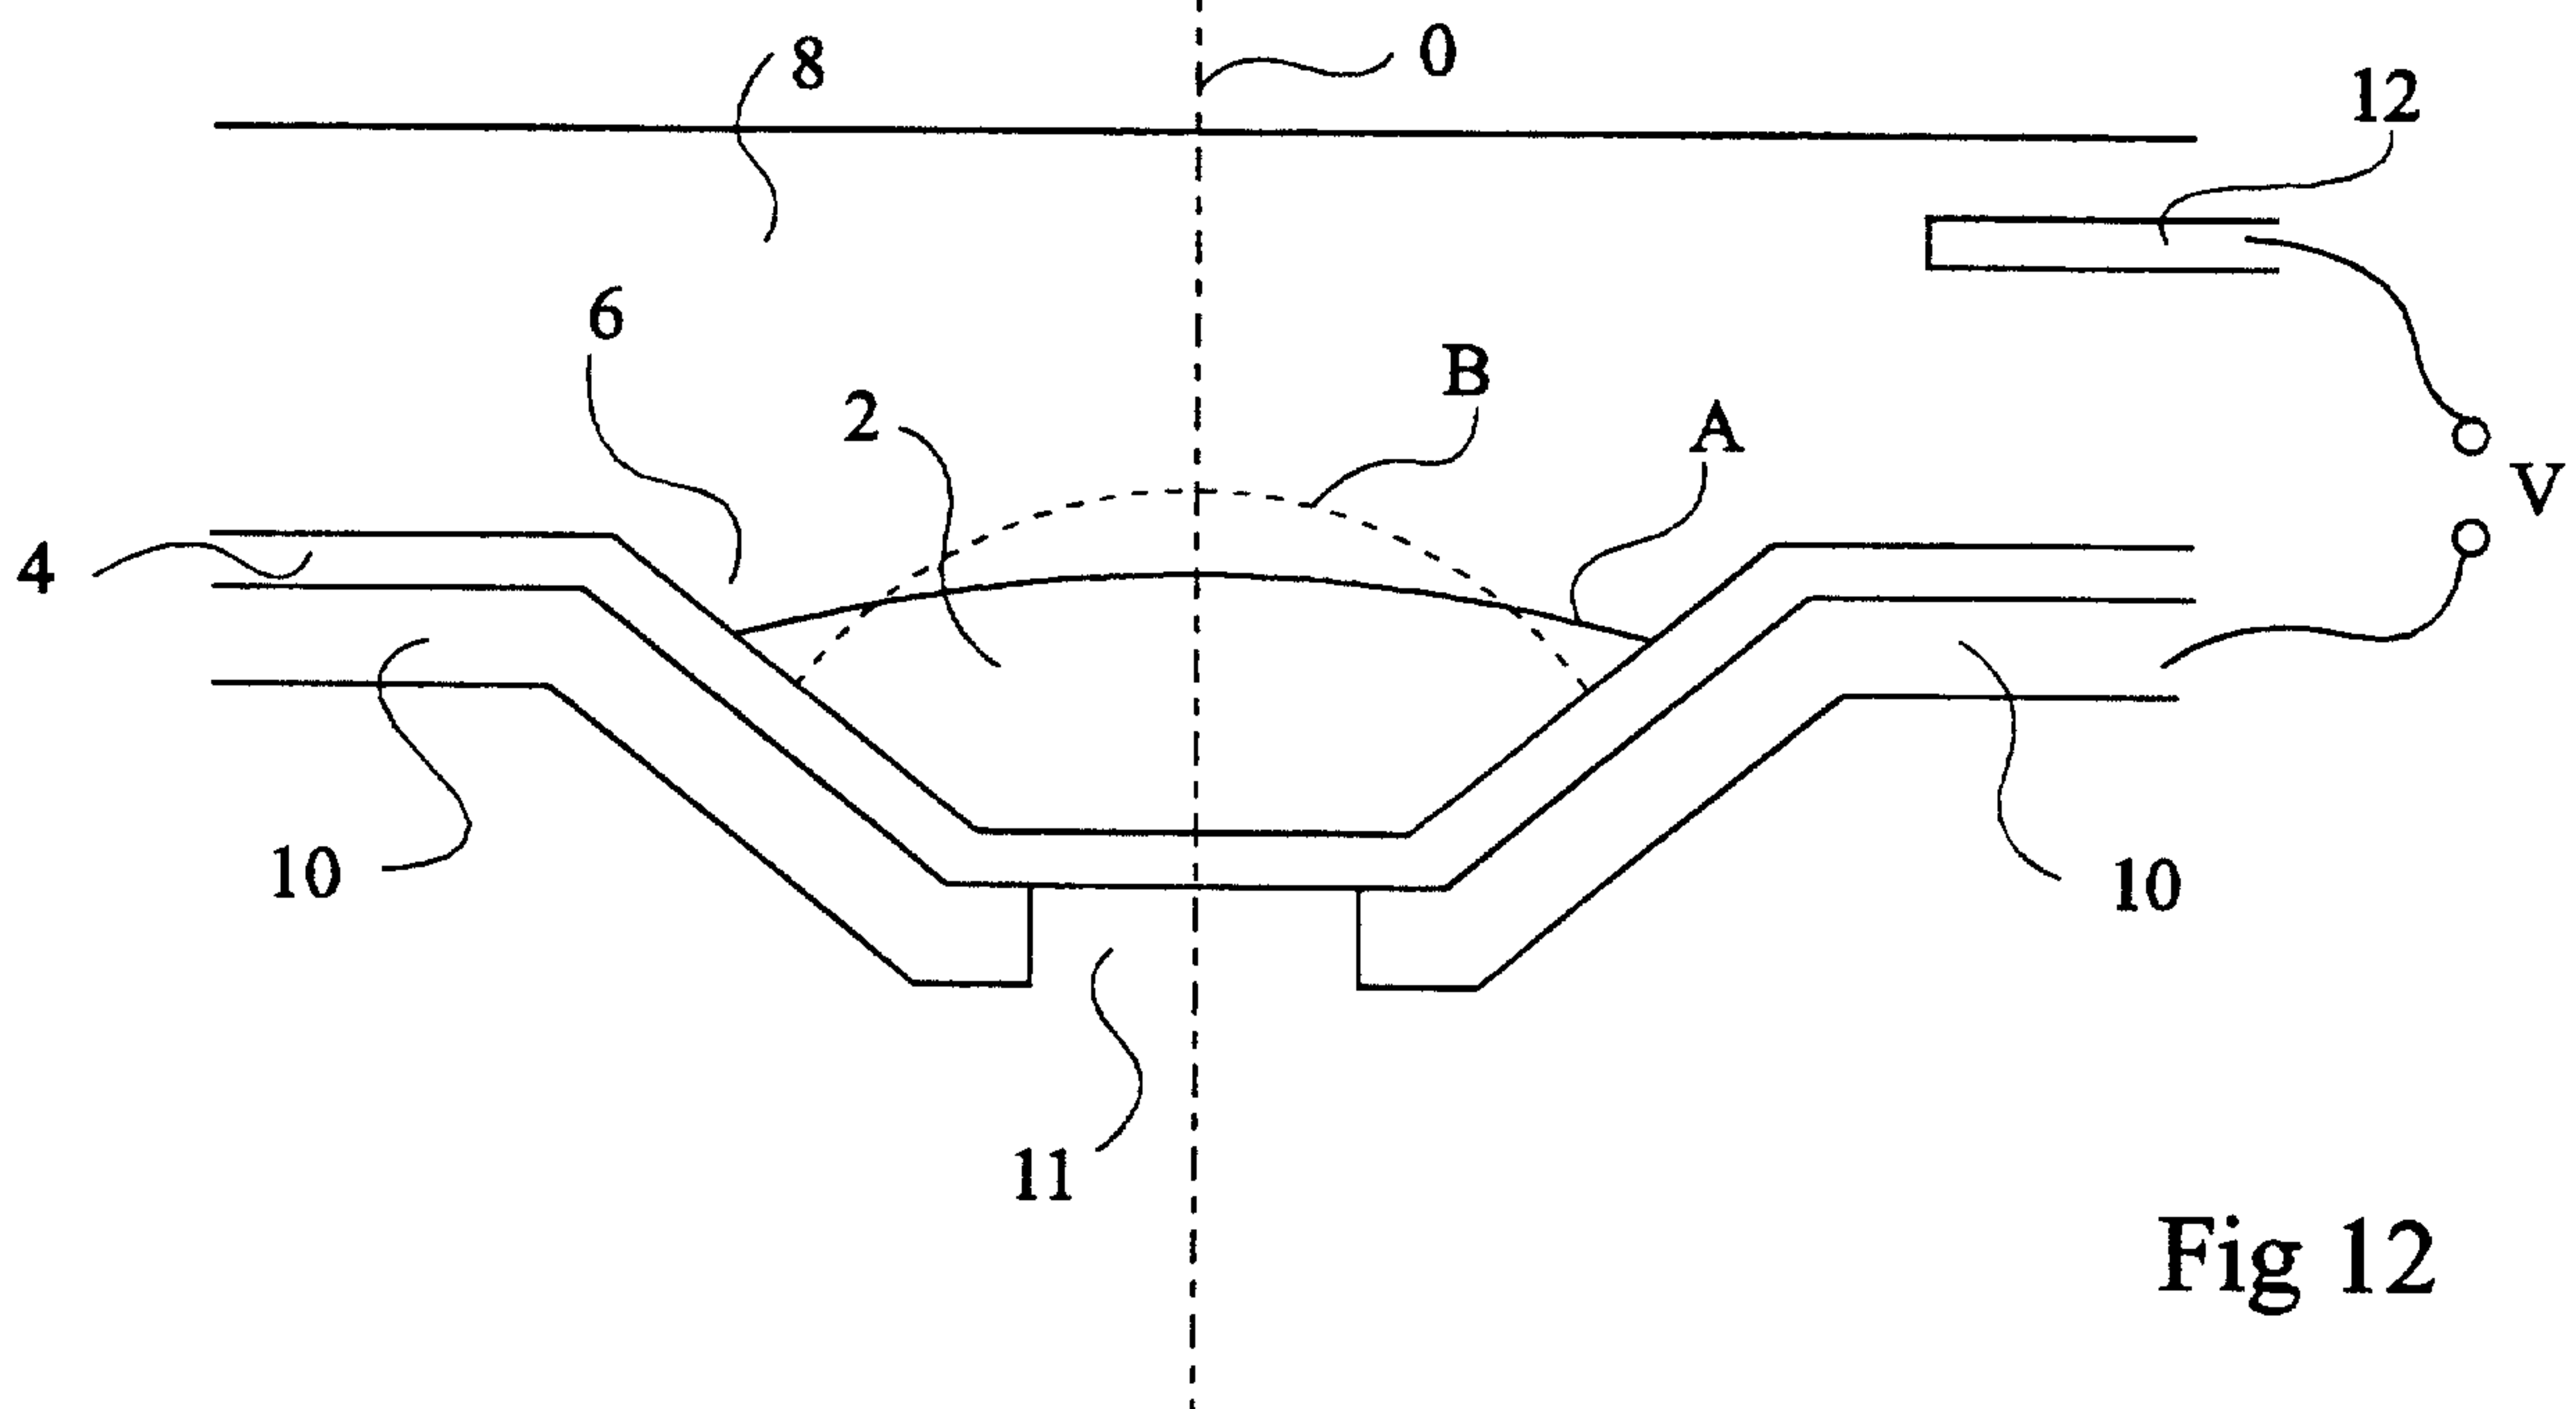


Fig 12

