



US008919548B2

(12) **United States Patent**
McGuire et al.

(10) **Patent No.:** **US 8,919,548 B2**
(45) **Date of Patent:** **Dec. 30, 2014**

(54) **GOLF BAGS WITH RETENTION SYSTEM AND METHODS TO MANUFACTURE GOLF BAGS**

(58) **Field of Classification Search**
USPC 206/315.1, 315.2, 315.3, 315.7; 248/96, 248/95, 97, 169; 280/645, 47.26
See application file for complete search history.

(75) Inventors: **Brian J. McGuire**, Phoenix, AZ (US);
Kim K. Chau, Phoenix, AZ (US);
Ruben E. Whitten, Phoenix, AZ (US);
Alex Cowan, Phoenix, AZ (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(73) Assignee: **Karsten Manufacturing Corporation**,
Phoenix, AZ (US)

1,790,092	A *	1/1931	William et al.	248/96
1,880,351	A *	10/1932	McDonald	248/96
2,282,842	A *	5/1942	Abell	248/96
4,676,464	A	6/1987	Reimers	
4,685,561	A	8/1987	Reimers	
4,778,136	A *	10/1988	Reimers	248/96
4,834,235	A *	5/1989	Solheim et al.	206/315.7
5,156,366	A *	10/1992	Anderson	248/96
5,339,951	A *	8/1994	Chen	206/315.7
5,340,063	A *	8/1994	Hsieh	248/96
5,353,003	A	10/1994	Maurer	
5,356,003	A *	10/1994	Gretz et al.	206/315.7
5,634,616	A	6/1997	Wang et al.	
5,816,399	A *	10/1998	Rhee	206/315.7
6,098,797	A *	8/2000	Han	206/315.7

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 506 days.

(21) Appl. No.: **12/961,254**

(22) Filed: **Dec. 6, 2010**

(65) **Prior Publication Data**

US 2012/0055820 A1 Mar. 8, 2012

FOREIGN PATENT DOCUMENTS

GB 2353481 2/2001

* cited by examiner

Primary Examiner — Fenn Mathew
Assistant Examiner — Cynthia Collado

Related U.S. Application Data

(60) Provisional application No. 61/380,993, filed on Sep. 8, 2010.


(51) **Int. Cl.**
A63B 55/00 (2006.01)
A63B 55/04 (2006.01)

(57) **ABSTRACT**

(52) **U.S. Cl.**
CPC **A63B 55/045** (2013.01)
USPC **206/315.7**; 206/315.1; 206/315.25; 206/315.3; 206/315.5; 280/645; 280/47.26; 248/96; 248/95; 248/97

Embodiments of golf bags with an extensible bag stand having a retention system and methods to manufacture golf bags are generally described herein. Other embodiments of golf bags with an extensible bag stand having a retention system may be described and claimed.

5 Claims, 9 Drawing Sheets

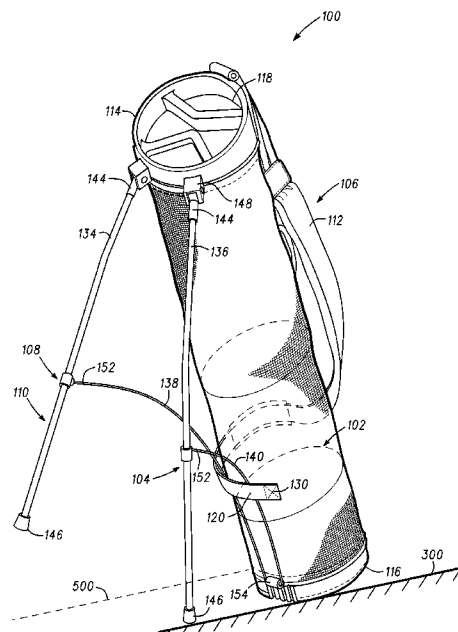

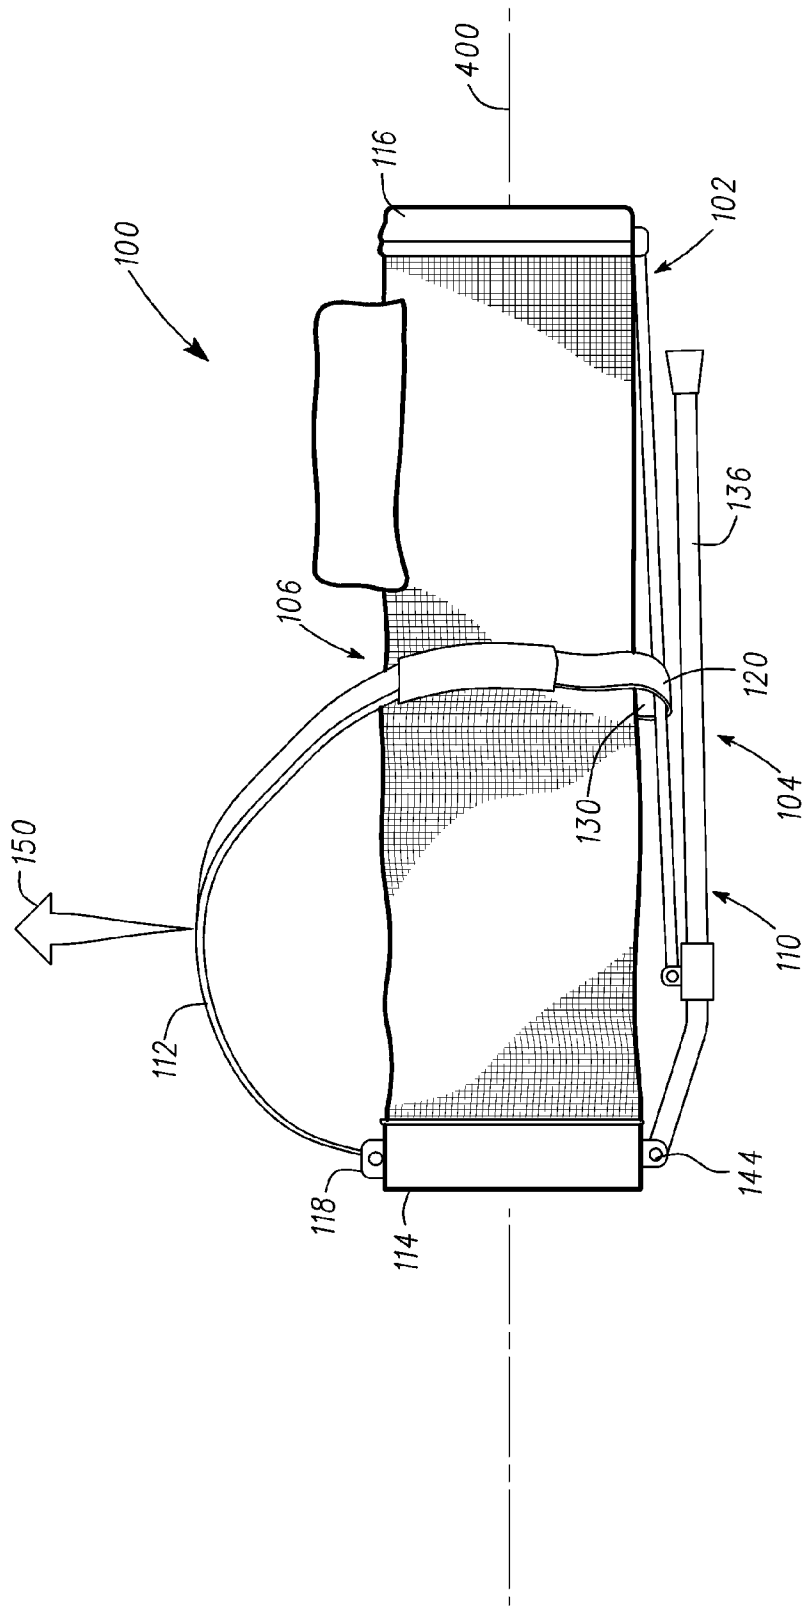


Fig. 2

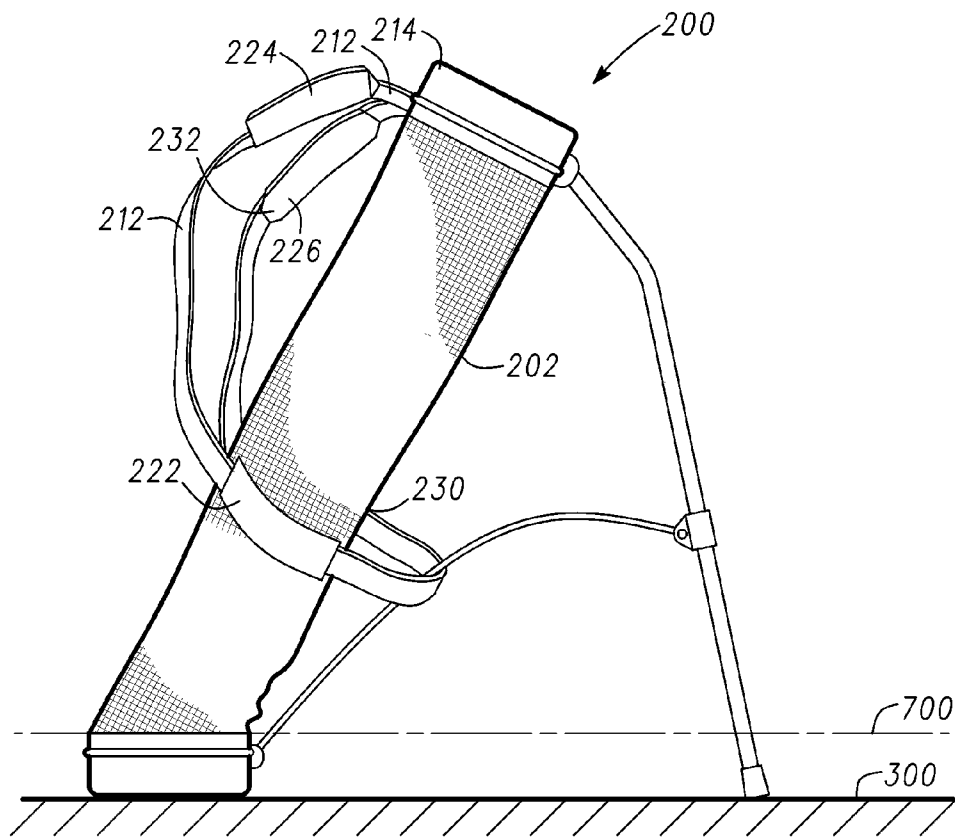


Fig. 3

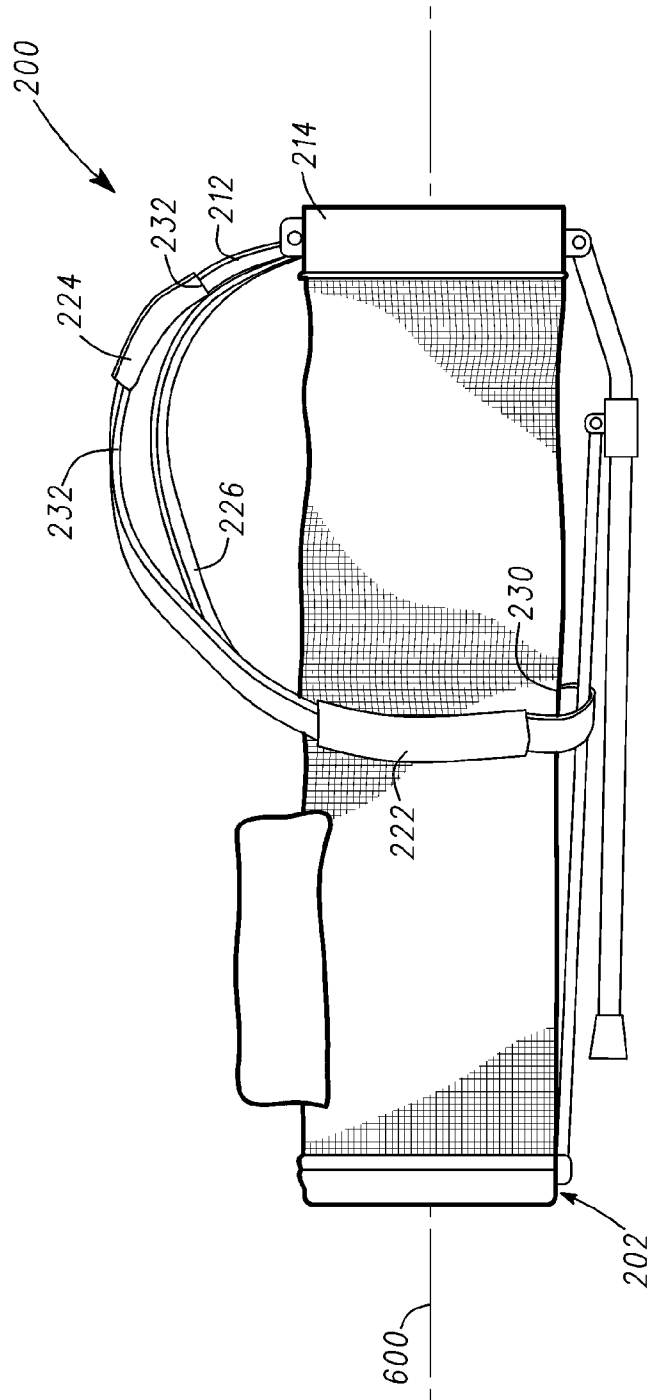


Fig. 4

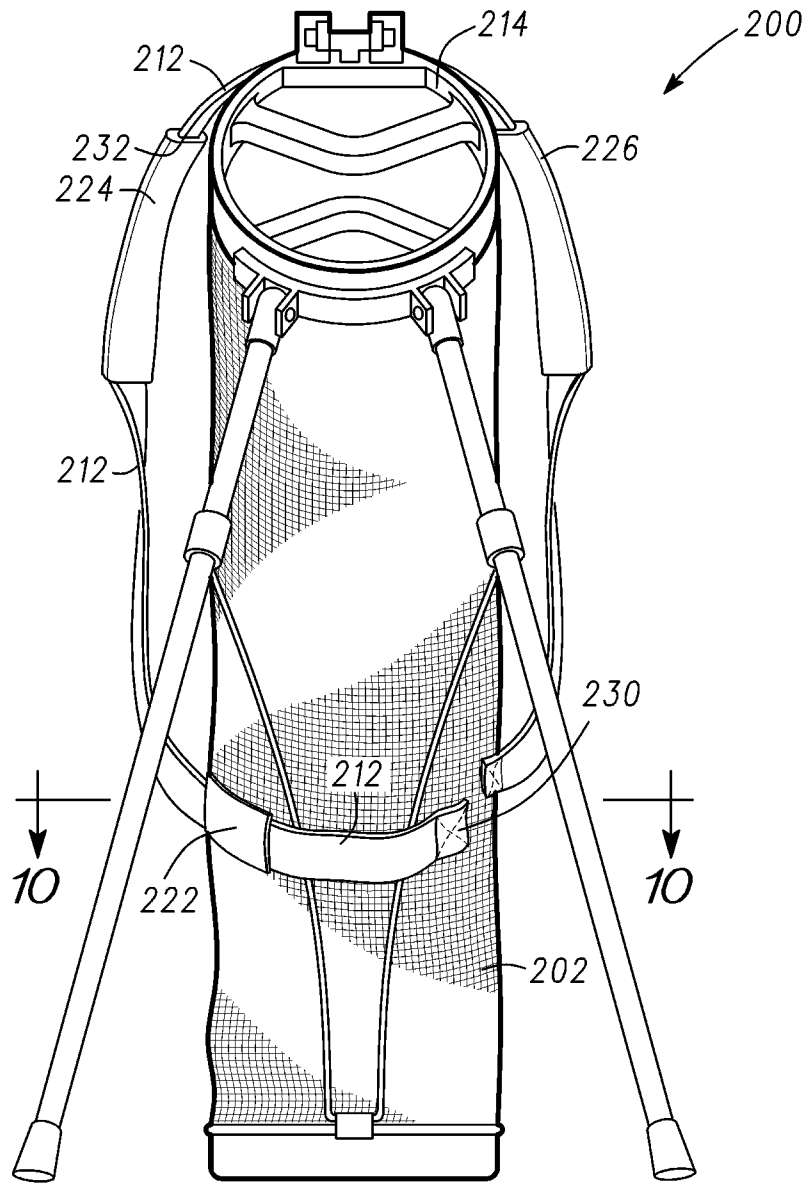


Fig. 5

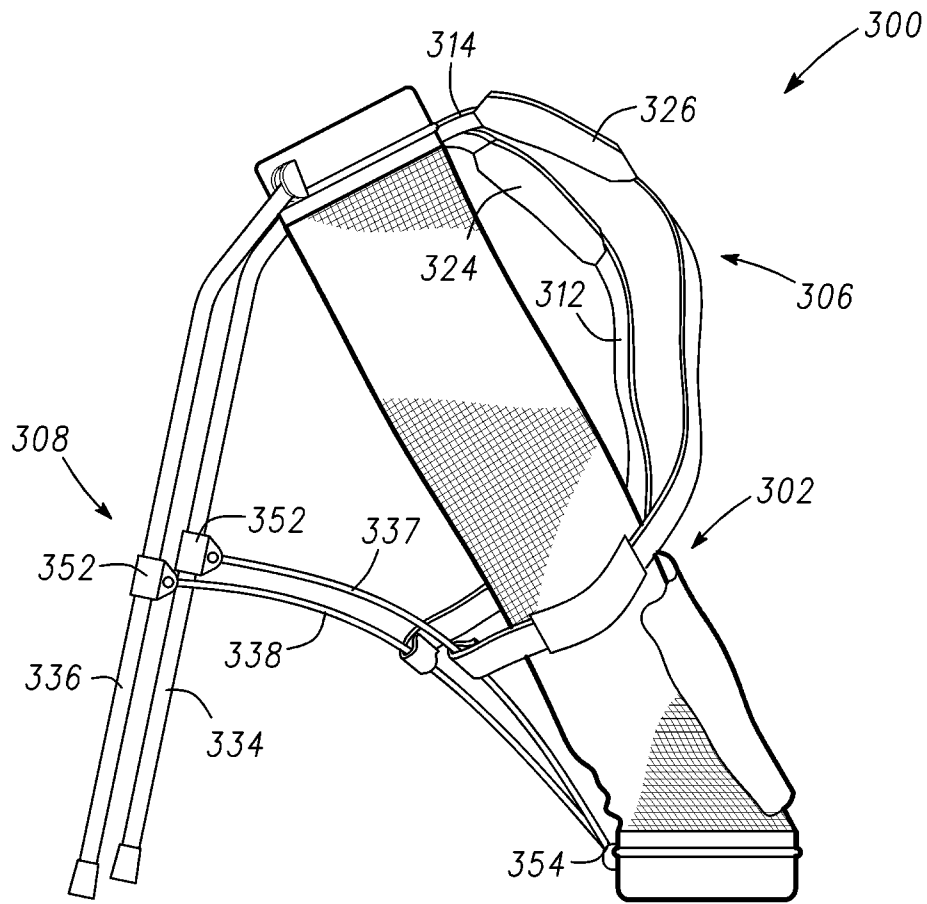


Fig. 6

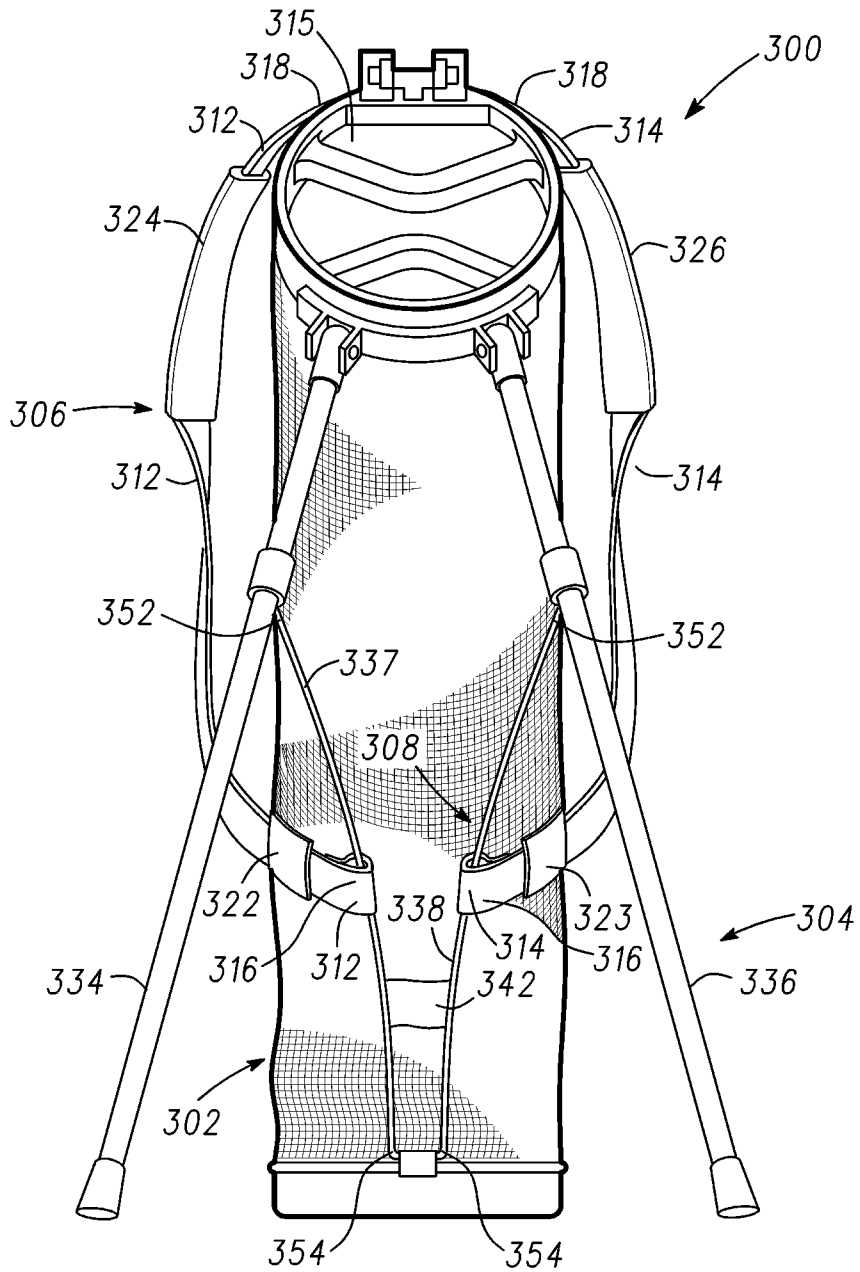


Fig. 7

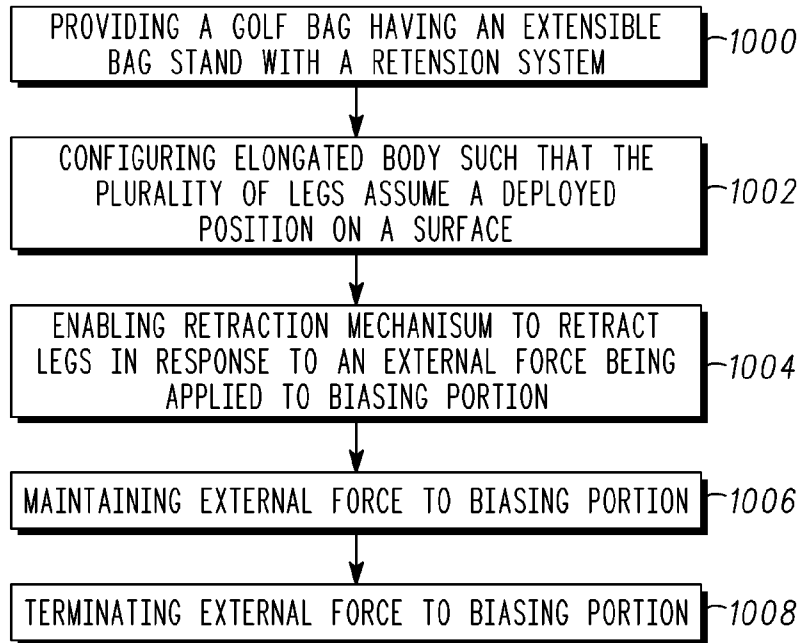


Fig. 8

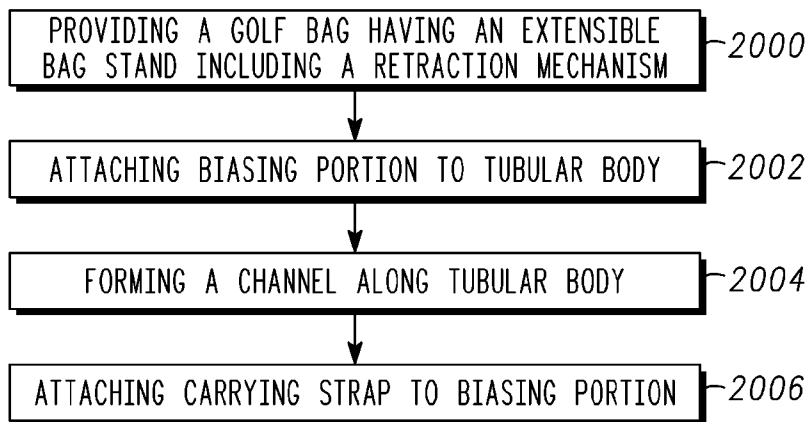


Fig. 9

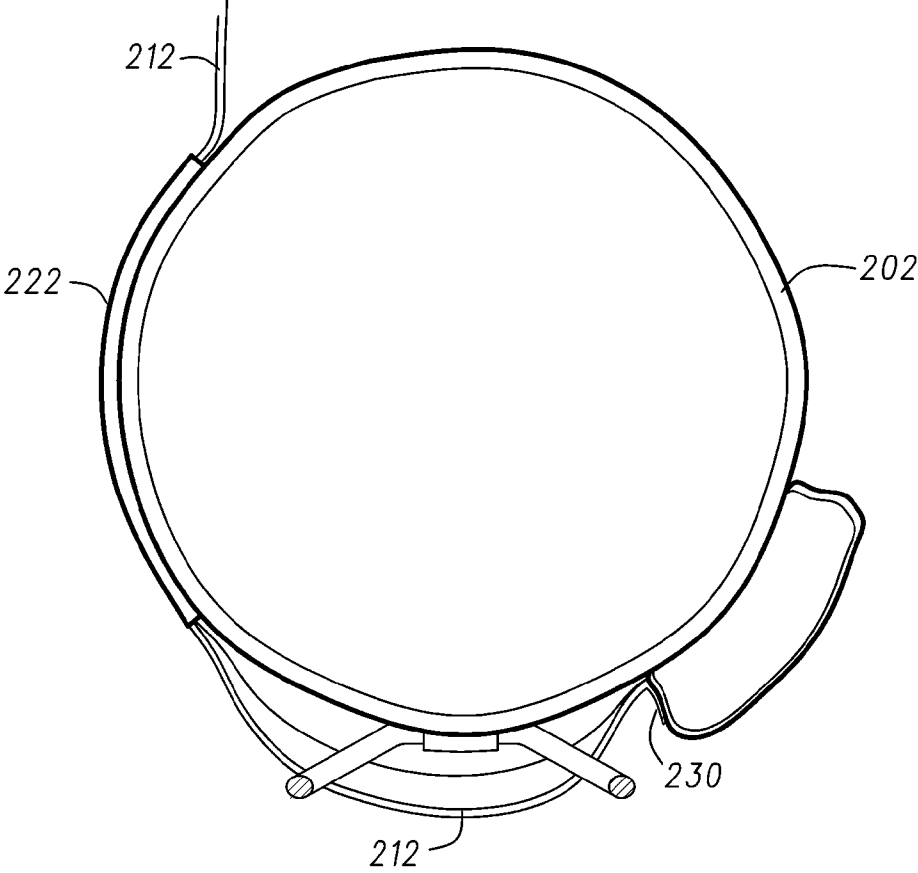


Fig. 10

1

GOLF BAGS WITH RETENTION SYSTEM AND METHODS TO MANUFACTURE GOLF BAGS

CROSS-REFERENCE TO RELATED APPLICATIONS

This is a non-provisional claiming benefit of U.S. Provisional Application No. 61/380,993 entitled "Golf Bags with Retention Mechanism and methods to Manufacture Golf Bags" filed on Sep. 8, 2010, the contents of which are entirely incorporated by reference.

FIELD

The present disclosure is related to golf bags and methods to manufacture such golf bags, and in particular a carry golf bag with an extensible bag stand having a retention system.

BACKGROUND

Most golf bags may be in the form of a tubular fabric or leather container having a generally cylindrical configuration with a closed bottom end and an open top end through which golf clubs are inserted into and removed from the golf bag. Although golf bags are manufactured in a variety of sizes and materials so as to better suit various intended uses, golf bags are conventionally grouped into two basic classes. The first class of golf bags are relatively large and heavy, and therefore are not very well suited for carrying by the individual (e.g., cart bags), while the second class of golf club bags are generally smaller and lighter and are designed to be carried by the individual during play.

The second class of golf bags are usually referred to as "carry bags" which are carried by the individual using a carrying strap that may be used to lift and carry the golf bag. Many of these types of carry bags have an extensible bag stand devised for supporting the golf bag in a substantially upright position whenever the individual sets down the golf bag on a surface. A widely used and well known extensible golf bag stand has been devised for demountable attachment to the side of golf bags is disclosed in U.S. Pat. No. 4,834,236 which describes a golf bag stand having a pair of legs with one end pivotally attached to one portion of the golf bag and another end engaged to a retraction mechanism. The retraction mechanism is configured to operate with a toggle mechanism that causes the retraction mechanism to retract and collapse the pair of legs from a deployed position to a retracted position whenever the golf bag is lifted and carried by the individual. However, the retraction mechanism for such golf bags can become worn after repeated use and lose the ability to effectively collapse the legs to the retracted position. A worn retraction mechanism can also lose the ability to maintain the pair of legs in the retracted position whenever the golf bag is carried because one or both of the legs may droop due to the loss of tensile strength in the retraction mechanism that retains the pair of legs in the retracted position.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a simplified illustration of one embodiment of a golf bag having a retention system with an extensible bag stand in the deployed position;

FIG. 2 is a simplified illustration showing the embodiment of the golf bag having the retention system of FIG. 1 with the extensible bag stand in the retracted position;

2

FIG. 3 is a simplified illustration of another embodiment of the golf bag having a retention system with the extensible bag stand in the deployed position;

FIG. 4 is a simplified illustration showing the embodiment of the golf bag having the retention system of FIG. 3 with the extensible bag stand in the retracted position;

FIG. 5 is a front view showing the embodiment of the golf bag having the retention system of FIGS. 3 and 4 with the extensible bag stand in the deployed position;

FIG. 6 is a simplified illustration of yet another embodiment of the golf bag having a retention system with the extensible bag stand in the deployed position;

FIG. 7 is a front view showing the embodiment of the golf bag having the retention system of FIG. 6 with the extensible bag stand in the deployed position;

FIG. 8 is a flow chart illustrating one method of using the golf bag with the retention system;

FIG. 9 is a flow chart illustrating one method to manufacture the golf bag with the retention system; and

FIG. 10 is a cross-sectional view taken along line 10-10 of FIG. 5 showing a channel of the retention system.

Corresponding reference characters indicate corresponding elements among the view of the drawings. The headings used in the figures should not be interpreted to limit the scope of the claims.

DESCRIPTION OF EXAMPLES OF EMBODIMENTS

Golf bags designed to be carried by the individual usually have an extensible bag stand having legs devised for supporting the golf bag in a substantially upright position when the individual sets down the golf bag on a surface. The extensible bag stand may also include a retraction mechanism adapted to retract the legs into a retracted position when the golf bag is lifted off the surface and carried by the individual. However, repeated use of the extensible bag stand can cause the retraction mechanism to become worn over time and lose the ability to completely collapse the legs to the retracted position or fail to maintain the legs in the retracted position when the golf bag is carried by an individual.

As such, the golf bag with extensible bag stand having a retention system and method of manufacturing such a retention system as described herein improves such golf bags by automatically collapsing the pair of legs into the retracted position and maintaining the legs in the retracted position when the individual lifts up and carries the golf bag.

Referring to the drawings, an embodiment of the golf bag is illustrated and generally indicated as **100** in FIGS. 1 and 2. In general, the golf bag **100** includes a generally tubular elongated body **102** defining an open top end **114** and a closed bottom end **116**. As shown in FIG. 1, the tubular elongated body **102** includes an extensible bag stand **104** for supporting the tubular elongated body **102** in a substantially upright position when an individual sets down the golf bag on a surface **300**. The extensible bag stand **104** includes a retraction mechanism **108** having an upper end **152** connected to a plurality of legs **110** and a lower end **154** connected to the tubular elongated body **102**. Each of the legs **110** includes one end **144** pivotally attached to the tubular elongated body **102** for positioning the legs **110** between a deployed position and a retracted position. In addition, a retention system **106** includes a biasing portion **112** having a first end **118** attached to a first portion of the tubular elongated body **102** and a second end **120** attached to a second portion of the tubular elongated body **102**. The biasing portion **112** may be arranged such that the retraction mechanism **108** is positioned between

the tubular elongated body **102** and the biasing portion **112**. As shown in FIG. 2, the biasing portion **112** retracts the retraction mechanism **106** when an external force **150** is applied to the biasing portion **112** such that the biasing portion **112** positions and maintains the legs **110** in the retracted position. The biasing portion **112** may be a band, a strap, a cord, or a rope.

As used herein the term “deployed position” shall mean the position of the legs **110** being substantially deployed outwardly from the tubular elongated body **102** when the individual sets the golf bag **100** down such that the legs **110** contact the surface **300**, whereas the term “retracted position” shall mean the position of the legs **110** being substantially retracted inwardly towards the tubular elongated body **102** such that the legs **110** no longer contact the surface **300** as the individual lifts up the golf bag **100**.

The retraction mechanism **108** for the extensible bag stand **104** may be a spring wire **108** made of a resilient metallic material that bias the legs **110** outwardly when the tubular elongated body **102** is placed in the deployed position and then retracts the legs **110** inwardly to the retracted position whenever the tubular elongated body **102** is lifted of the surface **300**. The spring wire **108** may be a single wire arrangement or a plurality of wires. Alternatively, the spring wire **108** may be made from any other resilient material, such as a plastic or a metallic composite, capable of repeatedly applying a bias to the legs **110** in either the deployed position or the retracted position by the extensible bag stand **104**.

As shown in FIG. 1, one example of the spring wire **108** may be first and second wires **138** and **140** that engage a respective pair of legs **134** and **136**. Specifically, the first and second wires **138** and **140** may each have a first leg end **152** that engages a respective leg **134** and **136** and a second leg end **154** that is operatively engaged to the tubular elongated body **102**. In particular, each second leg **154** may be operatively engaged to a toggle mechanism (not shown) that forms a part of the golf bag **100** for causing either the deployed position or the retracted position of legs **110** by the extensible bag stand **104**.

As further shown, the pair of legs **134** and **136** each define one end **146** adapted to support the tubular elongated body **102** in a substantially upright position on the surface **300** as well as another end **144** that may be pivotally engaged to a bracket **148** attached proximate the open top end **114** of the tubular elongated body **102**. The pivotal engagement of each end **144** to the bracket **148** may be a pin and socket arrangement which allows movement of the legs **110** along a two-dimensional plane or a ball and socket arrangement that allows movement of the legs **110** along a three-dimensional plane. In one embodiment, the structure and operation of the extensible bag stand **104** may be the extensible bag stand disclosed in U.S. Pat. No. 4,834,235, which is incorporated by reference in its entirety. However, the apparatus, articles of manufacture, and methods described herein are not limited in this regard.

In one arrangement, the second end **120** of the biasing portion **112** may be engaged to the tubular elongated body **102** such that the biasing portion **112** establishes a fixed point **130** relative to the tubular elongated body **102**. When an individual applies an external force **150**, such as by lifting the tubular elongated body **102** off the surface **300**, the weight of the golf bag **100** creates a tension in the biasing portion **112** that causes the biasing portion **112** to slide relative to the fixed point **130** and retract the spring wire **108**. When the golf bag **100** is carried by the individual such that the longitudinal axis **400** (FIG. 2) is substantially parallel to plane **500** (FIG. 1), the force of gravity acting on the tubular elongated body **102**

creates a constant tension on the biasing portion **112** that maintains the spring wire **108** in a substantially retracted position until the tension is released by setting the tubular elongated body **102** on surface **300**. In this arrangement, the retention system **106** requires the weight of the tubular elongated body **102** as a force, the individual as a pivot point, and the biasing portion **112** as a tensioning means to provide a much greater force to retract the spring wire **108** to the retracted position than would otherwise be available if the retention system **106** was absent. Setting down the tubular elongated body **102** on surface **300** causes the biasing portion **112** to loosen as the external force **150** is no longer being applied and permit the spring wire **108** and legs **110** to assume a deployed position.

Referring to FIGS. 3, 4, 5 and 10 another embodiment the golf bag, designated **200**, is substantially similar to golf bag **100**. In particular, a channel **222** may be provided along the tubular elongated body **202** that is configured to receive the biasing portion **212** and acts to guide the biasing portion **212** relative to tubular elongated body **202** when the tubular elongated body **202** is being lifted or carried by the individual. The channel **222** also acts as a means of transferring the tension applied to the biasing portion **212** through the channel **222** when an external force **150** is applied to the biasing portion **212**. Alternatively, the golf bag **200** may include a ring, hook and/or buckle arrangement, either internal or external to the tubular elongated body **202** that also guides the biasing portion **212** in similar fashion as channel **222**. The channel **222** may be made of woven materials, webbing, or a hard plastic material and either sewn or otherwise attached internally or externally relative to the tubular elongated body **202**. It is contemplated that the channel **222** may also be provided with the tubular elongated body **102** of golf bag **100** to provide the same guiding function as described above.

The golf bag **200** may also include a carrying strap **224** for permitting an individual to lift and carry the tubular elongated body **202**. The carrying strap **224** defines a conduit **232** that is engaged to the biasing portion **212** and permits the individual to apply the external force **150** to the biasing portion **212** by lifting the carrying strap **224** off the surface **300** such that the longitudinal axis **600** of tubular elongated body **202** is substantially parallel to the plane **700** of surface **300**. The biasing portion **212** may have a first end attached proximate the open top end **214**, while a second end of the biasing portion **212** is attached to a fixed point **230** in similar fashion as described above. Alternatively, the golf bag **200** may include a second carrying strap **226** having a first end that is also attached proximate the open top end **214**, while a second end of the carrying strap **226** is fixedly attached along the lower portion of the tubular elongated body **202**. In one embodiment, the second carrying strap **226** is not engaged to the biasing portion **212** such that only the first carrying strap **224** is engaged to the biasing portion **212** and functions to apply any tension through the biasing portion **212**.

Referring to FIGS. 6 and 7, another embodiment of the golf bag, designated **300**, is similar to golf bags **200** and **300** with the exception of the arrangement and operation of biasing portion relative to the extensible bag stand **304** as shall be described below. The retention system **306** may include a first biasing portion **312** and a second biasing portion **314** with each portion **312** and **314** having a first end **316** engaged or looped around a first wire **337** and a second wire **338**, respectively, of retraction mechanism **308**. In addition, the first biasing portion **312** and second biasing portion **314** each have a second end **318** attached to the tubular elongated body **302** proximate the open top end **315**. A first carrying strap **324** may be engaged to the first biasing portion **312** and a second

strap 326 may be engaged to the second biasing portion 314 such that applying the external force 150 (FIG. 2) to the carrying straps 324 and 326 generates a tension in each biasing portion 312 and 314 and causes the retraction mechanism 308 to retract and collapse the first and second legs 334 and 336 into the retracted position from the deployed position. In one embodiment, the first and second wires 337 and 338 may each have a first leg end 352 that engages a respective leg 334 and 336 and a second leg end 354 that is operatively engaged to the tubular elongated body 302 for positioning the first and second legs 334 and 336 between a deployed position and a retracted position. In addition, the golf bag 300 may include first and second channels 322 and 323 that are adapted to receive and guide the first and second biasing portions 312 and 314, respectively. In addition, a connector 342 may engage the first wire 336 to the second wire 338.

In reference to the embodiments 100, 200 and 300 of golf bag, the retention systems of these embodiments, and in particular the biasing portions 112, 212 and 312 do not engage the plurality of legs 110, 210 and 310, but only engage the retraction mechanism 108, 208 and 308, for example the spring wire, during operation.

Referring to FIG. 8, a flow chart illustrates one method for lifting or using the golf bag of embodiments 100, 200 or 300 from a deployed position to a retracted position. At block 1000, a golf bag 100, 200, or 300 is provided having an extensible bag stand 104, 204 or 304 with a retention system 106, 206 or 306. At block 1002, the tubular elongated body 102, 202 or 302 is configured such that the legs 110, 210 or 310 assume on a surface 300 the deployed position. At block 1004, enabling the external force 150 to be applied to one or more biasing portions 112, 212, 214, 312 and/or 314 such that the one or more biasing portions 112, 212, 214, 312 and/or 314 cause the retraction mechanism 108, 208 or 308 to retract the one or more of legs 110, 210 or 310. The external force 150 may be maintained to the one or more biasing portions 112, 212, 214, 312 and/or 314 as recited in block 1006, thereby preventing the plurality of legs 110, 210 or 310 from moving from the retracted position. Finally, at block 1008, the external force 150 applied to the one or more biasing portions 112, 212, 214, 312 and/or 314 may be terminated such that the one or more legs 110, 210 or 310 are placed in the deployed position.

Referring to FIG. 9, a flow chart illustrating one method for manufacturing a golf bag 100 is shown. At block 2000, a golf bags 100, 200 and 300 are provided having the extensible bag stand 104, 204 and 304 with the a retraction mechanism 106, 206 and 306. At block 2002, one or more biasing portions 112, 212, and/or 312 are attached to the tubular elongated body 202 and 302. One or more channels 222 are then formed along the tubular elongated body 202 and 302 at block 2004. At block 2006, carrying straps 224, 226, 324, and 326 are attached to respective biasing portions 212 and 312.

While a particular order of actions is illustrated in FIGS. 8 and 9, these actions may be performed in other temporal sequences. For example, two or more actions may be performed in either FIG. 8 or FIG. 9 may be performed sequentially, concurrently, or simultaneously. Although FIGS. 8 and 9 depict a particular number of blocks, the processes of FIGS. 8 and 9 may not perform one or more blocks.

While the above examples may describe and the figures may depict golf bags with two legs, the apparatus, methods, and articles of manufacture described herein may be applicable to golf bags with a single leg. Alternatively, the apparatus, methods, and articles of manufacture described herein may also be applicable to golf bags with three or more legs.

However, the apparatus, methods, and articles of manufacture described herein are not limited in this regard.

Furthermore, the golf bag having an extensible bag stand with a retention system and methods to manufacture discussed herein may be implemented in a variety of embodiments, and the foregoing discussion of these embodiments does not necessarily represent a complete description of all possible embodiments. Rather, the detailed description of the drawings, and the drawings themselves, disclose at least one preferred embodiment of the golf bag having an extensible bag stand with a retention system and methods to manufacture golf bags, and may disclose alternative embodiments of golf bags and methods of manufacture. It is intended that the scope of golf bags having an extensible bag stand with a retention system and methods of manufacture shall be defined by the appended claims

All elements claimed in any particular claim are essential to golf bags having an extensible bag stand with a retention system and methods of manufacture in that particular claim. Consequently, replacement of one or more claimed elements constitutes reconstruction and not repair. Additionally, benefits, other advantages, and solutions to problems have been described with regard to specific embodiments. The benefits, advantages, solutions to problems, and any element or elements that may cause any benefit, advantage, or solution to occur or become more pronounced, however, are not to be construed as critical, required, or essential features or elements of any or all of the claims.

Moreover, embodiments and limitations disclosed herein are not dedicated to the public under the doctrine of dedication if the embodiments and/or limitations: (1) are not expressly claimed in the claims; and (2) are or are potentially equivalents of express elements and/or limitations in the claims under the doctrine of equivalents.

What is claimed is:

1. A golf bag comprising:

an elongated body having an open top end and a closed bottom end;

an extensible bag stand including a retraction mechanism having a first end connected to the elongated body and a second end attached to a plurality of legs for applying a biasing force to the plurality of legs for retraction and deployment of the plurality of legs, each of the plurality of legs having one end pivotally attached to the elongated body for positioning the plurality of legs between a deployed position and a retracted position by the retraction mechanism, and

a retention system including a plurality of elongated biasing portions, each of the plurality of elongated biasing portions having a first biasing end attached to the elongated body and a second biasing end attached to a respective portion of the retraction mechanism, wherein the plurality of elongated biasing portions is configured to retract the respective portion of the retraction mechanism in response to an external force is applied to each of the plurality of biasing portions such that the plurality of legs retracts from the deployed position to the retracted position when the retraction mechanism is retracted by the plurality of elongated biasing portions.

2. The golf bag of claim 1, wherein the retraction mechanism comprises a spring wire having a plurality of wires with each of the plurality of wires being attached to a respective one of the plurality of elongated biasing portions.

3. The golf bag of claim 1, wherein the retraction mechanism is a spring wire comprising a plurality of wires with each of the plurality of wires being attached to a respective one of the plurality of elongated biasing portions, and wherein the

plurality of wires comprises a pair of wires and the plurality of elongated biasing portions comprises a pair of elongated biasing portions, and wherein each of the pair of wires is attached to a respective one of the pair of elongated biasing portions.

4. The golf bag of claim 1, further comprising a channel 5 defined along the elongated body, wherein the plurality of elongated biasing portions slides within the channel when the external force is applied to the plurality of elongated biasing portions.

5. The golf bag of claim 1, wherein the second leg end of at 10 least one of the plurality of legs are in contact with a surface when in the deployed position and wherein the external force being applied to the plurality of elongated biasing portions causes the elongated body to be lifted off the surface and 15 cause the retraction mechanism to retract the plurality of legs to the retracted position.

* * * * *