



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 742 101 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
04.12.2002 Bulletin 2002/49

(51) Int Cl.7: **B41J 2/165, B41J 2/175**

(21) Application number: **96201971.7**

(22) Date of filing: **22.03.1993**

(54) **Ink discharge detecting method for an ink jet recording apparatus**

Tintenablagedetektionsverfahren für ein Tintenstrahlgerät

Méthode pour détecter la décharge de l'encre pour appareil d'enregistrement à jet d'encre

(84) Designated Contracting States:
DE ES FR GB IT

(30) Priority: **23.03.1992 JP 6484092**
26.01.1993 JP 1099593

(43) Date of publication of application:
13.11.1996 Bulletin 1996/46

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
93302130.5 / 0 562 786

(73) Proprietor: **CANON KABUSHIKI KAISHA**
Tokyo (JP)

(72) Inventors:
• **Saito, Atsushi**
Shimomaruko, Ohta-ku, Tokyo (JP)
• **Okubo, Akio**
Shimomaruko, Ohta-ku, Tokyo (JP)

- **Sasai, Keizo**
Shimomaruko, Ohta-ku, Tokyo (JP)
- **Ikeda, Yasuhiko**
Shimomaruko, Ohta-ku, Tokyo (JP)
- **Sugiyama, Shigeyuki**
Shimomaruko, Ohta-ku, Tokyo (JP)
- **Morita, Mitsuo**
Shimomaruko, Ohta-ku, Tokyo (JP)

(74) Representative:
Beresford, Keith Denis Lewis et al
BERESFORD & Co.
2-5 Warwick Court,
High Holborn
London WC1R 5DH (GB)

(56) References cited:
EP-A- 0 380 056 **EP-A- 0 443 832**
DE-A- 3 925 048 **US-A- 4 245 224**
US-A- 5 136 305

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 742 101 B1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to an ink recording method and an ink jet recording apparatus.

Related Background Art

[0002] Conventionally, a variety of recording apparatuses for recording onto a recording medium such as paper or OHP sheet have been proposed. An ink jet recording apparatus which directly jets ink from a recording head onto a recording sheet has gained wide acceptance as a recording apparatus having the advantages of low running costs and silent recording operation.

[0003] On the other hand, methods for detecting that the amount of ink has decreased in such an ink jet recording apparatus involve optically detecting a float moving up or down within an ink tank, or detecting the variation in resistance between electrodes provided within an ink tank.

[0004] However, the above conventional methods have a drawback in that a detectable member such as float or electrodes is necessary within the ink tank and, in the case of a disposable recording head of the cartridge type in which the recording head is formed integrally with the ink tank, the detectable member has to be also exchanged with the cartridge when the amount of ink within the ink tank has decreased so that costs and waste increase.

[0005] Further, the above conventional methods involve detecting analogue variations of ink quantity which result from the decreasing amount of ink within the ink tank, whereby if the detected result is below a preset threshold, ink absence is determined to occur at a time when the recording head is not, in practice, completely free of ink with the result that absence of ink is determined when slight amount of the ink is still left within the ink tank. Accordingly, the problem arises that, because that ink is not usable for recording running costs increase. Also, the ink level within the ink tank shifts up or down with the movement of the ink tank, bringing about malfunctions.

[0006] DE-A-3925048 describes a piezoelectric type ink jet printer which detects whether or not a piezoelectric ink jet head is ejecting ink by causing the piezoelectric ink jet head to discharge ink onto a sensor plate which is a good thermal conductor so that ink hitting the sensor surface causes the sensor surface and a positive temperature coefficient resistor coupled thereto to cool down.

[0007] The present invention is devised to resolve the above-mentioned problems of the conventional arts, and its object is to provide an ink jet recording apparatus

and an ink discharge detecting method in which a decrease in the amount of ink remaining or non-discharge of ink can be securely detected and the amount of waste ink unusable for the recording reduced.

[0008] In one aspect, the present invention provides an ink jet recording apparatus for recording using a recording head having discharge means for causing discharge of ink from discharge ports of the head onto a recording medium, the apparatus comprising:

ink detection means for detecting whether or not ink is being discharged from said recording head; positioning means for positioning said recording head and said ink detection means at relatively opposed locations; and

discharge determining means for determining whether or not ink is being discharged from said recording head when said recording head and said ink detection means are in said relatively opposed locations, characterised by control means for controlling the amount of ink discharged per unit time from a discharge port to cause the amount of ink discharged per unit time to be greater when ink is discharged to said ink detection means for said determination by said discharge determining means than when said recording is performed by discharging ink onto the recording medium.

[0009] In another aspect, the present invention provides a method for determining the ink discharge condition of an ink jet recording apparatus for recording using a recording head having discharge means for causing discharge of ink from discharge ports of the head onto a recording medium, the method comprising:

positioning said recording head and an ink detection means of the ink jet recording apparatus at relatively opposed locations; detecting whether or not ink is being discharged from said recording head; and determining whether or not ink is being discharged from said recording head when said recording head and said ink detection means are in said relatively opposed locations, characterised by controlling the amount of ink discharged per unit time from a discharge port to cause the amount of ink discharged per unit time to be greater when ink is discharged to said ink detection means for said determination than when said recording is performed by discharging ink onto the recording medium.

[0010] Figure 1 is a perspective view of a recording unit in an ink jet recording apparatus.

[0011] Figure 2 is a perspective view showing the constitution of a recording head.

[0012] Figure 3 is a cross-sectional view showing the structure of a cap unit in the ink jet recording apparatus.

[0013] Figure 4 is a block diagram showing a consti-

tutional example of a control system in the ink jet recording apparatus.

[0014] Figure 5 is a flowchart showing the sequence of detecting the presence or absence of ink discharge.

[0015] Figure 6 is a circuit diagram showing a constitutional example of a detection circuit.

[0016] Figure 7 is a block diagram showing a constitutional example of a control system in an ink jet recording apparatus.

[0017] Figure 8 is a circuit diagram showing a constitutional example of a detection circuit.

[0018] Figure 9 is a chart showing the output waveform from the detection circuit shown in Figure 8.

[0019] Figure 10 is a flowchart showing the sequence of detecting the presence or absence of ink discharge.

[0020] Figure 11 is a cross-sectional view showing the structure of a cap unit in an ink jet recording apparatus.

[0021] Figure 12 is a schematic view showing the interior of a recording head.

[0022] Figure 13 is a graph showing how the pressure at a point R within a head liquid chamber of Figure 12 changes with increasing number of recording sheets (ink consumption), when the ink is discharged from the head at the maximum frequency of the normal printing.

[0023] Figure 14 is a diagram showing a first configuration for changing the amount of discharged droplets.

[0024] Figure 15 is a diagram showing a second configuration for changing the amount of discharged droplets.

[0025] Figure 16 is a view for explaining ink discharge condition.

[0026] Figure 17 is a view for explaining ink discharge condition.

[0027] Figure 18 is a block diagram showing another configuration.

[0028] Figure 19 is a flowchart showing the essence of control operation in the configuration shown in Figure 18.

[0029] Figure 20 is a block diagram showing a schematic configuration in which a recording apparatus is applied to an information processing apparatus having the features of a word processor, a personal computer, a facsimile apparatus and a copying apparatus.

[0030] Figure 21 is an external view of the information processing apparatus as shown in Figure 20.

[0031] Figure 22 is an external view of the information processing apparatus as shown in Figures 20 and 21 which is of the integral type.

[0032] Figure 1 is a view showing an ink jet recording apparatus to which the present invention is applied. In Figure 1, 1 is a recording head, in this example, an ink jet recording head of the cartridge type in which an ink tank is contained therein and the whole recording head is exchanged for a new one when the ink becomes absent. 2 is a carriage for reciprocating the recording head 1 in a direction orthogonal to a conveying direction (sub-scan direction) of recording sheet 12 as indicated by the arrow, i.e., in a main scan direction, while carrying the

recording head 1 at good precision, in which the carriage is slidably held by a guide rod 11 and an abutting portion 2a. Reciprocating of the carriage 2 is performed by a pulley 4 driven by a motor not shown, and a timing belt 3, in which a print signal and the power to be given to the recording head 1 is supplied via a connector contained in the carriage 2 through a flexible cable 7 from an electric circuit in a main device.

[0033] 15 is a cap serving as ink receiving means, which is placed corresponding to a stand-by position (home position) of the carriage 2, and moved up or down as required to make close contact with the recording head 1 to cover a nozzle unit, thereby preventing the evaporation of ink or contamination of dirt.

[0034] To position the recording head 1 and the cap 15 at relatively opposed locations, a carriage home sensor 10 provided on the main device of recording apparatus and a light shielding plate 2a provided on the carriage 2 are used. The carriage home sensor 10 is composed of a photo-interrupter of the transmission or reflection type, which detects that when the carriage 2 is moved to the stand-by position, light transmitted from a portion of the carriage home sensor 10 is interrupted from passing therethrough by the light shielding plate 2a, or the recording head 1 and the cap 15 are positioned at relatively opposed locations, using reflected light.

[0035] Recording sheet 12 is supplied from the lower side upwardly in the figure, and bent to a horizontal direction by a sheet supply roller 5 and a paper guide 6 to be conveyed in a direction (sub-scan direction) as indicated by the arrow A. The sheet supply roller 5 and a sheet exhaust roller 9 are driven by respective drive systems, not shown, to convey the recording sheet 12 in the sub-scan direction at high precisions, in cooperation with the carriage 2 which is reciprocated, as required. 8 is a so-called spur shaft made of a water repellent material, and having spurs 8a spaced away at a predetermined interval so that they make contact with the recording surface of recording sheet 12 only at their circumferential blade-like portions, whereby even if they make contact with unfixed ink on the recording sheet immediately after the printing, the recording sheet 12 can be guided and conveyed without exerting adverse effects on the image.

[0036] The recording head 1 is, in this example, a recording head of the ink jet system with a resolution of 360DPI, and having 64 nozzles, in which the ink can be discharged through discharge ports at the top end of nozzles by the use of the pressure of film boiling arising in the ink due to heating by electricity-heat converters provided within the nozzles.

[0037] Next, a discharge principle of recording head for use with the ink jet recording apparatus will be described. A recording head unit to be applied to the ink jet recording apparatus typically comprises minute liquid discharge ports (orifices), liquid channels, energy exerting portions each provided on a part of each liquid chan-

nel, and energy generating means for generating liquid droplet forming energy to be applied to the liquid residing in said energy exerting portions, and is exchangeable.

[0038] Examples of energy generating means for generating such energy may include directing electromagnetic wave such as a laser to the liquid to be heated by absorption to discharge fine liquid droplets under the action of the heating, or heating the liquid by the use of electricity-heat converters to discharge the liquid. Among them, a recording head unit for use with the ink jet recording system of discharging the liquid by heat energy allows the recording to be made at high resolutions because liquid discharge ports (orifices) for discharging liquid droplets to form flying liquid droplets for recording can be arranged at high densities.

[0039] Also, the recording head unit using electricity-heat converters as energy generating means makes it possible to provide an ink jet recording head which is easy to fabricate in multi-nozzle and allows for high density packaging, with excellent mass productivity and low manufacturing costs, because the whole recording head can be easily made in compact size, and by fully utilizing many merits of the IC technology or micro process technology which has achieved remarkable technical advancements with improved reliability in the recent semiconductor fields, the longer and planar (two dimensional) construction can be easily accomplished.

[0040] An ink jet recording head unit fabricated through a semiconductor fabrication process by using electricity-heat converters as energy generating means is typically provided with liquid channels corresponding to ink discharge ports, and electricity-heat converters as means for applying heat energy to the liquid filling the liquid channels to discharge the ink through corresponding ink discharge ports to form flying liquid droplets, wherein the liquid is supplied from a common liquid chamber to each liquid channel. As to the fabrication method for the ink discharge unit, the present applicant has made an application of a method in which on a first substrate are laminated sequentially a solid layer for forming at least liquid channels, an active energy line curable material layer for use to form at least walls of liquid channels, and a second substrate, then a mask is laminated on the second substrate, active energy line is directed from upward of said mask toward at least the walls of liquid channels on the active energy line curable material layer to cure them as the constitutional portion, and then uncured portions of the solid layer and the active energy line curable material layer are removed from between two substrates to form at least liquid channels (see Japanese Laid-open Patent Application No. 62-253457).

[0041] Fig. 2 shows a schematic constitution of the ink jet recording head unit. The recording head unit 101 is constituted of an active energy line curable material layer 210 which has been cured, having electricity-heat converters 103, electrodes 104 and liquid channels 110

formed as the film on a substrate 102 which is a first substrate, through a semiconductor fabrication process such as etching vapor deposition and sputtering, and a ceiling plate 106. In such recording head unit 101, recording liquid 112 is supplied from a liquid reservoir through a liquid supply tube 107 to a common liquid chamber 108.

[0042] 109 is a connector for liquid supply tube. Recording liquid 112 in the common liquid chamber 108 is supplied into liquid channels 110 owing to capillary phenomenon, and retained stably with menisci formed on the ink discharge ports 111 at the top end of liquid channels. Thus, if electricity-heat converters 103 are energized, the liquid on the plane of electricity-heat converters is heated, giving rise to foaming phenomenon due to film boiling to discharge liquid droplets through ink discharge ports 111 by growth of bubbles. With the above constitution, a multi-nozzle ink jet recording head unit can be fabricated having a high density arrangement of liquid channels with a discharge port density of 400 dots/inch.

[0043] Accordingly, the temperature of discharged ink droplets becomes greatly higher than room temperature owing to heating by electricity-heat converters; the temperature change upon contact with ink droplets is detected by temperature detecting means, and the detected temperature is compared with room temperature, whereby the normal or abnormal discharge, or the presence or absence of ink within the ink tank can be examined. A temperature detecting element 16 is provided within the cap 15, and with the recording head 1 and the temperature detecting element 16 positioned at relatively opposed locations, the ink is discharged toward the temperature detecting element 16, and the presence or absence of ink discharge can be judged by monitoring the output of the temperature detecting element 16.

[0044] Herein, the temperature detecting element 16 may include, but is not limited to, those of detecting the temperature change as a physical quantity, and detecting the temperature change as a chemical change of substance; for example, the temperature change caused by the contact with the ink is detected as a change in the current or voltage on the basis of the change in the resistance value of a resistor.

[0045] Fig. 3 is a cross-sectional view showing the details of the cap 15. In Fig. 15, 15a is a cap main body formed of an elastic material such as a rubber, which is held by a cap support 15b and pressed against the surface of recording head 1 which is placed opposed to the cap, thereby sealingly enclosing the nozzles 1a of the recording head 1 to prevent the nozzles 1a from clogging due to evaporation of ink. On the other hand, when the clogging occurs in the nozzles 1a, the pressure within the cap 15 is caused to decrease by activating a suction pump not shown connected to one end of a suction tube 17, so that the ink is discharged through the nozzles 1a of the recording head 1, thereby removing the clogging to recover the recording head 1.

[0046] 18 is an ink absorbing member, which is configured to absorb the ink discharged from the discharge ports 1a, and have the feature of retaining the interior of cap 15 in a highly humid state by absorbing the ink, thereby preventing the nozzles 1a from drying and clogging.

[0047] 16 is a temperature detecting element for detecting the absence of ink, which is a small thermistor in this example. The temperature detecting element 16 is placed at a position substantially opposite the nozzles 1a, when the recording head 1 is at a stand-by position, so that if the ink is discharged from the discharge ports 1a of the recording head 1, ink droplets will impinge correctly on the outer face of the temperature detecting element 16, whereby it is possible to detect the presence or absence of ink discharge by detecting the presence or absence of temperature change.

[0048] Fig. 4 is a block diagram showing a schematic configuration of a main part of the recording apparatus.

[0049] In Fig. 4, 21 is a control unit for controlling the whole of the recording apparatus, comprising a CPU 23 such as a microprocessor, a ROM 25 storing a control program for the CPU 23 as shown in flowchart of Fig. 5, and various data, and a RAM 27 useful as the work area for the CPU 23 and for temporarily storing various data.

[0050] 16 is the temperature detecting element as previously described, 29 is a detection circuit connected to the temperature detecting element 16, 31 is an A/D converting circuit for converting an analog signal output from the detection circuit 29 into digital signal to be sent to a control unit 21, 33 is a head driving circuit for driving the recording head 1 in accordance with an instruction of the control unit 21, 35 is an image data input circuit for inputting image data sent from the host into the control unit 21, 37 is an alarm circuit for making an alarm for the occurrence of ink undischARGE or ink absence, based on a signal sent out from the control unit 21, which detects the ink undischARGE or ink absence based on the output from the temperature detecting element 16, and 39 is an image memory for once storing print data of one page. Carriage driving means 32 for driving the carriage 2 is connected to the control unit 21.

[0051] Fig. 5 is a flowchart showing a control processing with the control unit 21. A detection sequence for ink discharge will be described with reference to the flowchart of Fig. 5. If a print start signal is received, the print data of one page sent is once stored in the image memory 39 (step S1). Then, data is printed by the recording head 1 based on data of the image memory 39 (step S2). If recording of one page is terminated, the carriage 2 is moved by the carriage driving means 32 under the control of the control unit 21 to a stand-by position at which the recording head 1 is placed opposite the cap 15 (step S3), wherein whether or not the carriage 2 has moved to the stand-by position can be detected by the carriage home sensor 10.

[0052] In a state where the cap 15 is separated about 1 mm from the nozzle face, each nozzle of the recording

head discharges 200 ink droplets toward the temperature detecting element 16 (step S4). The temperature of discharged droplets is from about 50 to 60°C, which is above room temperature, whereby a signal from the temperature detecting element 16 is input into the detection circuit 29 consisting of a bridge circuit and an amplifier circuit as shown in Fig. 6.

[0053] The detection circuit 29 as shown in Fig. 6 is constituted of the bridge circuit for converting the change in resistance of the temperature detecting element 16 with respect to temperature change into the voltage change, and the amplifier circuit for amplifying the voltage change thus obtained. By monitoring the voltage value output from the amplifier circuit, the temperature change of the temperature detecting element 16 can be detected. The voltage value output from the detection circuit 29 is converted from analog to digital form by the A/D converting circuit 31, and then input into the control unit 21.

[0054] The control unit 21 compares the input voltage value with a predetermined threshold (a voltage value corresponding to a temperature above the highest ambient temperature allowable with the recording apparatus and below the temperature of ink droplets, for example, 40°C), whereby if its value is greater than the threshold, the control unit 21 judges that the output of temperature detecting element 16 has changed (Yes at step S5), and that the ink has been discharged, that is, there is some ink remain, so that its page has been completely printed, and erases data of the image memory 39 (step S6). And to prevent discharged ink from depositing within the cap, the ink collected within the cap 15 is sucked as waste ink via a suction tube 17 by a suction pump, not shown, so as to completely remove waste ink from within the cap 15 (step S7).

[0055] On the other hand, if the voltage value output from the detection circuit 29 and input into the control unit 21 is equal to or less than the threshold, the control unit 21 judges that the output of the temperature detecting element 16 has not changed (No at step S5), and that no ink has been discharged, that is, there is no ink remaining. It then issues an alarm signal indicating the ink absence to the alarm circuit 37, and displays an ink absence alarm (step S8), prompting the user to exchange the recording cartridge, wherein since its page has not been completely printed as the ink is used up in the course of the recording, print data is left stored in the image memory 39.

[0056] Then, when the recording cartridge is exchanged by the user who has recognized the alarm signal (Yes at step S9), the return operation including an initial filling operation of filling new liquid channels for ink supply with the ink is performed (step S10). And data of one page is again printed from the top portion of the page, based on data stored in the image memory 39 (step S11), and then the procedure returns to step S3 to execute the operation following the step S3. In this way, the ink absence detection sequence is executed.

As described above the temperature detecting element 16 is provided within the cap 15, it will, however, be understood that the temperature detecting element 16 is not necessarily provided within the cap 15, and an ink absence detection unit may be separately disposed at a predetermined site on a main scan passage of the carriage and provided with the temperature detecting element 16 and a waste ink withdrawing means to enable ink discharge from the recording head. For example, in a color printer with a plurality of recording heads, it is common to have a cap as ink receiving means individually for each ink color to avoid the mixing of ink colors, and if the temperature detecting element is provided within each cap, temperature detecting elements corresponding to the number of recording heads are required, but it will be understood that if as previously described, the ink absence detection unit is provided separately, and each color ink is discharged in sequence from each recording head by moving the carriage to respective position, it is only necessary to provide a single temperature detecting element.

[0057] The above described example uses a small spherical thermistor as the temperature detecting element, which forms a spot-like temperature measuring portion, for a recording head of large print width and having a discharge port array of more nozzles, the nozzles may be only partially monitored, resulting in a risk of false detection. Accordingly, to cope with such recording head of large print width and having a discharge port array of more nozzles, the temperature measuring portion of the temperature detecting means is of a shape in which it is placed opposite the discharge ports of the discharge port array, when the recording head and the temperature detecting means are positioned at relatively opposed locations, and specifically, if the temperature detecting means is linear or planar, more reliable temperature detection will be made.

[0058] As above described, the recording apparatus allows the presence or absence of ink discharge to be detected, and therefore allows the ink non-discharge for any reason to be detected. If unexpected failure occurs, such as non-discharge owing to fixing of ink within nozzles or malfunction of electric circuit of the recording head not to permit application of discharge signal, the occurrence of such failure can be detected.

[0059] However, the recording apparatus makes it possible to detect ink non-discharge which can be considered as the decrease in the ink remain quantity within the ink tank.

[0060] Fig. 7 is a block diagram showing the schematic configuration of a recording apparatus 1-2. In Fig. 7, 51 is an ambient temperature detecting element for detecting the ambient temperature of the recording apparatus to be used, wherein this detecting element is composed of the same element as the temperature detecting element 16, and provided outside of a cap 15, as well as being connected to a detection circuit 29.

[0061] Fig. 8 is a circuit diagram showing the detec-

tion circuit 29, consisting of a bridge circuit using a temperature detecting element 16 and an ambient temperature detecting element 51 for outputting the voltage proportional to the difference between resistance values of both elements, that is, the difference between both temperatures, and an amplifier circuit for amplifying the voltage thus obtained. By monitoring the voltage value output from this amplifier circuit, the temperature change of the temperature detecting element 16 relative to the ambient temperature can be detected.

[0062] 53 is a comparator which outputs a signal "1" when the output from the detection circuit 29 is above a predetermined threshold, and a signal "0" when at or below the predetermined threshold, which signal is then sent to a control unit 21. Fig. 9 shows the relation between the output waveform from the detection circuit 29 and the discharge signal to the nozzles of recording head, with the time indicated in the axis of abscissas and the output voltage value from the detection circuit 29 indicated in the axis of ordinates of output waveform. In the figure, the straight line as indicated by Vth shows the threshold level.

[0063] Since other configuration of Fig. 8 is the same as that shown in Fig. 4, the explanation thereof is omitted. The detection sequence of ink discharge is the same as the control procedure as shown in the flowchart of Fig. 5. Note that the judgment at step S5 is made by checking to determine whether or not the output voltage value corresponding to the difference between temperatures of the temperature detecting element 16 and the ambient temperature detecting element 51 exceeds a predetermined threshold.

[0064] When the ambient temperature decreases, its difference from the temperature of temperature detecting element 16 increases, whereby there is the effect of being less affected by instantaneous temperature changes caused by electrical noises of recording apparatus or wind.

[0065] When discharging the ink through all the discharge ports at step S4, it is preferable to discharge the ink toward the temperature detecting element 16 while the carriage member 2 is moved 1 mm, that is, the recording head 1 is moved 1 mm in a main scan direction. Herein, the reason of discharging the ink while the carriage 2 is moved 1 mm is to prevent the ink from not hitting the temperature detecting element 16 due to displaced impinging position of ink droplets, wherein the recording head 1 is moved along with the movement of the carriage member 2, and flying ink droplets may also be moved about 1 mm within an opening portion of the cap 15, resulting in a higher probability of impingement upon the temperature detecting element 16, and thereby more reliable temperature detection.

[0066] In this way, even with a small detection area of the temperature detecting element, it is possible to make temperature detection without malfunction by discharging the ink while the recording head is moved, thereby dispersing ink droplets over a large range to ex-

tend the detectable area.

[0067] Although as described above, the ambient temperature detecting element is provided apart from the temperature detecting element, and the presence or absence of ink discharge is judged based on the difference between the temperature detected by the temperature detecting element and the ambient temperature (room temperature), it should be noted that the substantially same effects can be obtained by altering the detection sequence using only the temperature detecting element described above with reference to Fig. 5 without using the ambient temperature detecting element. Fig. 10 is a flowchart showing such a sequence. The different point from that shown in Fig. 5 is that after the carriage member 2 is moved to a stand-by position (cap position) at step S23, the ambient temperature is measured using a temperature detecting element 16 and its output value is temporarily stored in a RAM 27 of the control unit 21 (step S24), and after each nozzle is caused to discharge 200 ink droplets, the output change of the temperature detecting element 16 is checked by detecting the difference between the output value of temperature detecting element 16 and that before ink discharge temporarily stored as previously described, whereby the presence or absence of ink discharge is judged.

[0068] The block diagram showing the schematic configuration of a main portion of the recording apparatus is the same as that shown in Fig. 4, and the detection circuit 29 is the same as that shown in Fig. 6. If the interval between the measurement of the ambient temperature at step S24 and the temperature measurement with the temperature detecting element 16 after ink discharge at step S26 is made very short, e.g., about several hundreds msec, the change in the ambient temperature within this interval can be substantially ignored.

[0069] As shown in Fig. 11, an ink absorbing member may be provided around the periphery of the temperature detecting element 16, and if an ink droplet adhering to the surface of temperature detecting element 16 grows to some extent of volume the ink droplet is contacted with and absorbed into the ink absorbing member to prevent the ink droplet from growing beyond a certain size.

[0070] As described, the ink within the cap 15 is removed by a suction pump, not shown, but in order not to degrade the sensitivity or thermal response ability, it is desirable to remove as many ink droplets adhering to the temperature detecting element 16 as possible. The shape of ink absorbing member 18 is devised as shown in Fig. 11 and the distance A between the temperature detecting element and the ink absorbing member is set so that if an ink droplet reaches a size A as shown in Fig. 11 the ink droplet is absorbed into the ink absorbing member, and prevented from further growing. It is preferable that this distance A is 2 mm or less.

[0071] In this way, by setting the distance between the temperature detecting element 16 and the ink absorbing

member 18 at a predetermined value, it is possible to prevent the sensitivity or thermal response ability caused by adhering ink from degrading, and improve the detection precision of the temperature detecting element 16.

[0072] The surface of temperature detecting element 16 may be made water repellent so that the ink may be unlikely to adhere to the surface of temperature detecting element 16. In particular, it is preferable that the surface of temperature detecting element 16 is thinly coated with water repellent material not to make the thermal response ability worse.

[0073] The method of making water-repellent the surface of temperature detecting element 16 may include forming at least the surface of temperature detecting element 16 with a water repellent material. For example, there are methods that the temperature detecting element 16 is dipped in a dispersant having the powder of water repellent material dispersed, or coated with said dispersant, and then burned by heating, or that the temperature detecting element 16 is dipped in a dispersant having the powder of water repellent material dispersed, or coated with said dispersant, and then cured by irradiation of ultraviolet ray, or that the surface of temperature detecting element 16 is pasted (lined) with a film made of water repellent material, or that when the water repellent material is polyolefine type, the temperature detecting element 16 is coated with the powder of this water repellent material, and then deposited by heating.

[0074] The material having high water repellency is preferably a fluororesin or a polyolefine type resin from the aspect of ink resistance. Specifically, examples of fluororesin material may include tetrafluoroethylene resin, perfluoroalkoxy resin, tetrafluoroethylene-hexafluoropolypropylene copolymer resin, and fluorovinylidene resin, and examples of polyolefine type resin may include polyethylene and polypropylene.

[0075] This is intended to prevent the false detection that the absence of ink is judged despite of some quantity of ink remain because discharged ink droplets may adhere to the temperature detecting element 16 to inhibit the sensitivity or thermal response ability of the temperature detecting element 16, and to prevent ink droplets left intact and stiffened on the temperature detecting element 16 from degrading the sensitivity or thermal response ability.

[0076] Further, with a combination with the arrangements described above, it is possible to facilitate the removal of ink adhering to the surface of temperature detecting element 16, further enhancing the effects.

[0077] If the operation of detecting the presence or absence of ink discharge, that is, undischARGE due to ink shortage, based on the presence or absence of rise in temperature by causing ink droplets heated by the recording head to impinge directly against the temperature detecting means provided within the cap as above described, is performed for each recording of one sheet, for example, there is the advantage that there is no need

for providing any special detecting member on the recording head or ink tank. In particular, this is an effective method as ink absence detecting means applicable to the so-called disposable type head in which the recording head and the ink tank are integrally formed, and exchanged for new one if the ink is used up.

[0078] Next, an embodiment in accordance with the present invention will be described.

[0079] Where the ink absence is detected with the above method, there is a case that complete undisch-
 5
 10
 15
 20
 25
 30
 35
 40
 45
 50
 55
 60
 65
 70
 75
 80
 85
 90
 95
 100
 105
 110
 115
 120
 125
 130
 135
 140
 145
 150
 155
 160
 165
 170
 175
 180
 185
 190
 195
 200
 205
 210
 215
 220
 225
 230
 235
 240
 245
 250
 255
 260
 265
 270
 275
 280
 285
 290
 295
 300
 305
 310
 315
 320
 325
 330
 335
 340
 345
 350
 355
 360
 365
 370
 375
 380
 385
 390
 395
 400
 405
 410
 415
 420
 425
 430
 435
 440
 445
 450
 455
 460
 465
 470
 475
 480
 485
 490
 495
 500
 505
 510
 515
 520
 525
 530
 535
 540
 545
 550
 555
 560
 565
 570
 575
 580
 585
 590
 595
 600
 605
 610
 615
 620
 625
 630
 635
 640
 645
 650
 655
 660
 665
 670
 675
 680
 685
 690
 695
 700
 705
 710
 715
 720
 725
 730
 735
 740
 745
 750
 755
 760
 765
 770
 775
 780
 785
 790
 795
 800
 805
 810
 815
 820
 825
 830
 835
 840
 845
 850
 855
 860
 865
 870
 875
 880
 885
 890
 895
 900
 905
 910
 915
 920
 925
 930
 935
 940
 945
 950
 955
 960
 965
 970
 975
 980
 985
 990
 995
 1000
 1005
 1010
 1015
 1020
 1025
 1030
 1035
 1040
 1045
 1050
 1055
 1060
 1065
 1070
 1075
 1080
 1085
 1090
 1095
 1100
 1105
 1110
 1115
 1120
 1125
 1130
 1135
 1140
 1145
 1150
 1155
 1160
 1165
 1170
 1175
 1180
 1185
 1190
 1195
 1200
 1205
 1210
 1215
 1220
 1225
 1230
 1235
 1240
 1245
 1250
 1255
 1260
 1265
 1270
 1275
 1280
 1285
 1290
 1295
 1300
 1305
 1310
 1315
 1320
 1325
 1330
 1335
 1340
 1345
 1350
 1355
 1360
 1365
 1370
 1375
 1380
 1385
 1390
 1395
 1400
 1405
 1410
 1415
 1420
 1425
 1430
 1435
 1440
 1445
 1450
 1455
 1460
 1465
 1470
 1475
 1480
 1485
 1490
 1495
 1500
 1505
 1510
 1515
 1520
 1525
 1530
 1535
 1540
 1545
 1550
 1555
 1560
 1565
 1570
 1575
 1580
 1585
 1590
 1595
 1600
 1605
 1610
 1615
 1620
 1625
 1630
 1635
 1640
 1645
 1650
 1655
 1660
 1665
 1670
 1675
 1680
 1685
 1690
 1695
 1700
 1705
 1710
 1715
 1720
 1725
 1730
 1735
 1740
 1745
 1750
 1755
 1760
 1765
 1770
 1775
 1780
 1785
 1790
 1795
 1800
 1805
 1810
 1815
 1820
 1825
 1830
 1835
 1840
 1845
 1850
 1855
 1860
 1865
 1870
 1875
 1880
 1885
 1890
 1895
 1900
 1905
 1910
 1915
 1920
 1925
 1930
 1935
 1940
 1945
 1950
 1955
 1960
 1965
 1970
 1975
 1980
 1985
 1990
 1995
 2000
 2005
 2010
 2015
 2020
 2025
 2030
 2035
 2040
 2045
 2050
 2055
 2060
 2065
 2070
 2075
 2080
 2085
 2090
 2095
 2100
 2105
 2110
 2115
 2120
 2125
 2130
 2135
 2140
 2145
 2150
 2155
 2160
 2165
 2170
 2175
 2180
 2185
 2190
 2195
 2200
 2205
 2210
 2215
 2220
 2225
 2230
 2235
 2240
 2245
 2250
 2255
 2260
 2265
 2270
 2275
 2280
 2285
 2290
 2295
 2300
 2305
 2310
 2315
 2320
 2325
 2330
 2335
 2340
 2345
 2350
 2355
 2360
 2365
 2370
 2375
 2380
 2385
 2390
 2395
 2400
 2405
 2410
 2415
 2420
 2425
 2430
 2435
 2440
 2445
 2450
 2455
 2460
 2465
 2470
 2475
 2480
 2485
 2490
 2495
 2500
 2505
 2510
 2515
 2520
 2525
 2530
 2535
 2540
 2545
 2550
 2555
 2560
 2565
 2570
 2575
 2580
 2585
 2590
 2595
 2600
 2605
 2610
 2615
 2620
 2625
 2630
 2635
 2640
 2645
 2650
 2655
 2660
 2665
 2670
 2675
 2680
 2685
 2690
 2695
 2700
 2705
 2710
 2715
 2720
 2725
 2730
 2735
 2740
 2745
 2750
 2755
 2760
 2765
 2770
 2775
 2780
 2785
 2790
 2795
 2800
 2805
 2810
 2815
 2820
 2825
 2830
 2835
 2840
 2845
 2850
 2855
 2860
 2865
 2870
 2875
 2880
 2885
 2890
 2895
 2900
 2905
 2910
 2915
 2920
 2925
 2930
 2935
 2940
 2945
 2950
 2955
 2960
 2965
 2970
 2975
 2980
 2985
 2990
 2995
 3000
 3005
 3010
 3015
 3020
 3025
 3030
 3035
 3040
 3045
 3050
 3055
 3060
 3065
 3070
 3075
 3080
 3085
 3090
 3095
 3100
 3105
 3110
 3115
 3120
 3125
 3130
 3135
 3140
 3145
 3150
 3155
 3160
 3165
 3170
 3175
 3180
 3185
 3190
 3195
 3200
 3205
 3210
 3215
 3220
 3225
 3230
 3235
 3240
 3245
 3250
 3255
 3260
 3265
 3270
 3275
 3280
 3285
 3290
 3295
 3300
 3305
 3310
 3315
 3320
 3325
 3330
 3335
 3340
 3345
 3350
 3355
 3360
 3365
 3370
 3375
 3380
 3385
 3390
 3395
 3400
 3405
 3410
 3415
 3420
 3425
 3430
 3435
 3440
 3445
 3450
 3455
 3460
 3465
 3470
 3475
 3480
 3485
 3490
 3495
 3500
 3505
 3510
 3515
 3520
 3525
 3530
 3535
 3540
 3545
 3550
 3555
 3560
 3565
 3570
 3575
 3580
 3585
 3590
 3595
 3600
 3605
 3610
 3615
 3620
 3625
 3630
 3635
 3640
 3645
 3650
 3655
 3660
 3665
 3670
 3675
 3680
 3685
 3690
 3695
 3700
 3705
 3710
 3715
 3720
 3725
 3730
 3735
 3740
 3745
 3750
 3755
 3760
 3765
 3770
 3775
 3780
 3785
 3790
 3795
 3800
 3805
 3810
 3815
 3820
 3825
 3830
 3835
 3840
 3845
 3850
 3855
 3860
 3865
 3870
 3875
 3880
 3885
 3890
 3895
 3900
 3905
 3910
 3915
 3920
 3925
 3930
 3935
 3940
 3945
 3950
 3955
 3960
 3965
 3970
 3975
 3980
 3985
 3990
 3995
 4000
 4005
 4010
 4015
 4020
 4025
 4030
 4035
 4040
 4045
 4050
 4055
 4060
 4065
 4070
 4075
 4080
 4085
 4090
 4095
 4100
 4105
 4110
 4115
 4120
 4125
 4130
 4135
 4140
 4145
 4150
 4155
 4160
 4165
 4170
 4175
 4180
 4185
 4190
 4195
 4200
 4205
 4210
 4215
 4220
 4225
 4230
 4235
 4240
 4245
 4250
 4255
 4260
 4265
 4270
 4275
 4280
 4285
 4290
 4295
 4300
 4305
 4310
 4315
 4320
 4325
 4330
 4335
 4340
 4345
 4350
 4355
 4360
 4365
 4370
 4375
 4380
 4385
 4390
 4395
 4400
 4405
 4410
 4415
 4420
 4425
 4430
 4435
 4440
 4445
 4450
 4455
 4460
 4465
 4470
 4475
 4480
 4485
 4490
 4495
 4500
 4505
 4510
 4515
 4520
 4525
 4530
 4535
 4540
 4545
 4550
 4555
 4560
 4565
 4570
 4575
 4580
 4585
 4590
 4595
 4600
 4605
 4610
 4615
 4620
 4625
 4630
 4635
 4640
 4645
 4650
 4655
 4660
 4665
 4670
 4675
 4680
 4685
 4690
 4695
 4700
 4705
 4710
 4715
 4720
 4725
 4730
 4735
 4740
 4745
 4750
 4755
 4760
 4765
 4770
 4775
 4780
 4785
 4790
 4795
 4800
 4805
 4810
 4815
 4820
 4825
 4830
 4835
 4840
 4845
 4850
 4855
 4860
 4865
 4870
 4875
 4880
 4885
 4890
 4895
 4900
 4905
 4910
 4915
 4920
 4925
 4930
 4935
 4940
 4945
 4950
 4955
 4960
 4965
 4970
 4975
 4980
 4985
 4990
 4995
 5000
 5005
 5010
 5015
 5020
 5025
 5030
 5035
 5040
 5045
 5050
 5055
 5060
 5065
 5070
 5075
 5080
 5085
 5090
 5095
 5100
 5105
 5110
 5115
 5120
 5125
 5130
 5135
 5140
 5145
 5150
 5155
 5160
 5165
 5170
 5175
 5180
 5185
 5190
 5195
 5200
 5205
 5210
 5215
 5220
 5225
 5230
 5235
 5240
 5245
 5250
 5255
 5260
 5265
 5270
 5275
 5280
 5285
 5290
 5295
 5300
 5305
 5310
 5315
 5320
 5325
 5330
 5335
 5340
 5345
 5350
 5355
 5360
 5365
 5370
 5375
 5380
 5385
 5390
 5395
 5400
 5405
 5410
 5415
 5420
 5425
 5430
 5435
 5440
 5445
 5450
 5455
 5460
 5465
 5470
 5475
 5480
 5485
 5490
 5495
 5500
 5505
 5510
 5515
 5520
 5525
 5530
 5535
 5540
 5545
 5550
 5555
 5560
 5565
 5570
 5575
 5580
 5585
 5590
 5595
 5600
 5605
 5610
 5615
 5620
 5625
 5630
 5635
 5640
 5645
 5650
 5655
 5660
 5665
 5670
 5675
 5680
 5685
 5690
 5695
 5700
 5705
 5710
 5715
 5720
 5725
 5730
 5735
 5740
 5745
 5750
 5755
 5760
 5765
 5770
 5775
 5780
 5785
 5790
 5795
 5800
 5805
 5810
 5815
 5820
 5825
 5830
 5835
 5840
 5845
 5850
 5855
 5860
 5865
 5870
 5875
 5880
 5885
 5890
 5895
 5900
 5905
 5910
 5915
 5920
 5925
 5930
 5935
 5940
 5945
 5950
 5955
 5960
 5965
 5970
 5975
 5980
 5985
 5990
 5995
 6000
 6005
 6010
 6015
 6020
 6025
 6030
 6035
 6040
 6045
 6050
 6055
 6060
 6065
 6070
 6075
 6080
 6085
 6090
 6095
 6100
 6105
 6110
 6115
 6120
 6125
 6130
 6135
 6140
 6145
 6150
 6155
 6160
 6165
 6170
 6175
 6180
 6185
 6190
 6195
 6200
 6205
 6210
 6215
 6220
 6225
 6230
 6235
 6240
 6245
 6250
 6255
 6260
 6265
 6270
 6275
 6280
 6285
 6290
 6295
 6300
 6305
 6310
 6315
 6320
 6325
 6330
 6335
 6340
 6345
 6350
 6355
 6360
 6365
 6370
 6375
 6380
 6385
 6390
 6395
 6400
 6405
 6410
 6415
 6420
 6425
 6430
 6435
 6440
 6445
 6450
 6455
 6460
 6465
 6470
 6475
 6480
 6485
 6490
 6495
 6500
 6505
 6510
 6515
 6520
 6525
 6530
 6535
 6540
 6545
 6550
 6555
 6560
 6565
 6570
 6575
 6580
 6585
 6590
 6595
 6600
 6605
 6610
 6615
 6620
 6625
 6630
 6635
 6640
 6645
 6650
 6655
 6660
 6665
 6670
 6675
 6680
 6685
 6690
 6695
 6700
 6705
 6710
 6715
 6720
 6725
 6730
 6735
 6740
 6745
 6750
 6755
 6760
 6765
 6770
 6775
 6780
 6785
 6790
 6795
 6800
 6805
 6810
 6815
 6820
 6

tomatically performed.

[0089] Fig. 15 is a block diagram showing the configuration of another embodiment for changing the amount of discharged liquid droplets.

[0090] This embodiment has a pulse width setting circuit 1601 provided between the control unit 21 and the head driving circuit 33 in the block diagram as shown in Fig. 4. Other configuration is the same as that shown in Fig. 4, and the explanation thereof is omitted with the same numerals attached.

[0091] The method of changing the amount of discharged liquid droplets in this embodiment is as follows.

[0092] The head driving circuit 33 as shown in Fig. 14 is connected to the pulse width setting circuit 1601 for determining the width of discharge pulse. The pulse width setting circuit 1601 is configured to have two settable pulse widths of 7 μ s and 10 μ s upon a command from the control unit 21. The ink jet recording head for use in this embodiment is designed to exhibit the best print performance at a pulse width of 7 μ s, wherein the amount of liquid droplets at this pulse width is 80 ng. In the normal print, the printing is performed at a pulse width of 7 μ s, but when 200 droplets are discharged at step S4 in Fig. 5, the CPU 23 within the control unit 21 selects the pulse width of 10 μ s. If the pulse width is 10 μ s, the applied energy increases about 40%, resulting in increased discharge power. At the same time, the ink viscosity may reduce due to temperature elevation of the head, so that the amount of liquid droplets increases to 90 ng.

[0093] As above described, the amount of liquid droplets can be changed by switching the pulse width. To make such a control, the ROM 25 stores an operation program of switching two pulse widths as the recording procedure, whereby a series of recording operations are automatically performed.

[0094] In the above-described embodiment, the timing of notifying the absence of ink occurs more early by using a higher discharge frequency at the time of detection than normally, but it will be appreciated that as it is only necessary to increase the amount of discharged liquid droplets per unit time, the same effects can be also achieved by increasing the amount of pulse energy applied to the recording head and providing a larger liquid droplet discharged.

[0095] Next, an embodiment of a third configuration of the present invention will be described.

[0096] In each method described above, a considerable amount of ink may be consumed in detecting ink absence, so that the amount of ink wasted and running costs increase.

[0097] This embodiment aims to resolve the above problem by restricting the discharge nozzles to be used for detection to some part of them, so that the amount of used ink is reduced, and the waste ink and the running costs are reduced.

[0098] In this embodiment, in a series of sequence control, as shown in Fig. 5, 200 droplets at step S4 are

discharged only by nozzles provided opposite a detecting portion of the temperature detecting element 16 of the recording head 1.

[0099] Fig. 16 shows a detected discharge condition when this embodiment is applied. Fig. 16 is a cross-sectional view of the cap 15 as shown in Fig. 3 taken along the central line of the suction tube 17.

[0100] The recording head 1 for use in this embodiment has 64 nozzles 1a, with a resolution of 360 dots/inch, and thus has a discharge width of about 4.5 mm, but a corresponding detecting portion of the temperature detecting element 16 has only a width of about 1 mm, whereby even if the discharge operation with all the nozzles is performed, the ink not making contact with this portion will be wastefully consumed without participating in the detection. Accordingly, by using only this portion of 1 mm as a discharge region 1701, the ink which is wastefully used in the other portion can be saved. The setting of discharge region in this embodiment is as follows.

[0101] The ROM 25 in the block diagram as shown in Fig. 4 is provided with a storage area for storing a discharge pattern corresponding to a discharging portion and a non-discharging portion when detection is made. The CPU 23 refers to data of this area when detection is made and sends out a discharge pattern stored therein as discharge data to the head driving circuit 33. In this embodiment, because the detecting portion of the temperature detecting element 16 is about 1 mm width, as previously described, a pattern in which twenty nozzles opposite the detecting portion of the temperature detecting element 16 among 64 nozzles 1a participate in the discharge is written in the ROM 25.

[0102] While this embodiment has been described with a recording apparatus of the type in which the recording sheet is conveyed in a horizontal direction, and the ink is discharged downward from the recording head, it will be appreciated that the present invention is also applicable to a recording apparatus of the type in which the ink is discharged transversely (along a vertical direction) from the recording head and the recording sheet is conveyed from the lower side upwardly. In this case, it is further preferable to provide a detection and discharge region on the top portion of the recording width, as shown in Fig. 17. This is due to the fact that in the type in which the ink is discharged downwardly from the recording head, substantially equal negative pressure occurs in each nozzle, with the probability of non-discharge being equal irrespective of the position of discharge nozzle, but in the type in which the ink is discharged transversely from the recording head, greater negative pressure occurs in upper nozzles in the recording width due to the action of gravity, which result in higher probability of undischARGE. Therefore, there is such a case that even if the discharge is confirmed on the lower side, the undischARGE may occur on the upper side, whereby the detection and discharge region provided on the top portion of the recording width allows the dis-

charge condition to be confirmed securely without giving rise to any of the failures as above mentioned.

[0103] The discharge region is not necessarily provided as a block, but may be of a comb or stagger shape of selected discharge ports as long as the detected signal level can be sufficiently obtained.

[0104] As in each method described above, when the ink absence detection is made, and the recording head is exchanged because the absence of ink is detected, there is a risk that, if, there is no difference in external appearance between a new recording head and the recording head without ink, the recording head without ink may be mounted again by mistake.

[0105] A way of resolving the above problem will now be described with reference to the block diagram shown in Figure 18 and the flowchart shown in Figure 19. As will be explained below means are provided which allows the user to manually perform the ink absence detection, in addition to automatic detection for each page which is normally performed, thereby allowing the user to confirm that when the recording head is exchanged, a recording head to be mounted contains the quantity of ink to avoid the above inconvenience.

[0106] As shown in Fig. 18 an ink absence check button 1901 is provided for enabling the ink absence check to be performed by the control unit 21 in the block diagram as shown in Fig. 4. Other configuration is the same as that shown in Fig. 4, and the explanation thereof is omitted with the same numerals attached.

[0107] In a stand-by state other than for the recording operation, the CPU 23 monitors that the ink absence check button 1901 is pushed as shown in Fig. 19 (step S201). If the ink absence check button 1901 is not pushed, the CPU 23 monitors that a signal for starting printing is input (step S202), and if that signal is input, the procedure jumps to step S1 in the flowchart as shown in Fig. 5.

[0108] If the ink absence check button 1901 is pushed at step S201, the carriage 2 is moved to stand-by position (cap position) (step S203), and 200 droplets are discharged from each of all nozzles of the recording head 1 (step S204). Thereafter, if the output of temperature detecting element 16 is changed (step S205), the ink presence is displayed on a display unit, not shown, (step S206), and waste ink within the cap is sucked and removed (step S207). Then the procedure returns to step S201.

[0109] If the output of temperature detecting element 16 is not changed at step S205, an alarm message indicating the ink absence is displayed on the display unit as previously described (step S208). Thereafter, if the recording cartridge is exchanged (step S209), a predefined return operation is performed (step S210), and the procedure transfers to step S207. If the recording cartridge is not exchanged, the procedure transfers to step S208, where an alarm message is displayed again to prompt the user to exchange the recording cartridge.

[0110] This permits the user to know the presence or

absence of ink at any time. That is, control means are provided such that, if the ink presence is detected, a message "ink present" is displayed on the display unit, not shown, while if it is not detected, an ink absence alarm is displayed.

[0111] In this way, when the recording head is exchanged, a confirmation as to whether or not there remains the ink can be made, whereby the recording head which is empty is prevented from being mounted by mistake.

[0112] While as described above-mentioned with reference to Figs. 18 and 19, the discharge operation at step S204 for ink detection is performed through all the nozzles, the the manual ink detection operation described with reference to Figs. 18 and 19 can also be applied to apparatus embodying the present invention.

[0113] Fig. 20 is a block diagram showing a schematic configuration in which a recording apparatus of the present invention is applied to the information processing apparatus having the features of word processor, personal computer, facsimile terminal equipment, and copying machine. In the figure, 2101 is a control unit for controlling the whole apparatus, wherein it comprises a CPU such as a microprocessor or various I/O ports, and controls by outputting or inputting a control signal or data signal to or from each of sections, respectively. 2102 is a display section, which displays various kinds of menus, document information, and image data read by an image reader 2107 on the display screen. 2103 is a transparent, pressure sensitive touch panel provided on the display section 2102, which enables the entry of an item or coordinate value on the display section 2102 by depressing its surface with a finger or the like.

[0114] 2104 is an FM (Frequency Modulation) sound source section, which makes the FM modulation for the music information created on the music editor, which is stored in and read from a memory 2110 or an external storage device 2112 as the digital data. An electrical signal from the FM sound source section 2104 is converted into audible sound by a speaker section 2105. A printer section 2106 is useful as the output terminal for a word processor, a personal computer, a facsimile terminal equipment or a copying machine, to which a recording apparatus according to the present invention is applied.

[0115] 2107 is an image reader section which reads original data photoelectrically, and is provided midway on the conveying path of original to read a facsimile or copying original, and other various types of original. 2108 is a FAX receiving/transmitting section for FAX transmitting original data read by the image reader section 2107 or for FAX receiving facsimile signals that are transmitted, having an interface facility with the outside. 2109 is a telephone section, comprising various telephone features, such as ordinary telephone or automatic answering telephone. 2110 is a memory section comprising a ROM for storing system programs, manager programs and other application programs, character fonts, and dictionaries, a RAM for storing an application

program loaded from the external storage device 2112 and character information, and a video RAM.

[0116] 2111 is a keyboard section for inputting document information or various commands. 2112 is the external storage device which is a storage medium consisting of floppy disk or hard disk, wherein this external storage device 2112 is used to store character information, music or audio data, and user's application programs.

[0117] Fig. 21 is an appearance view of the information processing apparatus as shown in Fig. 20. In the figure, 2201 is a flat panel display formed of a liquid crystal for displaying various kinds of menus, graphic data or document information. On this display 2201 is installed the touch panel, which enables the entry of coordinate or specified item by depressing the surface of the touch panel with a finger or the like. 2202 is a handset to be used when the apparatus functions as a telephone.

[0118] A keyboard 2203 is detachably connected via a cord to a main device, and is used to input various character information or data. The keyboard 2203 is also provided with various function keys 2204. 2205 is an opening for insertion of the floppy disk.

[0119] 2207 is a paper laying board for laying thereon a paper to be read by the image reader section 2107, in which a read paper is exhausted from the rear side of device. In the facsimile reception, received data is recorded by an ink jet printer 2207.

[0120] It should be noted that the display section 2201 may be a CRT, but is preferably a flat panel such as a liquid crystal display using a ferroelectric liquid crystal. This is because the display can be made more compact, thinner, and lighter. When the above mentioned information processing apparatus functions as a personal computer or word processor, various information input from the keyboard 2111 in Fig. 15 are processed according to a predetermined program by the control unit 2101, and output to the printer 2106 as the image. When it functions as a receiver for the facsimile terminal equipment, the facsimile information input from the FAX receiving/transmitting section 2108 via the transmission line are received according to a predetermined program by the control section 2101, and output to the printer section 2106 as the received image.

[0121] And when it functions as a copying machine, an original is read by the image reader section 2107, and original data that was read is output via the control unit 2101 to the printer section 2106 as the copied image. Note that it functions as a transmitter for the facsimile terminal equipment, original data that was read by the image reader section 2107 is processed for transmission according to a predetermined program by the control unit 2101, and transmitted by the FAX receiving/transmitting section 2108 via the transmission line. It should be noted that the above mentioned information processing apparatus can be of the integral type in which an ink jet printer is contained within the main de-

vice as shown in Fig. 22, in which its portability can be enhanced. In the same figure, like reference numerals are affixed to parts having the same functions as those in Fig. 21.

[0122] Thus, if a recording apparatus according to the present invention is applied to the multifunctional information processing apparatus as above described, higher quality recording images can be obtained so that the features of the information processing apparatus can be further improved.

[0123] The present invention brings about excellent effects particularly in an ink jet recording apparatus for recording by forming flying ink droplets by the use of heat energy among the various ink jet recording systems.

[0124] As to its representative constitution and principle, for example, one practiced by use of the basic principle disclosed in, for example, U.S. Patents 4,723,129 and 4,740,796 is preferred. This system is applicable to either of the so-called on-demand type and the continuous type. Particularly, the case of the on-demand type is effective because, by applying at least one driving signal which gives rapid temperature elevation exceeding nucleus boiling corresponding to the recording information on electricity-heat converters arranged corresponding to the sheets or liquid channels holding a liquid (ink), heat energy is generated at the electricity-heat converters to effect film boiling at the heat acting surface of the recording head, and consequently the bubbles within the liquid (ink) can be formed corresponding one by one to the driving signals. By discharging the liquid (ink) through an opening for discharging by growth and shrinkage of the bubble, at least one droplet is formed. By making the driving signals into the pulse shapes, growth and shrinkage of the bubbles can be effected instantly and adequately to accomplish more preferably discharging of the liquid (ink) particularly excellent in response characteristic.

[0125] As the driving signals of such pulse shape, those as disclosed in U.S. Patents 4,463,359 and 4,345,262 are suitable. Further excellent recording can be performed by employment of the conditions described in U.S. Patent 4,313,124 of the invention concerning the temperature elevation rate of the above-mentioned heat acting surface.

[0126] As the constitution of the recording head, in addition to the combination of the discharging orifice, liquid channel, and electricity-heat converter (linear liquid channel or right-angled liquid channel) as disclosed in the above-mentioned respective specifications, the constitution by use of U.S. Patent 4,558,333 or 4,459,600 disclosing the constitution having the heat acting portion arranged in the flexed region is also included in the present invention. In addition, the present invention can be also effectively made the constitution as disclosed in Japanese Laid-Open Patent Application No. 59-123670 which discloses the constitution using a slit common to a plurality of electricity-heat converters as the discharg-

ing portion of the electricity-heat converter or Japanese Laid-Open Patent Application No. 59-138461 which discloses the constitution having the opening for absorbing pressure wave of heat energy correspondent to the discharging portion.

[0127] In addition, the present invention is effective for a recording head of the freely exchangeable chip type which enables electrical connection to the main device or supply of ink from the main device by being mounted on the main device, or a recording head of the cartridge type having an ink tank integrally provided on the recording head itself.

[0128] Also, addition of a restoration means for the recording head, a preliminary auxiliary means, etc., to the recording head is preferable, because the effect of the present invention can be further stabilized. Specific examples of these may include, for the recording head, capping means, cleaning means, pressurization or suction means, electricity-heat converters or another type of heating elements, or preliminary heating means according to a combination of these, and it is also effective for performing stable recording to perform preliminary mode which performs discharging separate from recording.

[0129] Further, as the recording mode of the recording device, the present invention is extremely effective for not only the recording mode only of a primary color such as black, etc., but also a device equipped with at least one of plural different colors or full color by color mixing, whether the recording head may be either integrally constituted or combined in plural number.

[0130] Though the ink is considered as the liquid in the embodiments as above described, another ink may be also usable which is solid below room temperature and will soften or liquefy at or above room temperature, or liquefy when a recording enable signal is issued.

[0131] In addition, in order to avoid the temperature elevation due to heat energy by positively utilizing the heat energy as the energy for the change of state from solid to liquid, or to prevent the evaporation of ink by using the ink which will stiffen in the shelf state, the use of the ink having a property of liquefying only with the application of heat energy, such as liquefying with the application of heat energy in accordance with a recording signal so that liquid ink is discharged, or may solidify prior to reaching a recording medium, is also applicable in the present invention. In such a case, the ink may be held as liquid or solid in recesses or through holes of a porous sheet, which is placed opposed to electricity-heat converters, as described in Japanese Laid-Open Patent Application No. 54-56847 or No. 60-71260. The most effective method for the ink as above described in the present invention is based on the film boiling.

[0132] Further, a recording apparatus according to the present invention may be used in the form of being provided integrally or separately as the image output terminal in an information processing equipment such as a word processor or computer, a copying machine in

combination with a reader, or a facsimile terminal equipment having the transmission and reception feature.

[0133] In particular, when the recording apparatus is used as a recording unit for the facsimile terminal equipment, received image is once stored in memory and then recorded, the discharge monitor as previously described is performed for each one page of recording, and the contents of memory are erased after the confirmation that the normal print has been made, whereby when the ink is used up, received data which is stored in memory can be output again after the exchanging of the head.

[0134] The present invention which is constituted as above described can exhibit the following effects.

[0135] An ink jet recording apparatus and an ink discharge detecting method can be provided in which decreased ink remain or ink undischARGE can be securely detected.

[0136] Also, it is possible to prevent the occurrence of such a failure that recording sheets are wastefully consumed or invaluable data is lost because the recording operation is continued despite of almost depletion of ink remain, so that the reliability of the recording apparatus can be improved.

[0137] Detection of the absence of ink remain takes place when the ink remain is almost depleted, whereby the ink is not wastefully used, resulting in reduced running costs.

[0138] In an ink jet recording apparatus in which the absence of ink is notified by monitoring the discharge to be completely performed in such a way as to discharge the ink periodically, for example, between pages, it is possible to prevent false detection due to unstable discharge condition immediately before the absence of ink, and to prevent the occurrence of such a failure that recording sheets are wastefully consumed, or invaluable data is lost because the recording operation is continued despite of almost depletion of ink remain, so that the reliability of the recording apparatus can be improved.

[0139] Also, it is possible to reduce the amount of ink to be used for detecting the absence of ink. Therefore, the percent of the amount of ink to be used other than for the recording is lessened, resulting in increased recordable number of recording sheets and reduced running costs. The ink used for detection must be withdrawn as waste ink, but as this amount of ink will decrease, the waste ink tank can be made smaller, thereby contributing to the compactness of the entire apparatus.

[0140] Since the ink absence detection can be made at any time by the user, it is possible to judge the ink remain by executing the ink absence detecting operation even by using such a recording head that the ink remain is not known from the outside. Therefore, it is possible to prevent the recording head which is empty from being mounted by mistake, thereby eliminating wasteful consumption of recording sheets.

Claims

1. An ink jet recording apparatus for recording using a recording head (1) having discharge means (105) for causing discharge of ink from discharge ports (111) of the head onto a recording medium, the apparatus comprising:

ink detection means (16, 29) for detecting whether or not ink is being discharged from said recording head; positioning means for positioning said recording head and said ink detection means at relatively opposed locations; and discharge determining means (21, 23) for determining whether or not ink is being discharged from said recording head when said recording head and said ink detection means are in said relatively opposed locations,

characterised by control means (21, 1501, 1601) for controlling the amount of ink discharged per unit time from a discharge port to cause the amount of ink discharged per unit time to be greater when ink is discharged to said ink detection means for said determination by said discharge determining means (21, 23) than when said recording is performed by discharging ink onto the recording medium.
2. An ink jet recording apparatus according to claim 1, wherein said control means (1501) is operable to control the number of ink droplets discharged per unit time.
3. An ink jet recording apparatus according to claim 2, wherein said control means (1501) is arranged to change the amount of ink discharged per unit time by controlling the ink discharge frequency.
4. An ink jet recording apparatus according to claim 1, wherein said discharge condition control means (1601) is operable to control the volume of ink droplets discharged by said recording head.
5. An ink jet recording apparatus according to any preceding claim, comprising a recording head (1) or an ink reservoir connected to said recording head (1), having negative pressure generating means (1310) for maintaining the inside of said recording head (1) at a negative pressure.
6. An ink jet recording apparatus according to any preceding claim including:

input means (1901) for indicating the start of discharge determination; and wherein said control means (21) is operable to cause the ink discharge detection to be performed periodically.
7. An ink jet recording apparatus according to any preceding claim, comprising a recording head having heat energy generating means for generating heat energy to create a bubble to cause ink discharge.
8. An ink jet recording apparatus according to any one of claims 1 to 7, wherein said ink detection means is a temperature sensor (16) and said discharge determining means (21, 23) is arranged to determine the ink discharge condition of the recording head on the basis of a temperature change detected by said temperature sensor.
9. An image forming device comprising an ink jet recording apparatus according to any of claims 1 to 8, and transmitting means (2108) for transmitting image data or receiving means (2108) for image data to be recorded.
10. An image forming device comprising an ink jet recording apparatus according to any of claims 1 to 8, or an image forming device according to claim 9, further comprising image reading means (2107) for reading an original image.
11. An image forming device comprising an ink jet recording apparatus according to any of claims 1 to 8, or an image forming device according to either of claims 9 and 10, further comprising recording signal input means.
12. An image forming device according to claim 11, wherein said recording signal input means is a keyboard (2111).
13. A method for determining the ink discharge condition of an ink jet recording apparatus for recording using a recording head (1) having discharge means (105) for causing discharge of ink from discharge ports (111) of the head onto a recording medium, the method comprising:

positioning said recording head and an ink detection means (16, 29) of the ink jet recording apparatus at relatively opposed locations; detecting whether or not ink is being discharged from said recording head; and determining whether or not ink is being discharged from said recording head when said recording head and said ink detection means are in said relatively opposed locations, **characterised by** controlling the amount of ink discharged per unit time from a discharge port to cause the amount of ink discharged per unit time to be greater when ink is discharged to said ink detection means for said determination

than when said recording is performed by discharging ink onto the recording medium.

14. A method according to claim 13, which comprises controlling the amount of ink discharged by controlling the number of ink droplets discharged per unit time. 5
15. A method according to claim 17, which comprises controlling the amount of ink discharged by controlling the ink discharge frequency. 10
16. A method according to claim 13, which comprises controlling the amount of ink discharged by controlling the volume of each of the ink droplets discharged by said recording head. 15
17. A method according to any one of claims 13 to 16, which comprises causing the ink discharge condition to be determined both in response to an input signal input using input means and periodically. 20
18. A method according to any one of claims 13 to 17 which comprises using as the recording head a recording head which uses thermal energy to cause ink discharge. 25
19. A method according to any one of claims 13 to 18, which comprises using as the ink detection means a temperature sensor for detecting temperature and determining the ink discharge condition on the basis of the output of the temperature sensor. 30

Patentansprüche 35

1. Tintenstrahlaufzeichnungsgerät zur Aufzeichnung, das einen Aufzeichnungskopf (1) verwendet, der eine Ausstoßeinrichtung (105) zur Verursachung eines Ausstoßes von Tinte aus Ausstoßöffnungen (111) des Kopfes auf einen Aufzeichnungsträger aufweist, wobei das Gerät umfasst: 40

eine Tintenerfassungseinrichtung (16, 29) zur Erfassung, ob Tinte von dem Aufzeichnungskopf ausgestoßen wird oder nicht, eine Positionierungseinrichtung zur Positionierung des Aufzeichnungskopfes und der Tintenerfassungseinrichtung bei relativ gegenüberliegenden Positionen und 50

eine Ausstoßbestimmungseinrichtung (21, 23) zur Bestimmung, ob Tinte von dem Aufzeichnungskopf ausgestoßen wird oder nicht, wenn der Aufzeichnungskopf und die Tintenerfassungseinrichtung bei den relativ gegenüberliegenden Positionen sind, **gekennzeichnet durch** eine Steuerungseinrichtung (21, 1501, 1601) zur Steuerung der pro Einheitszeit aus 55

einer Ausstoßöffnung ausgestoßenen Tintenmenge, um zu veranlassen, dass die pro Einheitszeit ausgestoßene Tintenmenge größer ist, wenn Tinte zu der Tintenerfassungseinrichtung für die Bestimmung **durch** die Ausstoßbestimmungseinrichtung (21, 23) ausgestoßen wird, als wenn die Aufzeichnung **durch** Ausstoßen von Tinte auf den Aufzeichnungsträger ausgeführt wird.

2. Tintenstrahlaufzeichnungsgerät nach Anspruch 1, wobei die Steuerungseinrichtung (1501) betreibbar ist, die Anzahl von Tintentröpfchen zu steuern, die pro Einheitszeit ausgestoßen werden.
3. Tintenstrahlaufzeichnungsgerät nach Anspruch 2, wobei die Steuerungseinrichtung (1501) eingerichtet ist, die pro Einheitszeit ausgestoßene Tintenmenge durch Steuerung der Tintenausstoßfrequenz zu verändern.
4. Tintenstrahlaufzeichnungsgerät nach Anspruch 1, wobei die Ausstoßzustandssteuerungseinrichtung (1601) betreibbar ist, das Volumen von durch den Aufzeichnungskopf ausgestoßenen Tintentröpfchen zu steuern.
5. Tintenstrahlaufzeichnungsgerät nach einem der vorhergehenden Ansprüche, umfassend einen Aufzeichnungskopf (1) oder ein mit dem Aufzeichnungskopf (1) verbundenes Tintenreservoir, mit einer Unterdruckerzeugungseinrichtung (1310) zum Halten der Innenseite des Aufzeichnungskopfes (1) auf einem Unterdruck.
6. Tintenstrahlaufzeichnungsgerät nach einem der vorhergehenden Ansprüche, mit

einer Eingabeeinrichtung (1901) zum Angeben des Starts einer Ausstoßbestimmung, wobei die Steuerungseinrichtung (21) betreibbar ist, zu veranlassen, dass die Tintenausstoßerkennung periodisch ausgeführt wird.
7. Tintenstrahlaufzeichnungsgerät nach einem der vorhergehenden Ansprüche, umfassend einen Aufzeichnungskopf mit einer Wärmeenergieerzeugungseinrichtung zur Erzeugung von Wärmeenergie, um eine Blase zur Verursachung eines Tintenausstoßes zu erzeugen.
8. Tintenstrahlaufzeichnungsgerät nach einem der Ansprüche 1 bis 7, wobei die Tintenerfassungseinrichtung ein Temperatursensor (16) ist und die Ausstoßbestimmungseinrichtung (21, 23) eingerichtet ist, den Tintenausstoßzustand des Aufzeichnungskopfes auf der Grundlage einer durch den Temperatursensor erfassten Temperaturänderung zu be-

stimmen.

9. Bilderzeugungsvorrichtung, die ein Tintenstrahlauzeichnungsgerät nach einem der Ansprüche 1 bis 8 und eine Übertragungseinrichtung (2108) zur Übertragung von Bilddaten oder eine Empfangseinrichtung (2108) für aufzuzeichnende Bilddaten umfasst. 5
10. Bilderzeugungsvorrichtung, die ein Tintenstrahlauzeichnungsgerät nach einem der Ansprüche 1 bis 8 umfasst, oder eine Bilderzeugungsvorrichtung nach Anspruch 9, mit einer Bildleseeinrichtung (2107) zum Lesen eines Ursprungsbilds. 10
11. Bilderzeugungsvorrichtung, die ein Tintenstrahlauzeichnungsgerät nach einem der Ansprüche 1 bis 8 umfasst, oder eine Bilderzeugungsvorrichtung nach einem der Ansprüche 9 und 10, mit einer Aufzeichnungssignaleingabeeinrichtung. 15
12. Bilderzeugungsvorrichtung nach Anspruch 11, wobei die Aufzeichnungssignaleingabeeinrichtung eine Tastatur (2111) ist. 20
13. Verfahren zum Bestimmen des Tintenausstoßzustands eines Tintenstrahlauzeichnungsgeräts zur Aufzeichnung, das einen Aufzeichnungskopf (1) verwendet, der eine Ausstoßeinrichtung (105) zur Verursachung eines Ausstoßes von Tinte aus Ausstoßöffnungen (111) des Kopfes auf einen Aufzeichnungsträger aufweist, wobei das Verfahren die Schritte umfasst: 25

Positionieren des Aufzeichnungskopfes und einer Tintenerfassungseinrichtung (16, 29) des Tintenstrahlauzeichnungsgeräts bei relativ gegenüberliegenden Positionen, Erfassen, ob Tinte von dem Aufzeichnungskopf ausgestoßen wird oder nicht, und Bestimmen, ob Tinte von dem Aufzeichnungskopf ausgestoßen wird oder nicht, wenn der Aufzeichnungskopf und die Tintenerfassungseinrichtung bei den relativ gegenüberliegenden Positionen sind, **gekennzeichnet durch** einen Schritt zum Steuern der pro Einheitszeit aus einer Ausstoßöffnung ausgestoßenen Tintenmenge, um zu veranlassen, dass die pro Einheitszeit ausgestoßene Tintenmenge größer ist, wenn Tinte zu der Tintenerfassungseinrichtung für die Bestimmung ausgestoßen wird, als wenn die Aufzeichnung **durch** Ausstoßen von Tinte auf den Aufzeichnungsträger ausgeführt wird. 30 35 40 45 50

14. Verfahren nach Anspruch 13, mit einem Schritt zum Steuern der ausgestoßenen Tintenmenge durch Steuern der Anzahl von Tintentröpfchen, die pro 55

Einheitszeit ausgestoßen werden.

15. Verfahren nach Anspruch 13, mit einem Schritt zum Steuern der ausgestoßenen Tintenmenge durch Steuern der Tintenausstoßfrequenz.
16. Verfahren nach Anspruch 13, mit einem Schritt zum Steuern der ausgestoßenen Tintenmenge durch Steuern des Volumens jedes der durch den Aufzeichnungskopf ausgestoßenen Tintentröpfchen.
17. Verfahren nach einem der Ansprüche 13 bis 16, mit einem Schritt zum Veranlassen, dass der Tintenausstoßzustand sowohl in Reaktion auf ein Eingangssignal, das unter Verwendung einer Eingabeeinrichtung eingegeben wird, als auch periodisch bestimmt wird.
18. Verfahren nach einem der Ansprüche 13 bis 17, mit einem Schritt zum Verwenden eines Aufzeichnungskopfes, der Wärmeenergie zur Verursachung eines Tintenausstoßes verwendet, als den Aufzeichnungskopf.
19. Verfahren nach einem der Ansprüche 13 bis 18, mit Schritten zum Verwenden eines Temperatursensor zur Erfassung einer Temperatur als die Tintenerfassungseinrichtung und zum Bestimmen des Tintenausstoßzustands auf der Grundlage eines Ausgangssignals des Temperatursensors. 25 30

Revendications

1. Appareil d'enregistrement à jet d'encre destiné à enregistrer en utilisant une tête d'enregistrement (1) ayant un moyen de décharge (105) destiné à provoquer une décharge d'encre depuis des orifices de décharge (111) de la tête sur un support d'enregistrement, l'appareil comportant : 35 40

un moyen (16, 29) de détection d'encre destiné à détecter si de l'encre est déchargée ou non de ladite tête d'enregistrement ; un moyen de positionnement destiné à positionner ladite tête d'enregistrement et ledit moyen de détection d'encre dans des emplacements relativement opposés ; et un moyen (21, 23) de détermination de décharge destiné à déterminer si de l'encre est en cours de décharge ou non de ladite tête d'enregistrement lorsque ladite tête d'enregistrement et ledit moyen de détection d'encre sont dans lesdits emplacements relativement opposés, 45 50 55

caractérisé par des moyens de commande (21, 1501, 1601) destinés à commander la quantité

- d'encre déchargée par unité de temps depuis un orifice de décharge pour rendre la quantité d'encre déchargée par unité de temps, lorsque l'encre est déchargée vers ledit moyen de détection d'encre pour ladite détermination par ledit moyen (21, 23) de détermination de décharge, plus grande que lorsque ledit enregistrement est effectué par décharge d'encre sur le support d'enregistrement.
2. Appareil d'enregistrement à jet d'encre selon la revendication 1, dans lequel ledit moyen de commande (1501) peut fonctionner de façon à commander le nombre de gouttelettes d'encre déchargées par unité de temps.
 3. Appareil d'enregistrement à jet d'encre selon la revendication 2, dans lequel ledit moyen de commande (1501) est agencé de façon à faire varier la quantité d'encre déchargée par unité de temps en commandant la fréquence de décharge de l'encre.
 4. Appareil d'enregistrement à jet d'encre selon la revendication 1, dans lequel ledit moyen (1601) de commande de condition de décharge peut fonctionner de façon à commander le volume des gouttelettes d'encre déchargées par ladite tête d'enregistrement.
 5. Appareil d'enregistrement à jet d'encre selon l'une quelconque des revendications précédentes, comportant une tête d'enregistrement (1) ou un réservoir d'encre raccordé à ladite tête d'enregistrement (1), ayant un moyen (1310) de génération d'une pression négative pour maintenir l'intérieur de ladite tête d'enregistrement (1) à une pression négative.
 6. Appareil d'enregistrement à jet d'encre selon l'une quelconque des revendications précédentes, comprenant :
 - un moyen d'entrée (1901) destiné à indiquer le début d'une détermination de décharge ; et dans lequel
 - ledit moyen de commande (21) peut fonctionner de façon à faire exécuter périodiquement la détection de décharge d'encre.
 7. Appareil d'enregistrement à jet d'encre selon l'une quelconque des revendications précédentes, comportant une tête d'enregistrement ayant un moyen de génération d'énergie thermique destiné à générer de l'énergie thermique pour engendrer une bulle provoquant une décharge d'encre.
 8. Appareil d'enregistrement à jet d'encre selon l'une quelconque des revendications 1 à 7, dans lequel ledit moyen de détection d'encre est un capteur (16) de température et ledit moyen (21, 23) de détermination de décharge est agencé de façon à déterminer la condition de décharge d'encre de la tête d'enregistrement sur la base d'une variation de température déterminée par ledit capteur de température.
 9. Dispositif de formation d'image comportant un appareil d'enregistrement à jet d'encre selon l'une quelconque des revendications 1 à 8, et un moyen d'émission (2108) destiné à émettre des données d'image ou un moyen de réception (2108) pour des données d'image devant être enregistrées.
 10. Dispositif de formation d'image comportant un appareil d'enregistrement à jet d'encre selon l'une quelconque des revendications 1 à 8, ou un dispositif de formation d'image selon la revendication 9, comportant en outre un moyen (2107) de lecture d'image destiné à lire une image originale.
 11. Dispositif de formation d'image comportant un appareil d'enregistrement à jet d'encre selon l'une quelconque des revendications 1 à 8, ou dispositif de formation d'image selon l'une des revendications 9 et 10, comportant en outre un moyen d'entrée de signal d'enregistrement.
 12. Dispositif de formation d'image selon la revendication 11, dans lequel ledit moyen d'entrée de signal d'enregistrement est un clavier (2111).
 13. Procédé pour déterminer la condition de décharge d'encre d'un appareil d'enregistrement à jet d'encre destiné à enregistrer en utilisant une tête d'enregistrement (1) ayant un moyen de décharge (105) pour provoquer une décharge d'encre à partir d'orifices de décharge (111) de la tête sur un support d'enregistrement, le procédé comprenant :
 - le fait de positionner ladite tête d'enregistrement et un moyen (16, 29) de détection d'encre de l'appareil d'enregistrement à jet d'encre en des emplacements relativement opposés ;
 - le fait de détecter si de l'encre est déchargée ou non de ladite tête d'enregistrement ; et
 - le fait de déterminer si de l'encre est déchargée ou non de ladite tête d'enregistrement lorsque ladite tête d'enregistrement et ledit moyen de détection d'encre sont dans lesdits emplacements relativement opposés, **caractérisé par** un réglage de la quantité d'encre déchargée par unité de temps depuis un orifice de décharge pour rendre la quantité d'encre déchargée par unité de temps, lorsque de l'encre est déchargée vers ledit moyen de détection d'encre pour ladite détermination, plus grande que lorsque ledit enregistrement est effectué en déchargeant de l'encre sur le support d'enregistrement.

14. Procédé selon la revendication 13, qui comprend le réglage de la quantité d'encre déchargée par une commande du nombre de gouttelettes d'encre déchargé par unité de temps. 5
15. Procédé selon la revendication 17, qui comprend le réglage de la quantité d'encre déchargée par une commande de la fréquence de décharge d'encre.
16. Procédé selon la revendication 13, qui comprend le réglage de la quantité d'encre déchargée par une commande du volume de chacune des gouttelette d'encre déchargées par ladite tête d'enregistrement. 10 15
17. Procédé selon l'une quelconque des revendications 13 à 16, qui comprend la détermination de la condition de décharge d'encre à la fois en réponse à un signal d'entrée appliqué en entrée en utilisant un moyen d'entrée, et périodiquement. 20
18. Procédé selon l'une quelconque des revendications 13 à 17, qui comprend l'utilisation en tant que tête d'enregistrement d'une tête d'enregistrement qui utilise de l'énergie thermique pour provoquer une décharge d'encre. 25
19. Procédé selon l'une quelconque des revendications 13 à 18, qui comprend l'utilisation, en tant que moyen de détection d'encre, d'un capteur de température pour une détection de température et la détermination de la condition de décharge d'encre sur la base du signal de sortie du capteur de température. 30 35

40

45

50

55

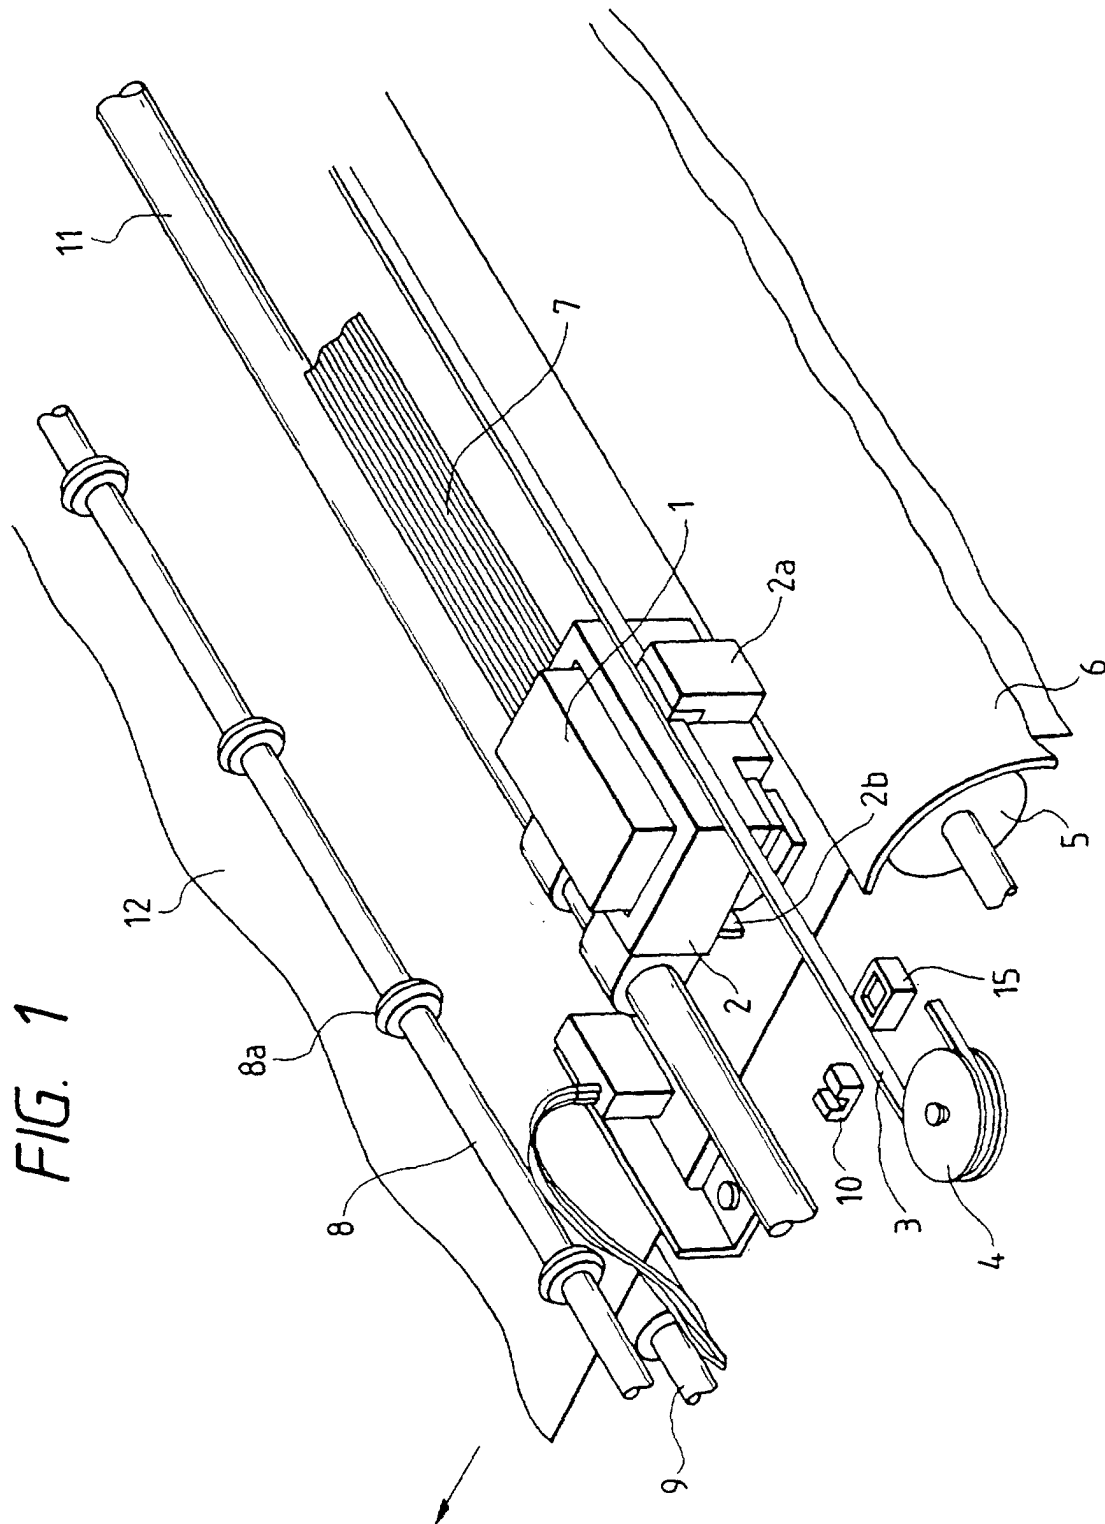


FIG. 2

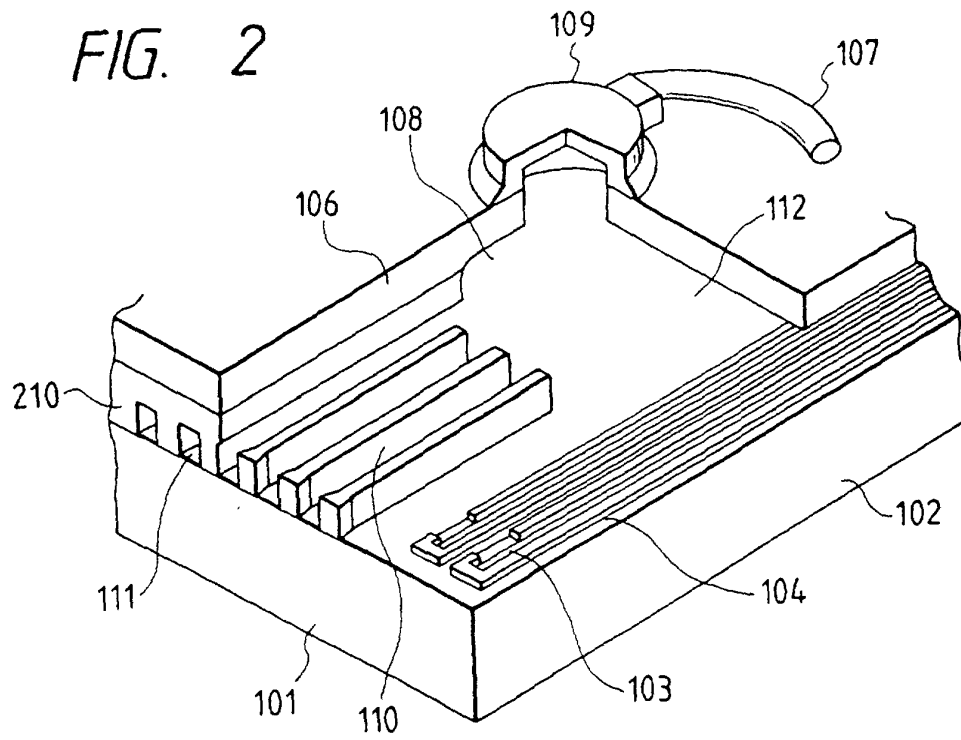


FIG. 3

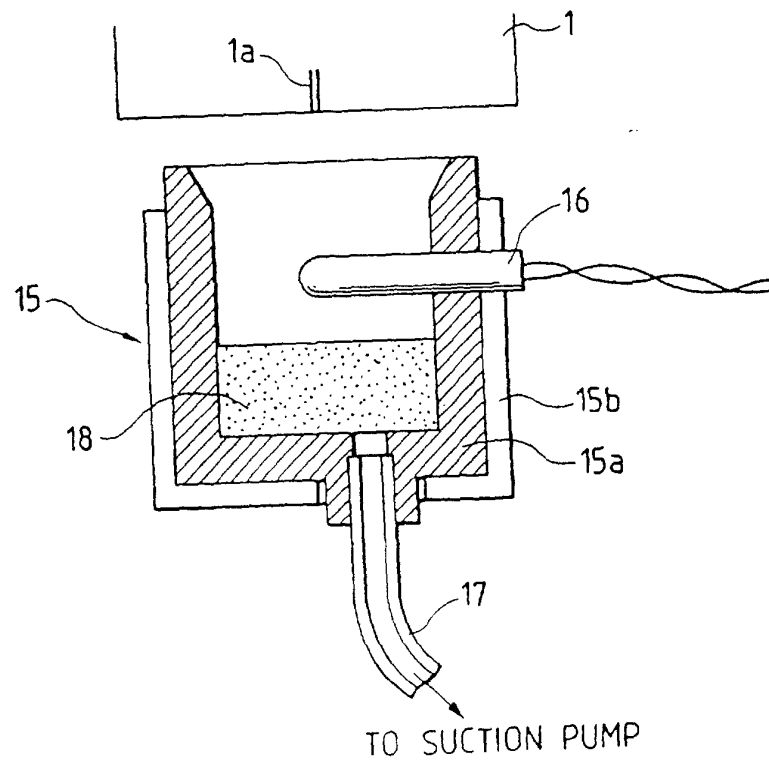


FIG. 4

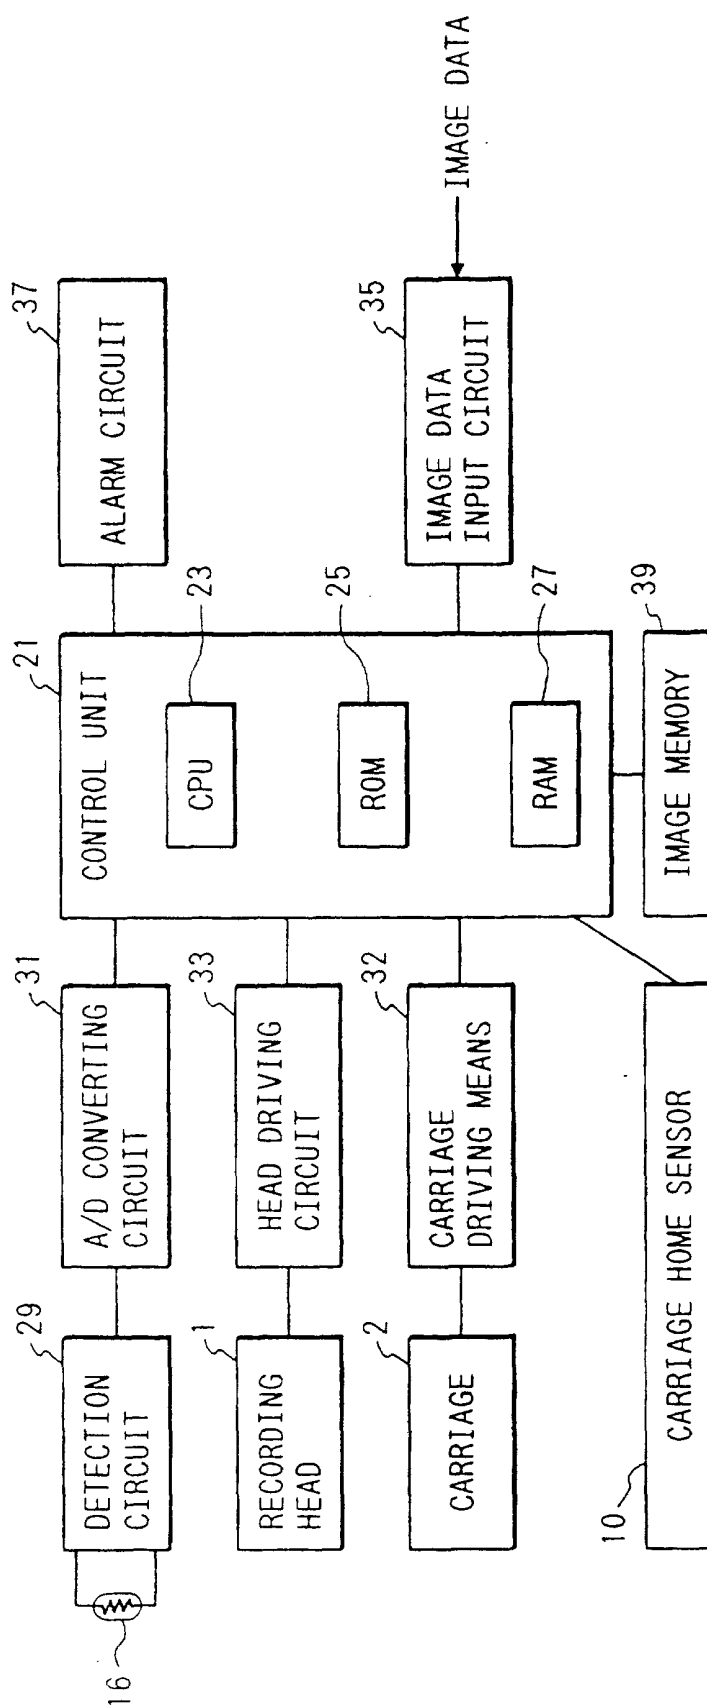


FIG. 5

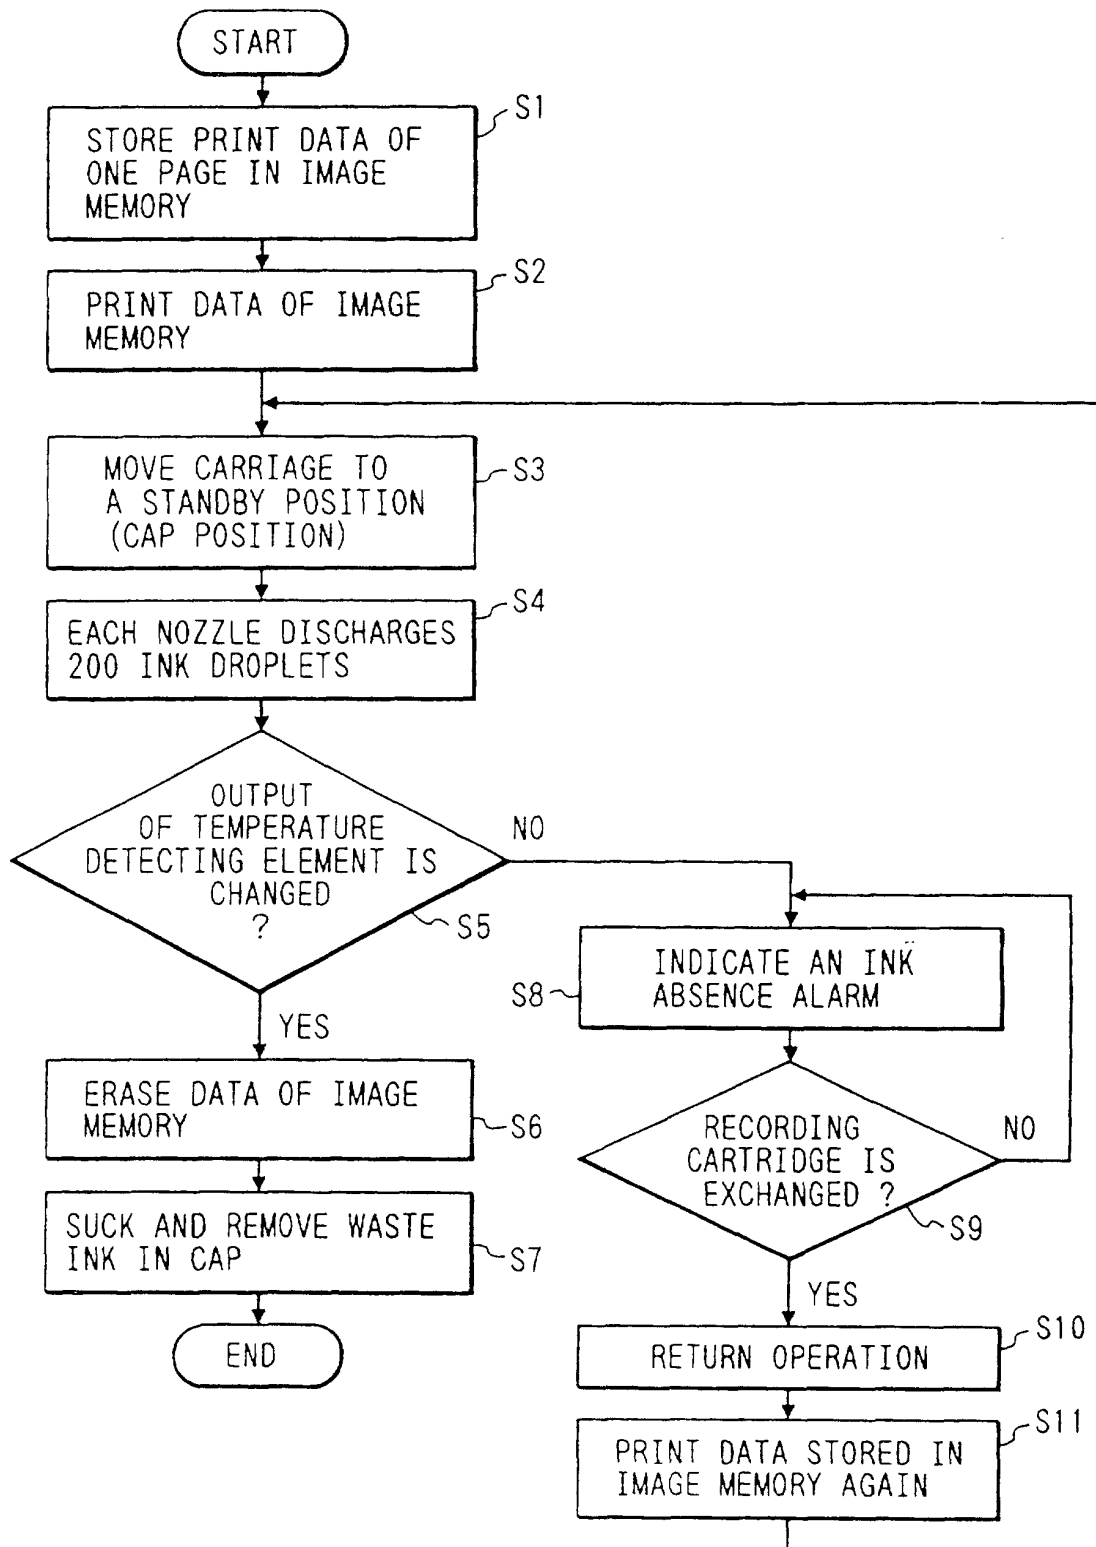


FIG. 6

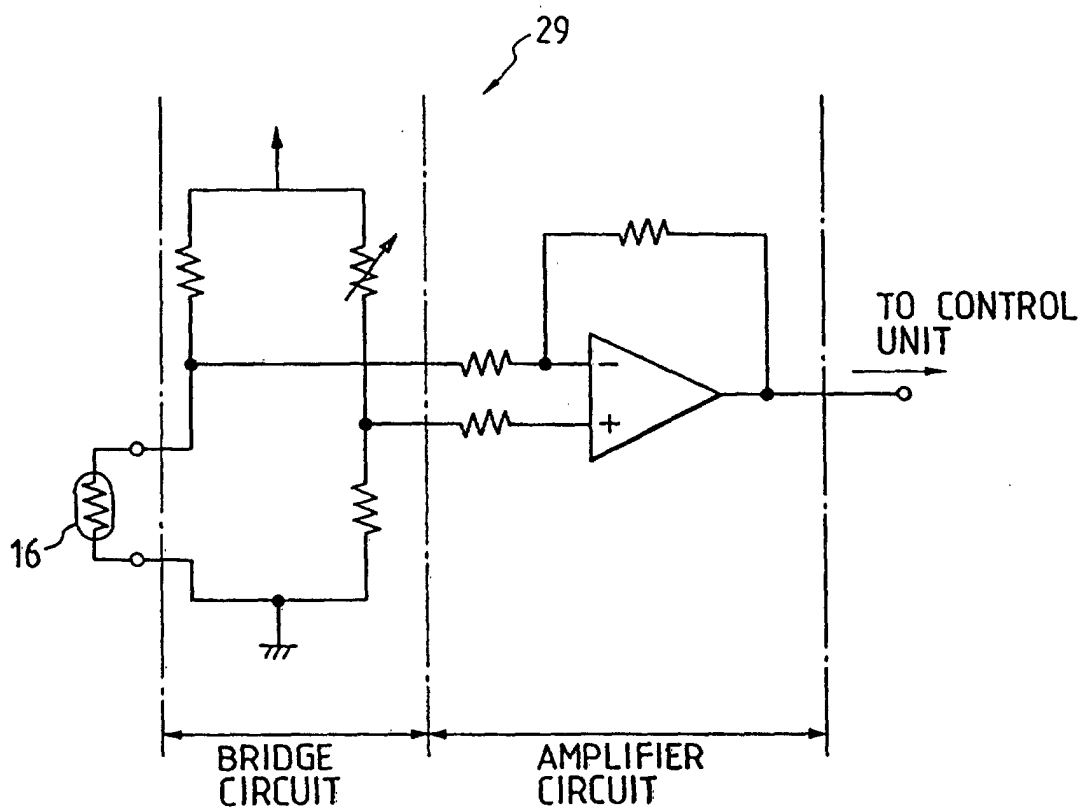


FIG. 7

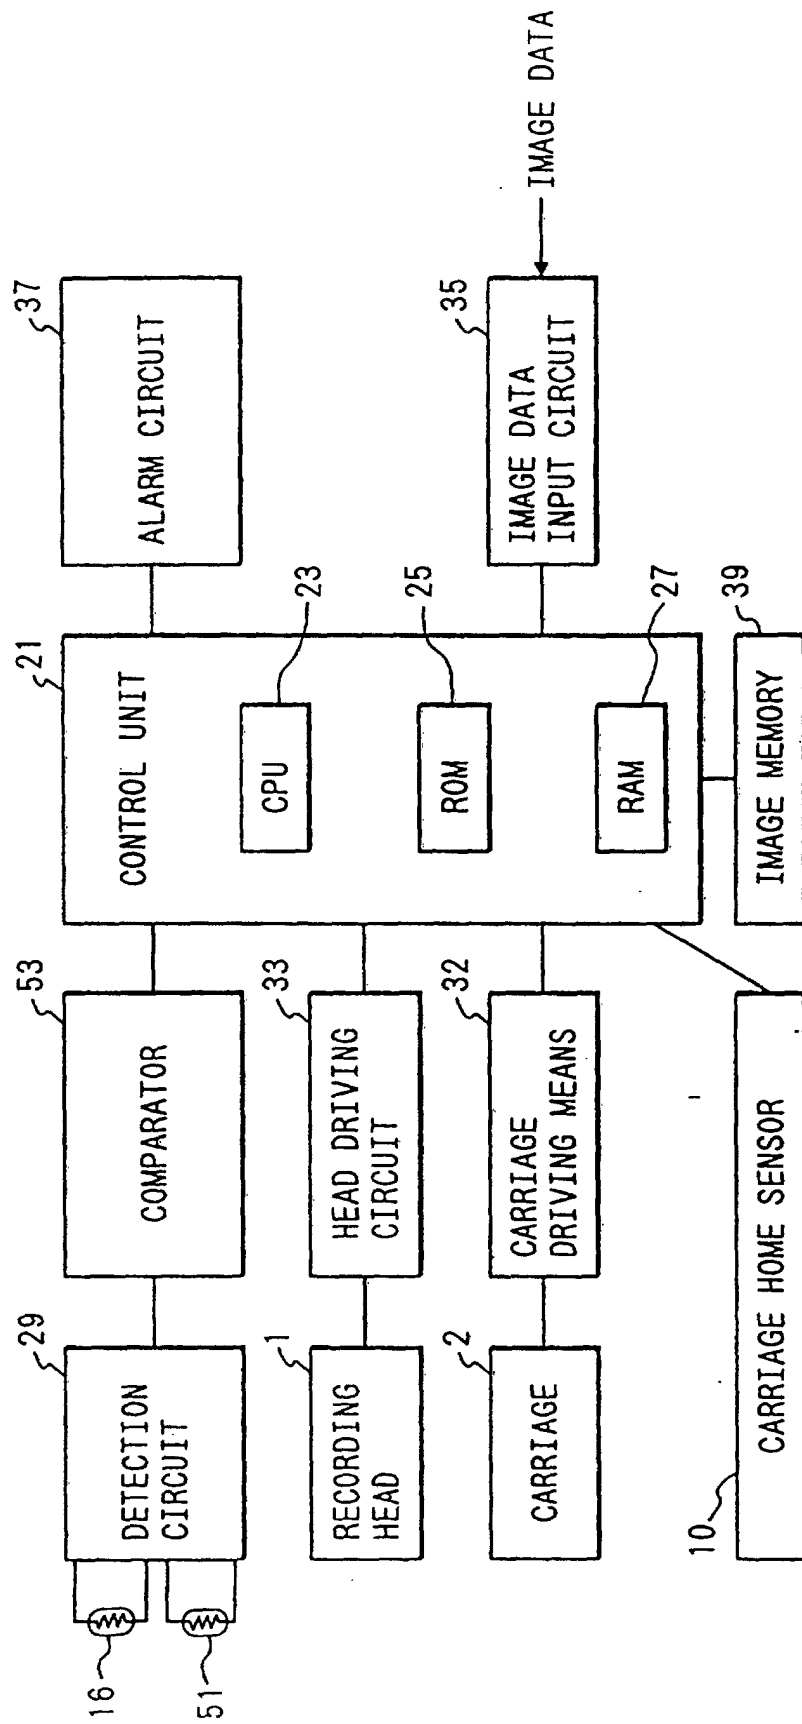


FIG. 8

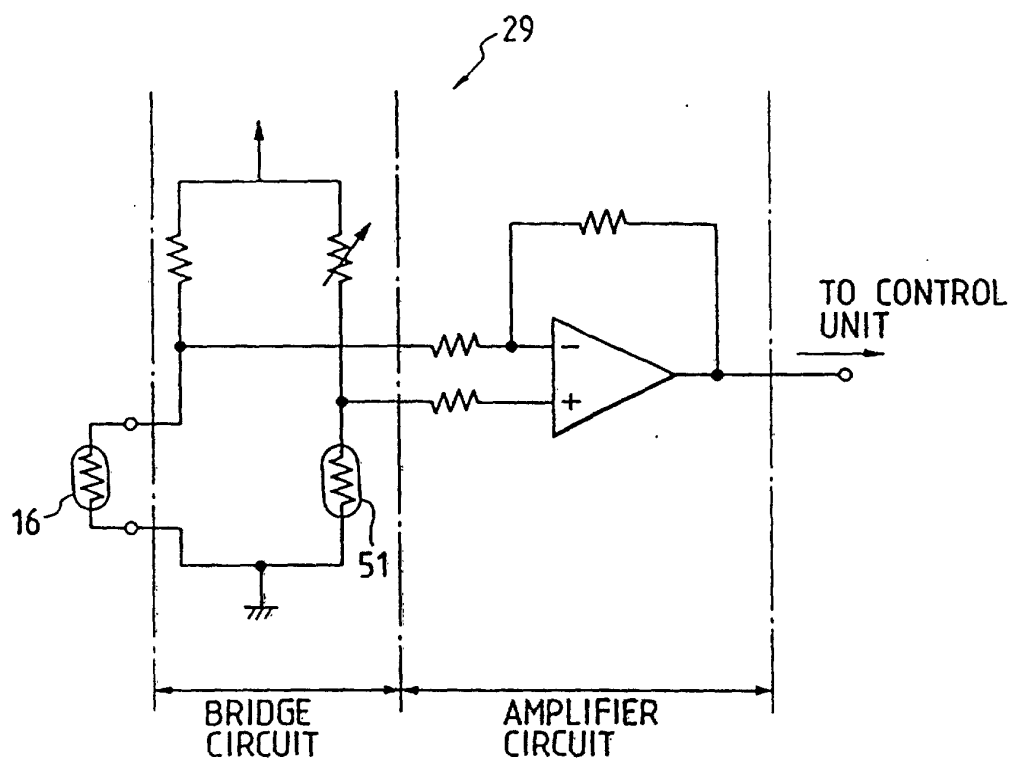


FIG. 9

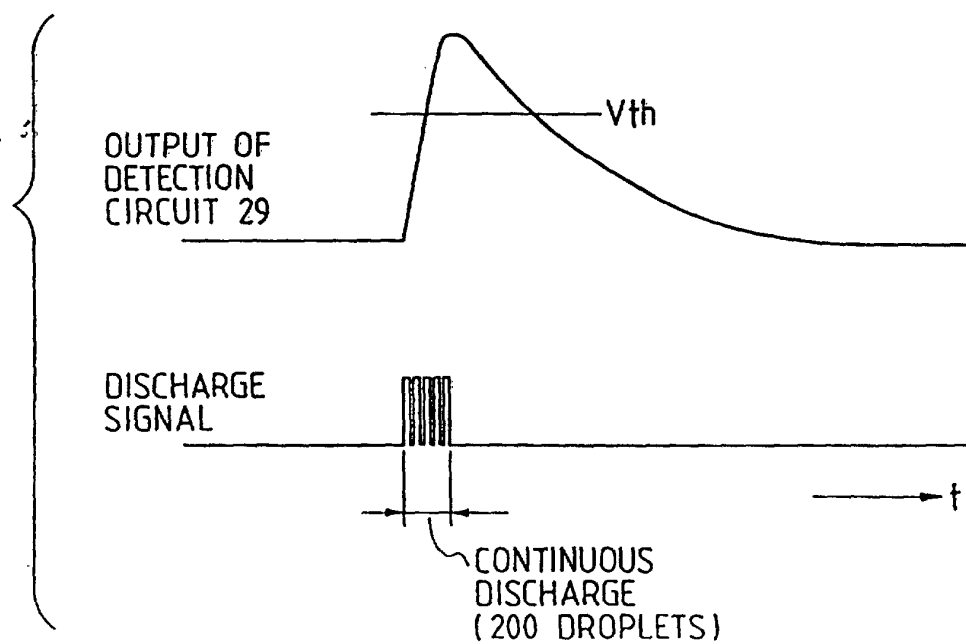


FIG. 10

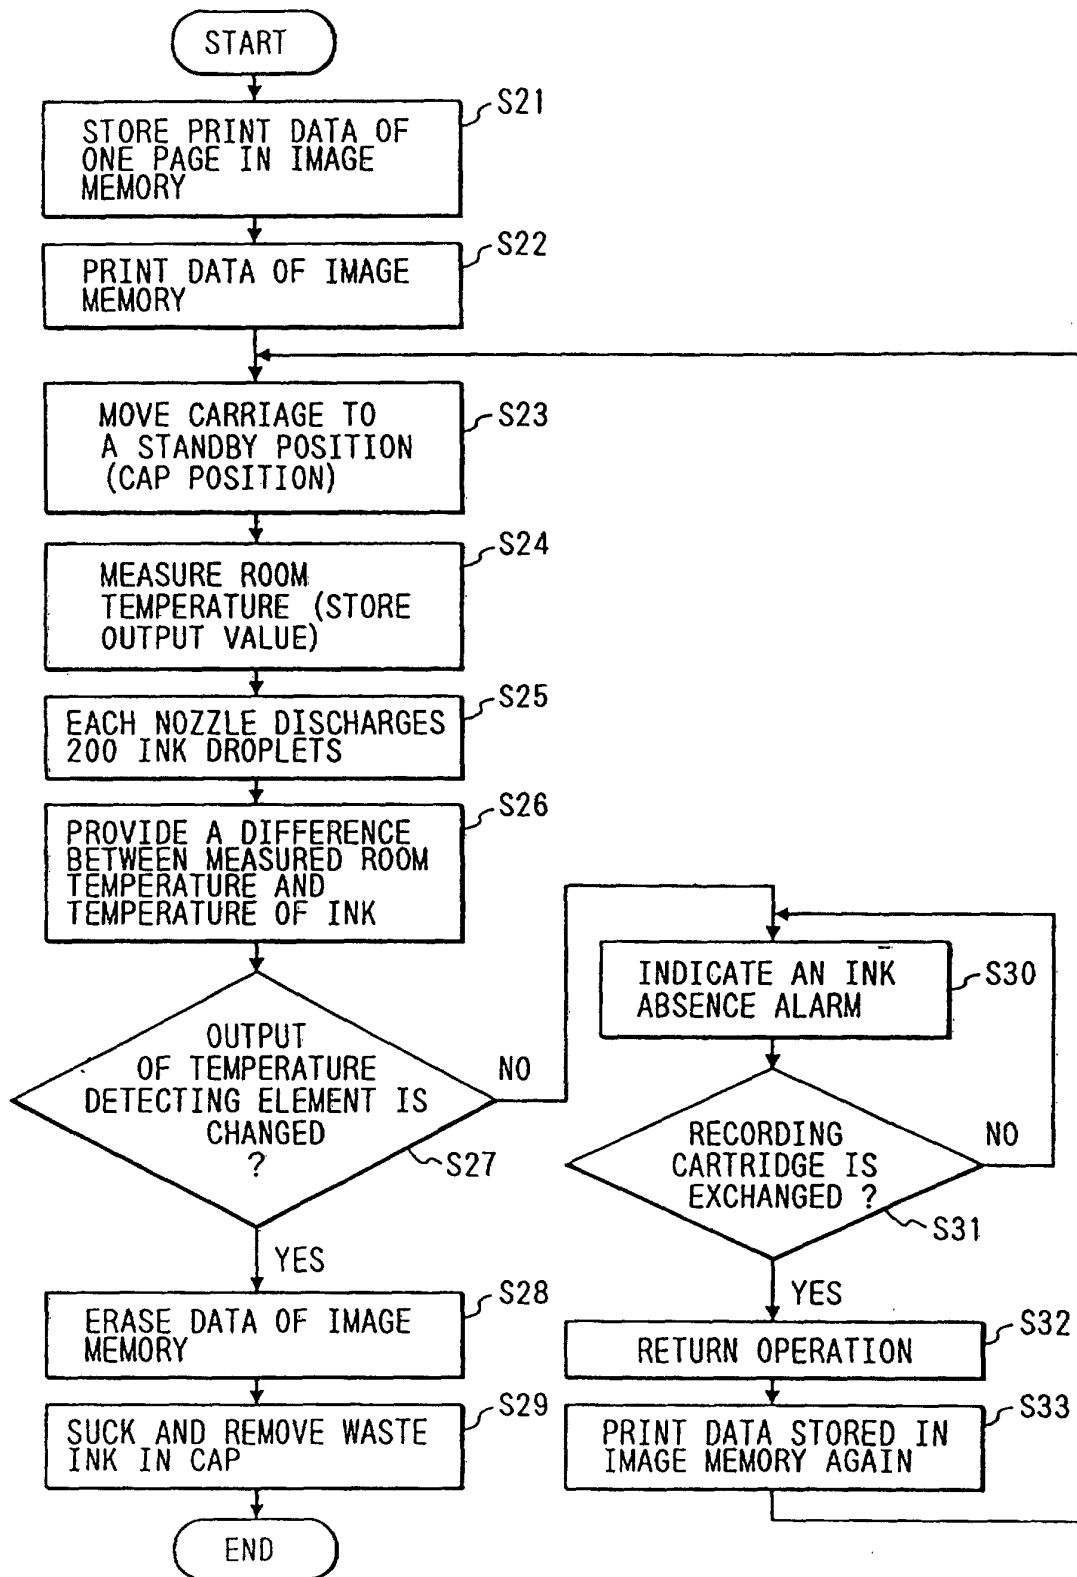


FIG. 11

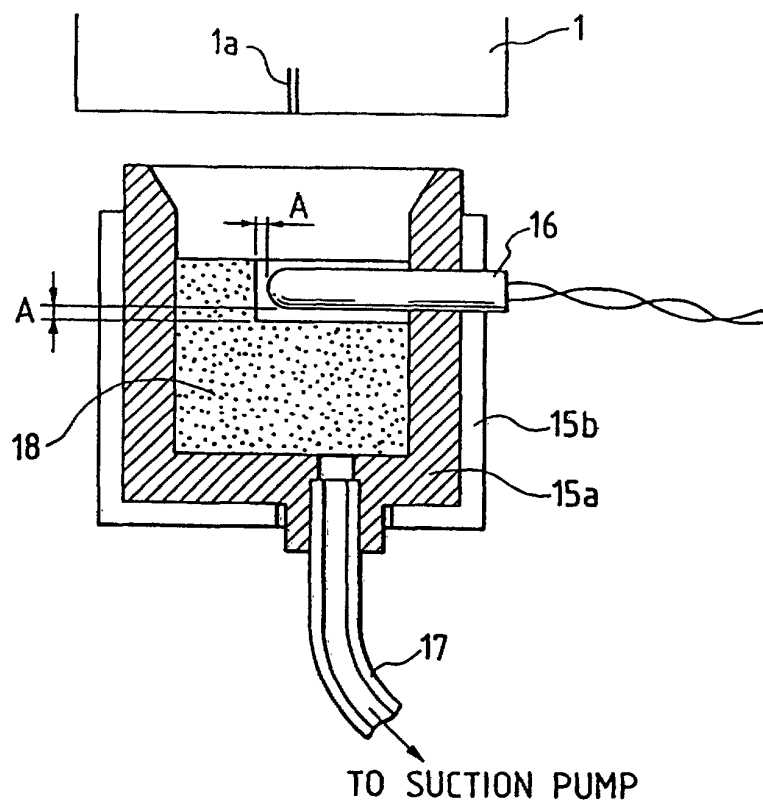


FIG. 12

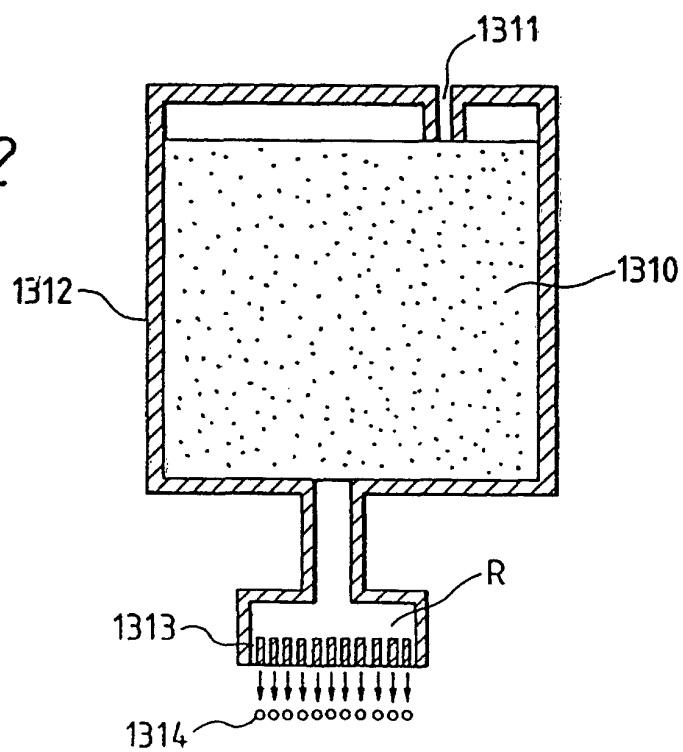


FIG. 13

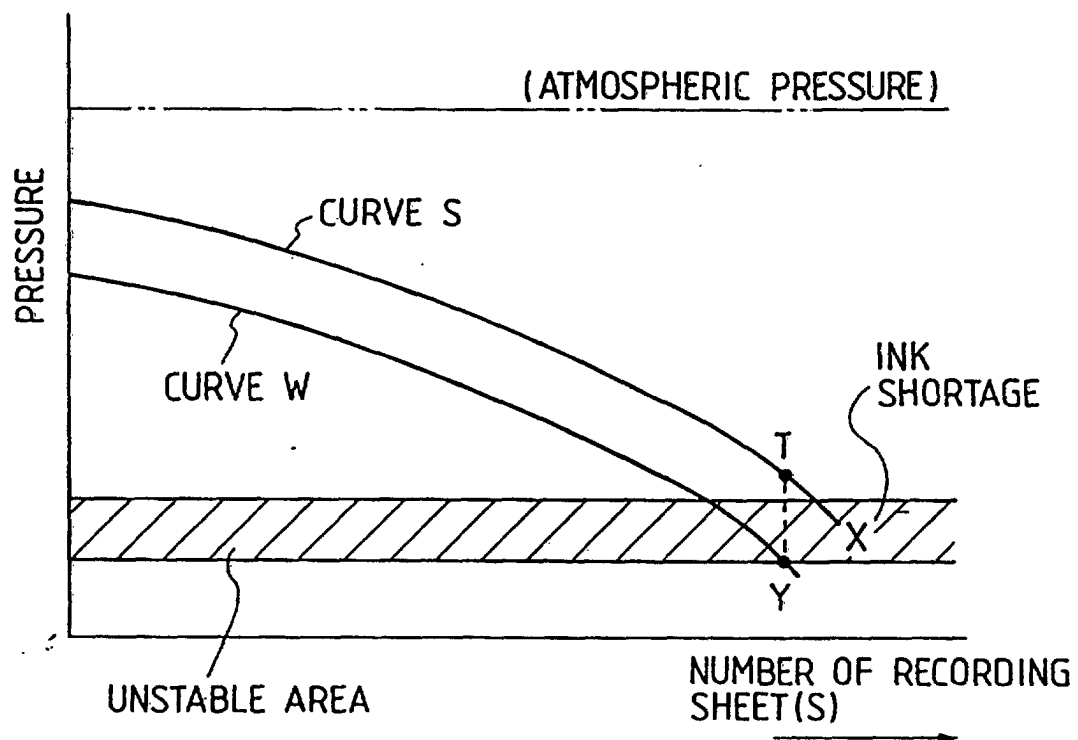


FIG. 14

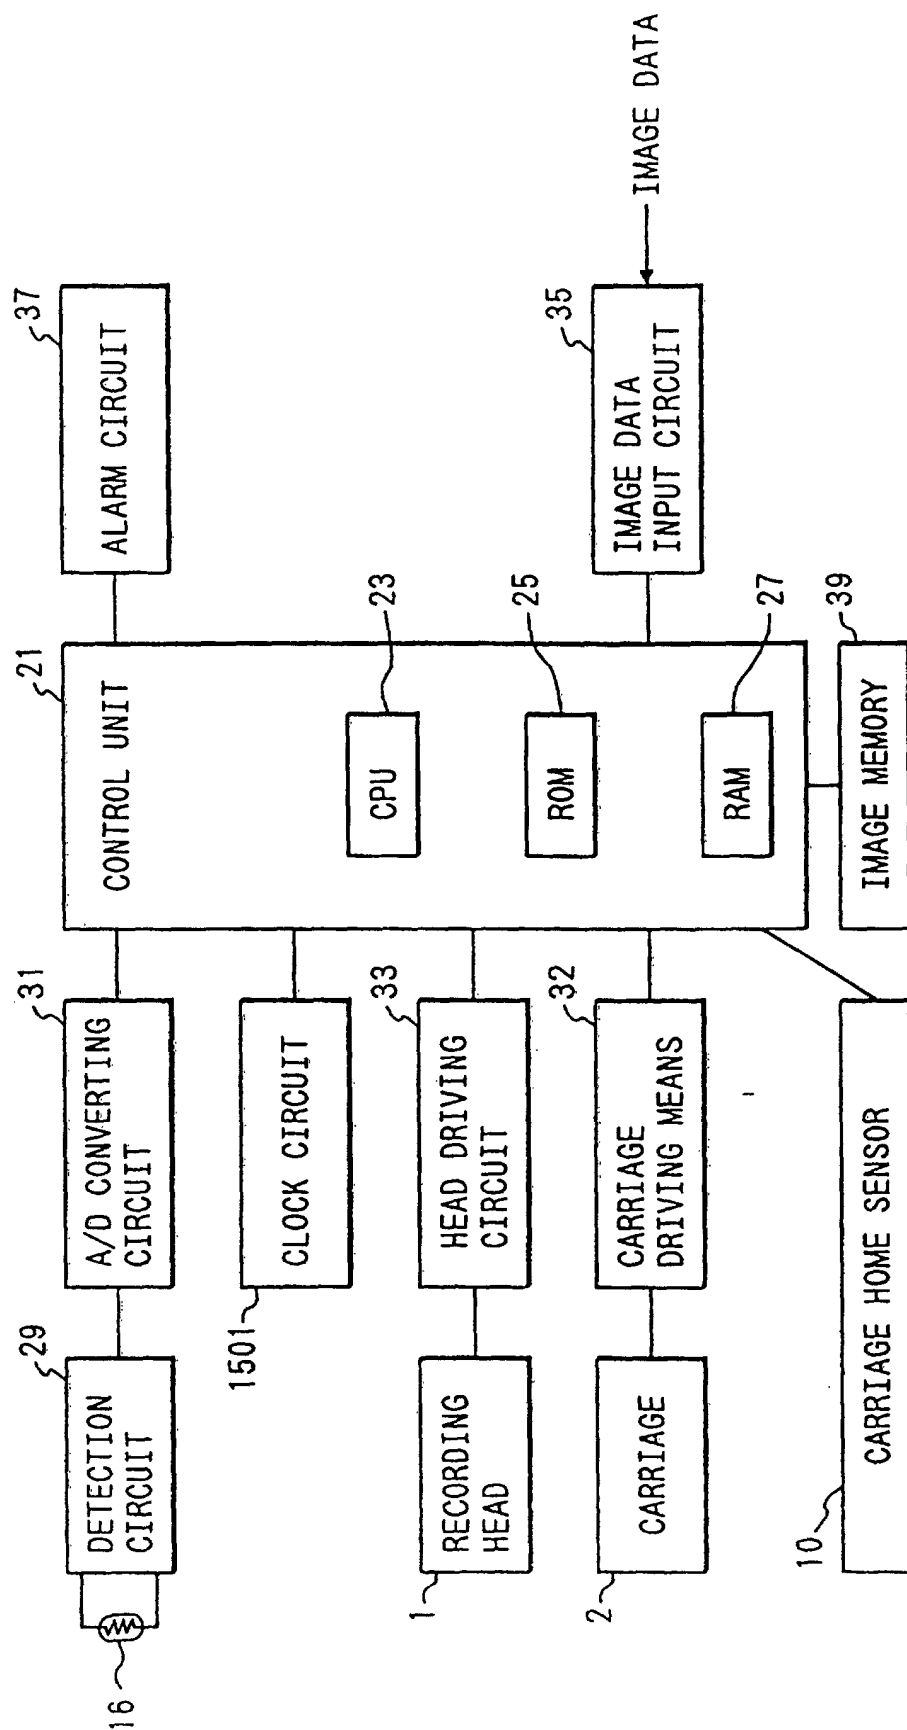


FIG. 15

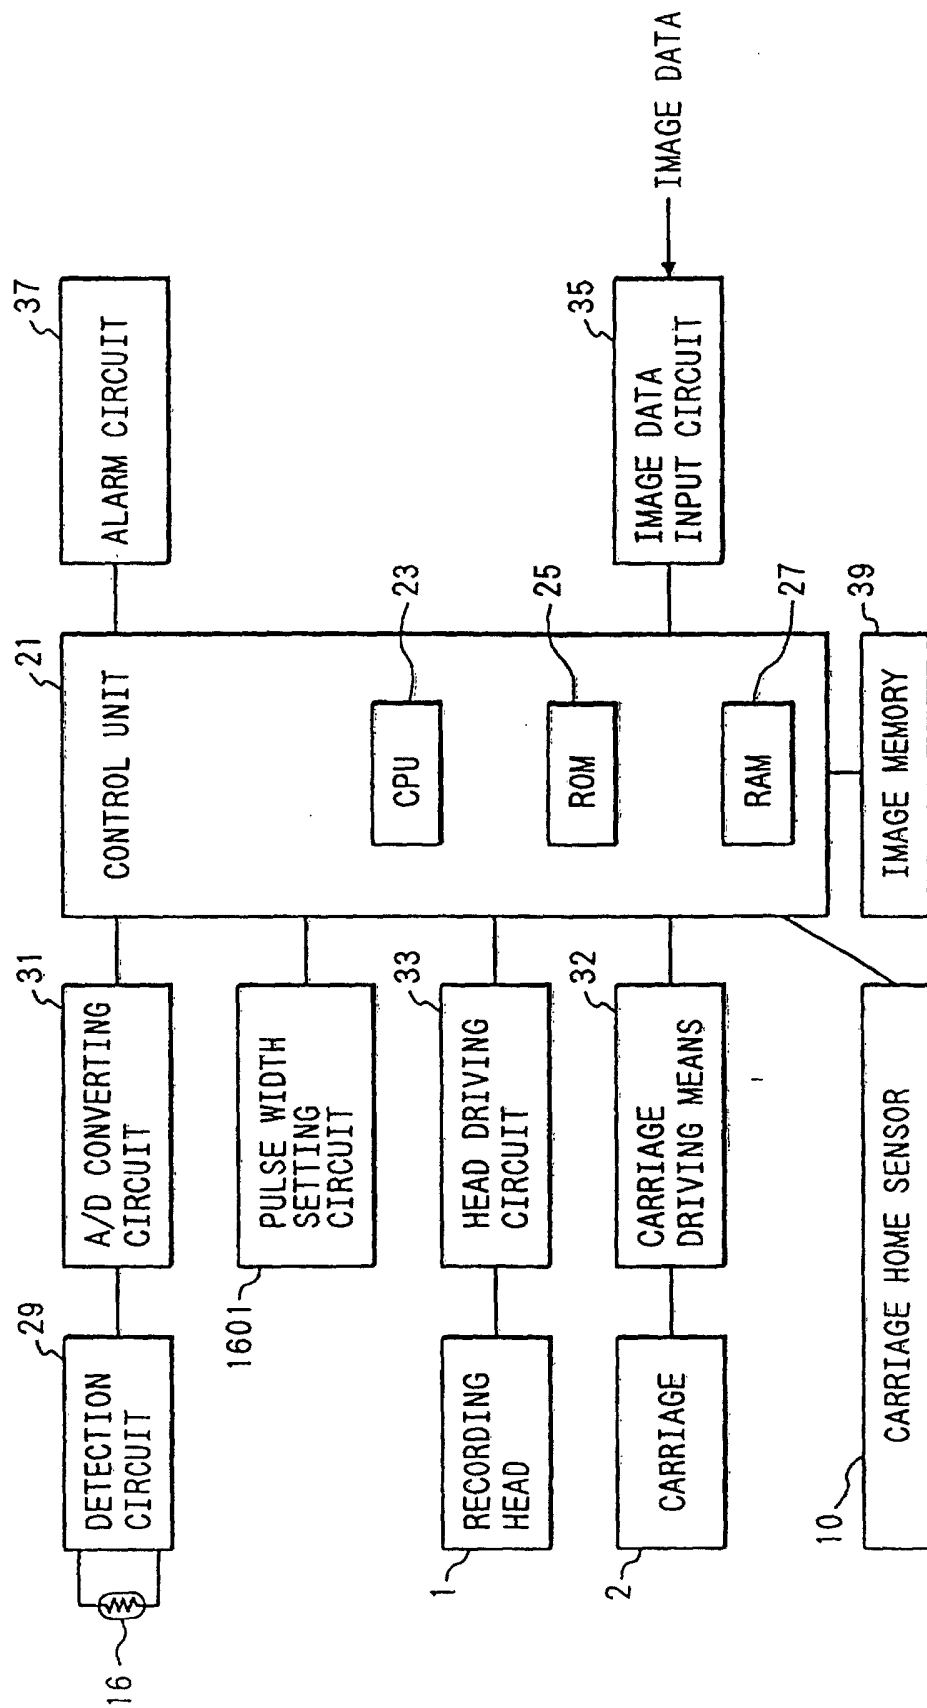


FIG. 16

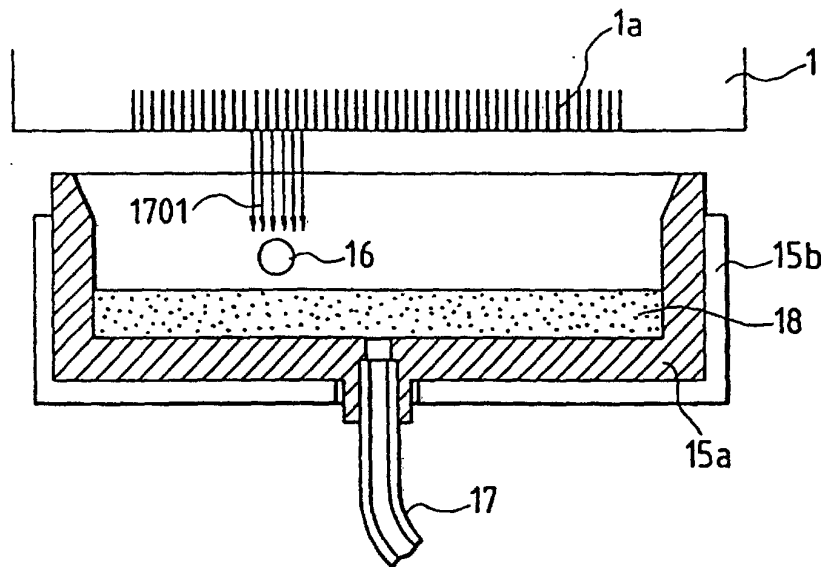


FIG. 17

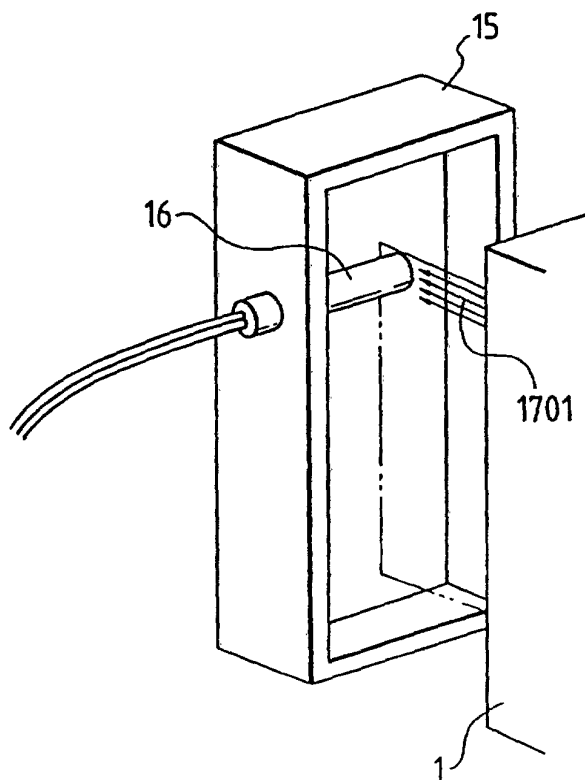


FIG. 18

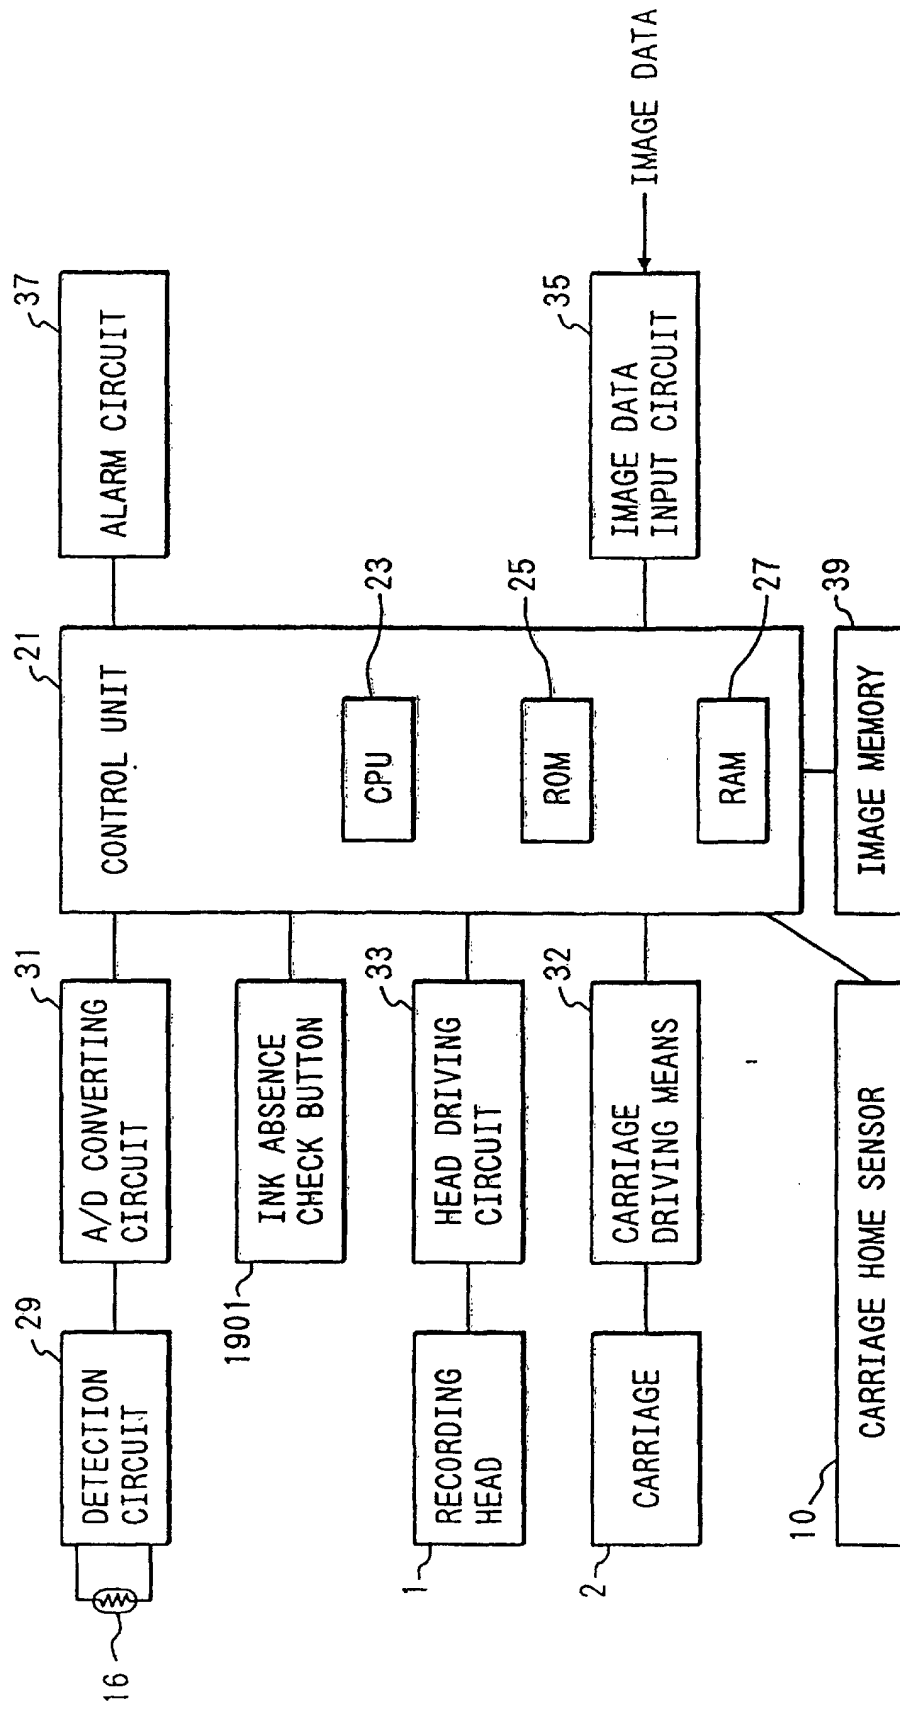


FIG. 19

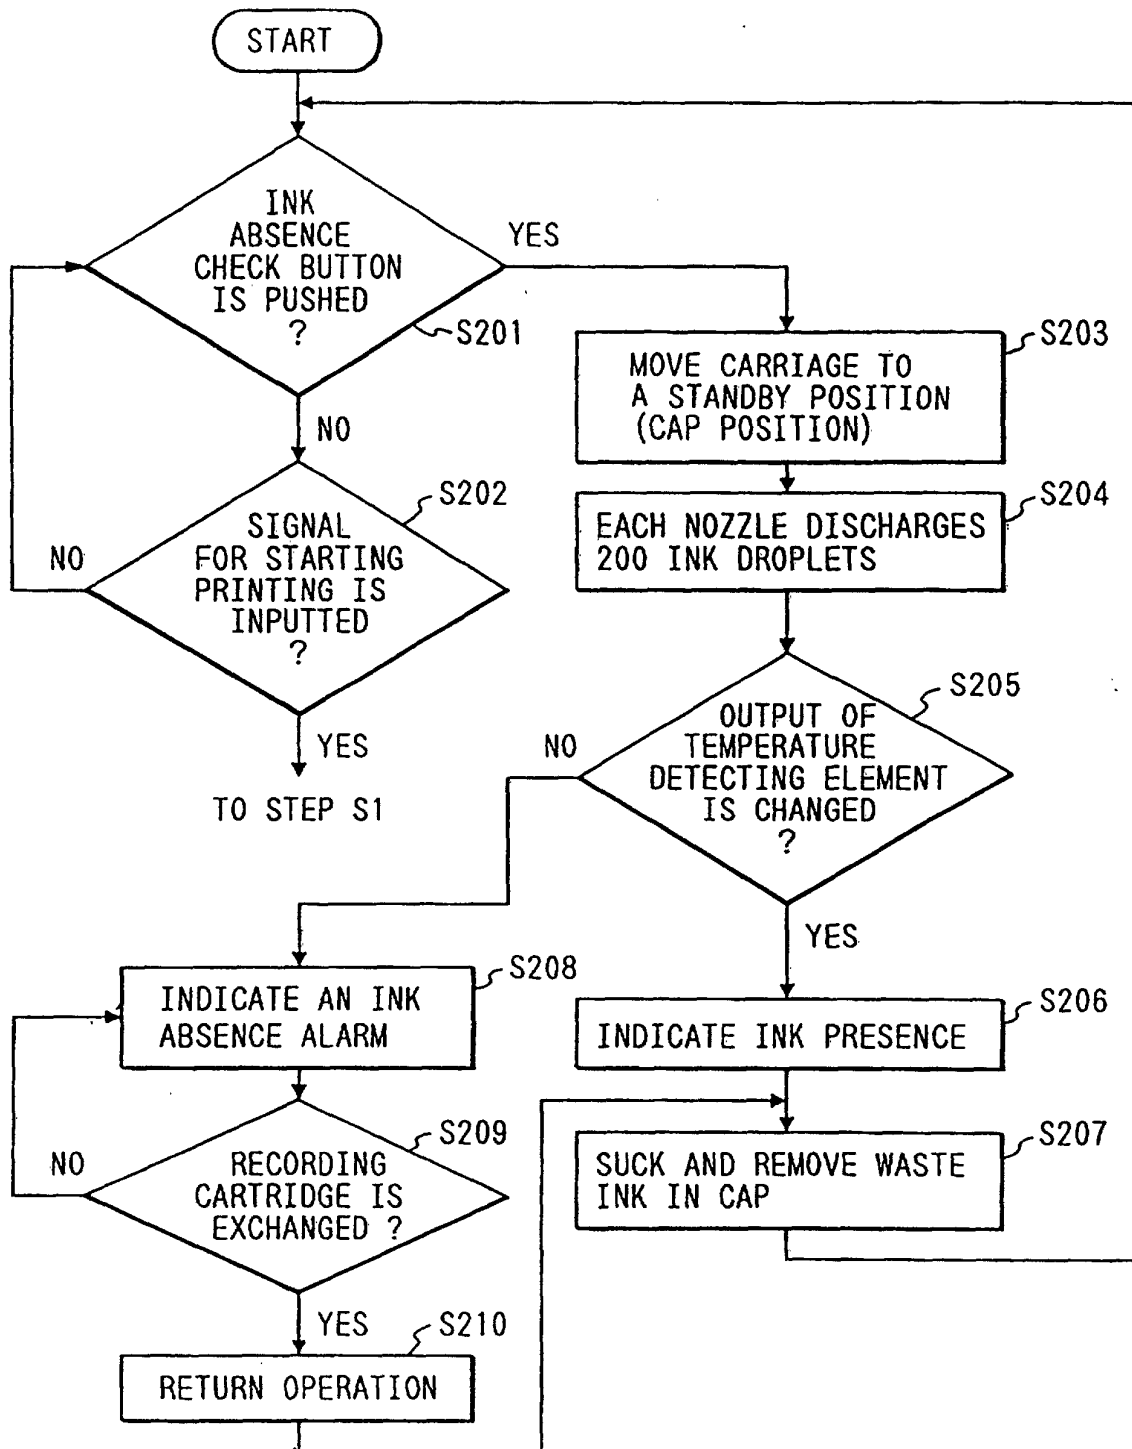


FIG. 20

