



AU9465417

(12) PATENT ABRIDGMENT (11) Document No AU-B-65417/94
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No 672903

- (54) Title
DRILLING ARRANGEMENT AND DRILLING FEED MECHANISM
- International Patent Classification(s)
(51)^E **E21B 019/08**
- (21) Application No **65417/94** (22) Application Date **19.04.94**
- (87) PCT Publication Number : **WO94/24408**
- (30) Priority Data
- (31) Number (32) Date (33) Country
93/2781 21.04.93 ZA SOUTH AFRICA
- (43) Publication Date **08.11.94**
- (44) Publication Date of Accepted Application : **17.10.96**
- (71) Applicant(s)
JARMO UOLEVI LEPPANEN; ROGER ROBARTS BRIGGS
- (72) Inventor(s)
JARMO UOLEVI LEPPANEN; ROGER ROBARTS BRIGGS
- (74) Attorney or Agent
SPRUSON & FERGUSON , GPO Box 3898, SYDNEY NSW 2001
- (56) Prior Art Documents
US 4553612
US 2701551
GB 530015
- (57) Claim
1. A drilling arrangement which includes a feed beam (110), a drill (112) which is mounted for movement relatively to the feed beam and which is engageable with a drill rod (114) which extends in a first direction from the drill, and a hydraulic multistage feed mechanism (118) which includes a first cylinder (120) which acts on the drill, a second cylinder (112) which is telescopically movable into or out of the first cylinder and which extends only to one side of the first cylinder, and a piston (124) which is telescopically movable into or out of the second cylinder and which, when extending from the second cylinder, moves in a second direction which is opposite to the first direction, a protruding end (138) of the piston being engaged with means on the feed beam, and which is characterized in that differential control means (148;148A) are provided for controlling the force which is exerted by the hydraulic multistage feed mechanism (118).



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵;
E21B 19/08

(11) International Publication Number: WO 94/24408

A1

(43) International Publication Date: 27 October 1994 (27.10.94)

(21) International Application Number: PCT/GB94/00828

(22) International Filing Date: 19 April 1994 (19.04.94)

(30) Priority Data: 93/2781 21 April 1993 (21.04.93) ZA

(71)(72) Applicants and Inventors: LEPPANEN, Jarmo, Uolevi [FI/ZA]; 11 Junction Road, Industries North, Germiston, Transvaal (ZA). BRIGGS, Roger, Roberts [GB/GB]; 23 Leyes Lane, Kenilworth, Warwickshire CU8 2OD (GB).

(74) Agent: BAILEY WALSH & CO.; 5 York Place, Leeds LS1 2SD (GB).

(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, LV, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

072003

(54) Title: DRILLING ARRANGEMENT AND DRILLING FEED MECHANISM

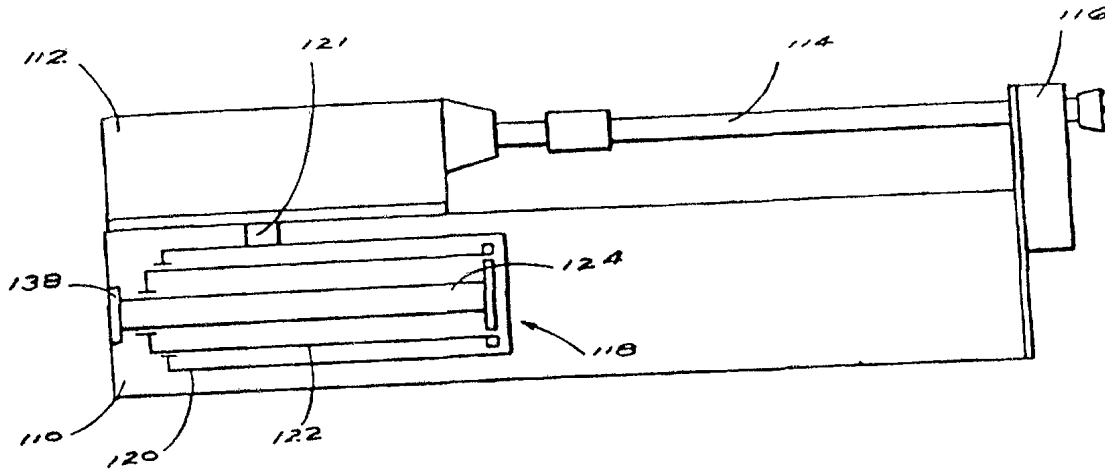

(57) Abstract

A drilling arrangement wherein a cylinder (120) of a multistage telescopic feed mechanism acts on a drill to move it in a first direction and two pistons (122; 124) extend from the cylinder only in a second direction opposite to the first direction, acting against a feed beam (110).

5

BACKGROUND OF THE INVENTION**DRILLING ARRANGEMENT AND DRILLING FEED MECHANISM**

This invention relates to a drilling arrangement and to a drilling feed mechanism.

10

A number of different drilling feed devices are used in underground mining and in long hole production drilling. Some of these prior art devices are shown in Figures 1 to 5 of the attached drawings.

15

Figure 1 shows a common drilling feed construction which includes a feed beam 8 with a chain feed 10 wherein a hydraulic or pneumatic motor rotates a chain sprocket wheel 12 either directly or via a reduction gearbox. The chain is connected to a rock drill 14 and linear movement is thereby imparted to a drill rod 16 which passes through a centralizer 18.

20

It is also known, see Figure 2, to make use of a screw feed mechanism wherein a suitable motor 20 rotates a threaded bar 22. A threaded bushing 24 which is engaged with the bar is connected to a rock drill 14 so that rotational movement of the bar is translated into linear movement of the rock drill and its drill rod 16.

25

It is also known to make use of telescopic cylinders to advance a rock drill. Three types of arrangement are known to the applicants.

The first arrangement, shown in Figure 3, includes a cylinder 26 and first and second pistons 28 and 30 arranged so that the first piston 28 acts as a cylinder tube for the second piston 30. The first piston i.e. the cylinder tube is movable from a protruding position on one side of the cylinder to a protruding position on the other side of the cylinder. The cylinder 26 is directly connected to a rock drill 14 by a mechanical connection 32.

In the second type of arrangement (Figure 4) an elongate first piston 34 extends substantially for the full length of travel of the rock drill and passes through a cylinder tube 36 which also acts as a second piston located inside a cylinder 38 which is fixed to a rock drill 14.

In a third arrangement, which is shown in Figure 5, first and second pistons 40 and 42 are again used with the first piston 40 being located inside a cylinder 44 and extending from one end of the cylinder. The first piston acts as a cylinder tube for the second piston 42 which extends from the cylinder tube in the same direction as a drill rod 16 which is attached to a rock drill 14.

A common feature of the aforementioned telescopic cylinder feeds is that one or both of the piston rods are exposed to the front of the rock drill. Rocks and material which are loosened during drilling can fall on to the exposed pistons and damage the pistons or lead to rapid wear of cylinder

seals. This results in additional expense and drilling down time. A similar disadvantage exists in respect of the chain and screw feed type device in that the chain and the threaded bar are exposed to material which is loosened during drilling.

5

It is desirable to have a constant feed force which is exerted by the drilling feed construction on the rock drill. A constant force is achieved fairly readily with a chain feed or a screw feed. However with multistage telescopic cylinder feeds it is necessary to construct the pistons with areas, which are pressurized, of equal magnitude. This in turn imposes limitations on the dimensions of the feed cylinder which can hinder or prevent optimal designs from being produced.

10

SUMMARY OF THE INVENTION

15

The invention provides, in the first instance, a drilling arrangement which includes a feed beam, a drill which is mounted for movement relatively to the feed beam and which is engageable with a drill rod which extends in a first direction from the drill, a multistage telescopic cylinder feed mechanism which includes a cylinder which acts on the drill and piston means which extends only in a second direction which is opposite to the first direction and which is telescopically movable relatively to the cylinder only to one side of the cylinder and which, when extending from the

20

cylinder, moves in the second direction, and means on the feed beam for engaging with a protruding end of the piston means.

5 The piston means may include a first piston mounted inside the cylinder and a second piston mounted inside the first piston.

Use may be made of differential control means for controlling the force which is exerted by the pistons when extending from the cylinder.

10 The differential control means may comprise any appropriate device and can for example consist of an adjustable sequence valve or a spring loaded and restricted one-way valve, or a shuttle valve.

15 The differential control means may be located externally of the cylinder, or inside the cylinder and, in the latter case, may be mounted to one of the pistons.

20 According to a different aspect of the invention there is provided a drilling arrangement which includes a feed beam, a drill which extends in a first direction and which is mounted for movement relatively to the feed beam, a cylinder which acts on the drill, and multistage piston means which extends only in a second direction which is opposite to the first direction and which is telescopically movable relatively to the cylinder only to one

side of the cylinder and which, when extending from the cylinder, reacts against the feed beam, thereby moving the drill in the first direction while the piston means moves relatively to the cylinder in the second direction.

5 The invention also extends to a drilling feed mechanism which includes a cylinder, a first piston which is mounted for relative sliding movement in the cylinder and which has sealing means in sliding contact with an inner wall of the cylinder, a first end on one side of the sealing means, and a reaction surface on an opposed side of the sealing means, a
10 second piston which is mounted for relative sliding movement in the first piston and which has a respective first end and a second end, a first variable volume being formed inside the cylinder and being partly bounded by the respective first ends of the first piston and the second piston, a port to the first variable volume, a second variable volume being
15 formed inside the cylinder and being partly bounded by the reaction surface, a port to the second variable volume, means for pressurizing the first and the second variable volumes via the respective ports, and differential control means for controlling the relative magnitudes of forces which are thereby exerted in opposed directions on the first end of the
20 piston and on the reaction surface respectively.

The differential control means may operate substantially to equalize the magnitudes of the said forces.

The differential control means may be located externally of the cylinder, or inside the cylinder, for example mounted to one of the pistons.

The differential control means may comprise any appropriate device and can for example consist of an adjustable sequence valve or a spring loaded one-way valve.

The invention also provides a drilling arrangement which includes a feed beam, a drill which is mounted for movement relatively to the feed beam, and a drilling feed mechanism of the aforementioned kind, the said cylinder acting on the drill and the said second end of the second piston engaging with the feed beam.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is further described by way of example with reference to the accompanying drawings in which:

Figures 1 to 5 depict prior art devices which have been explained in the preamble to this specification,

Figure 6 is a simplified side view of a drilling arrangement according to the invention,

Figure 7 is a simplified cross sectional side view, on an enlarged scale, of a drilling feed mechanism used in the drilling arrangement of Figure 6, and

5 Figure 8 and its inset drawing Figure 9 illustrate a variation of the arrangement shown in Figure 7.

DESCRIPTION OF PREFERRED EMBODIMENT

10 Figure 6 of the accompanying drawings illustrates a drilling arrangement according to the invention which includes a feed beam 110, a drill 112, a drill rod 114 which extends from the drill and which passes through a drill rod centralizer 116, and a drilling feed mechanism 118.

15 The mechanism 118 includes a cylinder 120 which is secured to the drill 112 by means of a mechanical connection 121.

Figure 7 illustrates, on an enlarged scale, the construction of the drilling feed mechanism 118. The mechanism includes the cylinder 120 and, mounted inside the cylinder, a first piston 122 which acts as a cylinder tube for a second piston 124.

20

The cylinder 120 includes seals 126 which act on an outer surface of the first piston 122. The first piston in turn includes seals 128 and 130 which respectively act on an outer surface of the second piston and on an inner surface of the cylinder. The second piston includes seals 132 which act on an inner surface of the first piston.

The first piston has a first end 134 on one side of the seal 130 and a reaction surface 135 on an opposite side of the seal. The second piston 124 has a first end 136 and a protruding second end 138.

A first variable volume 140 is formed inside the cylinder 120 and is partly bounded by the first ends 134 and 136 of the first and second pistons respectively. A second variable volume 142 is also formed inside the cylinder, on an opposed side of the seal 130 and is partly bounded by the reaction surface 135.

A port 144 is used to connect a hydraulic line 146 to the first variable volume 140. The supply line 146 also extends via a differential control device 148 to a second port 150 which is in communication with the second variable volume 142.

A second hydraulic line 152 leads to an opposed side of the differential control device 148 and to a port 154 near the second end 138 of the

second piston. This port extends via an internal passage 156 in the second piston to an exit port 158 which opens into a volume 160 formed between the first piston and the second piston.

5 The differential control device 148 includes a restricted spring loaded one-way valve 162 and a shuttle valve 164.

Referring to Figure 6 it is to be noted that the second end 138 of the second piston 124 acts against one end of the feed beam 110 and is fixed
10 thereto.

When the volume 140 is pressurized by hydraulic oil introduced via the supply line 146, a relatively increased pressure is produced in the volume 142 by the action of the spring loaded and restricted check valve 162. By
15 taking into account the relative areas of the first end 134 and the reaction surface 135 and by appropriately varying the pressure difference between the two volumes 140 and 142 the forces on the end 134 and the surface 135 can be controlled to achieve a situation in which:

20 (a) both pistons are extended in union relatively to the cylinder until the first piston 122 reaches a limiting position, whereupon the second piston 124 extends further, from the first piston, or

(b) The second piston 124 extends from the first piston 122 until a limiting position is reached, relatively to the first piston, whereupon the two pistons extend in union from the cylinder.

5 For example, in situation (b) the forces on the end 134 and on the reaction surface 135 can be equalized so that the extension force is that which arises on the end 136 of the second piston. The extension force remains constant during the piston extension process.

10 On the other hand it may be preferable to operate with situation (a), for the first piston, which has a larger diameter than the second piston, is relatively stiffer. To achieve this situation the force on the end 134 is slightly greater than the force on the surface 136. However, with this arrangement, there is a slight decrease in the extension force when the
15 first piston reaches the end of its stroke and the second piston then extends from the first piston.

As the second end 138 of the second piston is fixed to the feed beam the
aforementioned movement of the drilling feed mechanism is translated
20 into linear movement of the drill 112 in a direction which is opposite to the direction in which the pistons extend relatively to the cylinder 120.

When it is necessary to retract the feed mechanism the line 152 is

pressurized. The volume 142 is thereby pressurized and the first piston is moved to the right. Similarly the volume 160 is pressurized and the second piston is moved to the right.

5 It is to be noted from an examination of Figure 6 that the pistons 122 and 124 extend only from one side of the cylinder 120. They do not extend from the cylinder in the direction of the drill rod and are, in fact, maintained at positions behind the advancing drill 112. Consequently substantial protection is provided for the pistons by the drill 112 itself. The
10 drill protects the pistons from falling rocks and drill cuttings while drilling is in progress. No inner parts of the feed mechanism are therefore exposed in front of the drill.

In the Figure 7 arrangement the differential control device 148 is mounted
15 externally of the cylinder. Figures 8 and 9 show that it is possible to mount an equivalent device 148A to the first piston 122 inside the cylinder.

The device 148A includes a pilot to open one-way valve 180, a pilot line 184, and a restricting one-way valve 182. The valve 182 could be replaced
20 by a sequence valve. Other components shown in Figures 8 and 9 have similar reference numerals to those employed in Figures 6 and 7. The device 148A operates in substantially the same way as the device 148 in that the pilot line 184 opens the valve 180 when the volume 140 is

pressurized and allows hydraulic oil to flow through the restricting one-way valve 182 to cause a pressure difference, of a desired magnitude, between the two volumes 140 and 142.

- 5 The device 148A, being inside the cylinder, is protected and the external construction of the feed mechanism is simplified.

CLAIMS

1. A drilling arrangement which includes a feed beam (110), a drill (112) which is mounted for movement relatively to the feed beam and which is engageable with a drill rod (114) which extends in a first direction from the drill, and a hydraulic multistage feed mechanism (118) which includes a first cylinder (120) which acts on the drill, a second cylinder (112) which is telescopically movable into or out of the first cylinder and which extends only to one side of the first cylinder, and a piston (124) which is telescopically movable into or out of the second cylinder and which, when extending from the second cylinder, moves in a second direction which is opposite to the first direction, a protruding end (138) of the piston being engaged with means on the feed beam, and which is characterized in that differential control means (148;148A) are provided for controlling the force which is exerted by the hydraulic multistage feed mechanism (118).

2. A drilling arrangement according to claim 1 characterized in that the differential control means (148;148A) controls the said force at a substantially constant value.

AMENDED SHEET
IPEA/EP











3. A drilling arrangement according to claim 1 or 2 characterized in that the differential control means (148) is located externally of the cylinder (120) (Figure 7).

4. A drilling arrangement according to claim 1 or 2 characterized in that the differential control means (148A) is located inside the cylinder (120) and is mounted at least to the piston (124) (Figures 8,9).

AMENDED SHEET
IPEA/EP



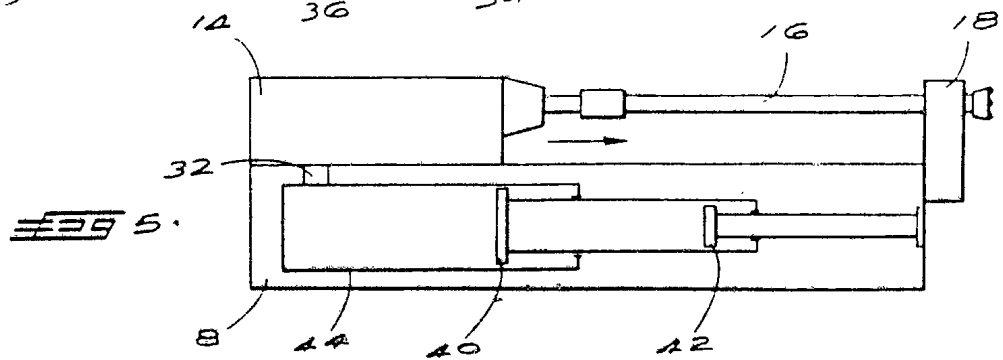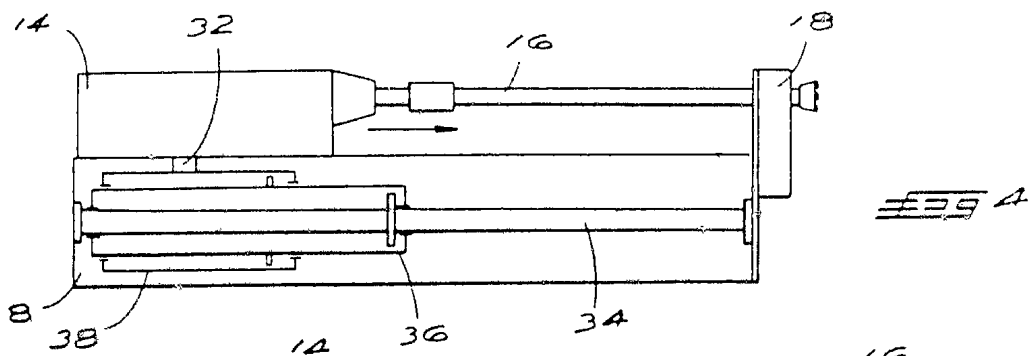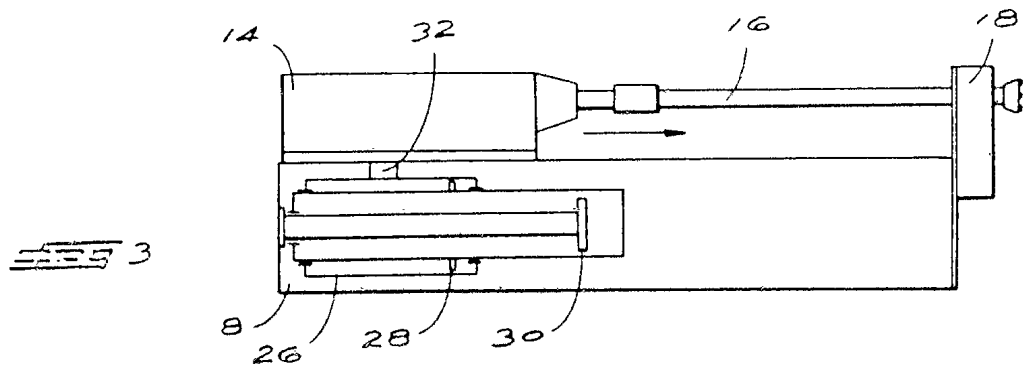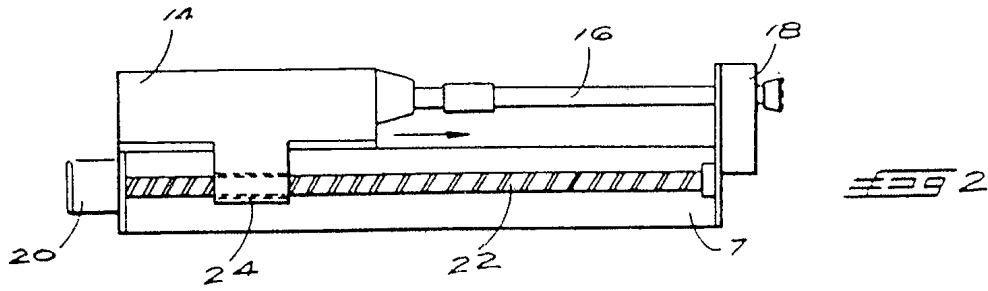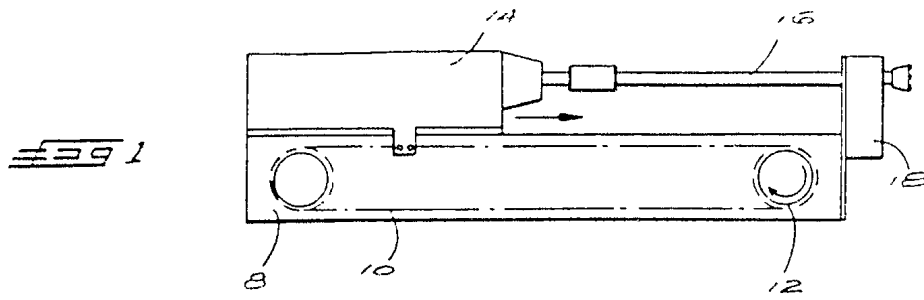

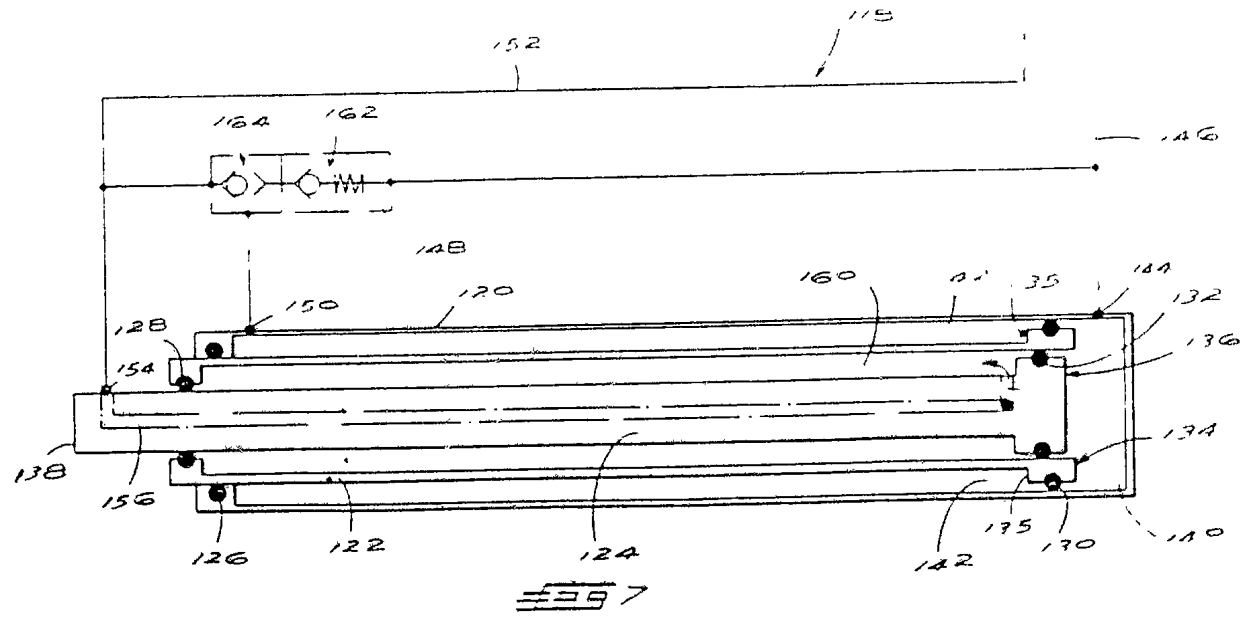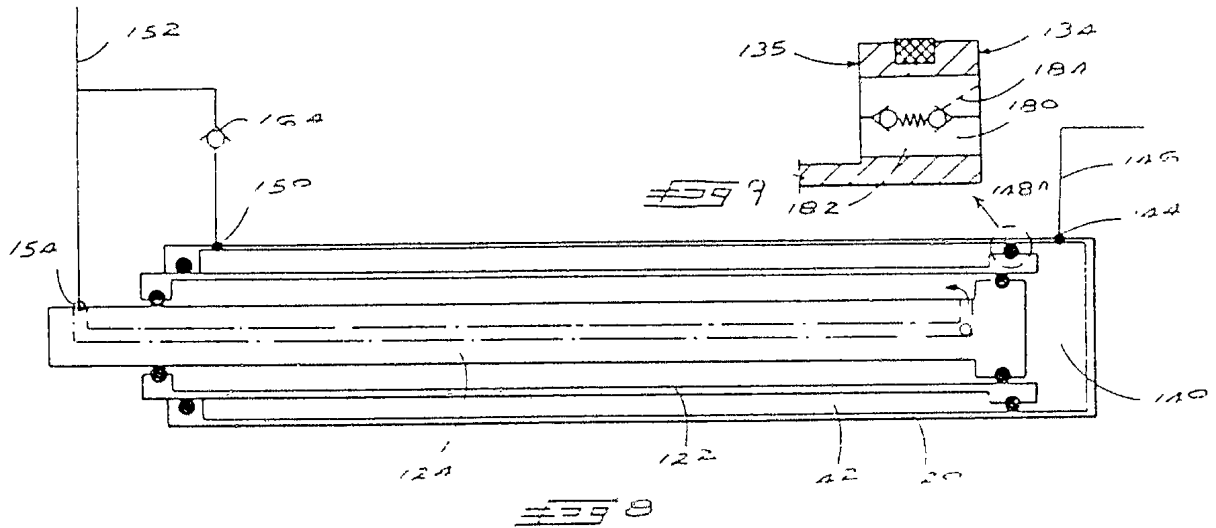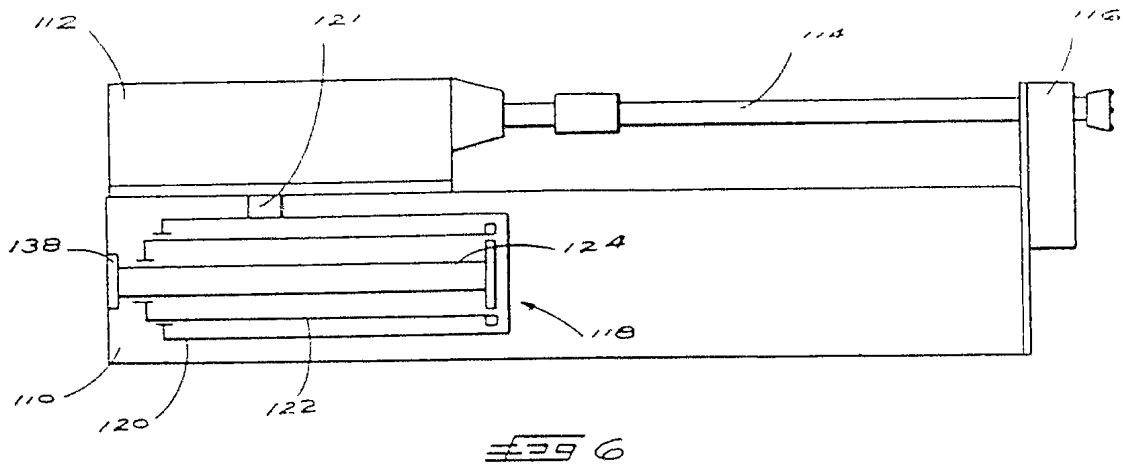

INTERNATIONAL SEARCH REPORT

International Application No.
PC1/GB 94/00828

A CLASSIFICATION OF SUBJECT MATTER
IPC 5 E21B19/08

According to International Patent Classification (IPC) or to both national classification and IPC

B FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 5 E21B E21C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	US,A,4 553 612 (DURHAM) 19 November 1985 see column 2, line 43 - line 54; figures ---	1,2,7 9
Y	US,A,2 701 551 (GUNNING) 8 February 1955 see figure 1 ---	1,2,7
A	GB,A,530 015 (INGERSOLL-RAND) 14 June 1939 see figure 4 ---	1,7,9
A	EP,A,0 016 717 (MONTABERT) 1 October 1980 see page 5, line 17 - line 24; figures -----	1,7,9

Further documents are listed in the continuation of box C.

Patent family members are listed in annex

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

4 August 1994

16. 08. 94

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Ex. 31 651 ept nl.
Fax: (+ 31-70) 340-3016

Authorized officer

Weiland, T

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/GB 94/00828

Patent document cited in search report	Publication date	Patent family number(s)	Publication date
US-A-4553612	19-11-85	NONE	

US-A-2701551		NONE	

GB-A-530015		NONE	

EP-A-0016717	01-10-80	FR-A- 2452587 AT-T- 3323 AU-B- 534269 AU-A- 5685680 CA-A- 1132530 JP-A- 55129589 US-A- 4364540	24-10-80 15-05-83 12-01-84 02-10-80 28-09-82 07-10-80 21-12-82
