

(51) International Patent Classification:  
*H05B 37/02* (2006.01)(21) International Application Number:  
PCT/US2012/045096(22) International Filing Date:  
29 June 2012 (29.06.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
61/503,292 30 June 2011 (30.06.2011) US  
13/538,615 29 June 2012 (29.06.2012) US(71) Applicant (for all designated States except US): **LUT-  
RON ELECTRONICS CO., INC.** [US/US]; 7200 Suter  
Road, Coopersburg, PA 18036-1299 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ECONOMY,  
Theodore, F.** [US/US]; 1908 West Allen Street, Al-  
lentown, PA 18104 (US). **BROWNE, John, C.** [US/US];  
941 6th Avenue, Bethlehem, PA 18018 (US). **FRICKE,  
William, Bryce** [US/US]; 43 North 4th Street, 1st Floor,Emmaus, PA 18049 (US). **KNODE, Galen, Edgar**  
[US/US]; 4577 Brighton Road, Macungie, PA 18062 (US).(74) Agent: **CONDO, Joseph, R.**; Condo Roccia LLP, One  
Liberty Place, Suite 2200, 1650 Market Street, Phil-  
adelphia, PA 19103 (US).(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,  
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,  
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,  
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,  
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,  
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,  
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,  
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,  
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: METHOD FOR PROGRAMMING A LOAD CONTROL DEVICE USING A SMART PHONE

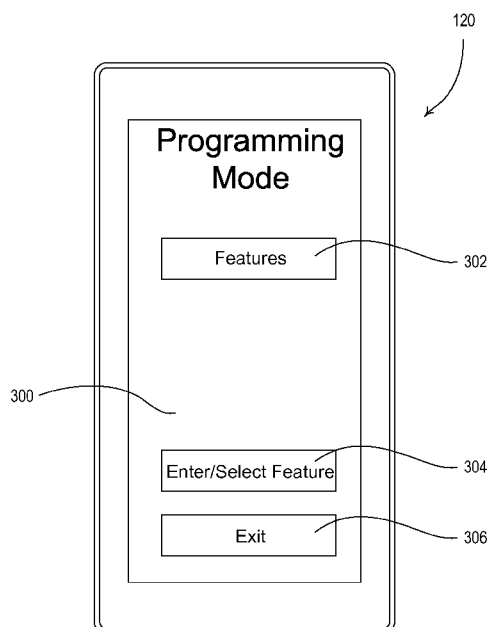


Fig. 3

(57) Abstract: A load control device for controlling the power delivered from an AC power source to an electrical load is able to receive radio-frequency (RF) signals from a Wi-Fi-enabled device, such as a smart phone, via a wireless local area network. The load control device comprises a controllably conductive device adapted to be coupled in series between the source and the load, a controller for rendering the controllably conductive device conductive and non-conductive, and a Wi-Fi module operable to receive the RF signals directly from the wireless network. The controller controls the controllably conductive device to adjust the power delivered to the load in response to the wireless signals received from the wireless network. The load control device may further comprise an optical module operable to receive an optical signal, such that the controller may obtain an IP address from the received optical signal and control the power delivered to the load in response to a wireless signal received from the wireless network that includes the IP address.



---

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

## METHOD FOR PROGRAMMING A LOAD CONTROL DEVICE USING A SMART PHONE

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority from U.S. Patent Application No. 13/538,615 filed June 29, 2012, entitled METHOD FOR PROGRAMMING A LOAD CONTROL DEVICE USING A SMART PHONE which claims the benefit of Provisional U.S. Patent Application No. 61/503,292, filed June 30, 2011, entitled LOAD CONTROL DEVICE HAVING INTERNET CONNECTIVITY.

[0002] This application is related to commonly assigned U.S. Patent Application No. [Attorney Docket No. 11-22101-P2], filed of even date, entitled LOAD CONTROL DEVICE HAVING INTERNET CONNECTIVITY; and to commonly assigned U.S. Patent Application No. [Attorney Docket No. 12-22260-P2], filed of even date, entitled METHOD OF OPTICALLY TRANSMITTING DIGITAL INFORMATION FROM A SMART PHONE TO A CONTROL DEVICE, the contents of each are hereby incorporated by reference herein in its entirety.

### BACKGROUND OF THE INVENTION

## Field of the Invention

**[0003]** The present invention relates to a load control device for controlling the amount of power delivered to an electrical load, and more particularly, to a wall-mounted dimmer switch that is operable to connect to the Internet via a wireless connection and to control a lighting load in response to messages received via the Internet.

## Description of the Related Art

**[0004]** A load control device may be adapted to be coupled in a series electrical connection between an alternating-current (AC) power source and an electrical load for control of the power delivered from the AC power source to the electrical load. Prior art load control devices include, for example, lighting control devices (such as wall-mounted dimmer switches and plug-in lamp dimmers), motor control devices (for motor loads), temperature control devices, motorized window treatments, and remote controls. Some load control devices are operable to transmit and receive wireless signals, such as radio-frequency (RF) or infrared (IR) signals, to thus provide for wireless control of the corresponding loads. One example of an RF lighting control system is disclosed in commonly-assigned U.S. Patent No. 5,905,442, issued May 18, 1999, entitled METHOD AND APPARATUS FOR CONTROLLING AND DETERMINING THE STATUS OF ELECTRICAL DEVICES FROM REMOTE LOCATIONS, the entire disclosure of which is hereby incorporated by reference.

**[0005]** There is a need for a wireless load control device that is operable to connect to the Internet via a wireless connection and to control or program a lighting load in response to messages received from a wireless device (*e.g.*, received via the Internet). It would be particularly desirable if such load control device were operable to be controlled or programmed from a Wi-Fi enabled control device, such as a smart phone (for example, an iPhone® or Android® smart phone).

## SUMMARY OF THE INVENTION

**[0006]** According to an embodiment of the present invention, a load control device may be implemented to control power delivered from an AC power source to an electrical load. The load

control device may include a controllably conductive device, a controller, and a near-field communications (NFC) module. The controllably conductive device may be adapted to be coupled in series electrical connection between the source and the load. The controller may be operatively coupled to a control input of the controllably conductive device for rendering the controllably conductive device conductive and non-conductive. The NFC module may be operatively coupled to the controller. The NFC may be operable to receive at least one NFC signal for programming operating parameters of the load control device. The controller may be operable to control the controllably conductive device to control the power delivered to the load based on the operating parameters of the load control device.

**[0007]** According to an embodiment of the present invention, the load control device may include a controllably conductive device, a controller, and an Internet Protocol communications module. The controllably conductive device may be adapted to be coupled in series electrical connection between the source and the load. The controller may be operatively coupled to the controllably conductive device for controlling the controllably conductive device. The Internet Protocol communications module may be operatively coupled to the controller. The Internet Protocol communications module may be operable to receive an Internet Protocol packet for programming the load control device. The controller may be operable to control the controllably conductive device based on the programming of the load control device.

**[0008]** According to an embodiment of the present invention, the load control device may include a controllably conductive device, a controller, and an optical module. The controllably conductive device may be adapted to be coupled in series electrical connection between the source and the load. The controller may be operatively coupled to a control input of the controllably conductive device for rendering the controllably conductive device conductive and non-conductive. The optical module may be operatively coupled to the controller. The optical module may be operable to receive an optical signal for programming operating parameters of the load control device. The controller may be operable to control the controllably conductive device to control the power delivered to the load based on the optical signal programming of the load control device.

**[0009]** According to an embodiment of the present invention, a load control system is described for controlling power delivered from an AC power source to an electrical load. The load control system may include a load control device and a smart phone. The load control device may

be adapted to be coupled in series electrical connection between the source and the load for controlling the power delivered to the load. The load control device may store one or more operating parameters. The smart phone may include a visual display for providing a user interface for adjusting the one or more operating parameters of the load control device. The smart phone may be operable to directly transmit operating parameters to the load control device.

**[0010]** According to an embodiment of the present invention, a lighting control device may be programmed using a wireless control device. The wireless control device may include a visual display and/or a camera. The lighting control device may be operable to adjust the intensity of a lighting load. The lighting load may be purchased in packaging having a barcode. The barcode of the packaging of the lighting load may be scanned using the camera of the wireless control device. The wireless control device may determine an operating parameter for the lighting load using information received from the scanned barcode. A digital message may be transmitted that includes the operating parameter to the lighting control device. The operating parameter may be stored in the lighting control device in response to the lighting control device receiving the digital message.

**[0011]** According to an embodiment of the present invention, the lighting control device may be operable to adjust the intensity of a lighting load by transmitting a first digital message from a wireless control device when the camera of the wireless control device is directed at the lighting load. The intensity of the lighting load may be adjusted to a first intensity in response to the lighting control device receiving the first digital message. The intensity of the lighting load may be decreased from the first intensity while the camera of the wireless control device is directed at the lighting load. A second digital message may be transmitted from the wireless control device to the lighting control device when the wireless control device detects flickering of the intensity of the lighting load. The intensity of the lighting load may be increased in response to the lighting control device receiving the second digital message. A third digital message may be transmitted from the wireless control device to the lighting control device when the wireless control device does not detecting flickering in the intensity of the lighting control device. The adjustment of the intensity of the lighting load may be ceased in response to the lighting control device receiving the third digital message, such that the intensity of the lighting load is at a second intensity. The second intensity may be stored as a low-end intensity of the lighting control device.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The invention will now be described in greater detail in the following detailed description with reference to the drawings in which:

[0013] Fig. 1 is a simple diagram of a radio-frequency (RF) lighting control system comprising a dimmer switch and a wireless control device, such as a smart phone, according to a first embodiment of the present invention;

[0014] Fig. 2 is an example screenshot that may be provided on the wireless control device for controlling the dimmer switch of the RF lighting control system of Fig. 1;

[0015] Fig. 3 is an example screenshot that may be provided on the wireless control device for programming the dimmer switch of the RF lighting control system of Fig. 1;

[0016] Fig. 4 is a simplified block diagram of the dimmer switch of the RF lighting control system of Fig. 1;

[0017] Fig. 5 is a front view of the wireless control device showing an example location of a portion of a display screen that may be used to transmit optical signals;

[0018] Fig. 6 is a perspective view showing the display screen of the wireless control device directed towards an optical receiver of the dimmer switch while the wireless control device is transmitting the optical signals;

[0019] Fig. 7 is a perspective view showing a camera lens and a camera flash light source of the wireless control device directed towards the optical receiver of the dimmer switch according to an example embodiment of the present invention;

[0020] Fig. 8 is a front view of the wireless control device showing an example targeting image for assisting in lining up the camera lens and the camera flash light source with the optical receiver of the dimmer switch according to an example embodiment of the present invention;

[0021] Fig. 9 is a simplified flow diagram illustrating an example embodiment for optically programming or controlling the dimmer switch via the wireless control device;

[0022] Fig. 10 is a simplified flow diagram illustrating an example embodiment for programming or controlling the dimmer switch via a Wi-Fi signal;

[0023] Fig. 11 is a simplified block diagram of a dimmer switch according to an alternate embodiment of the present invention;

[0024] Fig. 12 is a simplified flow diagram illustrating an example embodiment for programming or controlling the dimmer switch via near field communication (NFC) signals;

[0025] Fig. 13 is a simplified flow diagram illustrating another example embodiment for programming the dimmer switch via the NFC signals;

[0026] Fig. 14 is a simplified flow diagram illustrating another example embodiment for programming the dimmer switch;

[0027] Fig. 15 is a simple diagram of an RF lighting control system that using a proprietary protocol according to an alternate embodiment;

[0028] Fig. 16 is a simplified flow diagram illustrating an example embodiment for programming or controlling the dimmer switch using proprietary-protocol communications; and

[0029] Fig. 17 is a simplified flow diagram illustrating an example embodiment for programming the dimmer switch to corresponding low-end and high-end limits for a particular lamp.

#### DETAILED DESCRIPTION OF THE INVENTION

[0030] The foregoing summary, as well as the following detailed description of the preferred embodiments, is better understood when read in conjunction with the appended drawings. For the purposes of illustrating the invention, there is shown in the drawings an embodiment that is presently preferred, in which like numerals represent similar parts throughout the several views of the



drawings, it being understood, however, that the invention is not limited to the specific methods and instrumentalities disclosed.

**[0031]** Fig. 1 is a simple diagram of a radio-frequency (RF) lighting control system 100 that includes a dimmer switch 110 and a wireless control device 120, according to an example embodiment of the present invention. The wireless control device 120 may be any device capable of performing wireless communications, such as, a smart phone (for example, an iPhone® smart phone, an Android® smart phone, or a Blackberry® smart phone), a personal computer, a laptop, a wireless-capable media device (*e.g.*, MP3 player, gaming device, or television), or a tablet device, (for example, an iPad® hand-held computing device), a Wi-Fi or wireless-communication-capable television, or any other suitable Internet-Protocol-enabled device.

**[0032]** According to an embodiment of the present invention, the wireless control device 120 may be operable to transmit digital messages in one or more Internet Protocol packets to the dimmer switch 110. The Internet Protocol (IP) is responsible for addressing hosts and routing datagrams (*i.e.*, packets) from a source host to a destination host across one or more IP networks. For this purpose, the Internet Protocol defines an addressing system that has two functions: identifying hosts and providing a logical location service. This is accomplished by defining standard datagrams and a standard addressing system.

**[0033]** Each datagram has two components, a header and a payload. The IP header is tagged with the source IP address, destination IP address, and other meta-data needed to route and deliver the datagram. The payload is the data to be transported.

**[0034]** The wireless control device 120 may transmit the digital messages via RF signals 106 either directly or via a wireless network that includes a standard wireless router 130. For example, the wireless control device 120 may transmit the RF signals 106 directly to the dimmer switch 110 via a point-to-point communication, such as a Wi-Fi communication link, *e.g.*, an 802.11 wireless local area network (LAN), or other direct wireless communication link, *e.g.*, a Wi-MAX communication link or a Bluetooth® communication link. This point-to-point communication may be performed using a standardized communication, *e.g.*, Wi-Fi Direct, or any non-standardized

communication that allows a wireless device to connect to another wireless device without the use of a wireless access point. For example, the wireless control device 120 and/or the dimmer switch 110 may download a software access point (AP) that provides a protected wireless communication between the devices.

**[0035]** The wireless control device 120 may also transmit RF signals 106 to the dimmer switch 110 via a wireless network. The wireless network may enable wireless communications via one or more wireless communications links, such as a Wi-Fi communications link, a Wi-MAX communications link, a Bluetooth® communications link, a cellular communications link, a television white space (TVWS) communication link, or any combination thereof. For example, the wireless control device 120 may communicate with a network server via a first wireless communications link (*e.g.*, a cellular communications link), while the dimmer switch 110 communicates with the network server via a second communications link (*e.g.*, a Wi-Fi communications link). In an alternative embodiment, the wireless control device 120 and the dimmer switch 110 may communicate with the network via the same type of communication link. The lighting control system 100 may also include a femtocell, a Home Node B, and/or other network entity for facilitating the configuration and operation of the lighting control system and for allowing wireless communications and connection to the Internet.

**[0036]** The dimmer switch 110 may be coupled in series electrical connection between an AC power source 102 and a lighting load 104 for controlling the amount of power delivered to the lighting load. The dimmer switch 110 may be wall-mounted in a standard electrical wallbox, or alternatively implemented as a table-top load control device. The dimmer switch 110 comprises a faceplate 112 and a bezel 113 received in an opening of the faceplate. The dimmer switch 110 further comprises a toggle actuator 114 and an intensity adjustment actuator 116. Actuations of the toggle actuator 114 toggle, *e.g.*, alternately turn off and on, the lighting load 104. Actuations of an upper portion 116A or a lower portion 116B of the intensity adjustment actuator 116 may respectively increase or decrease the amount of power delivered to the lighting load 104 and thus increase or decrease the intensity of the lighting load 104 from a minimum (*i.e.*, low-end) intensity (*e.g.*, approximately 1-10%) to a maximum (*i.e.*, high-end) intensity (*e.g.*, approximately 100%). A

plurality of visual indicators 118, e.g., light-emitting diodes (LEDs), may be arranged in a linear array on the left side of the bezel 113. The visual indicators 118 are illuminated to provide visual feedback of the intensity of the lighting load 104. An example of a dimmer switch having a toggle actuator and an intensity adjustment actuator is described in greater detail in U.S. Patent No. 5,248,919 (“the 919 patent”), issued September 28, 1993, entitled LIGHTING CONTROL DEVICE, the entire disclosure of which is hereby incorporated by reference. Alternatively, the dimmer switch 110 could be replaced by an electronic switch for simply turning the lighting load 104 on and off. The electronic switch may include a single visual indicator, e.g., the middle indicator of the visual indicators 118 of the dimmer switch 110.

**[0037]** According to an example embodiment of the present invention, the dimmer switch 110 may include an optical receiver 119. The optical receiver 119 may be used to receive optical signals from the wireless control device 120. Optical signals may be free-space optical communications or communications via physical connections. For example, free space optical communications may include communications via air, while physical optical communications may include communications via optical fiber cable or an optical transmission pipe. The optical signals may also be included in visible light, e.g., a flashing light, or non-visible light, e.g., infrared, spectrums.

**[0038]** The optical signals may provide instructions for programming and/or adjusting the operating parameters (e.g., the low-end intensity and the high-end intensity) of the dimmer switch 110. For example, the optical signals may be used to configure the dimmer switch such that the dimmer switch 110 is operable to receive the RF signals 106 from the wireless control device 120 as will be described in greater detail below. The optical signals may also be used to control or program the lighting configurations of the dimmer switch 110. And, though embodiments described herein may be described with respect to using optical signals or other signals to program or control a dimmer switch from a wireless control device, such signals may be used to program or control any device that is capable of receiving instructions via such optical or other signals, such as shades, thermostats, plug-in devices, or the like.

**[0039]** Wireless load control devices are described in greater detail in commonly-assigned U.S. Patent No. 5,838,226, issued November 17, 1998, entitled COMMUNICATION PROTOCOL FOR TRANSMISSION SYSTEM FOR CONTROLLING AND DETERMINING THE STATUS OF ELECTRICAL DEVICES FROM REMOTE LOCATIONS; U.S. Patent No. 6,803,728, issued October 12, 2004, entitled SYSTEM FOR CONTROL OF DEVICES; U.S. Patent Application No. 12/033,223, filed February 19, 2008, entitled COMMUNICATION PROTOCOL FOR A RADIO-FREQUENCY LOAD CONTROL SYSTEM; and U.S. Patent Application No. 13/234,573, filed September 16, 2011, entitled DYNAMIC KEYPAD FOR CONTROLLING ENERGY-SAVINGS SETTINGS OF A LOAD CONTROL SYSTEM; the entire disclosures of which are hereby incorporated by reference.

**[0040]** The wireless control device 120 has a visual display 122, which may comprise a touch screen having, for example, a capacitive touch pad displaced overtop the visual display, such that the visual display may display soft buttons that may be actuated by a user. Alternatively, the wireless control device 120 may comprise a plurality of hard buttons (e.g., physical buttons) in addition to the visual display 122. The wireless control device 120 may download a product control application for allowing the user to control the lighting load 104. In response to actuations of the displayed soft buttons or hard buttons, the wireless control device 120 transmits digital messages to the dimmer switch 110 directly or through other wireless communications described herein. For example, the digital messages may be transmitted via Wi-Fi communication using the wireless router 130. The dimmer switch 110 may adjust the intensity of the lighting load 104 in response to commands included in the digital messages, such that the dimmer switch controls the lighting load in response to actuations of the soft buttons or hard buttons of the wireless control device 120.

**[0041]** In addition, the wireless control device 120 may be controlled to transmit optical signals, near field communication (NFC) signals, or RF signals according to a proprietary RF communication protocol (such as, for example, the Clear Connect™ protocol) as described herein. For example, the visual display 122 may be controlled to transmit optical signals to the optical receiver 119 of the dimmer switch 110 (as will be described in greater detail below). The wireless control device 120 may also comprise a camera lens 124 (Fig. 6) and a camera flash lighting

source 126 (Fig. 6), which may also be used to transmit and receive optical signals for controlling the lighting load.

**[0042]** The dimmer switch 110 and the wireless control device 120 may both be assigned a unique address for wireless communications described herein. For example, where wireless communications are performed using a Wi-Fi communication link, a Media Access Control (MAC) address may be assigned (e.g., during manufacture). The wireless control device 120 may connect to the wireless LAN via the wireless router 130 using standard procedures. The wireless control device 120 is assigned an Internet Protocol (IP) address upon connecting to the wireless LAN. The wireless control device 120 may store the service set identifier (SSID) and the SSID password of the wireless LAN. After obtaining the IP address, the wireless control device 120 is able to assign an IP address (e.g., different from the IP address of the wireless control device 120) to the dimmer switch 110. Alternatively, the dimmer switch 110 may be operable to obtain the IP address from the wireless router 130 using, for example, procedures defined by the Wi-Fi Protected Setup standard.

**[0043]** The dimmer switch 110 may be associated with (e.g., assigned to) the wireless control device 120, such that the wireless control device may transmit commands for controlling the intensity of the lighting load 104 or programming the dimmer switch 110. Such commands may be transmitted to the dimmer switch 110 via the RF signals 106. Digital messages transmitted to and from the dimmer switch 110 may include, for example, the MAC address and the IP address of the dimmer switch 110. The dimmer switch 110 is operable to turn the lighting load 104 on and off. The dimmer switch 110 is also operable to adjust the intensity of the lighting load in response to received digital messages, including the MAC address and the IP address of the dimmer switch, for example. In addition, the wireless router 130 may be operable to receive commands for controlling the lighting load 104 from the Internet, and may wirelessly transmit corresponding digital messages to the dimmer switch 110.

**[0044]** According to an example embodiment, the dimmer switch 110 may be assigned an IP address, an SSID, an SSID password, and/or a software AP at manufacture, such that the dimmer switch 110 may act as an AP for other communication devices in a LAN. The wireless control device 120 may recognize the dimmer switch 110 as an AP and may connect to the LAN via the

dimmer switch 110. For example, the dimmer switch 110 may connect to router 130 or may perform the functions of the router 130 itself.

**[0045]** The dimmer switch 110 may also connect to the wireless LAN to discover other dimmer switches (not shown). The dimmer switch 110 may discover the other dimmer switches using any discovery protocol, such as Bonjour, Simple Service Discovery Protocol (SSDP), Bluetooth® Service Discovery Protocol (SDP), DNS service discovery (DNS-SD), Dynamic Host Configuration Protocol (DHCP), Internet Storage Name Service (iSNS), Jini for Java objects, Service Location Protocol (SLP), Session Announcement Protocol (SAP) for RTP sessions, Simple Service Discovery Protocol (SSDP) for Universal Plug and Play (UPnP), Universal Description Discovery and Integration (UDDI) for web services, Web Proxy Autodiscovery protocol (WPAD), Web Services Dynamic Discovery (WS-Discovery), XMPP Service Discovery (XEP-0030), and/or XRDS for XRI, OpenID, OAuth, etc. Upon the dimmer switch 110 discovering one or more other dimmer switches, the dimmer switch may create a peer-to-peer network of dimmer switches capable of communicating with one another. For example, the dimmer switches may communicate programming and/or control instructions received from the wireless control device 120.

**[0046]** The wireless control device 120 may control the lighting load 104 by communicating instructions to the dimmer switch 110 via the RF signals 106 that cause the dimmer switch 110 to execute control instructions that have been pre-programmed on the dimmer switch 110. For example, the dimmer switch 110 may be pre-programmed at manufacture or via an update to execute the control instructions. The control instructions may include pre-configured settings (*e.g.*, protected or locked lighting presets), instructions for raising/lowering lighting level, instructions for fading, instructions for scheduling, instructions for turning lights on/off, or any other pre-programmed instruction, for example.

**[0047]** The wireless control device 120 may also program the settings (*i.e.*, the operating parameters) of the dimmer switch 110 (*e.g.*, when the dimmer switch is in programming mode). For example, the dimmer switch 110 may be a dimmer switch that may have a limited user interface (UI) or may not have any user interface. As such, the user interface of the wireless control device 120 may be used to program the dimmer switch 110. For example, various wireless communication

links described herein, e.g., Wi-Fi signals, optical signals, near field communication (NFC) signals, or proprietary-protocol RF signals, may be used to program any of a number of programmable features provided by the dimmer switch 110. Such features may be selected via the wireless control device 120. For example, the wireless control device 120 may program the dimmer switch 110 with such features as protected or locked presets, high-end trim, low-end trim, adjustable delay, fade time, load type, performing communications via wireless communication modes (e.g., as described herein), or being compatible with different lamps. In addition, the wireless control device 120 may be operable to program the dimmer switch 110 to change between modes of operation, for example, between a switching mode, a dimming mode, and/or an electronic timer mode (i.e., a countdown timer mode). The programming signal may be a one-way or two-way serial communication with the dimmer switch 110.

**[0048]** A protected preset is a feature that allows the user to lock the present light intensity level as a protected preset lighting intensity to which the dimmer may set the lighting load 104. For example, when the dimmer switch 110 is turned on while a protected preset is disabled, the dimmer may set the lighting load 104 to the intensity level at which the dimmer was set when the lighting load was last turned off. When the dimmer switch 110 is turned on while protected preset is enabled, the dimmer may set the lighting load 104 to the protected preset intensity level, for example. The protected preset value may be user-programmed. For example, the user may select a value from among a plurality of allowable values for the protected preset light intensity level. When the lighting load 104 is turned on with protected preset enabled, a processor or controller may access a memory in the dimmer switch 110 to retrieve the user-selected value, and cause the lighting load 104 to be set to the intensity level represented by that value.

**[0049]** High-end trim (i.e., high-end intensity) is a feature that governs the maximum intensity level to which the lighting load 104 may be set by the dimmer switch 110. Values for the high-end trim may range between about 60% and about 100% of full intensity, for example. In an example embodiment, the high-end trim may be pre-programmed to be about 90% of full intensity. In a dimmer switch 110, high-end trim is a feature that may be user-programmed as described herein.

**[0050]** Similarly, low-end trim (i.e., low-end intensity) is a feature that governs the minimum intensity level to which the lighting load 104 may be set by the dimmer switch 110. Values for the low-end trim may range between about 1% and about 20% of full intensity, for example. In an example embodiment, the low-end trim may be preprogrammed to be about 10% of full intensity. In a dimmer switch 110, low-end trim is a feature that may be user-programmed as described herein.

**[0051]** Delay-to-off is a feature that causes the lighting load 104 to remain at a certain intensity level for a prescribed period of time before fading to off. Such a feature may be desirable in certain situations, such as, for example, when a user wishes to turn out bedroom lights before retiring, but still have sufficient light to make his way safely to bed from the location of the dimmer switch 110 before the lights are completely extinguished. Similarly, the night staff of a large building may wish to extinguish ambient lights from a location that is some distance away from an exit, and may wish to delay the fade to off for a period of time sufficient for them to walk safely to the exit. Delay-to-off times may range from about 10 seconds to about 60 seconds for example. The delay-to-off time may be user-programmed, as described herein. For example, the user may select a value from among a plurality of allowable values for the delay-to-off time. When the lighting load is turned off with the delay-to-off feature enabled, the dimmer switch 110 may access the user-selected value of delay-to-off feature from memory. The lighting load 104 may remain at the current intensity level for a time represented by the user-selected value of delay-to-off feature.

**[0052]** Fading is a feature whereby the dimmer causes the lighting load 104 to change from one intensity level to another at a certain rate or plurality of successive rates based on different closures of the toggle switch or indicated in the instructions received from the wireless control device 120 and depending on the state of lighting load 104. Examples of fading are described in greater detail in the 919 patent. U.S. Patent No. 7,071,634, issued July 4, 2006, entitled LIGHTING CONTROL DEVICE HAVING IMPROVED LONG FADE OFF, discloses a lighting control device that is capable of activating a long fade off from any light intensity and is incorporated herein by reference. Any or all of the features that define the fade features may be user-programmed via the wireless control device 120.



**[0053]** Another feature that may be programmed as described herein is load type. The load type may be inductive, resistive, or capacitive. Forward phase-controlled dimming may be desirable where the load is inductive or resistive; reverse phase-controlled dimming may be desirable where the load is capacitive. Thus, the load type may be defined, at least in part, by a feature having a value associated with either forward phase control or reverse phase control.

**[0054]** In addition, the dimmer switch 110 may comprise an occupancy sensor or may be responsive to a remote occupancy sensor, and may store operating parameters, such as an occupancy sensor sensitivity setting or timeout value that may be programmed by the wireless control device 120. The wireless control device 120 may also be operable to program the dimmer switch 110 to operate in one of an occupancy mode and a vacancy mode. In the occupancy mode, the dimmer switch 110 operates to turn a controlled lighting load on and off in response to the occupancy sensor. In the vacancy mode, the dimmer switch 110 operates to only turn the lighting load off in response to the occupancy sensor. Examples of occupancy and vacancy sensors are described in greater detail in commonly-assigned U.S. Patent No. 7,940,167, issued May 10, 2011, entitled BATTERY-POWERED OCCUPANCY SENSOR; U.S. Patent No. 8,009,042, issued August 30, 2011, entitled RADIO-FREQUENCY LIGHTING CONTROL SYSTEM WITH OCCUPANCY SENSING; and U.S. Patent Application No. 8,199,010, issued June 12, 2012, entitled METHOD AND APPARATUS FOR CONFIGURING A WIRELESS SENSOR, the entire disclosures of which are hereby incorporated by reference.

**[0055]** Fig. 2 is an example screenshot 200 that may be provided on the wireless control device 120 when executing a product control application. The screenshot 200 includes a name field 210 for displaying a name of the lighting load 104 presently being controlled and an intensity field 212 for displaying the present intensity of the controlled lighting load 104. The wireless control device 120 displays a plurality of soft buttons and controls for the user to actuate to control the lighting load 104. The same controls may be implemented using hard buttons that correspond to items in the wireless control device 120 display.

**[0056]** As shown in Fig. 2, the wireless control device 120 displays an on button 220 for turning the lighting load 104 on to the maximum intensity (e.g., approximately 100%), an off

button 222 for turning the lighting load 104 off, a raise button 224 for raising the intensity of the lighting load 104 by a predetermined amount, and a lower button 226 for lowering the intensity of the lighting load 104 by a predetermined amount. In addition, the wireless control device 120 displays a virtual slider control 230 having an actuator knob 232 positioned along an elongated vertical slot 234. The user may touch the actuator knob 232 and slide the knob up and down to respectively raise and lower the intensities of the lighting load 104. The wireless control device 120 additionally displays a scroll bar 236 that is moved horizontally to cause the wireless control device 120 to control other lighting loads 104 that may be a part of the lighting control system 100.

**[0057]** In addition to, or alternative to, the soft buttons illustrated in Fig. 2, the wireless control device 120 display may enable user control of the lighting load 104 via text boxes (e.g., direct entry as a percentage of the maximum intensity), drop boxes, checkboxes, radio buttons, or voice activation. In another example embodiment, the user may control the lighting load 104 by tapping or pressing the wireless control device 120 display (e.g., by tapping or holding the wireless device 120 display to increase or decrease the lighting load 104). The wireless control device 120 display may be used to select the areas (e.g., rooms), lighting units (e.g., lamps), or dimmer switches that the user wishes to control with the wireless control device 120. According to another example embodiment, the control device 120 display may include options for the wireless communication link or RF signals 106 upon which the user may wish to communicate with the dimmer switch 110. The user may set preferences for the type of wireless communication link or RF signals 106 upon which the wireless control device 120 communicates with the dimmer switch 102 based on various factors associated with one or more wireless communication links, e.g., cost, response time, error rate, reliability, etc. For example, if one wireless communication link is more reliable than another, the wireless control device 120 may communicate over the more reliable wireless communication link, if available.

**[0058]** Fig. 3 is an example screenshot 300 that may be provided on the wireless control device 120 upon entering the programming mode for programming the dimmer switch 110. Upon entering the programming mode, the wireless control device 120 may transmit a signal to the dimmer switch 110 to put the dimmer switch 110 into programming mode. While in programming

mode, the wireless control device 120 may provide various options for allowing a user to select features to be programmed on the dimmer switch 110. For example, the features may be displayed to a user via the feature display 302. The feature display 302 may include drop-down boxes, text boxes, soft buttons, radio buttons, checkboxes, or the like, that may allow a user to enter or select one or more features that the user wishes to program on the dimmer switch 110. The one or more features may be displayed as options (e.g., a list of features) for being programmed, or they may be recognized by the wireless control device 120 upon receipt of entry from a user (e.g., via a text box). The user may select the one or more features for programming by selecting the enter/select feature button 304. When the user selects the one or more features, the wireless control device 120 may transmit instructions to the dimmer switch 110 that cause the dimmer switch 110 to be programmed for performing the selected one or more features. For example, the instructions themselves may include software that enables the dimmer switch 110 to perform the selected features, or the instructions may trigger the dimmer switch 110 to retrieve the software from an external source, such as an external server for example.

**[0059]** The user may exit programming mode by selecting the exit button 306. By exiting the programming mode, the wireless control device 120 may return to other operating modes and/or transmit a signal to the dimmer switch 110 that returns the dimmer switch 110 to its normal operating mode. According to another example embodiment, the wireless control device 120 may exit the programming mode after a prescribed timeout period in which the wireless control device receives no input commands from the user.

**[0060]** Fig. 4 is a simplified block diagram of the dimmer switch 110. The dimmer switch 110 comprises a controllably conductive device 410 coupled in series electrical connection between the AC power source 102 and the lighting load 104 for control of the power delivered to the lighting load. The controllably conductive device 410 may comprise a relay or other switching device, or any suitable type of bidirectional semiconductor switch, such as, for example, a triac, a field-effect transistor (FET) in a rectifier bridge, or two FETs in anti-series connection. The controllably conductive device 410 includes a control input coupled to a drive circuit 412.

**[0061]** The dimmer switch 110 further comprises a controller 414 coupled to the drive circuit 412 for rendering the controllably conductive device 410 conductive or non-conductive to thus control the power delivered to the lighting load 104. The controller 414 may comprise a microcontroller, a programmable logic device (PLD), a microprocessor, an application specific integrated circuit (ASIC), a field-programmable gate array (FPGA), or any suitable processing device or control circuit. A zero-crossing detector 415 determines the zero-crossings of the input AC waveform from the AC power supply 102. A zero-crossing may be the time at which the AC supply voltage transitions from positive to negative polarity, or from negative to positive polarity, at the beginning of each half-cycle. The controller 414 receives the zero-crossing information from the zero-crossing detector 415 and provides the control inputs to the drive circuit 412 to render the controllably conductive device 410 conductive and non-conductive at predetermined times relative to the zero-crossing points of the AC waveform.

**[0062]** The controller 414 receives inputs from mechanical switches 416 that are mounted on a printed circuit board (not shown) of the dimmer switch 110, and are arranged to be actuated by the toggle actuator 114 and the intensity adjustment actuator 116. The controller 414 also controls light-emitting diodes 418, which are also mounted on the printed circuit board. The light emitting diodes 418 may be arranged to illuminate the status indicators 118 on the front surface of the dimmer switch 110, for example, through a light pipe structure (not shown). The controller 414 is also coupled to a memory 420 for storage of unique identifiers (e.g., the MAC address and the IP address) of the dimmer switch 110, the SSID and the SSID password of the wireless LAN, instructions for controlling the lighting load 104, programming instructions for communicating via a wireless communication link, or the like. The memory 420 may be implemented as an external integrated circuit (IC) or as an internal circuit of the controller 414. A power supply 422 generates a direct-current (DC) voltage  $V_{CC}$  for powering the controller 414, the memory 420, and other low-voltage circuitry of the dimmer switch 110.

**[0063]** The dimmer switch 110 further includes a wireless communication module 430 for transmitting and receiving the RF signals 106 to and from the wireless control device 120 and/or the wireless router 130. For example, the wireless communication module 430 may be configured to

communicate via a Wi-Fi communication link, a Wi-MAX communication link, a Clear Connect™ communication link, and/or a Bluetooth® communication link. When the wireless communication module 430 comprises a Wi-Fi module, the controller 414 is operable to control the lighting load 104 in response to received digital messages in Wi-Fi packets (i.e., Internet Protocol packets received via the Wi-Fi signals). The wireless communication module 430 may comprise an RF transceiver and an antenna. Examples of antennas for wall-mounted dimmer switches are described in greater detail in U.S. Patent No. 5,982,103, issued November 9, 1999, and U.S. Patent No. 7,362,285, issued April 22, 2008, both entitled COMPACT RADIO FREQUENCY TRANSMITTING AND RECEIVING ANTENNA AND CONTROL DEVICE EMPLOYING SAME, the entire disclosures of which are hereby incorporated by reference.

**[0064]** The dimmer switch 110 further comprises an optical module 440, such as an optical signal receiving circuit for example. The optical module 440 may be optically coupled to the optical receiver 119. The optical module 440 may be coupled to the optical receiver 119 on the front surface of the dimmer switch 110, for example, through a light pipe (not shown), such that the optical module 440 may receive the optical signals from the wireless control device 120 via the light pipe. For example, the optical module 440 may comprise a photodiode (not shown) that is responsive to the optical signals transmitted by the wireless control device 120. In addition, the photodiode of the optical module 440 may be controlled by the controller 414, so as to transmit optical signals to the wireless control device 120 (as will be described in greater detail below), for example.

**[0065]** The wireless device 120 may control the controllably conductive device 410 using the optical signals and/or the digital messages received via the RF signals 106. According to an example embodiment, the controller 414 may determine the module from which the signals are received, e.g., from the wireless communication module 430 or the optical module 440, and the controllably conductive device 410 may be controlled based on those signals. The controller 414 may also transmit messages to the wireless control device 120 via optical signals or digital messages transmitted via the RF signals 106. For example, the controller 414 of the dimmer switch 110 may be used to transmit digital messages to the wireless control device 120 via wireless communication.

The digital messages may include alerts and/or feedback and status information regarding the lighting load 104. The digital messages may also include error messages or indications as to whether the dimmer switch 110 is able to communicate via a wireless communication link or RF signal 106, for example.

**[0066]** Fig. 5 is a front view of the wireless control device 120 showing an example location of a portion 240 of the display screen 122 that may be used for transmitting optical signals. The wireless control device 120 may be operable to transmit a digital message via the optical signals by alternating a portion 240 of the display screen 122 between black and white (or two other contrasting colors) to modulate the light output of (i.e., flash) the portion of the display screen. Instead of turning light/dark transitioning of pixels on the display, the backlight may be on/off transitioned for increased bandwidth. While Fig. 5 illustrates a portion 240 of the display screen 122 for transmitting optical signals, other portions of the display screen or the entire display screen may also be used for transmitting the optical signals.

**[0067]** Fig. 6 is a perspective view showing the display screen 122 of the wireless control device 120 directed towards the optical receiver 119 of the dimmer switch 110 while the wireless control device is transmitting the optical signals. The portion 240 of the display screen 122 may be held close to the optical receiver 119 while the wireless control device 120 is transmitting the optical signals to ensure that the optical module 440 receives the optical signals. The proximity of the wireless control device 120 to the optical receiver 119 may be close enough for successfully transmitting the optical signal based on ambient light, the signal-to-noise ratio, error coding, etc. The wireless control device 120 may detect the dimmer switch 110 for performing optical signal communications. For example, the wireless control device 120 may comprise a proximity detector and may begin transmitting the optical signals to the optical module 440 when the wireless control device detects that the wireless control device is a predetermined distance from the dimmer switch 110.

**[0068]** According to another example embodiment, the dimmer switch 110 may be equipped with an electrostatic foam stylus tip, which is located a preset distance from the photodiode, for example. The wireless control device 120 may detect the presence of the stylus tip, correlating the

touch location with accelerometer data, to yield the specific display location in which to transmit the data for example. An application on the wireless control device 120 may use the built in proximity sensor as well as the stylus tip to ensure the display flashes when touching the dimmer switch 110 to be programmed. Alternatively, the proximity of the wireless control device 120 may be detected by the dimmer switch 110 and an indication may be transmitted to the wireless control device 120 via the digital message described herein. According to another embodiment, the optical module 440 could be located so as to receive the optical signals through the light pipe structure located between the status indicators 118 and the LEDs 418, such that the separate optical receiver 119 is not required on the front surface of the dimmer switch 110.

**[0069]** Additional bandwidth may be achieved via a tricolor red/green/blue (RGB) photodiode receiver assembly for an approximately three-times increase in bandwidth. For example, the portion 240 of the display screen 122 may be changed between different colors (e.g., red, green, and blue) or even more colors. Multiple bits may be encoded into the transitions from one specific color to another. Transfer rates may be as high as 60 bits/sec using the RGB photodiode receiver, for example.

**[0070]** According to an example embodiment of the present invention, the wireless control device 120 is able to execute the product control application to assign a unique identifier (e.g., the IP address) to the dimmer switch 110, before associating the wireless control device 120 with the dimmer switch, for example. The wireless control device 120 chooses a unique identifier for the dimmer switch 110 that is different than the unique identifier of the wireless control device 120 or any other devices on the wireless LAN. The unique identifier may be stored at the wireless control device 120, the dimmer switch 110, or on any other network entity, for example. The portion 240 of the display screen 122 may be held close to the optical receiver 119 before the wireless control device 120 begins transmitting the unique identifier via optical signals. The display screen 122 may also be used to transmit the SSID and the SSID password to the dimmer switch 110 via the optical signals. When the dimmer switch 110 successfully receives the unique identifier, the SSID, and/or the SSID password from the wireless control device 120, the dimmer switch 110 may connect to the local wireless network. For example, the dimmer switch 110 may connect to a wireless LAN and

transmit the MAC address of the dimmer switch to the wireless control device 120. The dimmer switch 110 may provide an indication (e.g., blink the lighting load 104 or provide another indication) that the dimmer switch has successfully connected to the wireless LAN. The wireless control device 120 may transmit and receive the RF signals 106 to and from the dimmer switch 110 to control the lighting load 104.

[0071] According to another alternate embodiment of the present invention, the camera lens 124 and the camera flash light source 126 may be used to transmit and receive optical signals to and from the optical module 440. Fig. 7 is a perspective view showing the camera lens 124 and the camera flash light source 126 of the wireless control device 120 directed towards the optical receiver 119 of the dimmer switch 110 according to embodiments of the present invention described herein. The camera flash light source 126 (which may comprise an LED) is controlled to generate the optical signals to thus transmit the digital messages to the dimmer switch 110. In addition, the photodiode of the optical module 440 of the dimmer switch 110 may be controlled to transmit optical signals. The optical signals may be received by the camera lens 124 of the wireless control device 120. Accordingly, a two-way optical communication link may be established between the dimmer switch 110 and the wireless control device 120.

[0072] As illustrated in Fig. 8, the display screen 122 may display a targeting image (e.g., cross-hairs 250). The target image may assist the user in lining up the camera lens 124, the camera flash light source 126, or the portion 240 of the display screen 122 with the optical receiver 119 of the dimmer switch 110. The display screen 122 may display a message to the user upon making a determination that the camera lens 124 and the camera flash light source 119 are aligned with the optical receiver 119 of the dimmer switch 110. The determination may be made by the wireless control device 120 itself, or the wireless control device 120 may make the determination based on an indication received from the dimmer switch 110. The indication may be received via an optical or other wireless signal for example.

[0073] Fig. 9 is a simplified flow diagram illustrating an example embodiment for optically programming or controlling a dimmer switch 110 via a wireless control device 120. As shown in Fig. 9, a programming or controlling procedure 900 may be started at 902 and the wireless control



device 120 may launch an application at 904. The application may display a user interface on the visual display 122 of the wireless control device 120. The application may enable the adjustment of the lighting load 104 or programming of the dimmer switch 110 via the optical signals. For example, the application may determine instructions for controlling or settings for programming the dimmer switch 110 at 806. Various settings or instructions may be input and/or stored to the wireless control device 120 application which may be transmitted to the dimmer switch 110, for example, via an optical signal at 908.

**[0074]** When the wireless control device 120 application completes the transmission, the dimmer switch 110 and/or the wireless control device 120 may provide an indication that the transmission has been completed. For example, the wireless control device 120 may receive an indication or message from dimmer switch 110 and/or provide an indication (e.g., audio alert, visual alert, or vibration) to a user at 910. According to another example embodiment, the dimmer switch 110 may display a message at the dimmer display or provide an indication via the lighting load 104 (e.g., blink the lamp associated with the dimmer) when the transmission has been received and/or processed. After the indication has been provided, the programming or controlling procedure 900 may end at 912.

**[0075]** According to an example embodiment, the wireless control device 120 and the application may be used to setup custom lighting schedules at the dimmer switch 110, such as lighting timer schedules, for example. The user interface provided on the display screen 122 of the wireless control device 120 may provide an easy-to-use interface for configuring the timeclock event times and actions of the timeclock schedule. After the timeclock schedule is configured, the wireless control device 120 may transmit (e.g., via the optical signals) the information defining the timeclock schedule to the dimmer switch 110, which may be stored in the memory 420 in the dimmer switch 110. In addition, the wireless control device 120 may transmit the present time of day (and possible the present time of year) to the dimmer switch 110 when transmitting the timeclock schedule information to thus calibrate the internal clock of the dimmer switch 110.

**[0076]** To transmit the timeclock schedule information, the application may enter a timer program mode and may be placed in close proximity to the dimmer switch 110. The wireless control

device 120 may transmit the schedule data to the dimmer switch 110, for example, optically via off/on transitions of the display, which may be similar to the low/hi transitions of a standard serial data stream. When data transfer is complete (e.g., checksums match) the dimmer switch 110 may provide an indication (e.g., audio signal beeps). If data transfer is not successful the programming process may repeat (e.g., 1-n times). If the process fails on the  $n^{\text{th}}$  attempt an error message (e.g., tone) may indicate a failed programming attempt. The dimmer switch 110 may run the schedules as programmed on the control device 120 application. Additionally, the control device 120 may run the schedules informing the user of the next scheduled event.

[0077] According to an example embodiment, the wireless control device 120 and the application may be used to program the dimmer switch 110 for wireless communication (e.g., Wi-Fi communication) via the local area network. The user may use the application to select a desired router or local area network for performing Wi-Fi communications via the dimmer switch 110. For example, the user may enter the name of the dimmer switch 110 for communicating on the local area network. The wireless control device 120 application prompts the user to select a program button, at which time the user may place the wireless control device 120 close to or against the dimmer switch 110 for programming via the optical signal. The optical signal may be received at the dimmer switch 110 via the optical module 440. The wireless control device 120 may transmit the acquired data to the dimmer switch 110, for example, optically via the black/white transitions of the display. Once the dimmer switch 110 successfully receives the data, the dimmer switch may join the network and obtain an IP address, which may become the static IP address of the dimmer switch. Once the dimmer switch 110 has an IP address, the dimmer switch sends a TCP/IP sockets message that includes the IP address, name, and/or serial number of the dimmer switch to the IP address of the wireless control device 120. In addition, the dimmer switch 110 may receive the IP address from the wireless control device 120 via the black/white transitions of the display.

[0078] Fig. 10 is a simplified flow diagram illustrating an example embodiment for programming or controlling a dimmer switch 110 using a Wi-Fi signal. As shown in Fig. 10, a programming or control procedure 1000 may be started at 1002 and the wireless control device 120 may launch an application that displays a user interface and enables Wi-Fi communication of user

inputs from the wireless control device 120 to the dimmer switch 110 at 1004. The wireless communication module 430 of the dimmer switch 110 may comprise a Wi-Fi module, such as a Wi-Fi receiver for example, to enable Wi-Fi communications. At 1006, the wireless control device 120 may assign a unique identifier (e.g., IP address and/or an SSID and the corresponding password) to the dimmer switch 110. The wireless control device 120 may transmit the unique identifier to the dimmer switch 110 at 1008, for example, via optical signals as described above. The application may determine instructions or settings for programming or controlling the dimmer switch 110 at 1010. Various settings or instructions may be input and/or stored to the wireless control device 120 application which may be transmitted (e.g., via a local area network or point-to-point communication) to the dimmer switch 110 via a Wi-Fi signal at 1012. When the wireless control device 120 completes the transmission, the dimmer switch 110 and/or the wireless control device 120 may provide an indication that the transmission has been completed. For example, the wireless control device 120 may receive an indication or message from dimmer switch 110 and/or provide an indication (e.g., audio alert, visual alert, or vibration) to a user at 1014. After the indication has been provided, the programming or controlling procedure 1000 may end at 1016.

**[0079]** According to an example embodiment, the Wi-Fi signal may include a non-standard Wi-Fi signal used to communicate via a vendor-specific proprietary access point. In this embodiment, the dimmer switch 110 may receive Wi-Fi communications via a vendor-specific beacon implementing a vendor-specific protocol. Using the vendor-specific beacon, vendor proprietary information may be included in the Wi-Fi signal, for example, as embedded information in a portion of the beacon management frame. The commands may be embedded in the beacon management frame using active and directed probe request/response for example.

**[0080]** Fig. 11 is a simplified block diagram of a dimmer switch 1110 according to an alternate embodiment of the present invention. The dimmer switch 1110 is identical to the dimmer switch 110 as shown in Fig. 4. However, the dimmer switch 1110 comprises an NFC module 1140 for receiving NFC signals from the wireless control device 120. The NFC module 1140 is coupled to a memory 1120 for storing operating parameters of the dimmer switch 1110. The memory 1120

may comprise, for example, an electrically-erasable programmable memory (EEPROM) that may be written to without the use of power (e.g., part number M24LR64-R manufactured by ST Microelectronics). The NFC module 1140 may also be coupled to a controller 1114, which may be operable to control the controllably conductive device 410 to thus control the lighting load 104 in response to the NFC signals.

**[0081]** Fig. 12 is a simplified flow diagram illustrating an example embodiment for programming or controlling the dimmer switch 1110 using NFC signals. As shown in Fig. 12, a programming or control procedure 1200 may be started at 1202 and the wireless control device 120 may launch an application at 1204. The application may displays a user interface on the visual display 122 of the wireless control device and enables receipt of NFC signals from the wireless control device 120 to the dimmer switch 1110. The application may determine instructions or settings for programming or controlling the dimmer switch 1110 at 1206. Various settings or instructions may be input and/or stored to the wireless control device 120 application which may be transmitted to the dimmer switch 1110 via the NFC signals at 1108. The wireless control device 120 may be moved close to the dimmer switch 110 for transmission of the NFC signals. When the wireless control device 120 completes the transmission of the NFC signals, the dimmer switch 1110 and/or the wireless control device 120 may provide an indication that the transmission has been completed. For example, the wireless control device 120 may receive an indication or message from dimmer switch 1210 and/or provide an indication to a user at 1210. After the indication has been provided, the programming or controlling procedure 1200 may end at 1212.

**[0082]** According to an alternate embodiment, the NFC signals may be transmitted to the dimmer switch 1110 to program the dimmer switch with operating parameters when an airgap switch (not shown) of the dimmer switch 1110 is opened as shown in the simplified flow diagram of Fig. 13. As shown in Fig. 13, a programming procedure 1300 may be started at 1302 and the wireless control device 120 may launch an application at 1304. The user determines settings for programming the dimmer switch 1110 using the application at 1306 and then opens the airgap switch of the dimmer switch at 1308, such that the controller 1114 is unpowered. After the airgap switch is opened at 1308, the wireless control device 120 is moved close to the dimmer switch 1110

for transmission of the NFC signals at 1310. When the wireless control device 120 completes the transmission of the NFC signals, the wireless control device 120 provides an indication that the transmission was completed at 1312. The user closes the airgap switch of the dimmer switch 1110 at 1314, after which the dimmer switch reboots with the new operating parameters at 1316. The dimmer switch 1110 blinks the lighting load 104 at 1318 if the dimmer switch was updated correctly, before the programming procedure 1300 ends at 1320.

**[0083]** Opening the airgap switch during the programming procedure 1300 helps to isolate the dimmer switch 1110 that is being programmed from other dimmer switches that may be installed near that dimmer switch (e.g., ganged with the dimmer switch in the same electrical wallbox), such that the other dimmer switches are not programmed by mistake. For example, the controller 1114 may prevent the NFC module 1140 from writing to the memory 1120 when the controller is powered. However, when the controller 1114 is unpowered, the controller will stop preventing the NFC module from writing to the memory 1120.

**[0084]** The dimmer switch 1110 may be programmed, via the wireless control device 120 for example, to the corresponding low-end and high-end intensities that provide for optimum operation of a particular lamp from a particular manufacturer. Since the operation of a lamp can vary from one lamp to the next (particularly for screw-in compact fluorescent lamps and screw-in light-emitting diode lamps), the wireless control device 120 may retrieve the appropriate the low-end and high-end intensities that correspond to a particular lamp. The information may be retrieved by scanning a barcode on a packaging of the lamp (e.g., using a camera of a smart phone) and then reading the low-end and high-end intensities from the memory 1120 or obtaining low-end and high-end intensities via the Internet, for example. After the wireless control device 120 determines the low-end and high-end intensities of the particular lamp from the retrieved information, the control device 120 programs the dimmer with the appropriate low-end and high-end intensities for the particular lamp. Alternatively, the wireless control device 120 may be operable to program only one of the high-end and low-end intensities or another operating parameter after scanning the barcode of the lamp.

**[0085]** Fig. 14 is a simplified flow diagram of a programming procedure 1400 for programming the low-end and high-end intensities of the dimmer switch 1110 by scanning a barcode of a particular lamp. The programming procedure 1400 is started at 1402 and the wireless control device 120 launches an application at 1404. The user then scans the barcode on the packaging of the lamp at 1406 using, for example, the camera of the wireless control device 120. The application on the wireless control devices 120 obtains the new high-end and/or low-end intensity, for example, from memory or via the Internet at 1408, and then transmits the new high-end and/or low-end intensity to the dimmer switch 1110 via the NFC signals at 1410. When the wireless control device 120 completes the transmission of the NFC signals, the dimmer switch 1110 and/or the wireless control device 120 provides an indication that the transmission has been completed at 1412 and the programming procedure 1400 ends at 1114. While the programming procedure 1400 of Fig. 14 is shown with the wireless control device 120 transmitting NFC signals to the dimmer switch 1110, the wireless control device 120 could alternatively transmit the new high-end and/or low-end intensity to the dimmer switch using Internet Protocol packets or optical signals as shown and described above.

**[0086]** According to an example embodiment, the wireless control device 120 application may use the camera lens 124 (Fig. 6) and a camera flash lighting source 126 (Fig. 6) to take a photograph of a lamp for programming the dimmer switch 1110. The dimmer switch 1110 may be programmed with the corresponding low-end and high-end limits for the photographed lamp. For example, the wireless control device 120 may transmit commands to the dimmer switch 1110 to program the lamp with the low-end and high-end intensities. The control device 120 may analyze the photograph and perform a look-up to determine the limits for the photographed lamp. The look-up may be performed locally or by retrieving information from an external source (e.g., external server) using information obtained during the analysis. According to another embodiment, the control device 120 may send the photograph of the lamp to the external source (e.g., external server) to retrieve the low-end and high-end limit information for the photographed lamp.

**[0087]** Fig. 15 is a simple diagram of an RF lighting control system 1500 comprising a dimmer switch 1510, a wireless control device 1520, and a gateway device 1540 according to an

alternate embodiment. The wireless control device 1520 may be operable to transmit RF signals 106 including Internet Protocol packets to the gateway device 1540 via the wireless router 130. The gateway device 1540 is then operable to transmit digital message according to a proprietary RF communication protocol (such as, for example, the Clear Connect™ protocol) to the dimmer switch 1510 via RF signals 1506. The dimmer switch 1510 includes a wireless communication module operable to receive digital messages according to the proprietary RF communication protocol via the RF signals 1506. In addition, a communication dongle (not shown) could be connected to the wireless control device 1520 to allow for direct communication between the wireless control device 1520 and the dimmer switch 1510 using the proprietary RF communication protocol. For example, the communication dongle could be plugged into a headphone jack on the wireless control device 1520.

**[0088]** Fig. 16 is a simplified flow diagram illustrating an example embodiment for programming or controlling the dimmer switch 1510 using the proprietary RF communication protocol. As shown in Fig. 16, a programming or control procedure 1600 may be started at 1602 and the wireless control device 1520 may receive the communication dongle at 1604. At 1606, the wireless control device 1520 may launch an application for sending user input and instructions using the proprietary RF communication protocol. The dimmer switch 1510 may be placed into a programming mode for receiving the RF signals 1506 according to the proprietary RF communication protocol and the user may select a dimmer from a list on the wireless control device 1520. The application may determine instructions or settings for programming or controlling the dimmer switch 1510 at 1608.

**[0089]** Various settings or instructions may be input and/or stored to the wireless control device 1520 application which may be transmitted to the dimmer switch 1510 settings or instructions may be transmitted using the proprietary RF communication protocol at 1610. According to an example embodiment, the transmission at 1608 may be performed via a direct communication between the wireless control device 1520 and the dimmer switch 1510 using the communication dongle. When the wireless control device 1520 application completes the transmission, the dimmer switch 1510 and/or the wireless control device 1520 may provide an indication that the transmission

has been completed. For example, the wireless control device 1520 may receive an indication or message from dimmer switch 1510 and/or provide an indication to a user at 1612. After the indication has been provided, the programming or control procedure may end at 1614.

**[0090]** According to an alternative embodiment, the transmission at 1610 may be performed via multiple communications, such as a non-proprietary-protocol communication (e.g., Wi-Fi) between the wireless control device 1520 and the gateway device 1540 and a proprietary-protocol communication from the gateway device 1540 to the dimmer switch 1510, for example. In this embodiment, the communication dongle may not be used or even received at 1604.

**[0091]** Fig. 17 is a simplified flow diagram illustrating an example embodiment for programming the dimmer switch 1510 using the wireless control device 1520 to have an appropriate low-end intensity for a particular lamp. As shown in Fig. 17, a programming procedure 1700 may be started at 1702 and the wireless control device 120 may launch an application at 1704 that displays a user interface for configuring the dimmer switch 1510 to the corresponding limits for a particular lamp. The dimmer switch 1510 may be placed into a programming mode (e.g., pressing or holding a button on the dimmer switch). The dimmer switch 1510 may repetitively transmit out a “programming mode” digital message that may be received by the wireless control device 1520 at 1706. The wireless control device 1520 may display the information regarding the dimmer switch 1510 that is received in the programming message on the visual display 122 (e.g., a list of dimmer switches). The wireless control device 1520 receives a user selection of the dimmer switch 1510 from the list of dimmer switches at 1708.

**[0092]** The user then points the camera lens 124 (Fig. 6) of the wireless control device 1520 at the lamp being controlled by the dimmer switch 1510 and actuates a start button displayed on the visual display 122 at 1710. The wireless control device 1520 may then transmit commands to the dimmer switch 1510 at 1712 to control the intensity of the lamp to a first intensity (e.g., approximately 50%-100%). The dimmer switch 1510 then slowly begins to decrease the intensity of the lamp towards the low-end intensity at 1714. When the dimmer switch 1510 tries to control the intensity of the lamp below the lowest intensity to which the lamp may be controlled, the lamp may begin to flicker. The application on the wireless control device 1520 may use the camera lens 124



(Fig. 6) and the camera flash lighting source 126 (Fig. 6) to detect the flicker in the lamp. When the flicker has been detected at 1716, the wireless control device 1520 may transmit a command to the dimmer switch 1510 at 1718 to begin slowly increasing the intensity of the lamp. When the wireless control device 1520 detects that the lamp has stopped flickering at 1720, the wireless control device 1520 may transmit a command to the dimmer switch 1510 at 1722 to stop adjusting the intensity of the lamp. The dimmer switch 1520 then stores the present intensity of the lamp as a new low-end intensity at 1724, before the programming procedure 1700 ends at 1726. When the wireless control device 1520 application completes the programming, the dimmer switch 1510 and/or the wireless control device 1520 may provide an indication that the load limit programming has been completed.

[0093] While the present application has been described with reference to the dimmer switches 110, 1110, 1510, and the wireless control devices 120, 1520, the concepts of the present invention could be applied to any control devices that are operable to communicate with each other, such as, for example, dimming ballasts for driving gas-discharge lamps; light-emitting diode (LED) drivers for driving LED light sources; screw-in luminaires including integral dimmer circuits and incandescent or halogen lamps; screw-in luminaires including integral ballast circuits and compact fluorescent lamps; screw-in luminaires including integral LED drivers and LED light sources; electronic switches, controllable circuit breakers, or other switching devices for turning appliances on and off; plug-in load control devices, controllable electrical receptacles, or controllable power strips for each controlling one or more plug-in loads; motor control units for controlling motor loads, such as ceiling fans or exhaust fans; drive units for controlling motorized window treatments or projection screens; motorized interior or exterior shutters; thermostats for a heating and/or cooling systems; temperature control devices for controlling setpoint temperatures of HVAC systems; air conditioners; compressors; electric baseboard heater controllers; controllable dampers; humidity control units; dehumidifiers; water heaters; pool pumps; televisions; computer monitors; audio systems or amplifiers; generators; electric chargers, such as electric vehicle chargers; an alternative energy controllers; occupancy sensors, vacancy sensors, daylight sensors, temperature sensors, humidity sensors, security sensors, proximity sensors, keypads, battery-powered remote controls,

key fobs, cell phones, smart phones, tablets, personal digital assistants, personal computers, timeclocks, audio-visual controls, safety devices, and central control transmitters.

**[0094]** Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention be limited not by the specific disclosure herein, but only by the appended claims. Additionally, the embodiments described herein may be implemented as a set of computer-executable instructions stored on a computer-readable medium, such as a random-access or read-only memory for example. Such computer-executable instructions may be executed by a processor or microcontroller, such as a microprocessor, within the dimmer switch 110 or the wireless control device 120, for example.

What is claimed is:

1. A load control device for controlling power delivered from an AC power source to an electrical load, the load control device comprising:
  - a controllably conductive device adapted to be coupled in series electrical connection between the source and the load;
  - a controller operatively coupled to a control input of the controllably conductive device for rendering the controllably conductive device conductive and non-conductive; and
  - a near-field communications (NFC) module operatively coupled to the controller and operable to receive at least one NFC signal for programming operating parameters of the load control device, wherein the controller is operable to control the controllably conductive device to control the power delivered to the load based on the operating parameters of the load control device.
2. The load control device of claim 1, further comprising:
  - a memory coupled to the NFC module and operable to store the operating parameters of the load control device.
3. The load control device of claim 2, wherein the operating parameters are received via the at least one NFC signal and are stored in the memory when the controller is unpowered.
4. The load control device of claim 3, further comprising
  - an airgap switch coupled in series with the controllably conductive device between the AC power source and the electrical load;
  - wherein when the airgap switch is in an open position, the airgap switch operable to disconnect the source from the load such that the controller is unpowered.
5. The load control device of claim 1, wherein the load control device comprises a lighting control device for controlling the intensity of a lighting load.

6. The load control device of claim 5, wherein the operating parameters comprise at least one of a low-end intensity and a high-end intensity of the lighting load.
7. The load control device of claim 1, wherein the operating parameters comprise one or more timeclock events of a timeclock schedule.
8. A load control device for controlling power delivered from an AC power source to an electrical load, the load control device comprising:
  - a controllably conductive device adapted to be coupled in series electrical connection between the source and the load;
  - a controller operatively coupled to the controllably conductive device for controlling the controllably conductive device; and
  - an Internet Protocol communications module operatively coupled to the controller and operable to receive an Internet Protocol packet for programming the load control device, wherein the controller is operable to control the controllably conductive device based on the programming of the load control device.
9. The load control device of claim 8, wherein the Internet Protocol packet is received from an Internet Protocol enabled device.
10. The load control device of claim 9, wherein the Internet Protocol enabled device is a smart phone, a tablet, a laptop, a desktop computer, or a television.
11. The load control device of claim 8, wherein the Internet Protocol packet provides instructions for programming the load control device.
12. The load control device of claim 11, wherein the load control device comprises a lighting control device for controlling the intensity of a lighting load.

13. The load control device of claim 12, wherein the operating parameters comprise at least one of a low-end intensity and a high-end intensity of the lighting load.
14. The load control device of claim 11, wherein the operating parameters comprise one or more timeclock events of a timeclock schedule.
15. The load control device of claim 8, wherein the Internet Protocol packet is received by way of a wireless local area network.
16. The load control device of claim 15, wherein the wireless local area network comprises a wireless router.
17. The load control device of claim 8, wherein the Internet Protocol packet is received by way of Wi-Fi communication.
18. The load control device of claim 8, wherein the load comprises a lighting load and the load control device comprises a dimmer switch.
19. A load control device for controlling power delivered from an AC power source to an electrical load, the load control device comprising:
  - a controllably conductive device adapted to be coupled in series electrical connection between the source and the load;
  - a controller operatively coupled to a control input of the controllably conductive device for rendering the controllably conductive device conductive and non-conductive; and
  - an optical module operatively coupled to the controller and operable to receive an optical signal for programming operating parameters of the load control device, wherein the controller is operable to control the controllably conductive device to control the power delivered to the load based on the optical signal programming of the load control device.

20. The load control device of claim 19, wherein the load control device comprises a lighting control device for controlling the intensity of a lighting load.
21. The load control device of claim 20, wherein the operating parameters comprise at least one of a low-end intensity and a high-end intensity of the lighting load.
22. The load control device of claim 19, wherein the operating parameters comprise one or more timeclock events of a timeclock schedule.
23. The load control device of claim 19, wherein the optical module comprises an optical signal receiving circuit operable to receive the optical signal, and wherein the controller is operable to obtain an IP address from the received optical signal, and to control the power delivered to the load in response to a wireless signal that includes the IP address.
24. A load control system for controlling power delivered from an AC power source to an electrical load, the load control system comprising:
- a load control device adapted to be coupled in series electrical connection between the source and the load for controlling the power delivered to the load, the load control device storing one or more operating parameters; and
  - a smart phone having a visual display for providing a user interface for adjusting the one or more operating parameters of the load control device;
- wherein the smart phone is operable to directly transmit operating parameters to the load control device.
25. The load control system of claim 24, wherein the load control device comprises a lighting control device for controlling the intensity of a lighting load.
26. The load control system of claim 25, wherein the operating parameters comprise at least one of a low-end intensity and a high-end intensity of the lighting load.

27. The load control system of claim 26, wherein the smart phone comprises a camera operable to scan a barcode of packaging of the lighting load, the smart phone operable to determine the low-end intensity for the lighting load using information received from the scanned barcode and to transmit the low-end intensity to the lighting control device.

28. The load control system of claim 26, wherein the smart phone comprises a camera and is operable to transmit a first digital message when the camera is directed at the lighting load, the lighting control device operable to adjust the intensity of the lighting load to a first intensity in response to receiving the first digital message, and to decrease the intensity of the lighting load from the first intensity while the camera is directed at the lighting load, the smart phone operable to transmit a second digital message when the computing device detects flickering of the intensity of the lighting load, the lighting control device operable to increase the intensity of the lighting load in response receiving the second digital message, the smart phone operable to transmit a third digital message when the smart phone does not detecting flickering in the intensity of the lighting control device, the lighting control device operable to cease adjusting the intensity of the lighting load in response to receiving the third digital message, such that the intensity of the lighting load is at a second intensity, the lighting control device operable to store the second intensity as a low-end intensity.

29. The load control system of claim 25, wherein the operating parameters comprise one or more timeclock events of a timeclock schedule.

30. The load control system of claim 24, wherein the load control device comprises an optical receiver for receiving optical signals from the smart phone, the smart phone operable to transmit the operating parameters to the load control device via the optical signals.

31. The load control system of claim 30, wherein the smart phone is operable to modulate the light output of at least a portion of the visual display to transmit the operating parameters to the load control device via the optical signals.

32. The load control system of claim 30, wherein the smart phone is operable to modulate the light output of a camera flash to transmit the operating parameters to the load control device via the optical signals.

33. The load control system of claim 24, wherein the load control device is responsive to near-field communication (NFC) signals, the smart phone operable to transmit the operating parameters to the load control device via NFC signals.

34. The load control system of claim 24, wherein the load control device is responsive to Internet Protocol packets, the smart phone operable to transmit the operating parameters to the load control device via the Internet Protocol packets.

35. A method of programming a lighting control device using a wireless control device having a visual display and a camera, the lighting control device operable to adjust the intensity of a lighting load that is purchased in packaging having a barcode, the method comprising:

- scanning the barcode of the packaging of the lighting load using the camera of the wireless control device;

- the wireless control device determining an operating parameter for the lighting load using information received from the scanned barcode;

- transmitting a digital message including the operating parameter to the lighting control device; and

- storing the operating parameter in the lighting control device in response to the lighting control device receiving the digital message.

36. The method of claim 35, wherein the operating parameter comprises at least one of a low-end intensity and a high-end intensity of the lighting load.

37. The method of claim 35, wherein the wireless control device determining an operating parameter for the lighting load comprises reading the operating parameter from a memory in the wireless control device.



38. The method of claim 35, wherein the wireless control device determining an operating parameter for the lighting load comprises transmitting a first digital message including the information received from the scanned barcode, and subsequently receiving a second digital message including the operating parameter.

39. The method of claim 35, wherein transmitting a digital message including the operating parameter comprises the wireless control device transmitting near-field communication (NFC) signals to the lighting control device.

40. The method of claim 35, wherein transmitting a digital message including the operating parameter comprises the wireless control device transmitting optical signals to the lighting control device.

41. The method of claim 35, wherein transmitting a digital message including the operating parameter comprises the wireless control device transmitting Internet Protocol packets to the lighting control device.

42. A method of programming a lighting control device using a wireless control device having a visual display and a camera, the lighting control device operable to adjust the intensity of a lighting load, the method comprising:

- transmitting a first digital message from the wireless control device when the camera of the wireless control device is directed at the lighting load;

- adjusting the intensity of the lighting load to a first intensity in response to the lighting control device receiving the first digital message;

- decreasing the intensity of the lighting load from the first intensity while the camera of the wireless control device is directed at the lighting load;

- transmitting a second digital message from the wireless control device to the lighting control device when the wireless control device detects flickering of the intensity of the lighting load;

- increasing the intensity of the lighting load in response to the lighting control device receiving the second digital message;

transmitting a third digital message from the wireless control device to the lighting control device when the wireless control device does not detecting flickering in the intensity of the lighting control device;

ceasing adjusting the intensity of the lighting load in response to the lighting control device receiving the third digital message, such that the intensity of the lighting load is at a second intensity; and

storing the second intensity as a low-end intensity of the lighting control device.

1/17

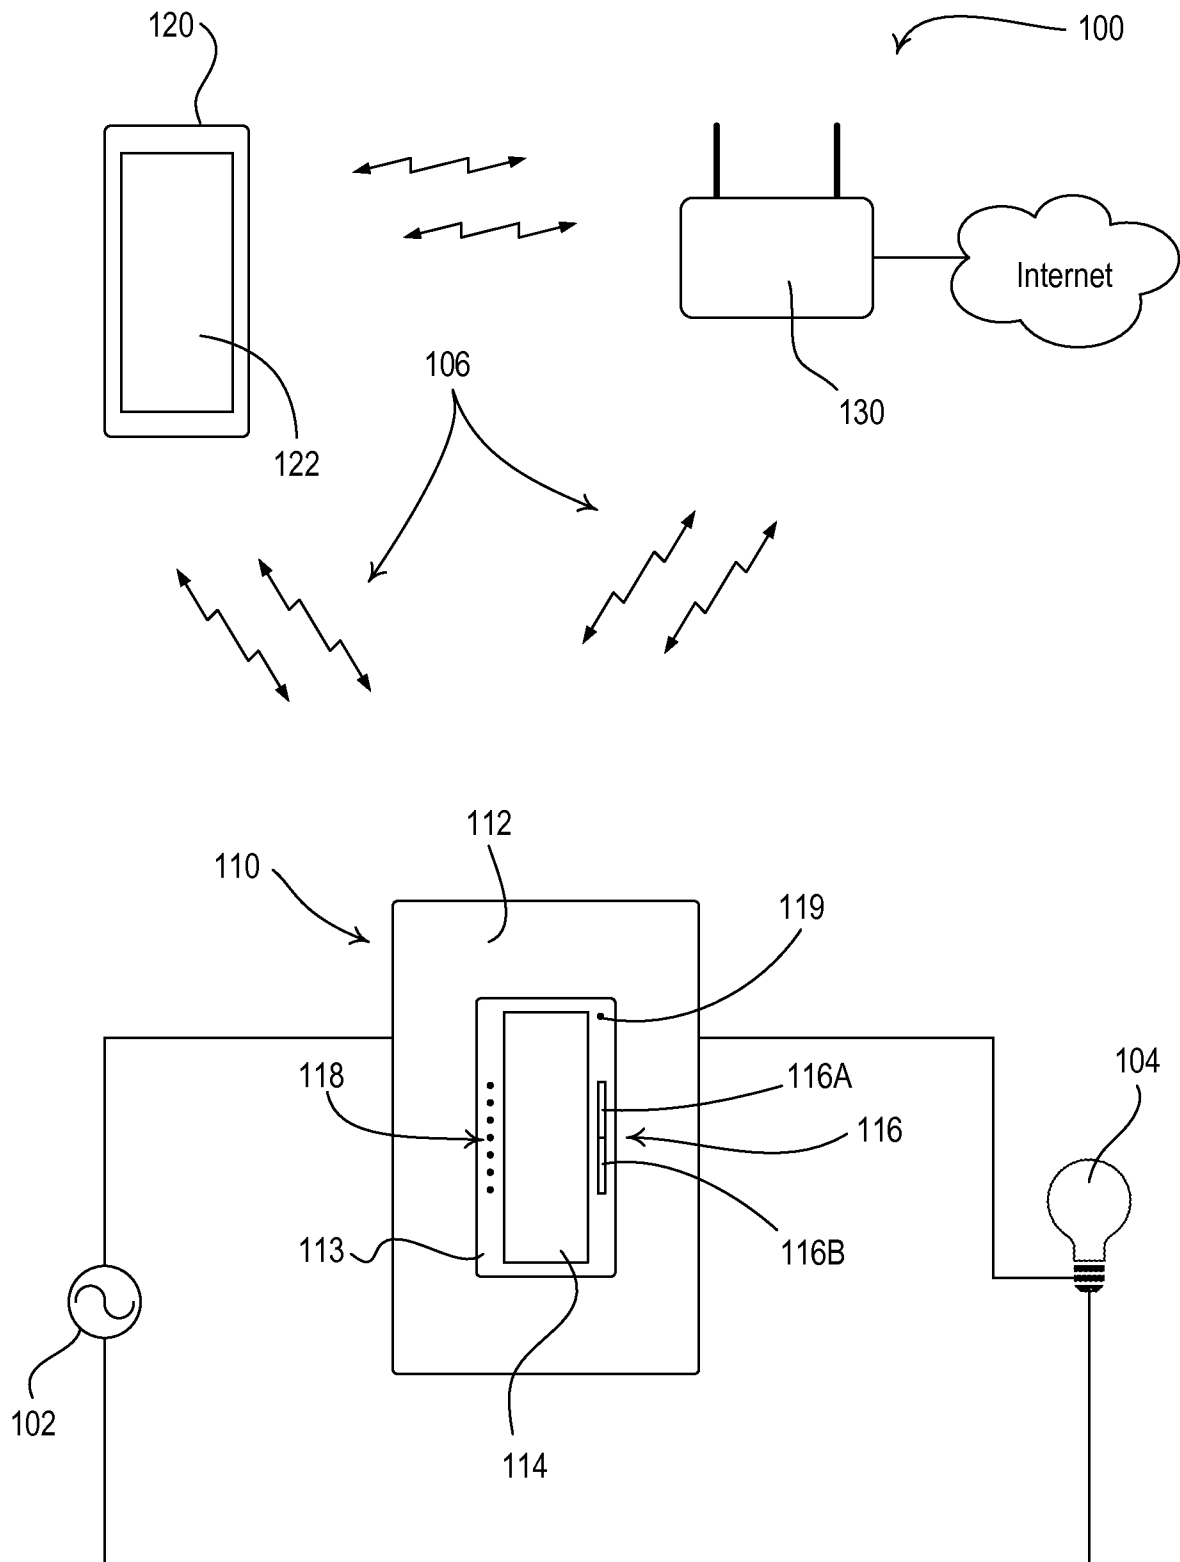


Fig. 1

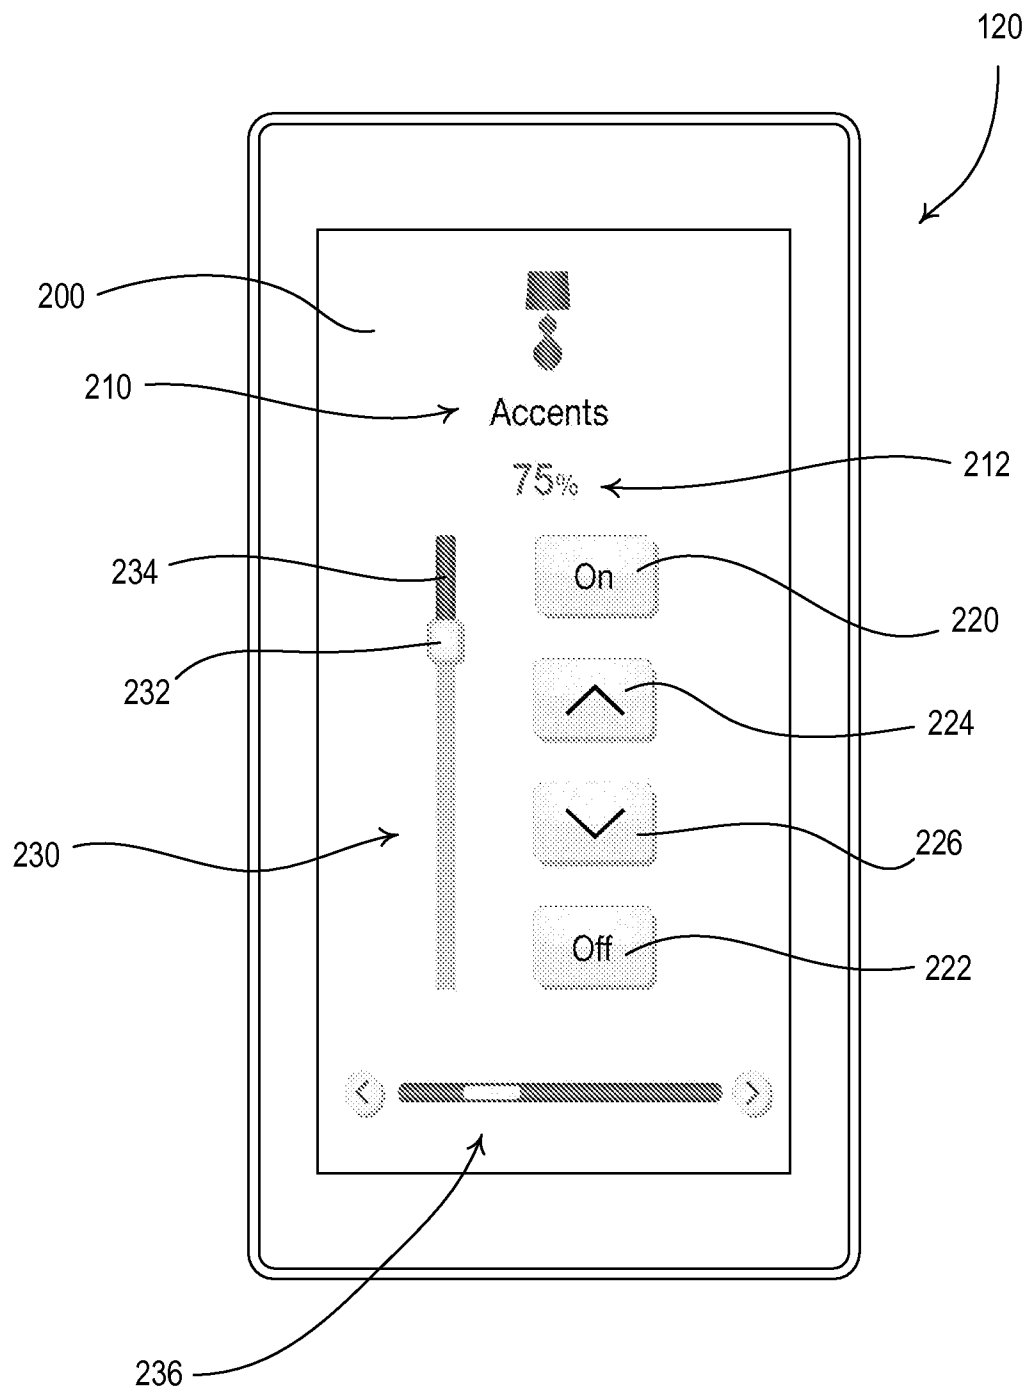


Fig. 2

3/17

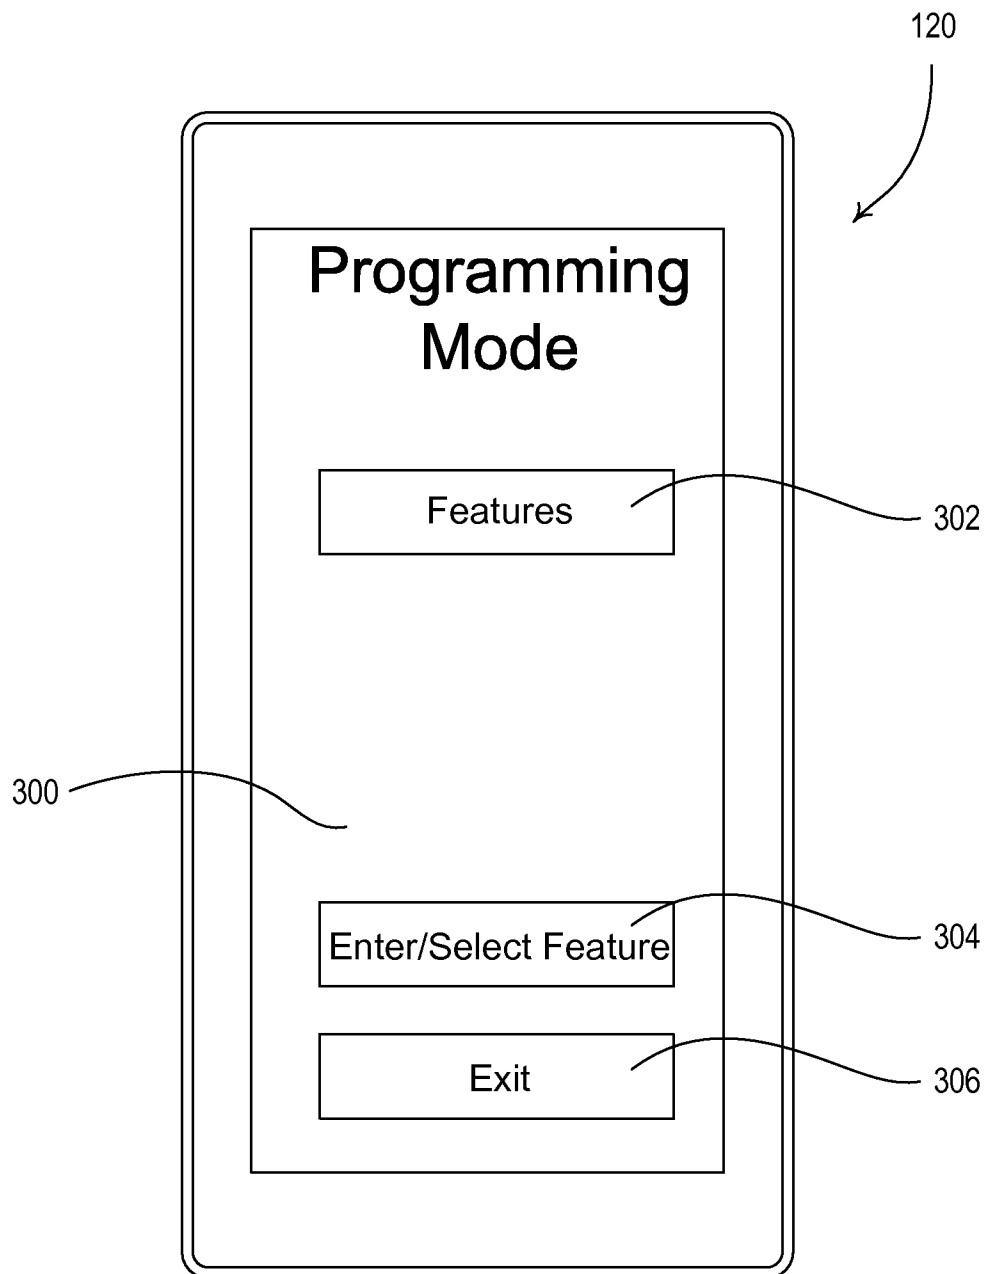


Fig. 3

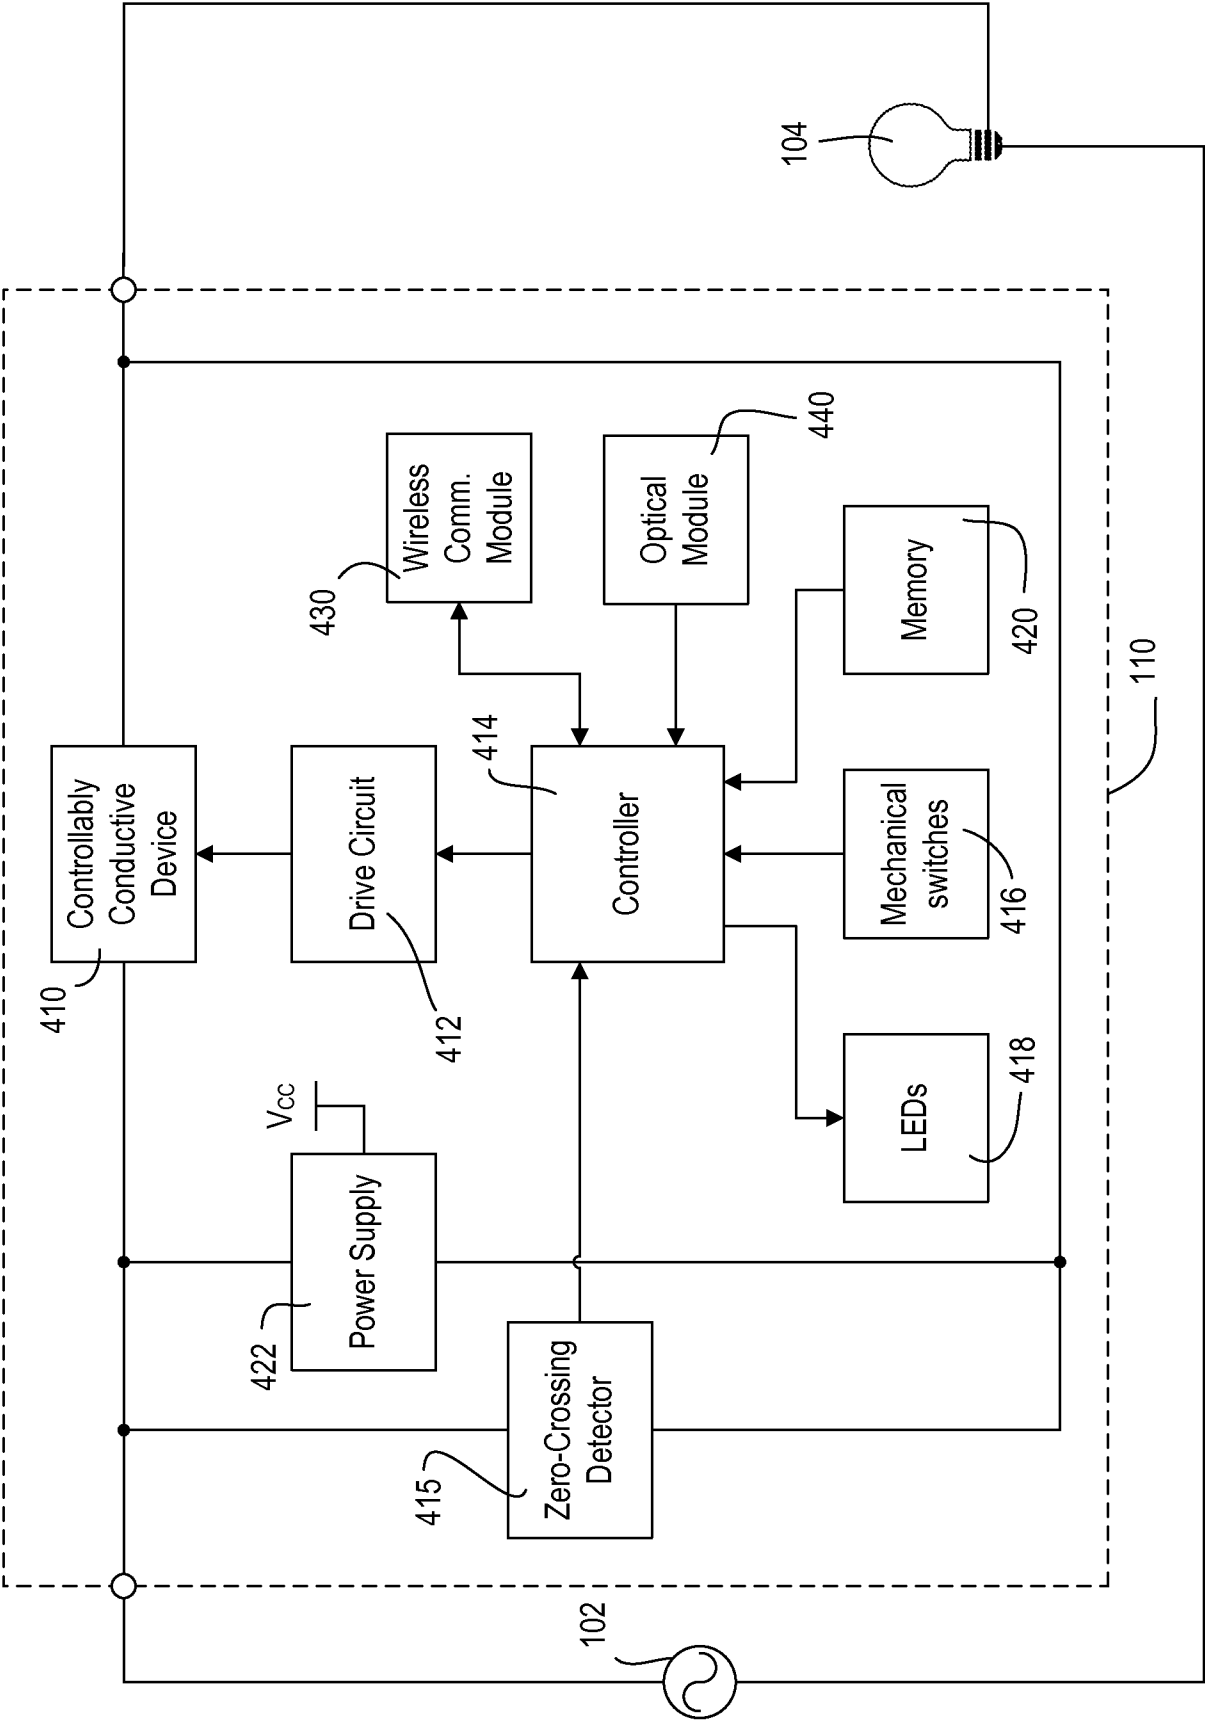


Fig. 4

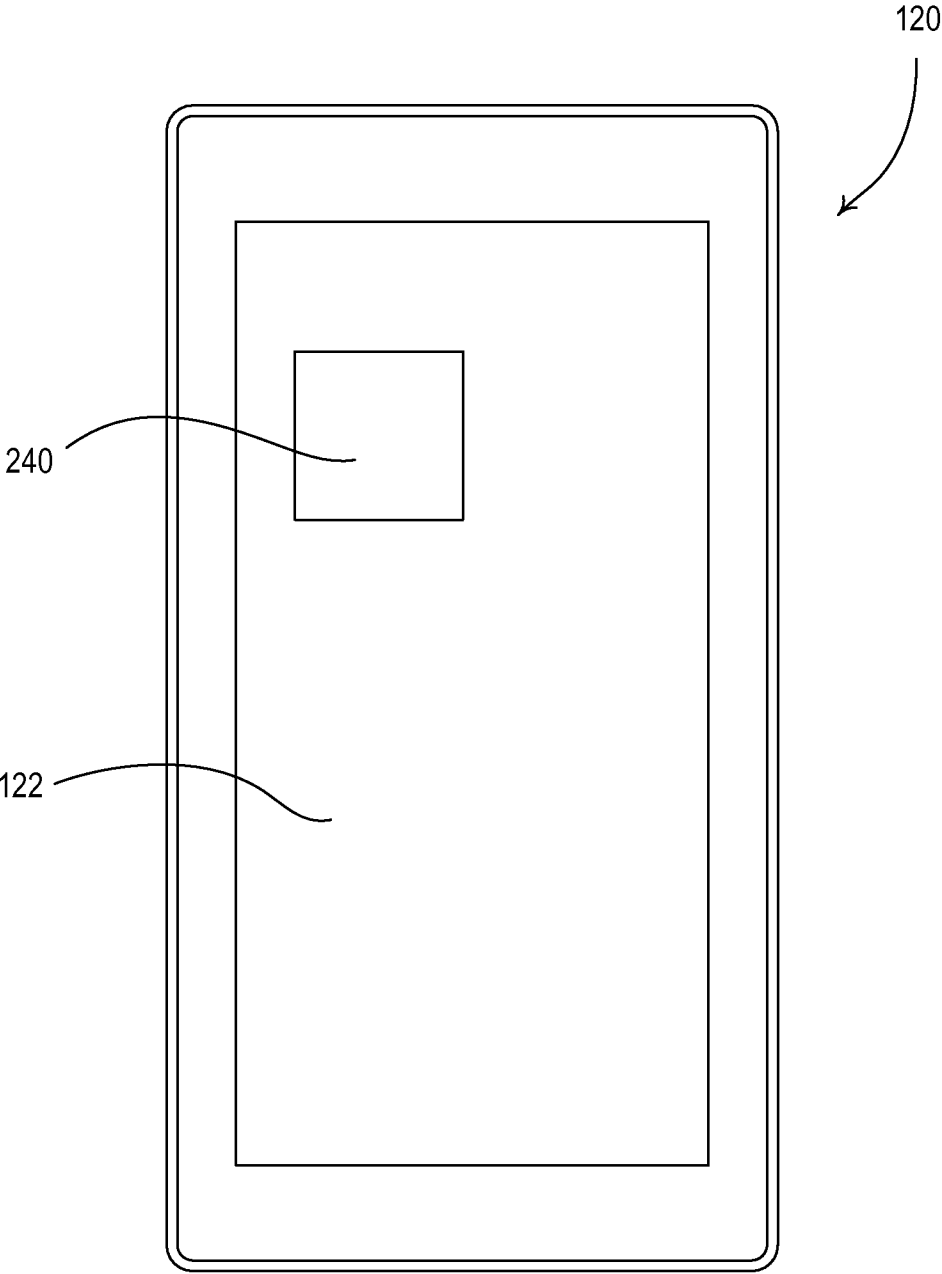


Fig. 5

6/17

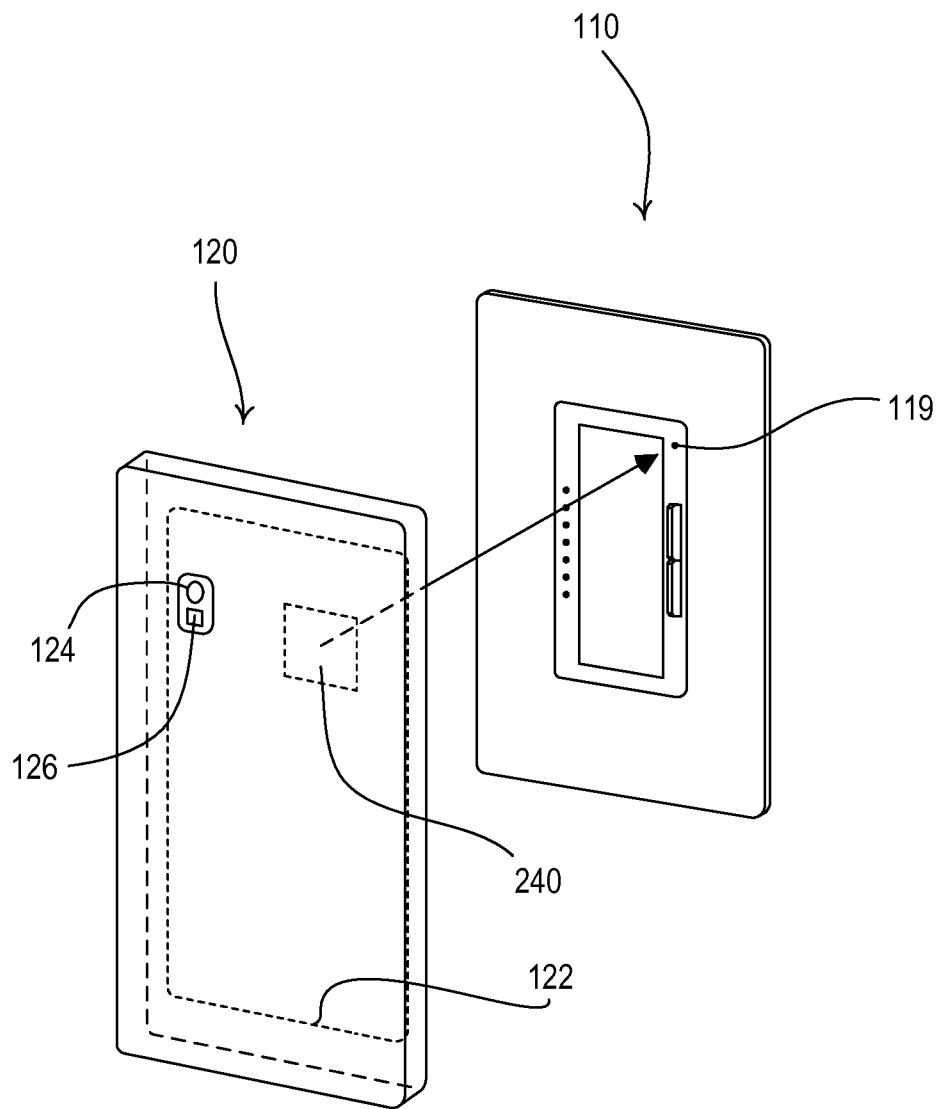


Fig. 6



7/17

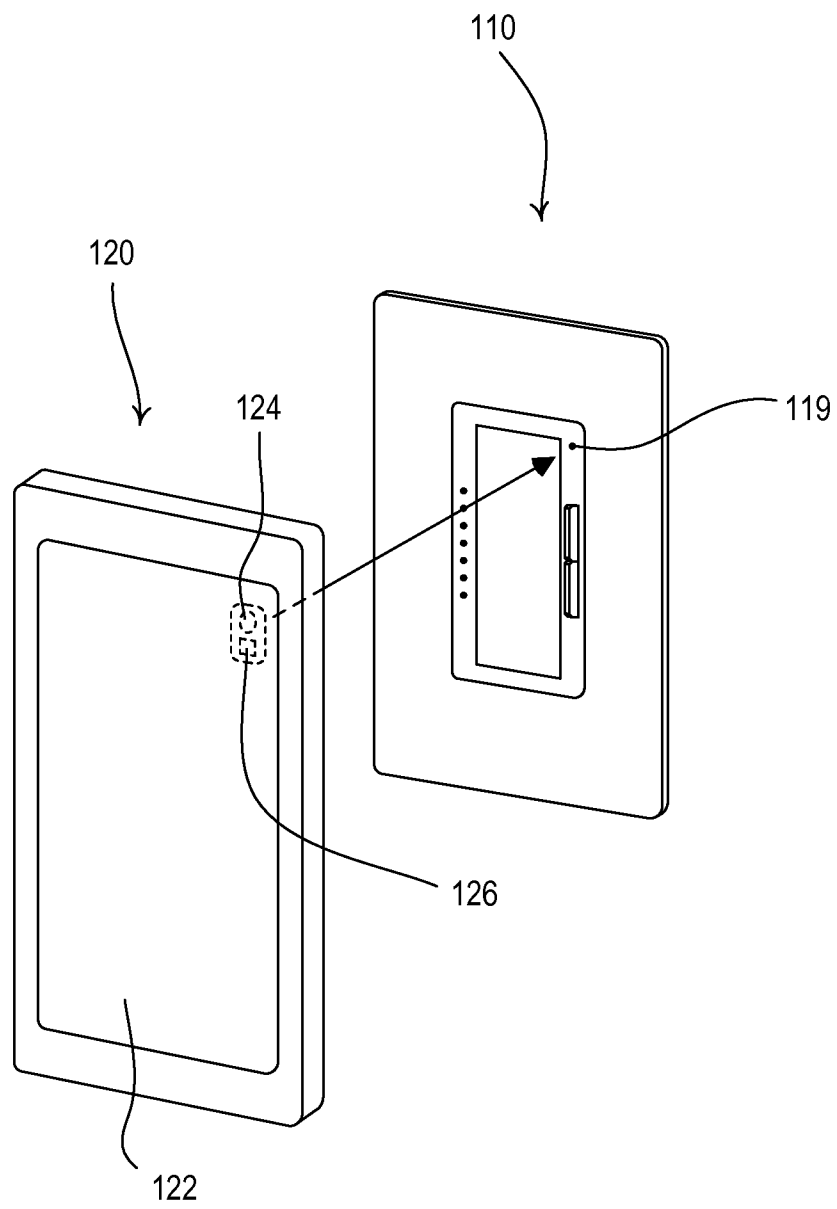


Fig. 7

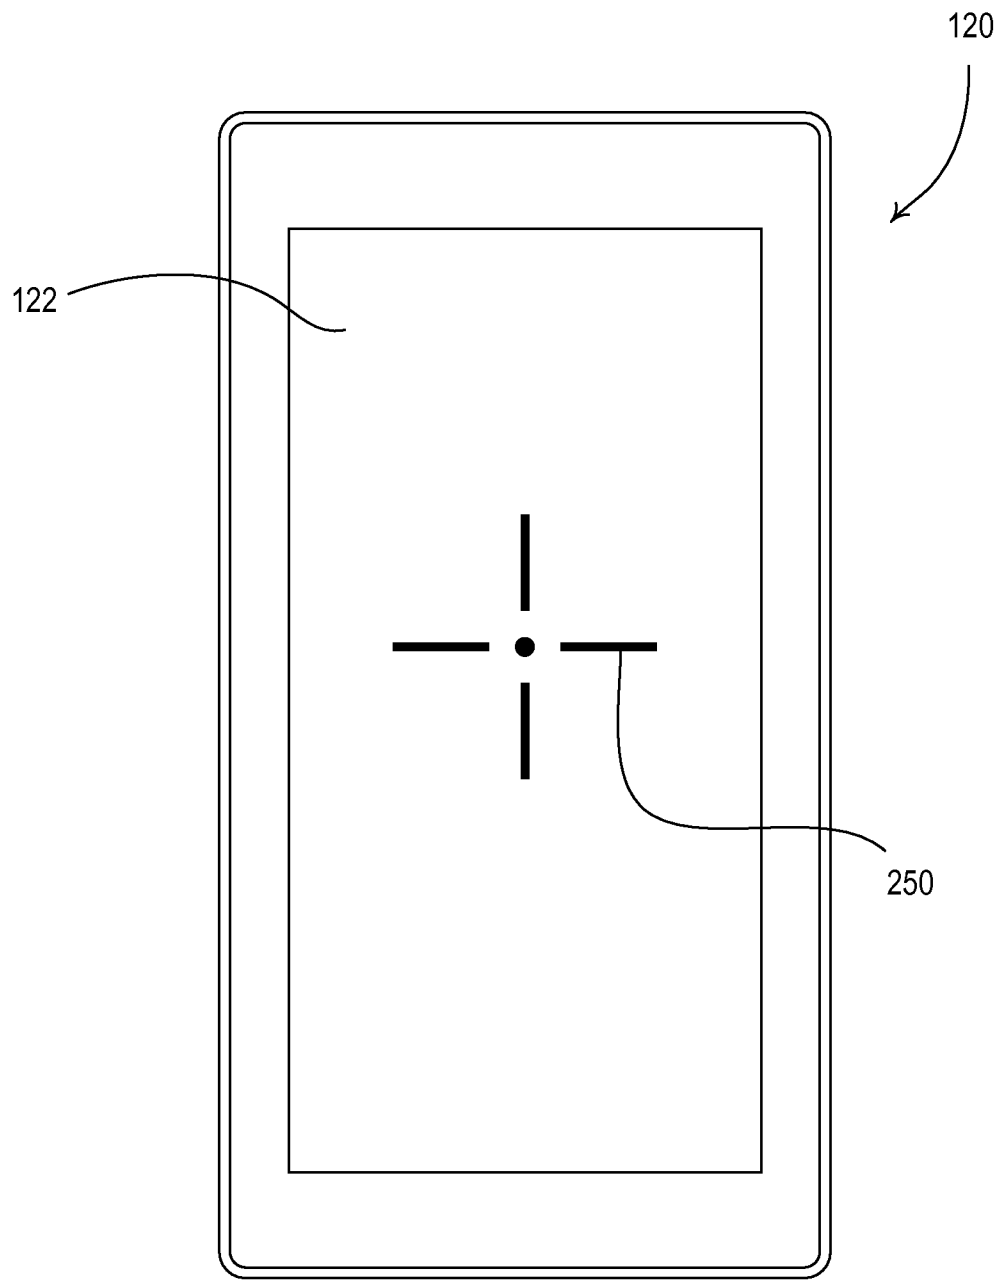
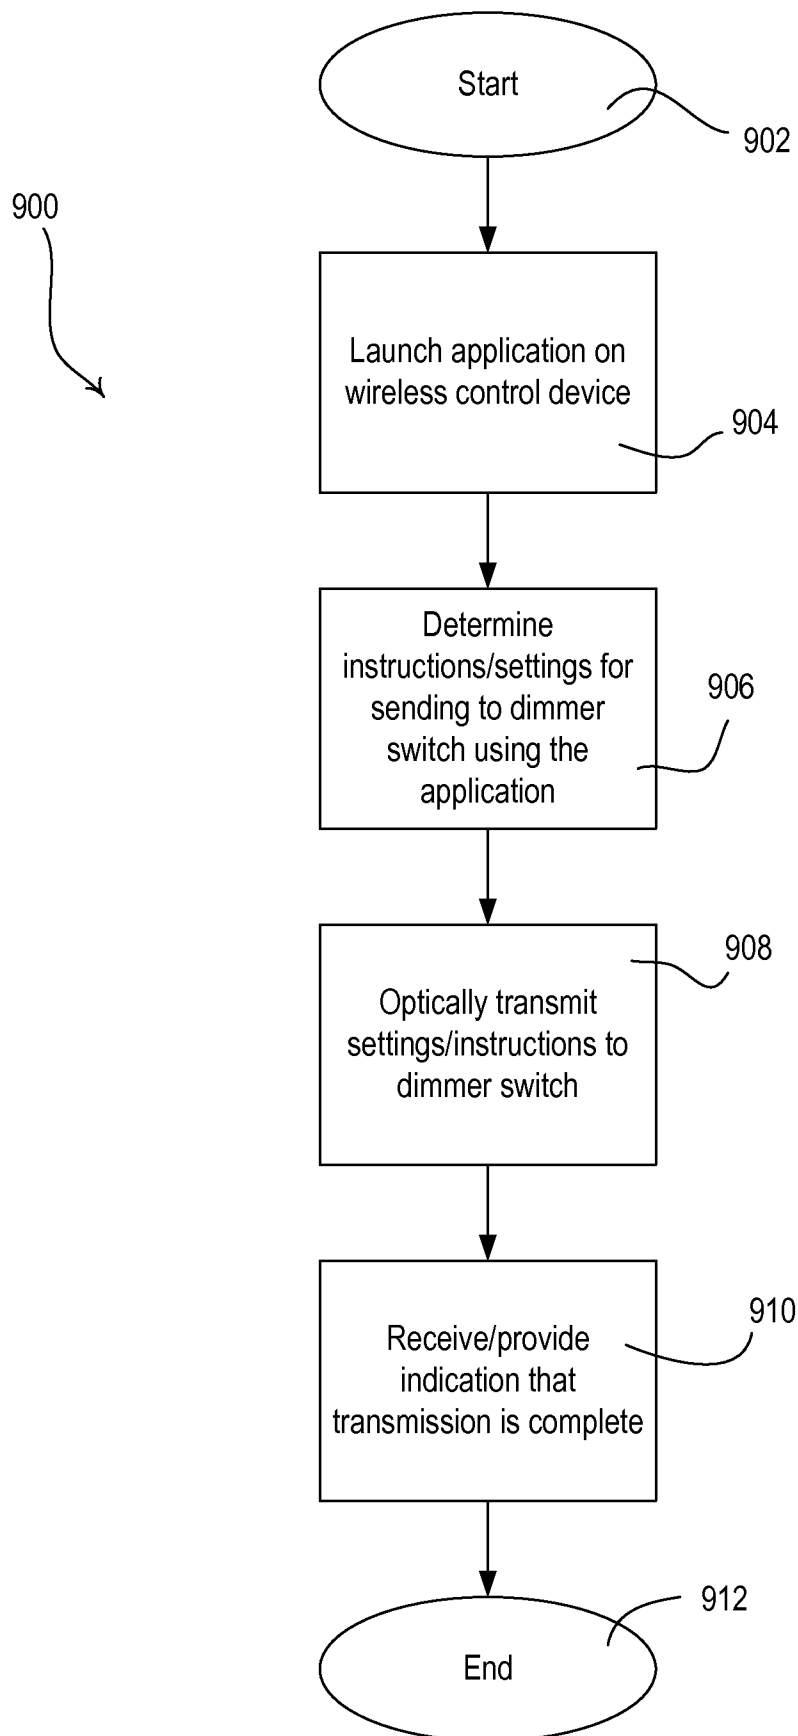


Fig. 8

9/17

**Fig. 9**

10/17

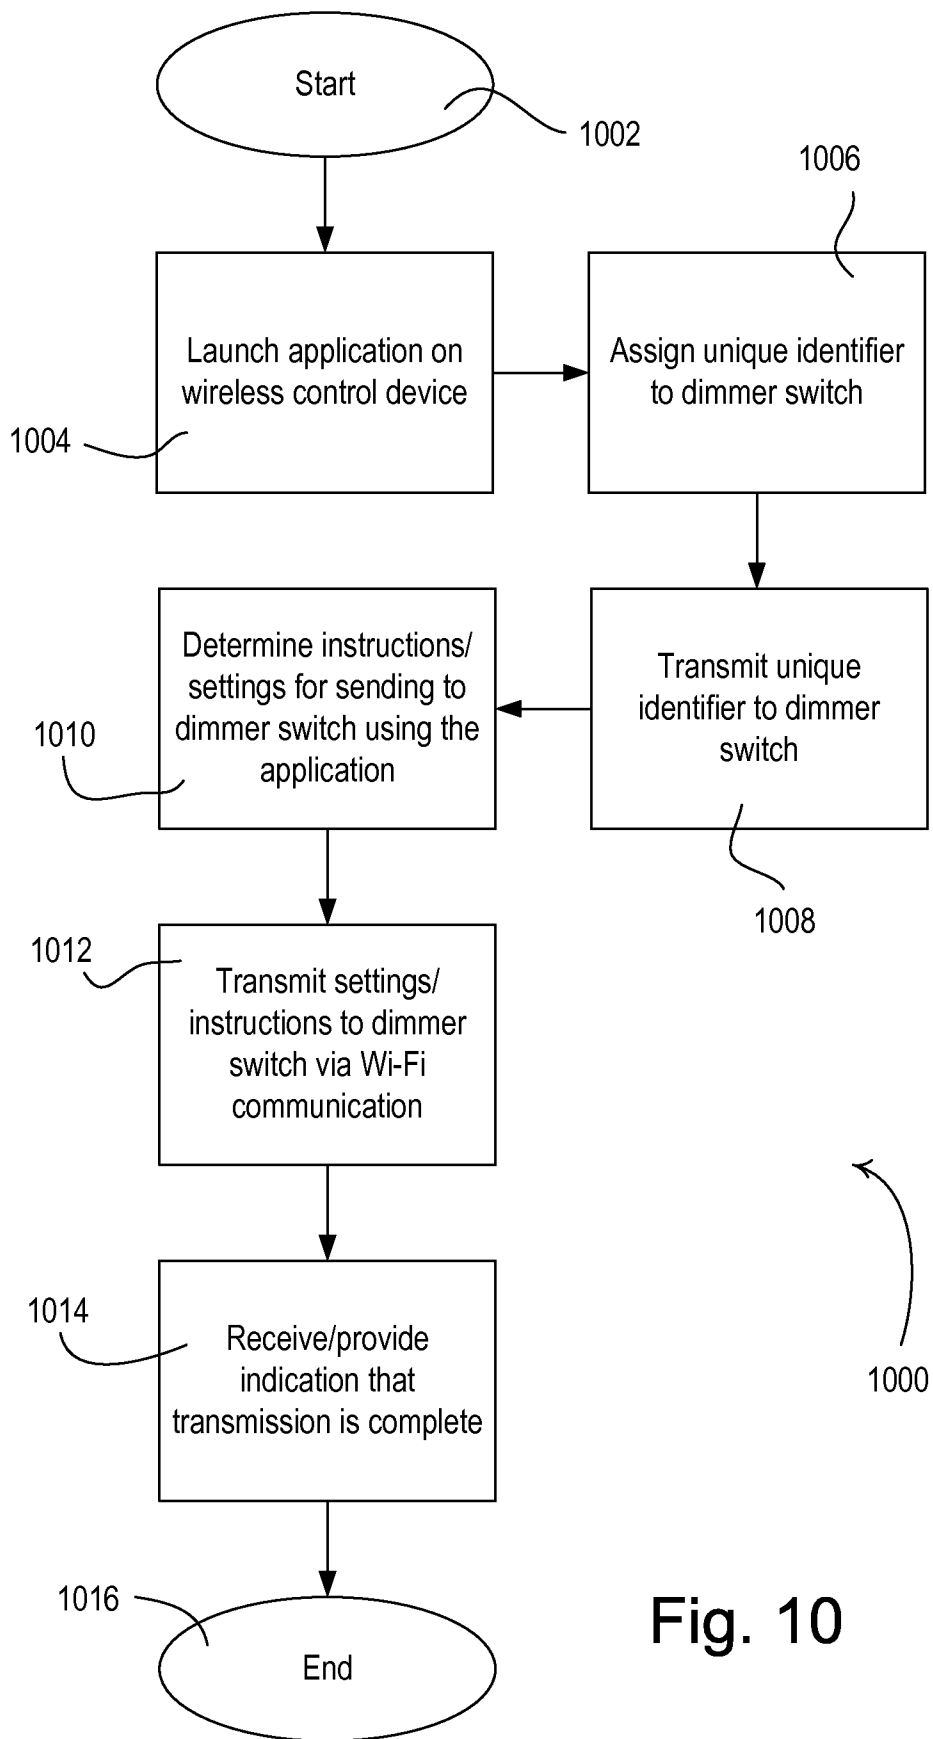


Fig. 10

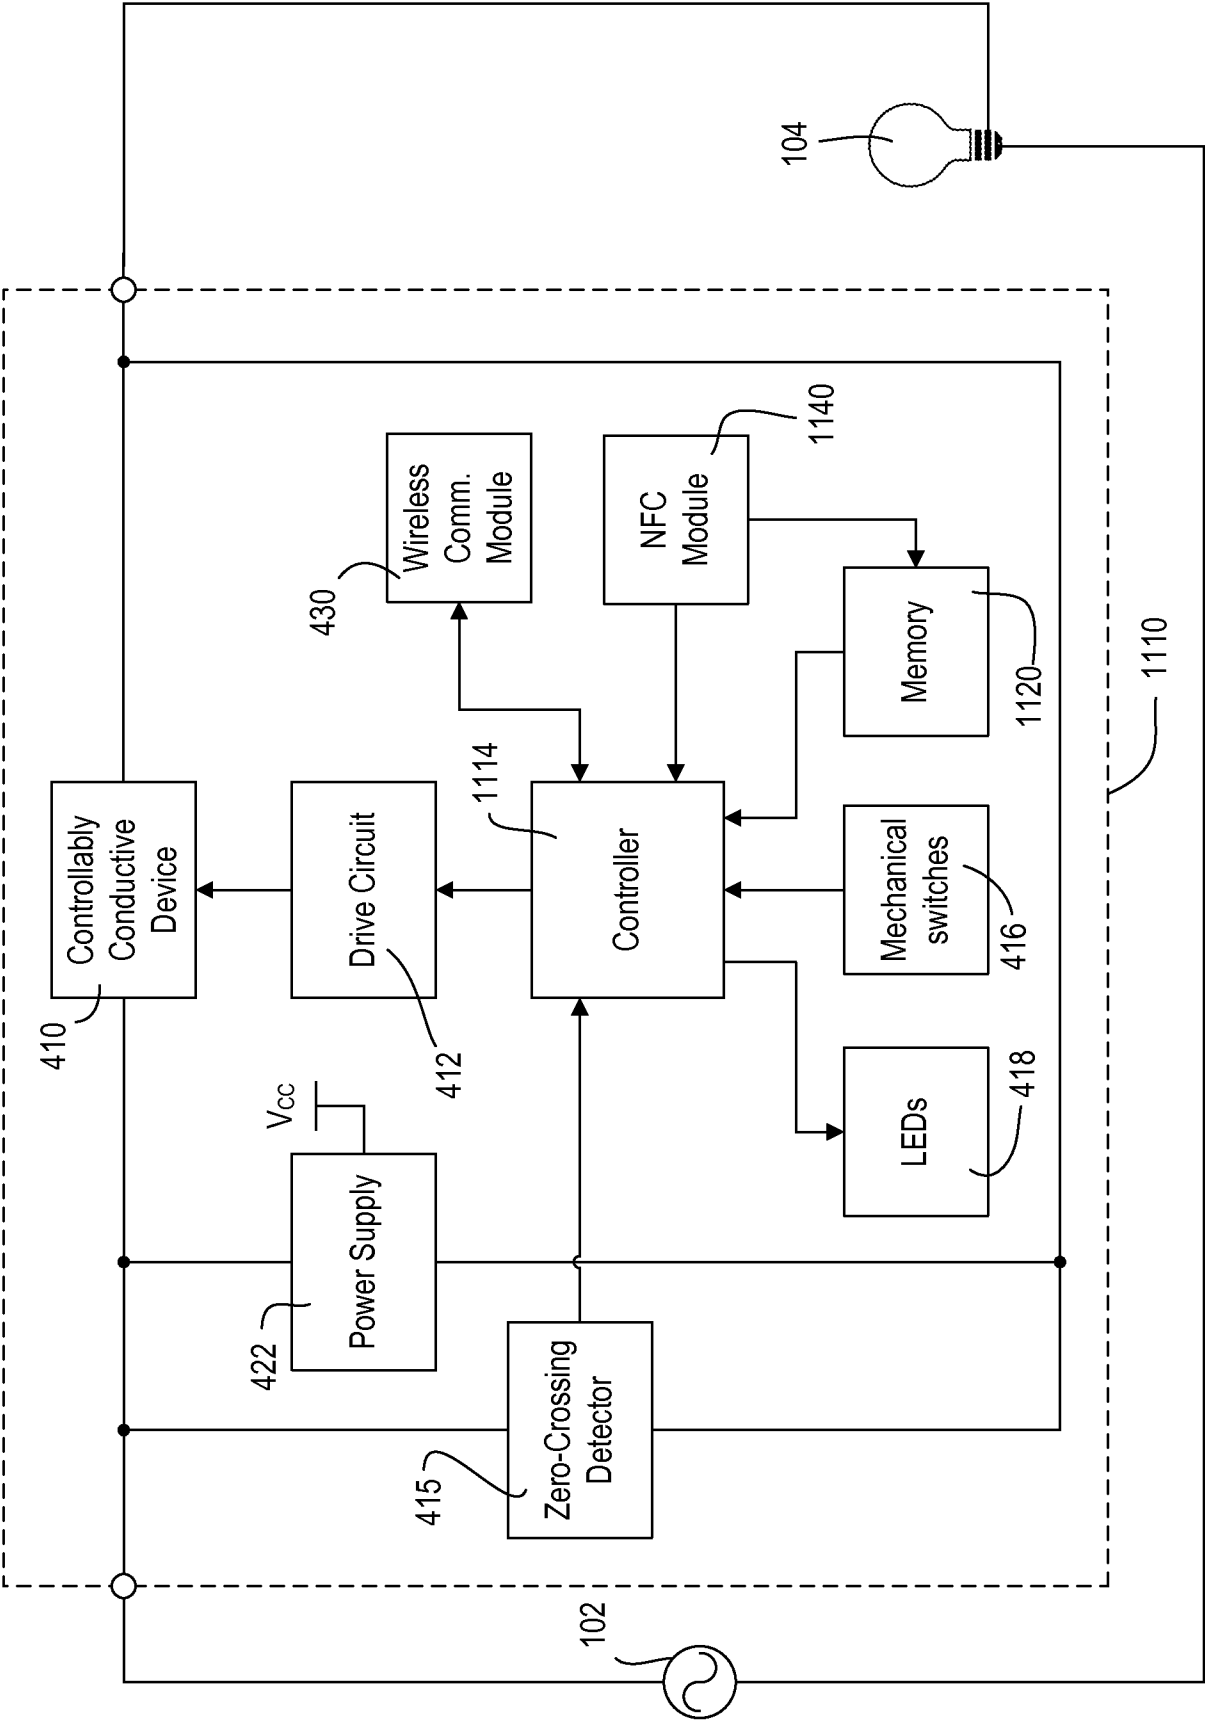


Fig. 11

12/17

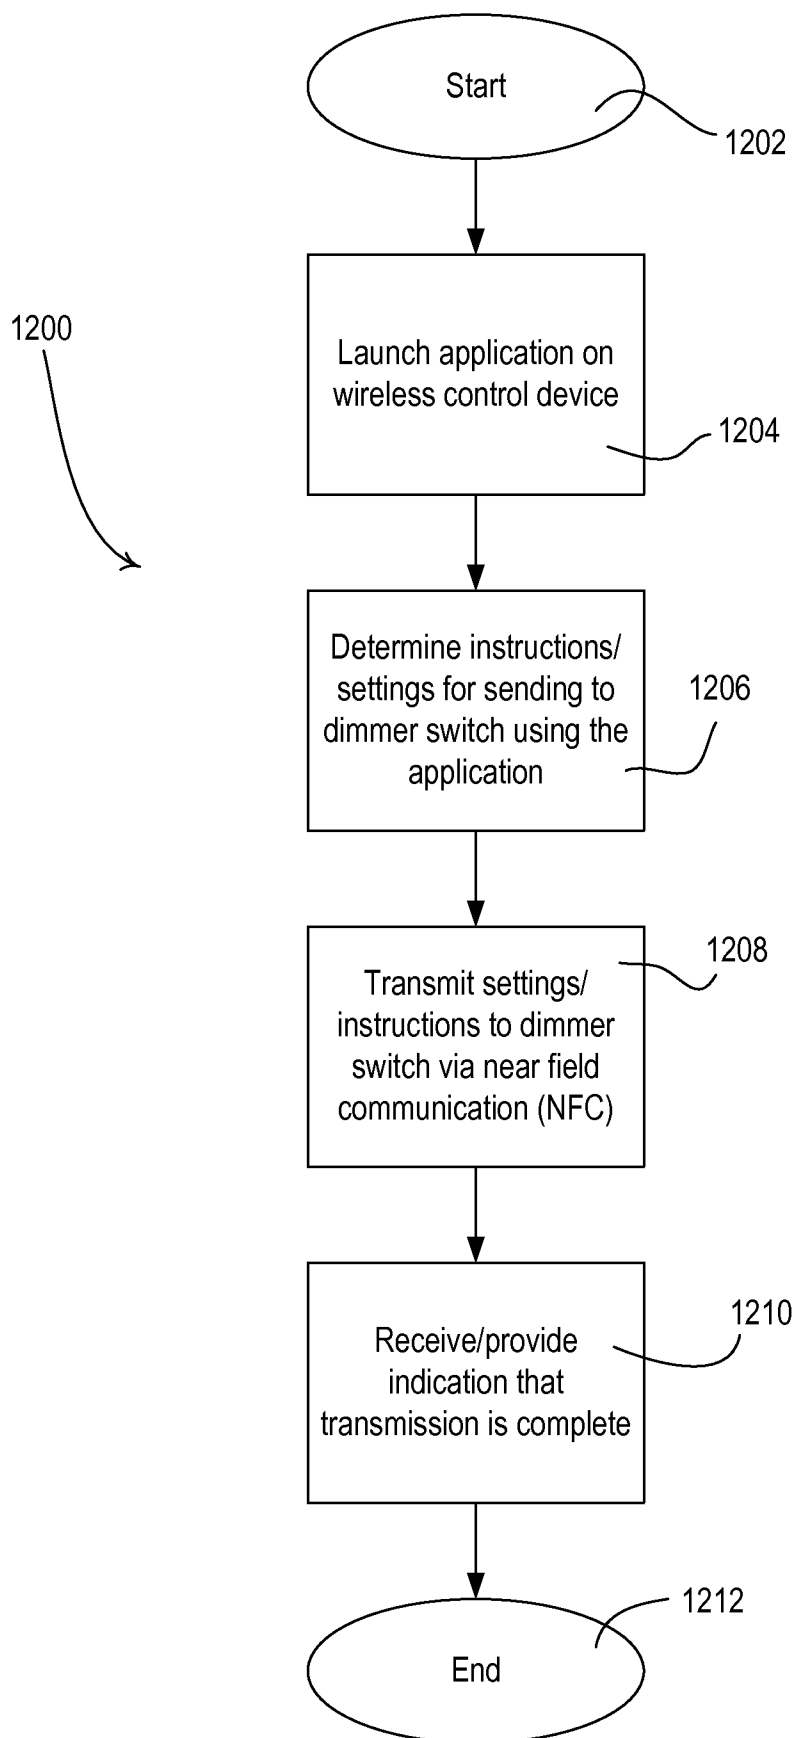


Fig. 12

13/17


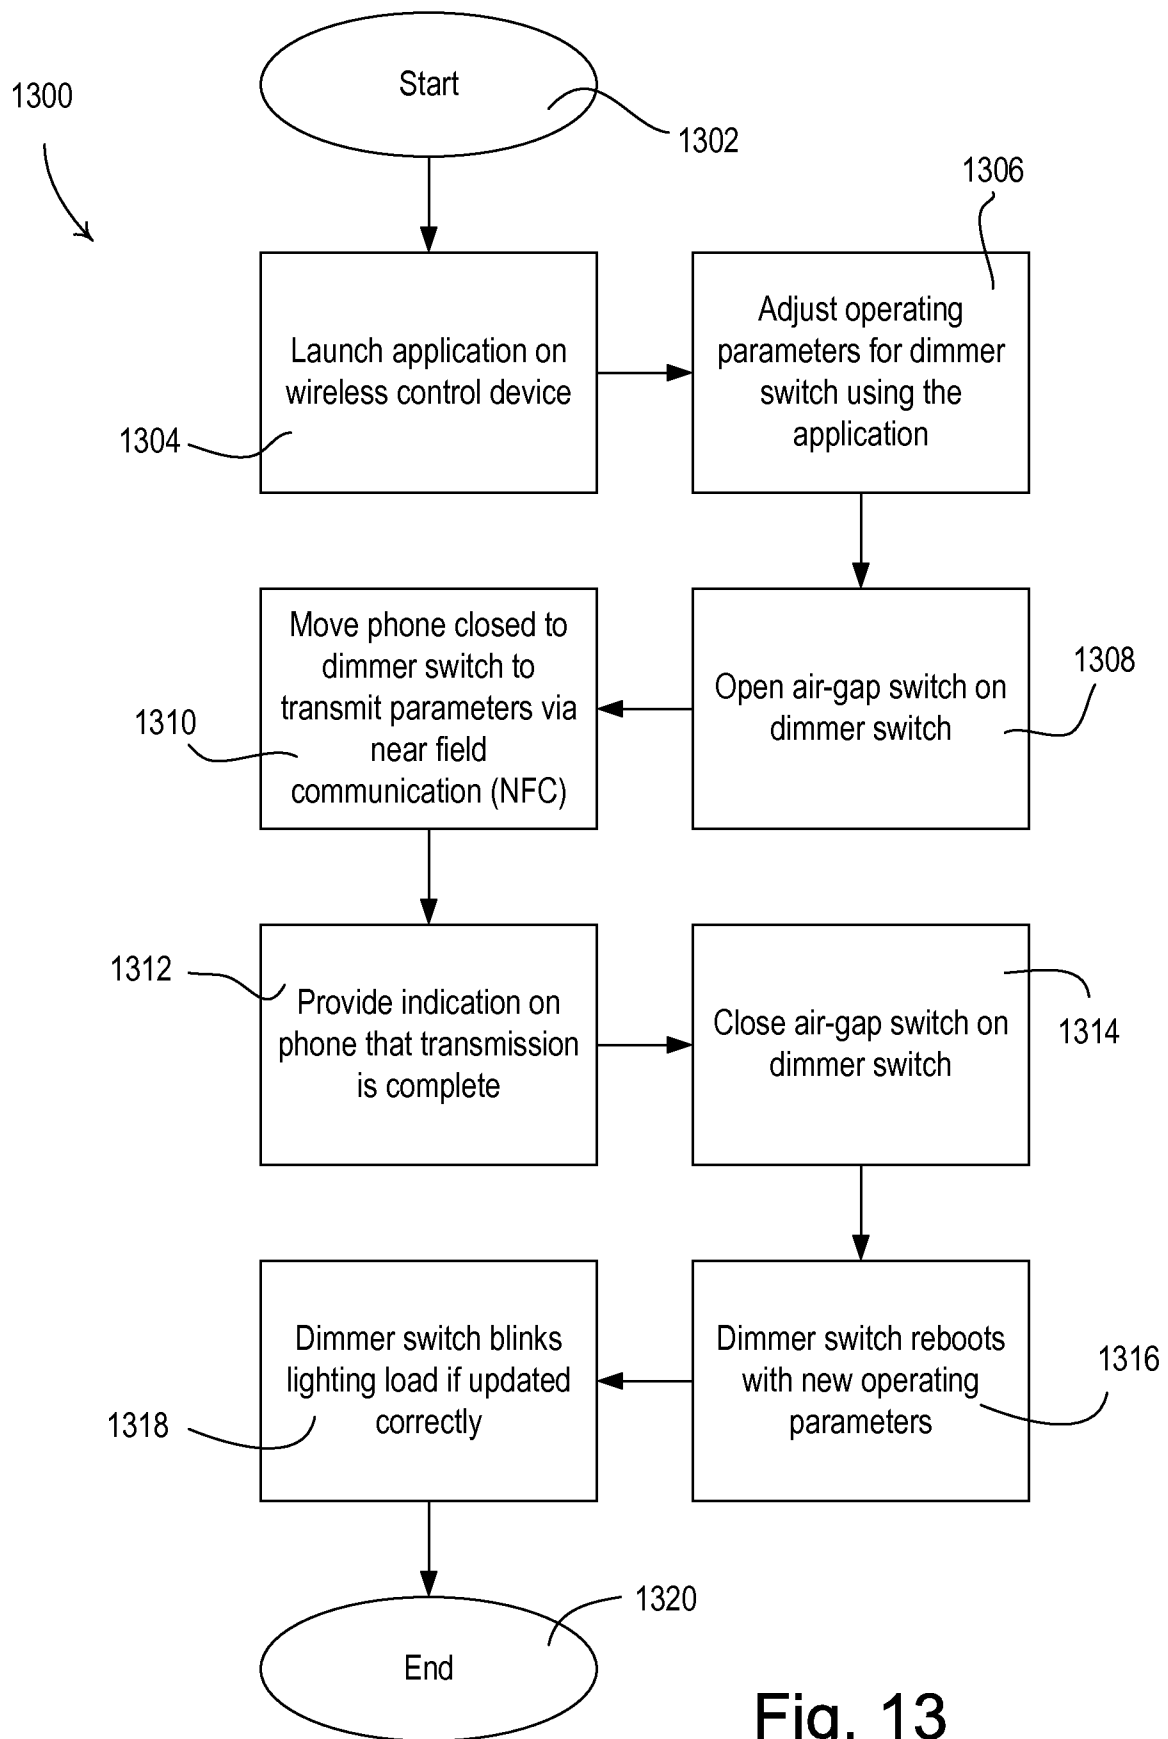


Fig. 13

14/17

**Fig. 14**

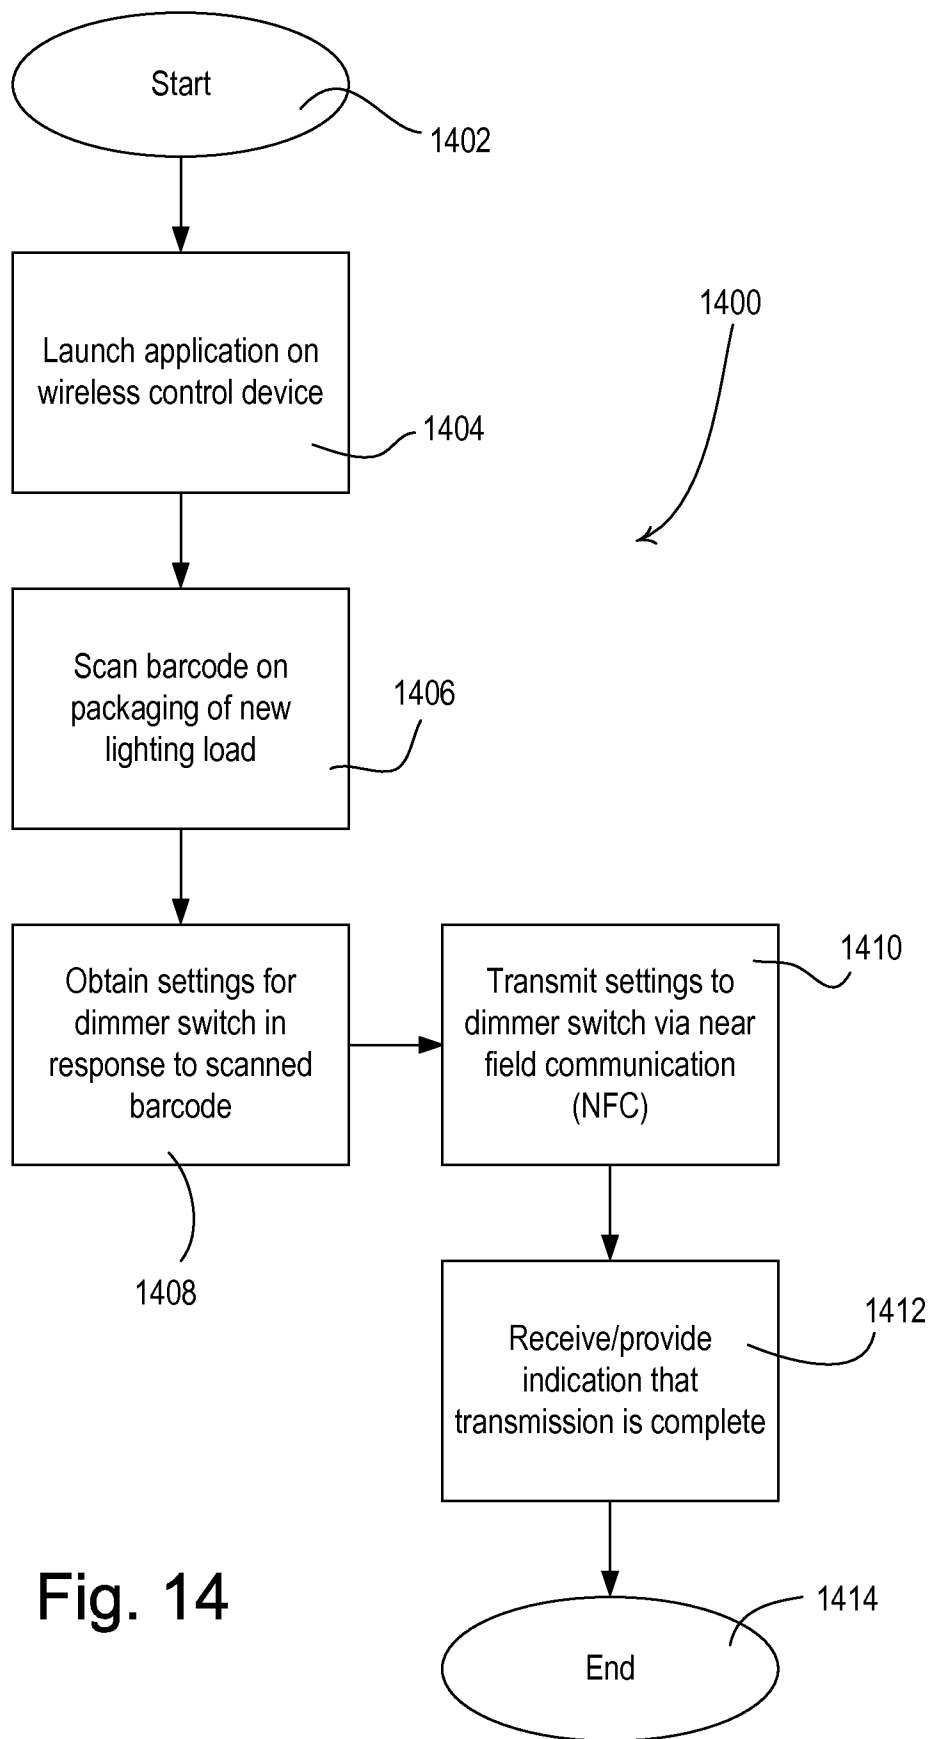

15/17

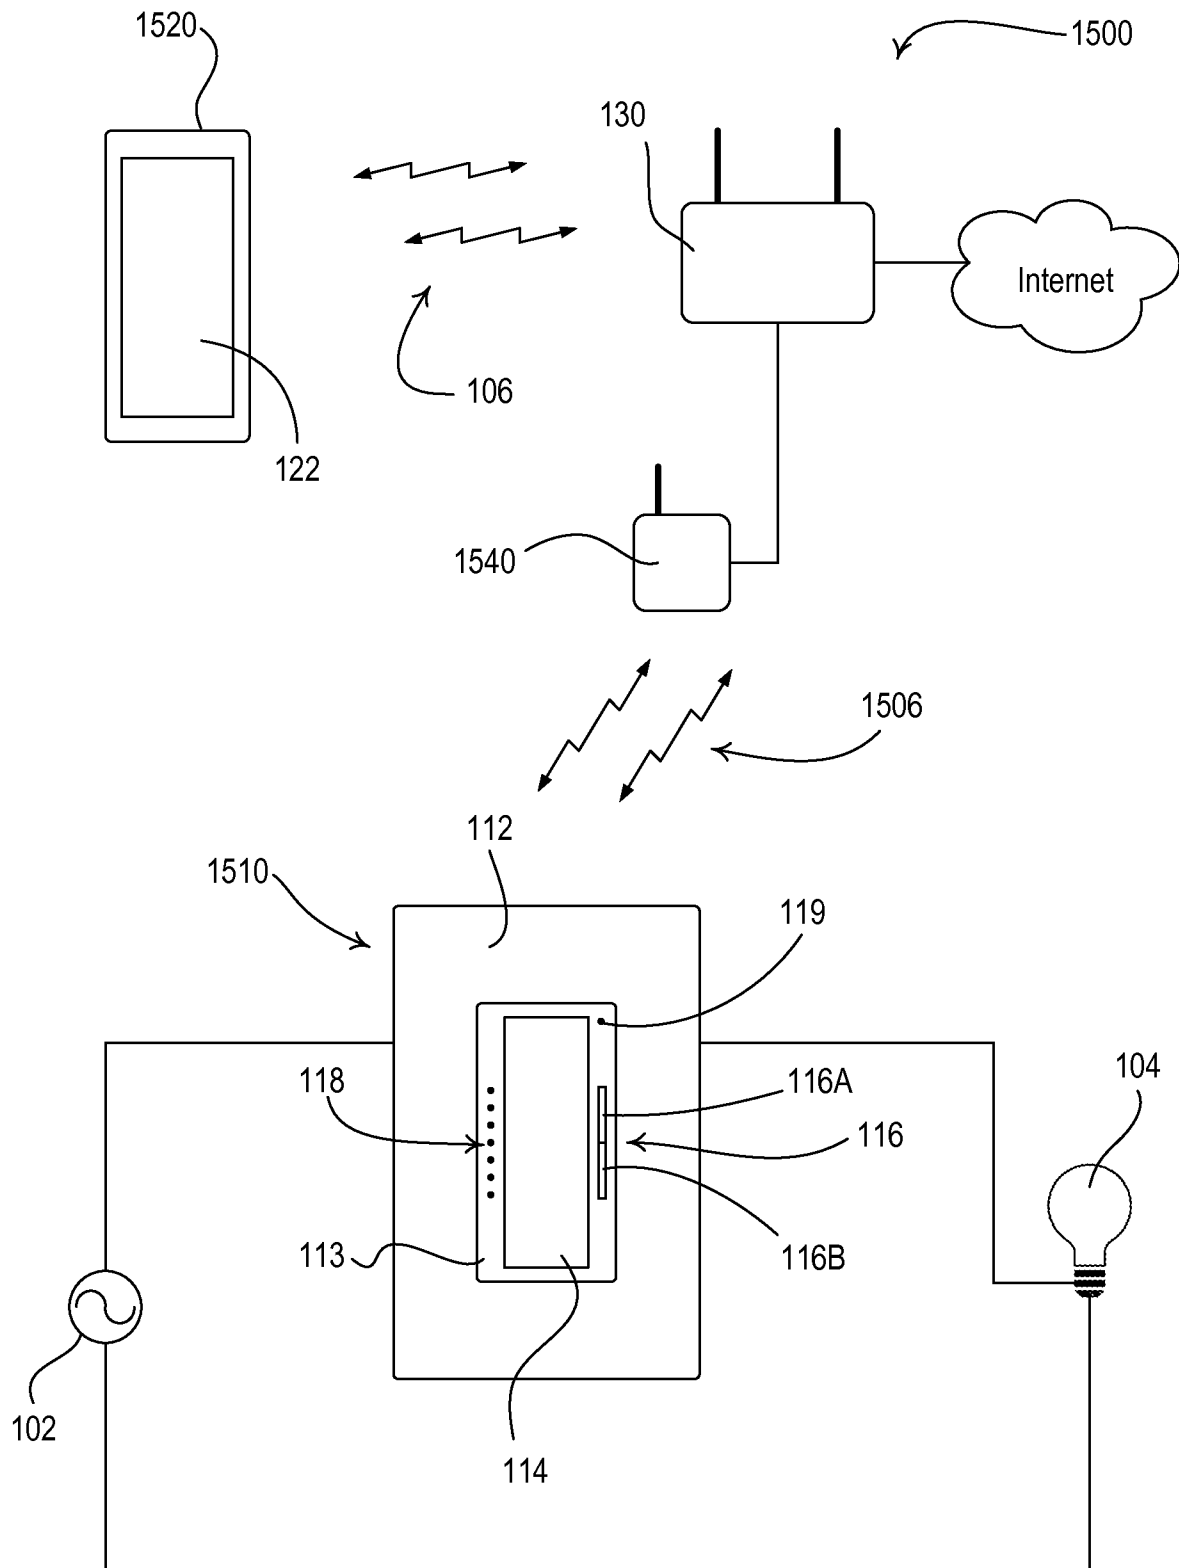


Fig. 15

16/17

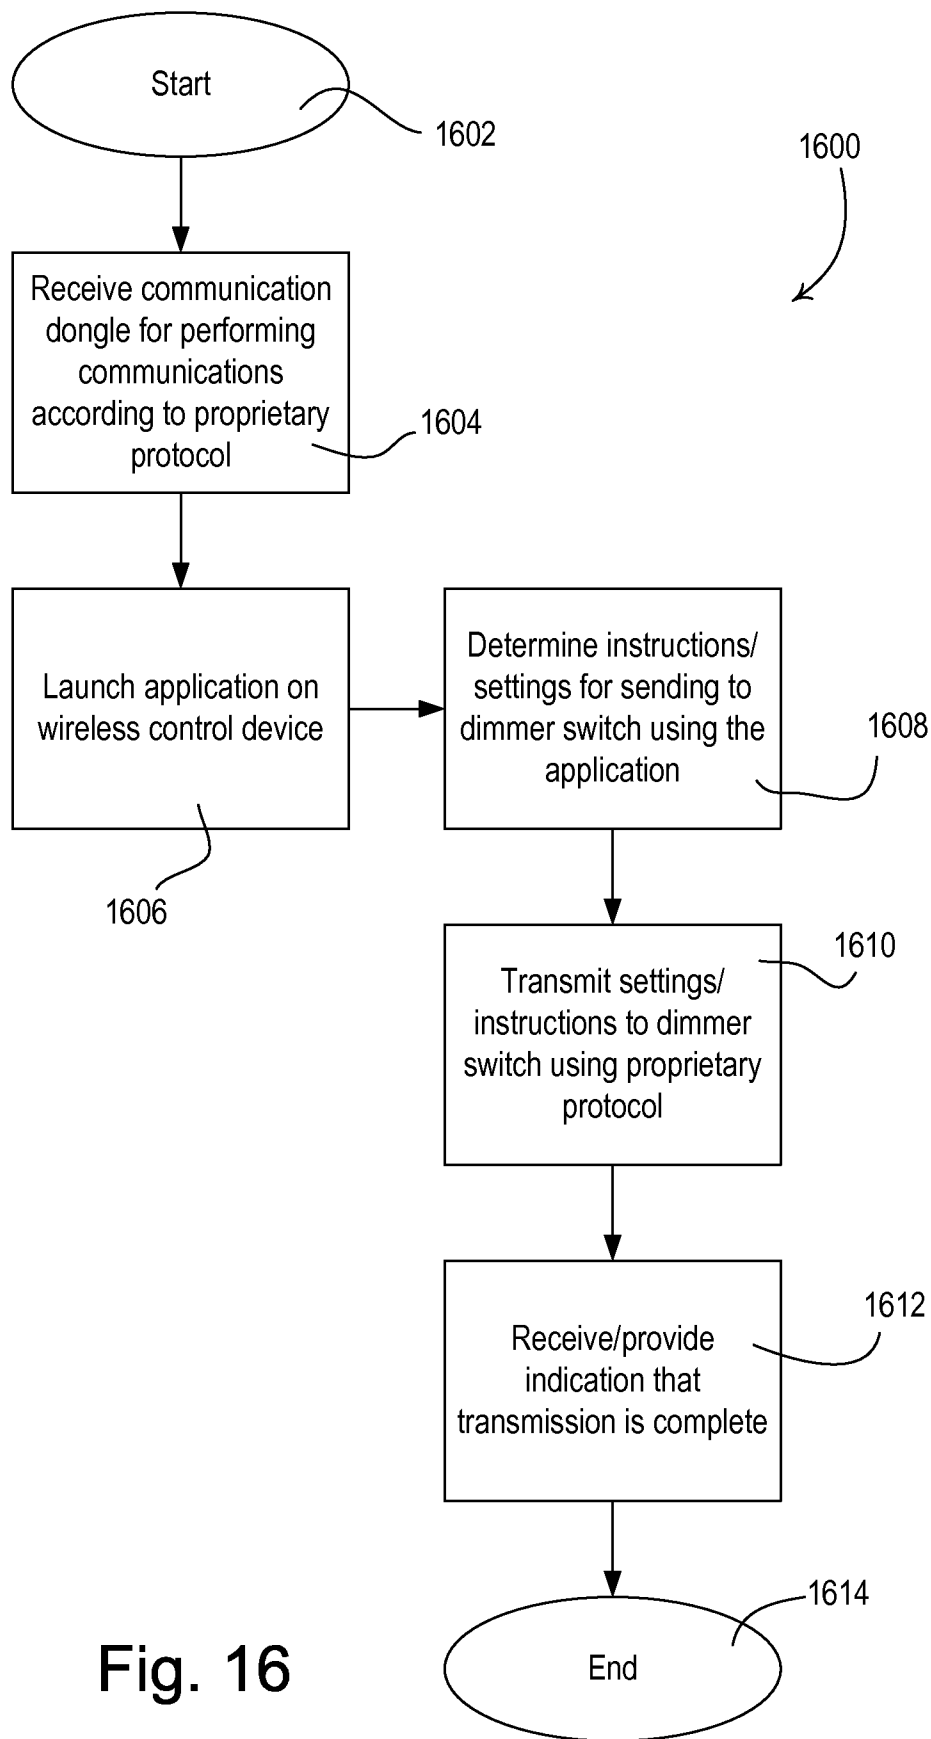


Fig. 16

17/17

