US 20030152673A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2003/0152673 A1

Tarlow (43) Pub. Date: Aug. 14, 2003

(54) FOOD PRESERVATION CONTAINER

(76) Inventor: **Kenneth Tarlow**, Corte Madera, CA (US)

Correspondence Address:
KENNETH TARLOW
21 GOLDEN HIND PASSAGE
CORTE MADERA, CA 94925 (US)

(21) Appl. No.: **10/068,661**

(22) Filed: **Feb. 8, 2002**


Publication Classification

(51) **Int. Cl.**[7] **B65D 85/00**

(52) **U.S. Cl.** **426/118**; 426/326; 426/395

(57) ABSTRACT

Food Preservation Container with a main container body and a circular lid. The lid has a built in on-off switch, air pump, ozone generator, timing circuit, pressure switch, vacuum switch, solenoid valve, power indicator light, vacuum indicator light, pressure indicator light and power supply. The container has a circular opening. The opening has a plurality of outwardly facing tabs about its circumference. The lid has a plurality of mating inwardly facing tabs that can interface with said outwardly facing tabs. The lid has a secondary floating inner lid, said inner lid having a soft rubber gasket attached to its perimeter, said inner lid capable of being forced toward the lip of said container opening by a cam attached to a hinged lever located on the front of said circular lid. The components contained within said lid arranged in such a way that said air pump automatically turns on when the user twists said lid onto said container opening thereby activating said on-off switch which turns on said pump. Said pump being automatically turned off when a predetermined pressure or vacuum is reached by means of said pressure switch or said vacuum switch. Said ozone generator is automatically turned on for a predetermined period of time and turned automatically turned off by means of said timing circuit. The air in said container is capable of being periodically released by said solenoid valve that is controlled by said timing circuit.

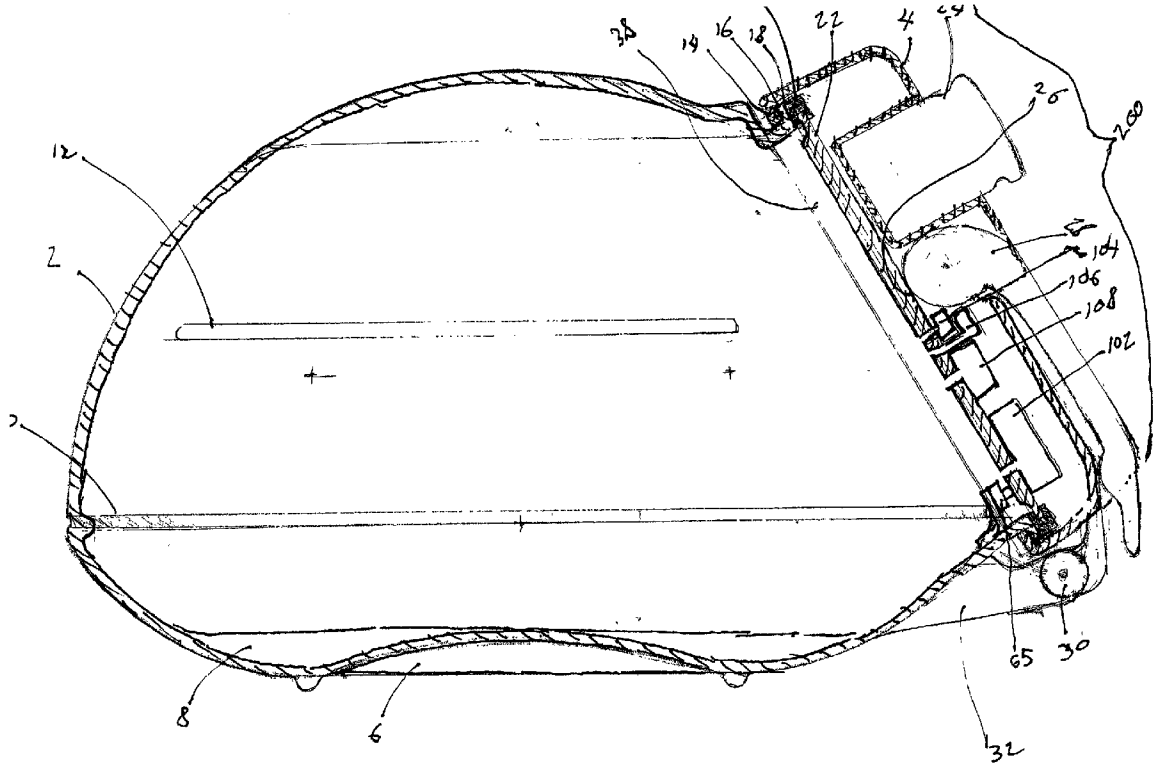

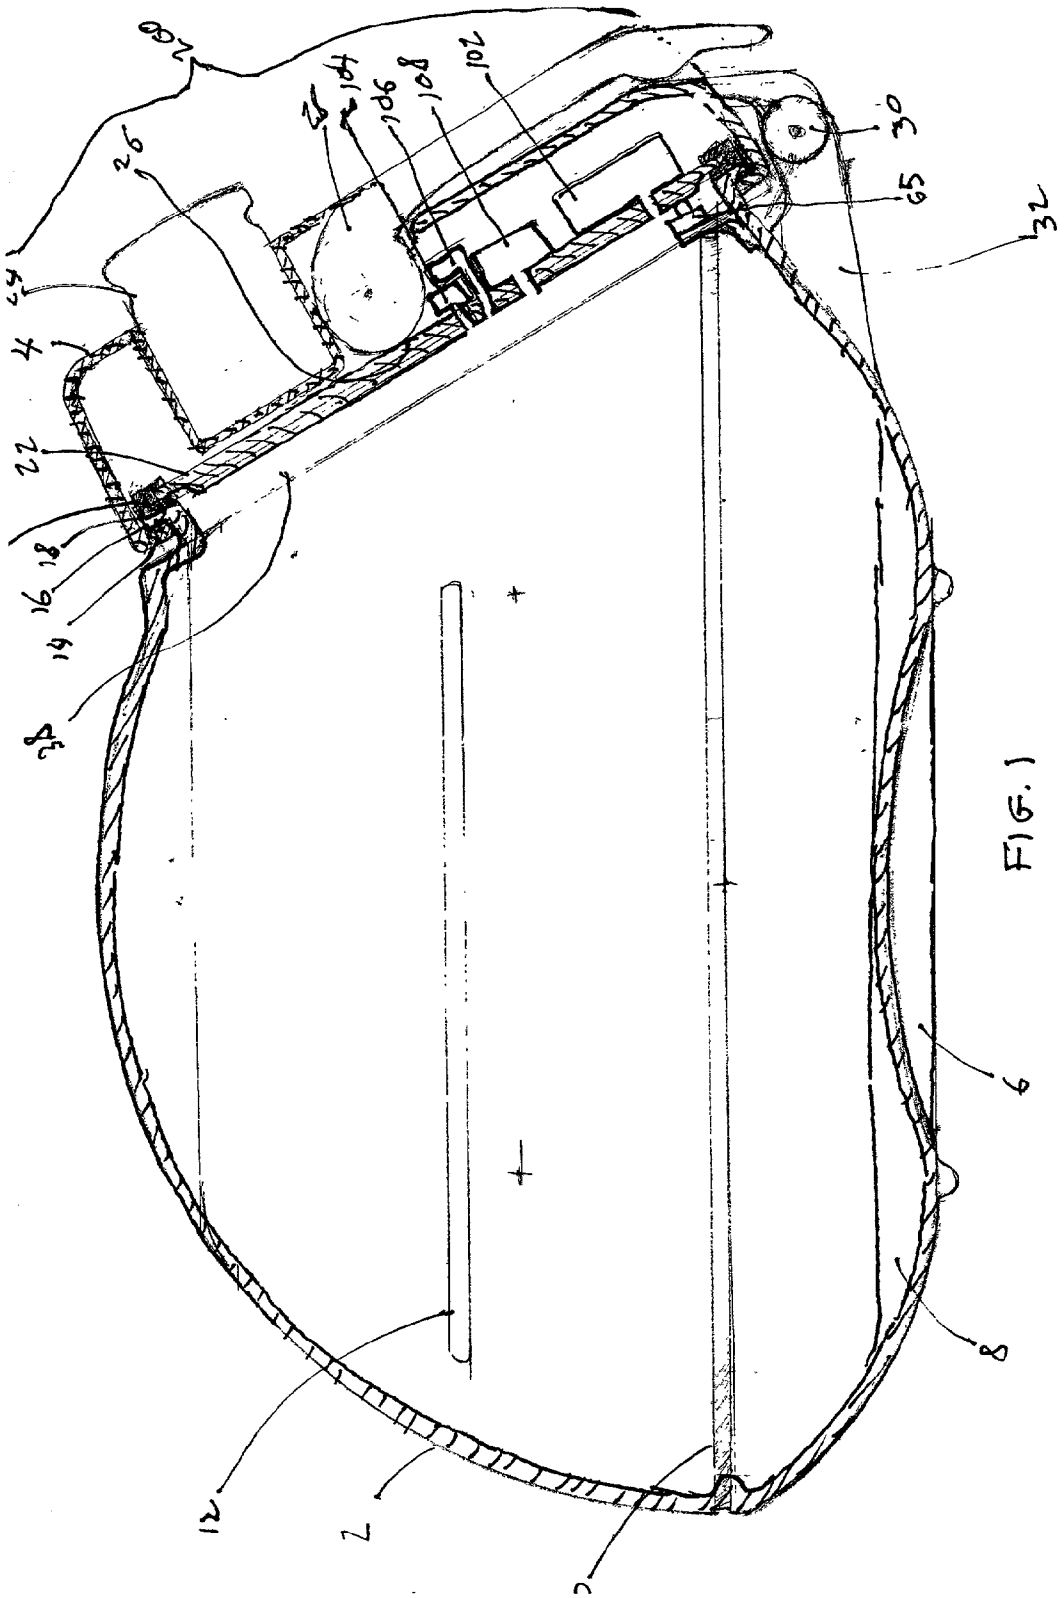


FIG. 1

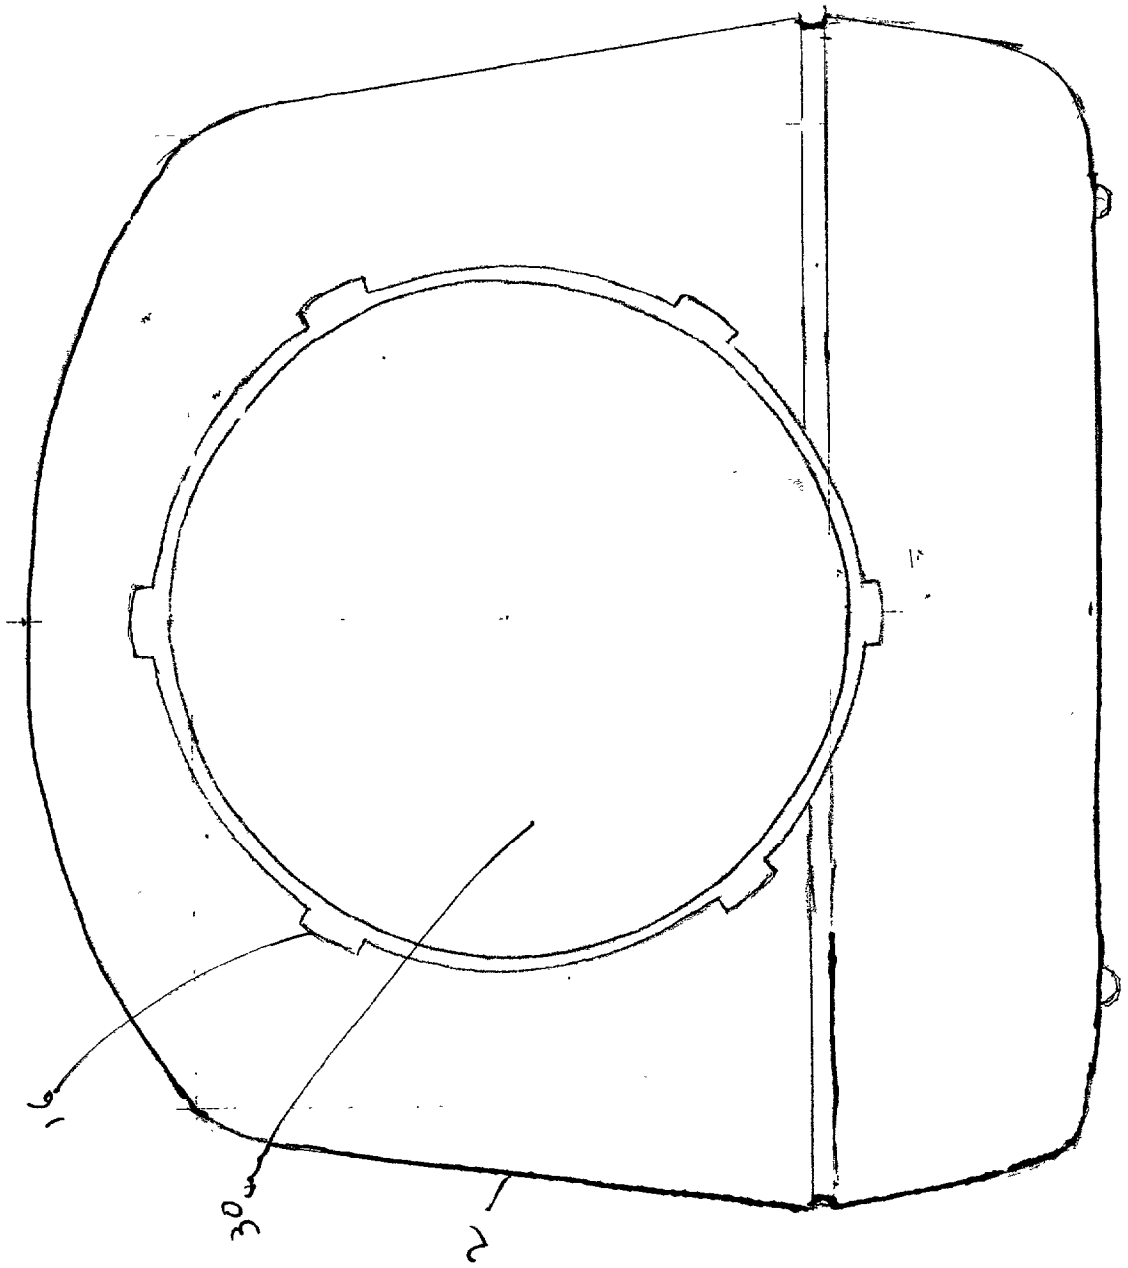


FIG. 2

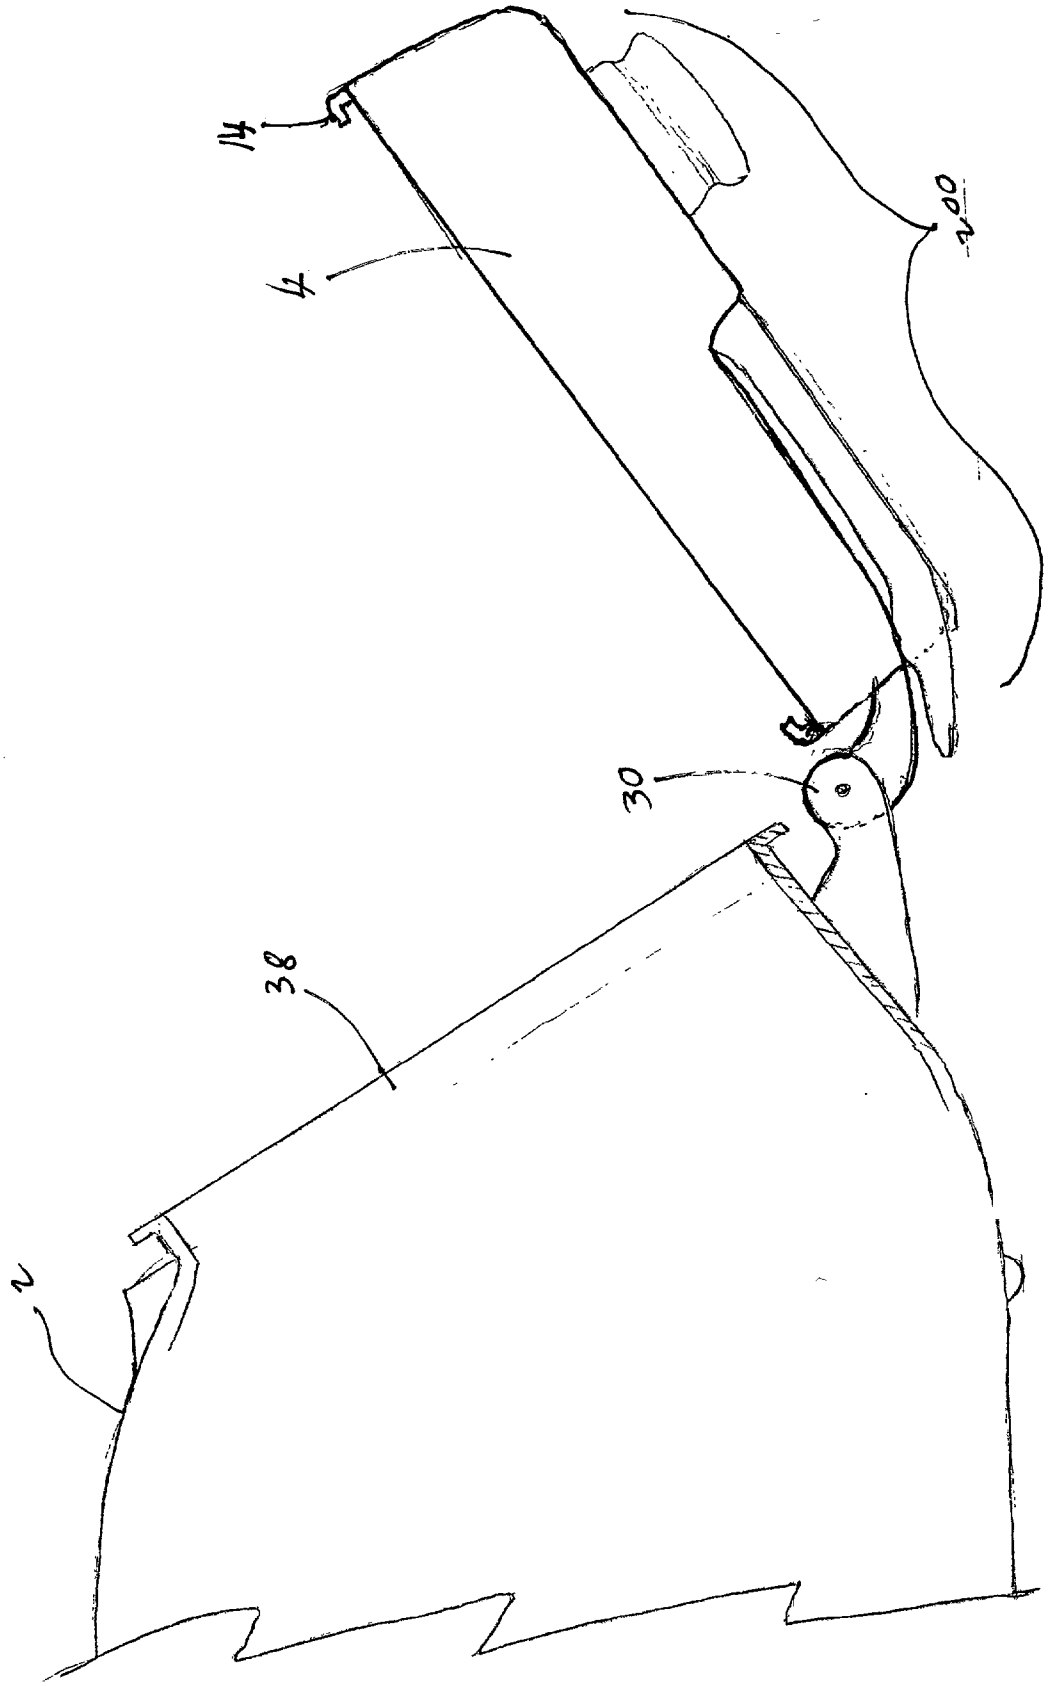


FIG. 3

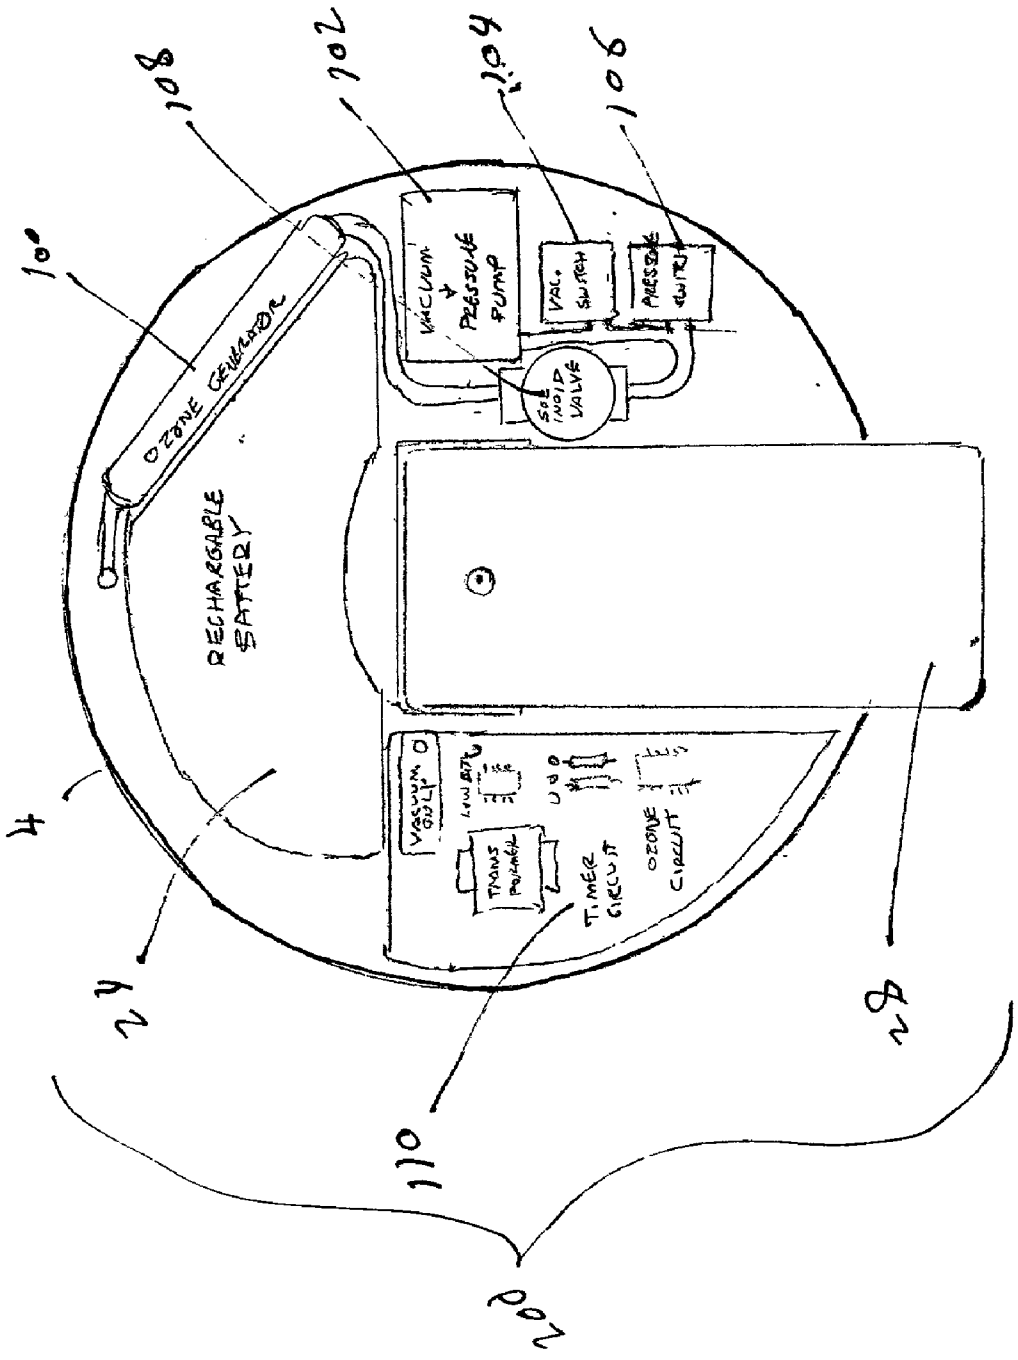

108
102
104
106
100
OZONE GENERATOR
VACUUM + PRESSURE PUMP
VAC. SWITCH
PRESSURE SWITCH
SOLENOID VALVE
RECHARGABLE BATTERY
VACUUM GAUGE
LOW BATT
TRANS FORMER
TIMER CIRCUIT
OZONE CIRCUIT
4
24
110
28
200

FIG. 4

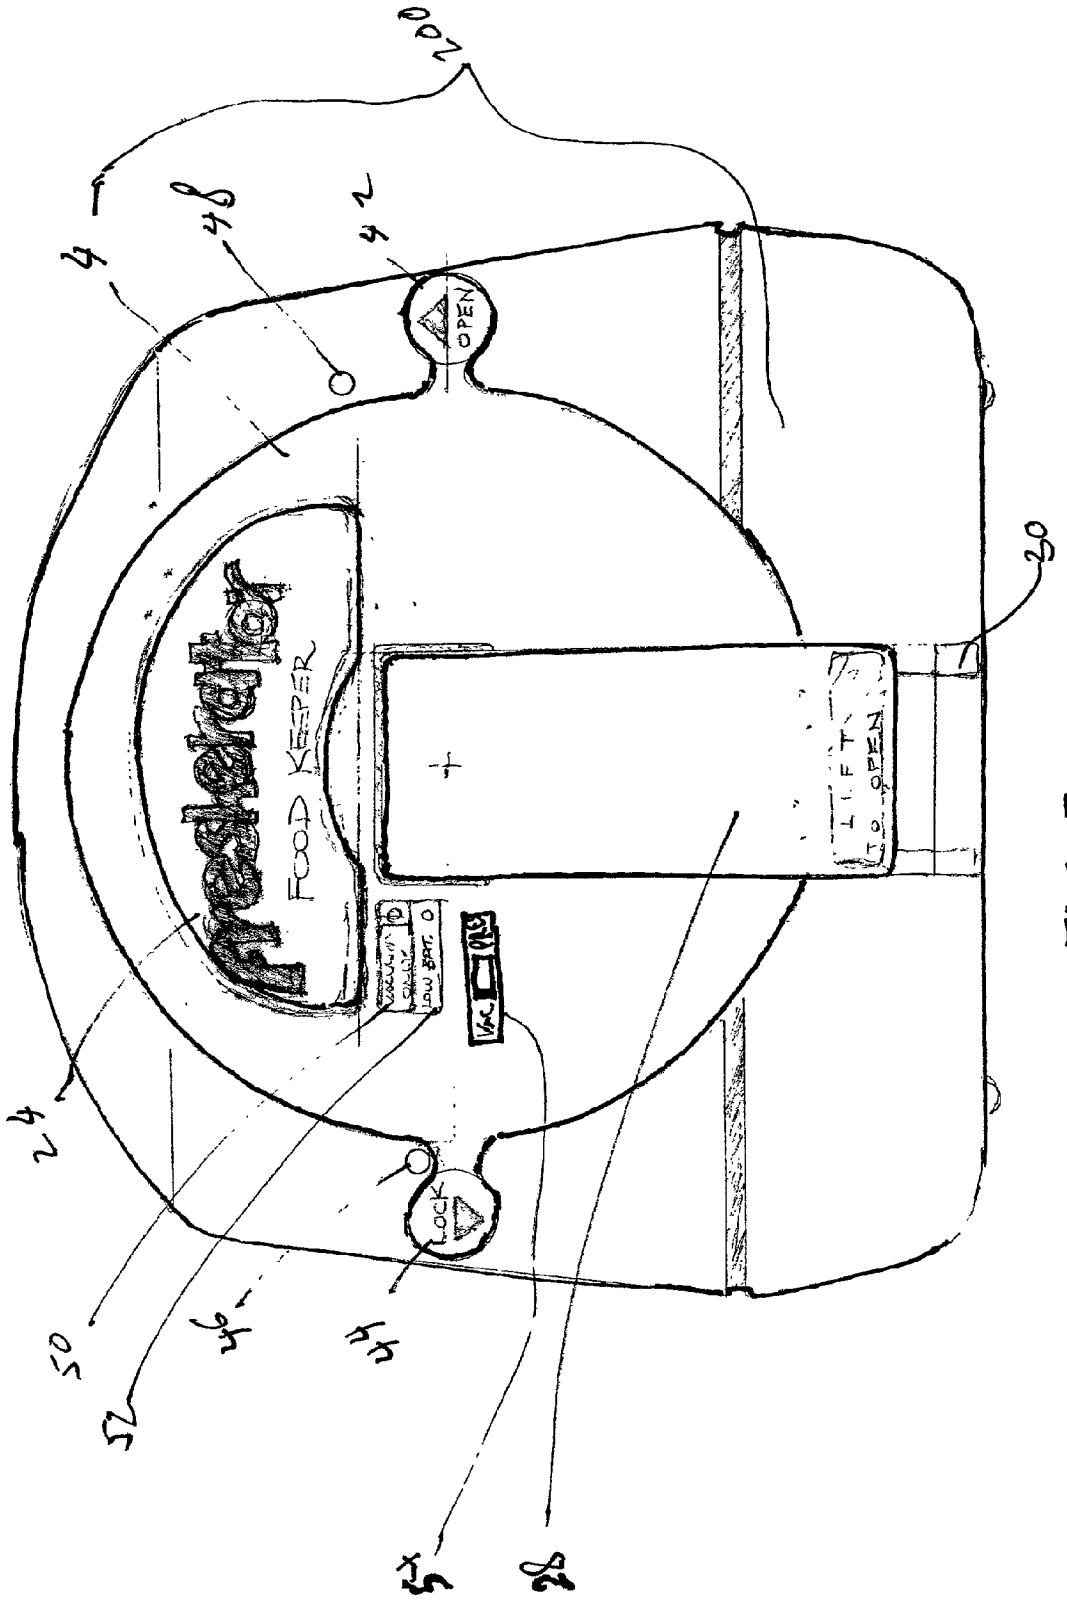

200
42
48
44
OPEN
20
LIFT
TO OPEN
FOOD KEEPER
LOCK
24
50
52
46
54
56
28

FIG. 5

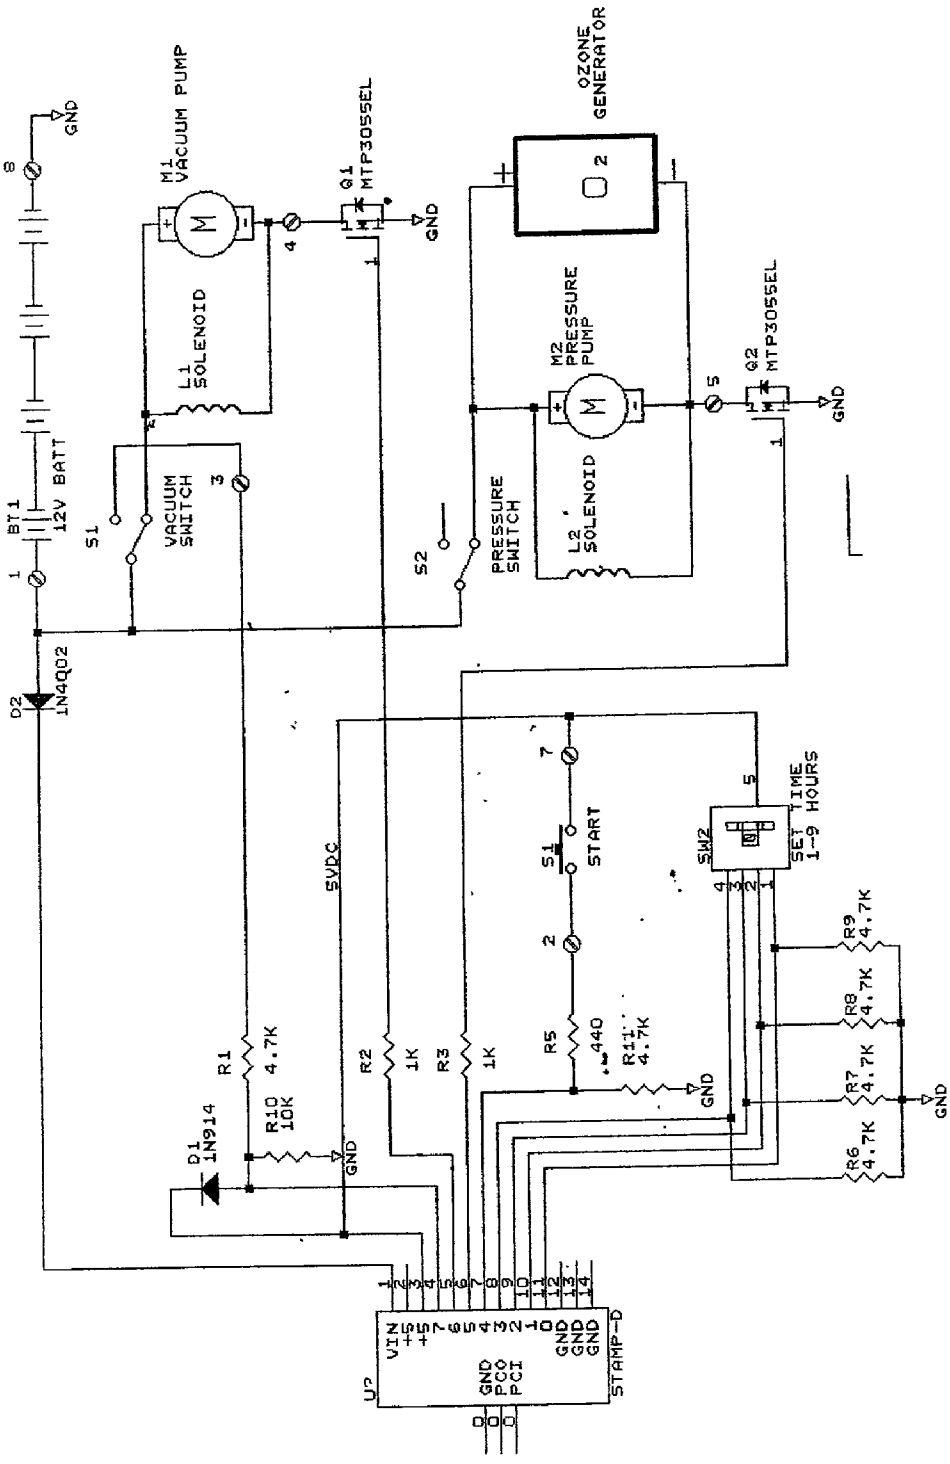

OZONE GENERATOR
M1 VACUUM PUMP
Q1 MTP30SSEL
M2 PRESSURE PUMP
Q2 MTP30SSEL
L1 SOLENOID
L2 SOLENOID
VACUUM SWITCH
PRESSURE SWITCH
BT1 12V BATT
D2 1N4002
D1 1N914
S1
S2
SW2 SET TIME 1-9 HOURS
START
5VDC
GND
R1 4.7K
R2 1K
R3 1K
R5 440
R6 4.7K
R7 4.7K
R8 4.7K
R9 4.7K
R10 10K
R11 4.7K
U2 STAMP-D
VIN
GND
PC0
PC1

FIG. 6

FOOD PRESERVATION CONTAINER

BACKGROUND OF THE INVENTION

[0001] This invention relates generally to the field of food storage containers, and more particularly to a food preservation container.

[0002] Methods for preserving food can be traced back thousands of years. Early man preserved food by drying it thereby eliminating damaging moisture. More recently mankind discovered that foods stay fresh longer when they are kept in a cool environment. In recent times the invention of the refrigerator and freezer have become a prime method of keeping foods fresh. Additionally, in recent times, the application of a vacuum, when sealing foods into jars or cans has proven to extend the usable life of food by eliminating the air that bacteria need to live in. More recently, the concept of keeping fruits, vegetables and flowers fresh by means of positive air pressure has been disclosed by Niedwwietz in his patent 710,979 issued in July of 1954 and Selby patent issued on Aug. 1, 1961.

[0003] All of the above mentioned methods have been tried and are currently in use in various forms.

[0004] However, non the prior art regarding refrigeration, vacuum or pressure or ozone, have combined these features into one, easy to use container for keeping all types of food fresh and bacteria free for extended periods of time.

SUMMARY OF THE INVENTION

[0005] The primary object of the invention is to provide a food preservation container that allows a person to pressurize or vacuumize the air inside of a storage container to help preserve the life of the food within said container.

[0006] Another object of the invention is to provide a food preservation container that adds ozone to the inside of the container to help kill mold and bacteria.

[0007] Another object of the invention is to provide a food preservation container that automatically replaces pressurized or vacuumized air at regular intervals to remove build-ups of harmful gasses generated by food within the container.

[0008] A further object of the invention is to provide a food preservation container whose lid is easy to remove and replace yet provides an air tight seal.

[0009] Yet another object of the invention is to provide a food preservation container that automatically re-pressurizes or re-vacuumizes and re-ozinates the air within the container without the need for the user to be present for the entire operation.

[0010] Still yet another object of the invention is to provide a food preservation container that automatically maintains a predetermined pressure or vacuum.

[0011] Other objects and advantages of the present invention will become apparent from the following descriptions, taken in connection with the accompanying drawings, wherein, by way of illustration and example, an embodiment of the present invention is disclosed.

[0012] Food Preservation Container comprising: a main container body, a circular lid having an integral side wall, said lid having a built in on-off switch, air pump, ozone generator, timing circuit, pressure switch, vacuum switch, solenoid valve, power indicator light, vacuum indicator light, pressure indicator light and power supply. Said container having a circular opening , said opening having a plurality of outwardly facing tabs about its perimeter, said lid having a plurality of mating inwardly facing tabs that can interface with said outwardly facing tabs. Said lid having a lower hinge portion that combines with a mating hinge portion on the lower front portion of said container opening. Said lid having a secondary floating inner lid, said inner lid having a soft rubber gasket attached to its perimeter, said inner lid capable of being forced toward the lip of said container opening by a cam attached to a hinged lever located on the front of said circular lid. Said power supply being removable and replaceable from the front of said lid. Said components contained within said lid arranged in such a way that said air pump automatically turns on when the user twists said lid onto said container opening thereby activating said on-off switch which turns on said pump, said pump being automatically turned off when a predetermined pressure or vacuum is reached by means of said pressure switch or said vacuum switch. Said ozone generator automatically turned on for a predetermined period of time and automatically turned off by means of said timing circuit. Said ozone generator being comprised of a corona discharge tube and a high voltage circuit that powers said tube. Said timing circuit being comprised of a microprocessor and discrete electronic components associated with said microprocessor. Said air in said container capable of being periodically released by said solenoid valve that is controlled by said timing circuit.

[0013] The drawings constitute a part of this specification and include exemplary embodiments to the invention, which may be embodied in various forms. It is to be understood that in some instances various aspects of the invention may be shown exaggerated or enlarged to facilitate an understanding of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] **FIG. 1** is a side section view of the food preservation container of the present invention.

[0015] **FIG. 2** is a front view of the container minus the lid.

[0016] **FIG. 3** is a side view of the container showing the lid in the open position.

[0017] **FIG. 4** is plan view of the contents within the lid of the present invention.

[0018] **FIG. 5** is a front view of the present invention with the lid in the closed position.

[0019] **FIG. 6** is a schematic drawing of the electronic timing circuit of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0020] Detailed descriptions of the preferred embodiment are provided herein. It is to be understood, however, that the present invention may be embodied in various forms. Therefore, specific details disclosed herein are not to be interpreted as limiting, but rather as a basis for the claims and as

a representative basis for teaching one skilled in the art to employ the present invention in virtually any appropriately detailed system, structure or manner.

[0021] Referring now to **FIG. 1** we see side section view of the food preservation container of the present invention. The present invention is comprised of a container **2** and a lid assembly **200**. The container **2** is made of rigid blow molded plastic such as high density polypropyline or polypropaline or the like. The overall shape is rounded so as to more easily accommodate internal air pressure or vacuum. Ribs **6,8** and indentations **10, 12** help to add reinforcement to the hollow container **2**. The lid assembly **200** is attached to the container by hinge member **30**. Lid assembly **200** has an outer cover **4** that is molded out of rigid plastic. The outer cover **4** is circular in shape and has an integral side wall that terminates in a lip that contains a plurality of inwardly facing tabs **16**. These tabs **16** interface with mating tabs **14** that extend outwardly from the lip of container opening **38**. The tabs **16** on container **2** can be clearly seen in **FIG. 2** where a front view of the container **2** is shown. The inwardly facing tabs **14** of the lid assembly **200** and the hinge portion **30** can be more clearly seen in **FIG. 3**.

[0022] **FIG. 4** shows a view of the inside of the lid assembly **200**. The components within the lid housing **4** are a rechargeable battery **24**, an ozone generator **100**, a vacuum-pressure pump **102**, a vacuum cutoff switch **104**, a pressure cutoff switch **106** a solenoid valve **108** and a microprocessor circuit **110** that provides timing functions as well as a driving circuit for the ozone generator **100**. Some of the inner lid components can also be seen in side section view in **FIG. 1**.

[0023] To use the present invention, the user opens the lid assembly **200** by lifting lever **28** thereby eliminating the pressure that has been exerted on inner lid **22** by the integral cam that is at one end of lever **28** as shown in **FIG. 1**. The user then rotates the lid assembly **200** by knobs **42,44** shown in **FIG. 5**. The user presses down on knob **44** and pulls up on knob **42** until the knob hits post **48**. The user can then swing the door open on its hinge **30**. The user then puts in or takes out food that is stored within container **2**. The user then closes lid assembly **200** in the reverse order as the opening sequence. In pressing down on lever **28**, the lever's integral cam pushes on floating inner plate **22**. Inner plate **22** has a rubber gasket **18** fastened to its perimeter so that the gasket **18** presses onto container opening lip **16** creating an air tight seal. This seal is effective in maintaining a vacuum or pressure within the container **2**. Upon closing lid assembly **200**, on-off switch **65** is activated when inner lid plate **22** strikes the switch **65** plunger. This in turn activates the pump **102** which can be set by slide switch **54** to produce a vacuum or pressure, depending on the type of food being stored, Foods such as fresh fruits and vegetables respond favorably to pressure and other foods such as cheese, meats and fish respond favorably to vacuum. My experiments have shown that a pressure of approximately five pounds per square inch work well for fruits and vegetables and a vacuum of approximately ten inches of mercury works well for vacuum applications. These relatively low settings also allow the container **2** and lid parts **4,22** to be molded from rigid plastic. Higher pressures or vacuums would require thicker walls and more ribs and higher quality plastic such as polycarbonate that would increase the overall price of the food preservation container thereby making it more difficult to sell the the general public. When the selector switch **54** is set to vacuum, and the lid closed, the vacuum pump **102** and the ozone generator **100** are activated and solenoid valve **108** is opened for a period of approximately three minutes as dictated by microprocessor circuit **110**. This causes ozone to be drawn through the container **2** and out through solenoid **108**. My experiments show that approximately one part per million of ozone is enough to kill mold and bacteria that are present on the surface of the food stored within container **2**. My experiments also show that less one tenth of one part per million of ozone escapes from the container when the lid is opened. This is below the EPA guidelines for safe exposure to ozone. After three minutes the solenoid valve **108** closes and vacuum pump **102** continues to pump air out of container **2** until proper vacuum is reached at which point vacuum pressure switch turns off the pump **102**. If, over time, the vacuum is diminished within container **2**, pump **102** automatically turns on to replenish the vacuum. After approximately twelve hours solenoid valve **108** is automatically opened to flush out gasses that have built up within container **2**. The valve **108** is then closed again and the vacuum is replenished. This sequence reccures every twelve hours to continue to expel harmful out gassing from food stored within container **2**. The same basic sequence occurs when the user sets selector switch **54** to pressure, except that instead of a vacuum being created in the container **2**, a positive pressure is created and the pump is turned off by pressure switch **106** when proper pressure is reached. The same periodic air purging occurs, and the same ozone generation occurs. The pump and ozone generator are powered by replaceable rechargeable battery **24**. Of course, other power supply's can be used including standard house voltage. The entire unit of the present invention is designed to be placed in a standard home refrigerator which is why the preferred embodiment makes use of a rechargeable battery. In the preferred embodiment, a recharging stand has a second battery being charged. When the user notices that low battery indicator **52** is lit, it is time for the user to replace the exhausted battery **24** with a recharged battery. The unit of the present invention is designed to use little energy, approximately two hundred millivolts at twelve volts, therefore the battery only has to be replaced once every four weeks. My experiments have shown that foods can remain fresh three to five times longer than when stored under normal refrigerator conditions. Different foods show different degrees of response to vacuum or pressure but in general, the result is always favorable in that foods remain fresh longer. **FIG. 6** is a schematic view of the electronic circuit of the present invention. The above described and illustrated way shows that the present invention is easy to use and allows a person to store a wide variety of foods in either a pressure environment or a vacuum environment that has been ozinated thereby extending the useful life of the food stored within.

[0024] While the invention has been described in connection with a preferred embodiment, it is not intended to limit the scope of the invention to the particular form set forth, but on the contrary, it is intended to cover such alternatives, modifications, and equivalents as may be included within the spirit and scope of the invention as defined by the appended claims.

What is claimed is:

1. Food Preservation Container comprising:

a main container body;

a circular lid having an integral side wall;

said lid having a built in on-off switch, air pump, ozone generator, timing circuit, pressure switch, vacuum switch, solenoid valve, power indicator light, vacuum indicator light, pressure indicator light and power supply;

said container having a circular opening;

said opening having a plurality of outwardly facing tabs about its circumference;

said lid having a plurality of mating inwardly facing tabs that can interface with said outwardly facing tabs;

said lid having a lower hinge portion that combines with a mating hinge portion on the lower front portion of said container opening;

said lid having a secondary floating inner lid;

said inner lid having a soft rubber gasket attached to its perimeter;

said inner lid capable of being forced toward the lip of said container opening by a cam attached to a hinged lever located on the front of said circular lid;

said power supply being removable and replaceable from the front of said lid;

said components contained within said lid arranged in such a way that said air pump automatically turns on when the user twists said lid onto said container opening thereby activating said on-off switch which turns on said pump;

said pump being automatically turned off when a predetermined pressure or vacuum is reached by means of said pressure switch or said vacuum switch;

said ozone generator automatically turned on for a predetermined period of time and turned automatically turned off by means of said timing circuit;

said ozone generator being comprised of a corona discharge tube and a high voltage circuit that powers said tube;

said timing circuit being comprised of a microprocessor and discrete electronic components associated with said microprocessor; and

said air in said container capable of being periodically released by said solenoid valve that is controlled by said timing circuit.

2 Food Preservation Container as claimed in claim 1 wherein said container is made of blow molded plastic such as polypropyline

3 Food Preservation Container as claimed in claim 1 wherein said lid is made of injection molded plastic such as ABS

* * * * *