



- (51) International Patent Classification:
H01F 27/30 (2006.01) H01F 27/32 (2006.01)
- (21) International Application Number:
PCT/IB2014/000440
- (22) International Filing Date:
27 March 2014 (27.03.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2013-069777 28 March 2013 (28.03.2013) JP
- (71) Applicant: TOYOTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).
- (71) Applicants (for all designated States except US): KABUSHIKI KAISHA TOYOTA JIDOSHOKKI [JP/JP]; 2-1, Toyoda-cho, Kariya-shi, Aichi-ken, 448-8671 (JP). TOKAI KOGYO CO., LTD. [JP/JP]; 4-1, Nagane-cho, Obu-city, Aichi-pref, 474-8688 (JP).
- (71) Applicant: HIRASAWA, Kazuo [JP/JP]; c/o TOKAI KOGYO CO., LTD., of 4-1, Nagane-cho, Obu-city, Aichi-pref., 474-8688 (JP).
- (72) Inventors; and
- (71) Applicants (for US only): HIRATA, Shuichi [JP/JP]; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, of 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP). SHINOHARA, Nobuki [JP/JP]; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, of 1, Toyota-cho, Toyota-shi,

Aichi-ken, 471-8571 (JP). OKADA, Takeshi [JP/JP]; c/o KABUSHIKI KAISHA TOYOTA JIDOSHOKKI, of 2-1, Toyoda-cho, Kariya-shi, Aichi-ken, 448-8671 (JP). KAMIKAWA, Yoshikazu [JP/JP]; c/o TOKAI KOGYO CO., LTD., of 4-1, Nagane-cho, Obu-city, Aichi-pref., 474-8688 (JP).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: REACTOR

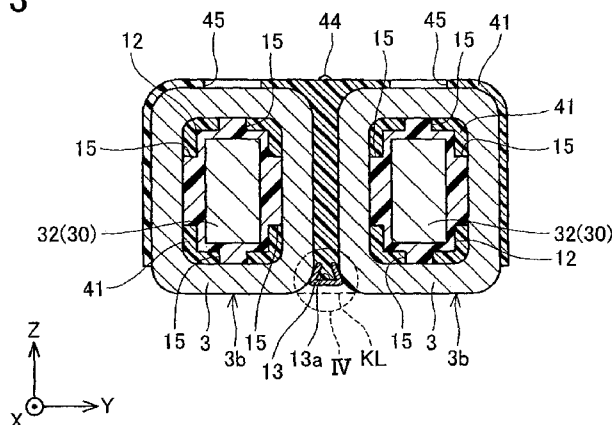FIG. 3

(57) Abstract: A reactor 2 disclosed by the present specification is equipped with two coils 3 that are arranged parallel to each other, a resin cover 41 that adheres to the two coils to cover the coils, and a column member 13. The resin cover 41 exposes lateral faces of the coils on such a side as to be in contact with a common tangential plane KL. The column member 13 is arranged parallel to the coils 3 in a space that is surrounded by the common tangential plane KL and the lateral faces of the respective coils 3. The column member 13 is exposed on a side thereof that is opposed to the common tangential plane KL, and is in contact with the respective coils 3 on the other side thereof. Furthermore, the column member 13 has a groove 13a that has an opening on the other side of the common tangential plane KL and extends along coil axes. The groove has a width that is narrow at the opening and widens toward a bottom of the groove. An interior of the groove is filled with resin of the resin cover 41.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

REACTOR

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The invention relates to a reactor. The reactor is a passive element that utilizes a coil, and may also be referred to as "an inductor".

2. Description of Related Art

[0002] A reactor is equipped with a core as a magnetic body, and a coil that is wound around the core. In some cases, the reactor is designed to have a bobbin that retains the coil. In many cases, the reactor is often covered with resin for the purpose of being insulated or protected against physical contact with other devices (e.g., Japanese Patent Application Publication No. 2011-249427 (JP-2011-249427 A), Japanese Patent Application Publication No. 2009-246222 (JP-2009-246222 A), and Japanese Utility Model Application Publication No. 05-066950 (JP-05-066950 U).

[0003] In a motor drive system of each of electric vehicles including hybrid vehicles, a reactor may be employed in a circuit of a voltage converter or the like. The reactor for electric vehicles allows a large current to flow therethrough, and hence generates a large quantity of heat. Technologies for efficiently cooling the reactor have been desired. In each of Japanese Patent Application Publication No. 2011-249427 (JP-2011-249427 A) and Japanese Patent Application Publication No. 2009-246222 (JP-2009-246222 A), there is disclosed a reactor having coils wound around parallel regions of ring-shaped cores respectively, as a reactor suited for electric vehicles. As a measure against heat, in the art of Japanese Patent Application Publication No. 2011-249427 (JP-2011-249427 A), the cores and the coils are entirely covered with resin, but the coils are partially exposed, and a radiator plate is placed against the coils at the exposed portions of the coils. In the art of Japanese Patent Application Publication No. 2009-246222 (JP-2009-246222 A), when viewed from an axial direction of the coils, the two coils are about half covered with resin with a plane passing two axes of the coils regarded as a border, to secure a strength, and the other halves are exposed to promote heat

radiation in the exposed regions.

SUMMARY OF THE INVENTION

[0004] In each of the arts of Japanese Patent Application Publication No. 2011-249427 (JP-2011-249427 A) and Japanese Patent Application Publication No. 2009-246222 (JP-2009-246222 A), the coils are covered with resin, but are partially exposed. For the sake of explanation, a resin component that covers the coils is referred to as a resin cover. In many cases, the resin cover is made according to an injection mold method in order to protect the coils and maintain the shape thereof. More specifically, an assembly of the coils and the cores is put into a mold, and molten resin is injected. The mold is made of metal. On the other hand, the coils have windings wound therearound. Therefore, the contour of the coils does not exhibit high accuracy, and gaps may be formed between the metallic mold and the coils. If gaps are formed in contact regions between the mold and the coils, molten resin leaks, so that the area of the regions of the coils to be intrinsically exposed may become small. In particular, in the case where the two coils are arranged parallel to each other and lateral faces of the coils are exposed on such a side as to be in contact with a common tangential plane, resin may leak out to the regions to be intrinsically exposed from between the adjacent coils. This is because it is difficult to appropriately place the mold against both the adjacent coils and strictly close a border that defines a space (i.e., a cavity) to be filled with resin, between the adjacent coils.

[0005] The art disclosed by the present specification provides a reactor in which coil exposed regions of a resin cover that covers coils are appropriately secured.

[0006] The reactor disclosed by the present specification is equipped with a resin cover that adheres to two coils to cover the coils. The resin cover exposes lateral faces of the respective coils on such a side as to be in contact with a common tangential plane. In the art disclosed by the present specification, a column member is arranged in advance separately from injection-molded resin, in regions that are equivalent to borders between the resin cover and the lateral faces to be intrinsically exposed, in a space that is surrounded by the common tangential plane and the lateral faces of the respective coils.

The column member is exposed on a side opposed to the common tangential plane, and is in contact with the respective coils on the other side. The column member prevents molten resin from leaking out along the lateral faces of the coils, instead of a mold during injection molding. Furthermore, the column member is provided with a groove that has an opening on the other side of the common tangential plane and extends along axes of the coils, such that the column member adheres to the lateral faces of the coils during injection molding. A width of the groove widens from the opening toward a bottom of the groove. During injection molding, an interior of the groove is filled with resin of the resin cover, but molten resin applies a pressure in such a manner as to press lateral walls of the groove outward inside the groove. The pressure serves as a force that causes outer sides of the lateral walls of the groove to adhere to the lateral faces of the coils respectively. Therefore, the column member adheres well to the lateral faces of the coils, and prevents molten resin from leaking from between the lateral faces of the coils and the column member. Incidentally, it is preferable that the column member be made of resin instead of being made of metal so as to adhere well to the lateral faces of the coils. Furthermore, in order to make it easy for molten resin to flow into the groove during injection molding, it is appropriate that a gate (a resin injection hole for molten resin) that is provided through a cavity face of the mold be oriented toward the groove. In the finished reactor, a gate trace is located in a direction in which the opening of the groove of the column member is oriented.

[0007] Incidentally, the resin cover exposes the lateral faces of the respective coils on such a side as to be in contact with the common tangential plane. However, other regions of the coils may be exposed. The details and further improvements of the art disclosed by the present specification will be described in the following " DETAILED DESCRIPTION OF EMBODIMENTS ".

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Features, advantages, and technical and industrial significance of an exemplary embodiment of the invention will be described below with reference to the

accompanying drawings, in which like numerals denote like elements, and wherein:

FIG. 1 is an exploded perspective view of a reactor according to the embodiment of the invention;

FIG. 2 is a perspective view of the reactor;

FIG. 3 is a cross-sectional view taken along a line III-III of FIG. 2; and

FIG. 4 is an enlarged view of a region surrounded by a broken line IV of FIG. 3.

DETAILED DESCRIPTION OF EMBODIMENT

[0009] Referring to the drawings, a reactor according to the embodiment of the invention will be described. FIG. 1 is an exploded perspective view showing a reactor 2 before injection molding (before resin molds are molded on parts of surfaces of coils). FIG. 2 is a perspective view showing the reactor 2 after injection molding, namely, the finished reactor 2. The reactor 2 is employed in, for example, a converter that steps up a battery voltage to a voltage suited to drive a motor in an electric vehicle. The reactor 2 is designed for large current, has a permissible current value equal to or larger than 100 (A), and uses rectangular wires as windings of coils. The rectangular wires are conducting wires with a rectangular cross-section, and have a small electric resistance. In the reactor 2, the rectangular wires are wound with wide faces thereof oriented in a longitudinal direction of the coils. In other words, the rectangular wires are wound with narrow faces thereof oriented in a radial direction of the coils. Such a winding pattern is referred to as edgewise winding or longitudinal winding.

[0010] Referring to the exploded view of FIG. 1, an overall structure of the reactor 2 will be outlined. The reactor 2 is equipped, as its main components, with double-barrel coils 3 that are electrically connected in series to each other and physically arranged such that coil axes thereof extend parallel to each other, a bobbin 10 (10a and 10b) that is inserted through the coils 3, and ring-shaped cores 30 that pass inside tubes of the bobbins 10 respectively. Incidentally, the direction in which the coil axes extend is equivalent to a direction in which an X-axis extends in the drawing. Besides, it should be noted in FIG. 1 that the right and left sides of the drawing are depicted from different

viewpoints for the sake of easy understanding (see two coordinate systems in the drawing).

[0011] The ring-shaped cores 30 are constituted by a pair of U-shaped cores 31a and 31b and two I-shaped cores 32. Both the cores are obtained by sintering ferrite particles coated with an insulating material together with resin. The pair of the U-shaped cores 31a and 31b are arranged with end faces thereof facing each other. The I-shaped cores 32 are arranged between the end faces of the pair of the U-shaped cores 31a and 31b. The two I-shaped cores 32 that are arranged parallel to each other constitute parallel regions in the ring-shaped cores. Spacer plates 33 are arranged between the end faces of the U-shaped cores 31a and 31b and the I-shaped cores 32 respectively. The spacer plates 33 are made of ceramics.

[0012] The bobbin 10 is divided into two parts, namely, a first part 10a and a second part 10b in the direction of the coil axes. The first part 10a has a structure in which two tube portions 12 are fixed to a flange 19 so as to be parallel to each other in accordance with the double-barrel coils 3. The coils 3 are formed by winding rectangular wires into a substantially rectangular shape, and the tube portions 12 are also substantially rectangular. The flange 19 defines one end of a coil winding range.

[0013] The second part 10b is equivalent to the other flange. Accordingly, the second part 10b may be referred to as the flange 10b in the following description. The flange 10b is provided with fitting holes 18a in which the two tube portions 12 that extend from the flange 19 of the first part 10a are fitted respectively. A column member 13 extends from the flange 19 parallel to the tube portions 12. The flange 10b is provided with a fitting hole 18b in which a tip of the column member 13 is fitted. The column member 13 and the fitting hole 18b will be described later.

[0014] The coils 3 are formed by winding rectangular wires in a substantially rectangular shape, and the tube portions 12 are also substantially in the shape of a quadratic prism. The double-barrel coils 3 are passed through the two tube portions 12 respectively, and the I-shaped cores 32 and the spacer plates 33 are inserted into the tube portions 12 respectively. Then, when the second part 10b is fitted to tips of the tube portions 12, the bobbin 10 is finished, and a unit having the double-barrel coils 3 that are parallel to each

her and wound between the two flanges 19 and 10b of the bobbin is finished. When the U-shaped cores 31a and 31b are inserted from both sides of the bobbin respectively, an assembly of the reactor 2 except a resin cover is finished. In the assembly of the reactor 2, the coils 3 are wound around the parallel regions of the ring-shaped cores 30 respectively. Besides, the pair of the flanges 19 and 10b define a winding range of the coils.

[0015] Incidentally, the tube portions 12 of the bobbin are substantially in the shape of a quadratic prism as described above. Convex streaks 15 are provided on four lateral faces of each of the tube portions 12 respectively. Head faces of the ridges 15 point out on inner faces of the coils 3 respectively. At a stage where the coils 3 are passed through the cores 30 respectively, gaps are created beside the ridges 15 respectively. However, the gaps are filled with resin of the resin cover during injection molding of the resin cover (which will be described later).

[0016] The flange 19 as one of the flanges is provided with slits 11 through which lead portions 3a of the coils 3 pass respectively. The lead portions 3a pass through the slits 11 respectively, but small plates 4 are arranged between the slits 11 and the lead portions 3a respectively. The small plates 4 are provided with holes, through which the lead portions 3a are passed respectively. Steps are provided around the small plates 4 respectively, and those step regions engage steps that are provided in the slits 11 respectively. The small plates 4 are constituted of small-diameter portions and large-diameter portions across the steps respectively. The large-diameter portions are opposed to the coils 3 respectively, and the small-diameter portions are located on the other side of the coils 3 respectively. The holes of the small plates 4 are so dimensioned as to be closely fitted to the lead portions 3a respectively. Peripheries of the lead portions 3a are sealed by the small plates 4 respectively. Besides, the large-diameter portions of the small plates 4 abut on peripheral edges of the slits 11 from the coil sides respectively, thus closing up the slits respectively. As will be described later, the coils 3 are molded by resin between the pair of the flanges 19 and 10b. However, when the reactor 2 before injection molding is put into a mold to inject resin between the pair of the flanges 19 and 10b, the small plates 4 prevent resin from leaking from between the slits 11 and the lead

portions 3a respectively.

[0017] FIG. 2 is a perspective view showing the reactor 2 after injection molding, namely, the finished reactor 2. The coils 3 are molded by resin (covered with resin) between the pair of the flanges 19a and 10b. The resin cover that covers the coils 3 is denoted by a reference numeral 41. However, the resin cover 41 has windows 45 above, and the coils 3 are partially exposed from the windows respectively. Besides, lower sides of the coils 3 are also exposed from the resin cover 41. The coils have a substantially rectangular cross-section, and the exposed regions of the lower sides thereof are those of the rectangular lateral faces of the two coils which are oriented in the same direction. In other words, those faces are the lateral faces of the respective coils on such a side as to be in contact with a common tangential plane.

[0018] A gate trace is denoted by a reference numeral 44. The gate trace is equivalent to a resin injection hole that is provided through a cavity face of a mold when the reactor before injection molding is put in the mold.

[0019] The resin cover 41 covers up to about half of a thickness of the flange 19 on the coil sides. As described above, the slits 11 for drawing out the lead portions, which are formed through the flange 19, are sealed by the small plates 4 respectively. Therefore, resin does not leak from between the slits 11 and the lead portions 3a.

[0020] In the reactor 2, the U-shaped cores 31a and 31b are also covered with resin outside the flange 19 (the second part 10b) (on the other side of the coils 3). A resin cover that covers the cores is denoted by a reference numeral 42. The resin cover 42 has fixation ribs 43 for fixing the reactor 2 to a housing. The resin cover 42 is also manufactured through injection molding.

[0021] The column member 13 and the fitting hole 18b fitted thereto shown in FIG. 1 will be described. FIG. 3 shows a cross-section along a line III-III of FIG. 2. The column member 13 extends from the flange 19 as one of the flanges along the axes of the coils 3. A tip of the column member 13 is fitted to the fitting hole 18b of the other flange 10b (see FIG. 1). The column member 13 is made of the same resin as the bobbin 10. As shown in FIG. 3, the column member 13 is located in a space that is surrounded by a

common tangential plane KL that is in contact with the lateral faces of the two coils 3 and the lateral faces of the two coils 3, and extends parallel to the coils 3. The column member 13 is embedded at an end of the resin cover 41 that fills a gap between the two coils 3. Besides, the column member 13 is equipped with a groove 13a that extends parallel to the coils 3 and opens in an orientation reverse to the common tangential plane KL. An interior of the groove 13a is filled with resin of the resin cover 41, and outer sides of lateral walls of the groove 13a abut on the lateral faces of the coils 3 respectively. This column member 13 closes the gap between the adjacent coils 3 so as to prevent molten resin from leaking out to the lower face sides of the coils between the two coils 3 during injection molding of the resin cover 41.

[0022] FIG. 4 is an enlarged view showing a range indicated by a reference symbol IV in FIG. 3. FIG. 4 shows how the resin cover 41 is injection-molded, and a mold 81 is also depicted.

[0023] The groove 13a of the column member 13 has a width that widens from an opening 13b toward a bottom of the groove, in a cross-section of FIG. 4, namely, a cross-section that is perpendicular to the axes of the coils. In FIG. 4, a width W1 of the opening of the groove 13a is smaller than a width W2 of the bottom of the groove 13a.

[0024] An advantage of the column member 13 will be described. There is a gap Sp between the mold 81 and the coils 3, but the column member 13 closes up a lower end of the gap between the adjacent coils 3, along the lateral faces of the coils 3 and along the axes of the coils. As indicated by a gate trace 44 of the resin cover 41 in FIG. 3, the resin injection hole opens toward the opening 13b of the groove 13a of the column member 13 in the mold. Accordingly, as indicated by an arrow A of FIG. 4, molten resin flows downward from above through the gap between the adjacent coils 3 (flows toward the opening 13b of the groove 13a), and applies a pressure to the lateral walls of the groove inside the groove 13a. Then, as indicated by an arrow B of FIG. 4, both the lateral walls of the groove 13a are pressed against the adjacent coils 3 respectively. This causes the lateral faces of the coils 3 to adhere to the column member 13, and prevents resin from leaking to the gap Sp. That is, lower faces 3b of the coils 3 that are scheduled to be

exposed are appropriately exposed. Incidentally, in a finished product, the groove 13a of the column member 13 is filled with the resin constituting the resin cover 41.

[0025] The column member 13 extends from the flange 19 as one of the flanges of the bobbin 10, and is engaged with the fitting hole 18b of the other flange (the second part 10b). Therefore, the column member 13 is supported at both ends thereof, and hence can well endure the pressure of resin during injection molding as well. Incidentally, a bottom face of the column member 13 (a face that is opposed to the common tangential plane KL in FIG. 3) is in contact with the mold 81, and therefore is supported by the mold 81 as well.

[0026] Points to remember about the art described in the embodiment of the invention will be mentioned. The resinous column member 13 more effectively seals the gap between the coils than the metallic mold that closes up the gap between the adjacent coils 3. This is because of the following reason. The coils are assemblies of windings and the contour thereof does not exhibit high accuracy, and therefore, a gap may be formed therebetween in the metallic mold. In contrast, the resinous column member 13 is more flexible than the metal, and hence can be flexibly deformed in accordance with the dispersion of the contour of the coils. Thus, gaps are unlikely to be formed between the column member 13 and the coils.

[0027] Besides, the windings of the coils may be equipped with insulating coatings. However, if such coils firmly abut on the metallic mold, the insulating coatings may be damaged. The resinous column member 13 is also advantageous in that there is a low possibility of the insulating coatings being damaged.

[0028] In a situation where the reactor 2 is actually mounted, a radiator plate or a cooler is arranged in a region equivalent to the mold 81 of FIG. 4. The radiator plate or the cooler is in direct contact with the coils to cool the coils. The column member 13 appropriately secures the regions to be exposed of the lower faces 3b of the coils and the peripheries thereof. In the reactor 2 according to this embodiment of the invention, the resin cover is prevented from unintentionally narrowing the regions to be exposed, so that the heat radiation performance of the coils is not damaged. Incidentally, "the lower faces

of the coils" are an appellation for the convenience of explanation, and the lateral faces of the coils that are to be exposed should not be limited to the lower faces.

[0029] The coils are not absolutely required to be substantially in the shape of a quadratic prism. The faces of the coils that are in contact with the cooler may be flat, and the other regions of the coils may be entirely or partially curved.

[0030] Although the concrete examples of the invention have been described above in detail, these are nothing more than exemplifications, and are not intended to limit the claims. The art set forth in the claims encompasses various modifications and alterations of the concrete examples exemplified above. The technical elements described in the present specification or the drawings are technically useful alone or in various combinations, and should not be limited to the combinations set forth in the claims at the time of the filing of the application. Besides, the art exemplified in the present specification or the drawings can achieve a plurality of objects at the same time, and is technically useful by achieving one of the objects in itself.

CLAIMS

1. A reactor comprising:

two coils that are arranged parallel to each other;

a resin cover that adheres to the two coils to cover the coils, the resin cover being configured to expose lateral faces of the respective coils on such a side as to be in contact with a common tangential plane; and

a column member that is arranged parallel to coil axes in a space that is surrounded by the common tangential plane and the lateral faces of the respective coils, the column member being exposed on a side thereof that is opposed to the common tangential plane and being in contact with the respective coils on a side thereof that is not opposed to the common tangential plane, the column member having a groove that has an opening on an other side of the common tangential plane and extends along the coil axes, the groove having a width that widens from the opening toward a bottom of the groove, and an interior of the groove being filled with resin of the resin cover.

2. The reactor according to claim 1, wherein

the column member is made of resin.

3. The reactor according to claim 1 or 2, wherein

the resin cover is made through injection molding.

4. The reactor according to claim 3, wherein

a gate trace during injection molding of the resin cover is located in a direction in which the opening of the column member is oriented.

FIG. 2

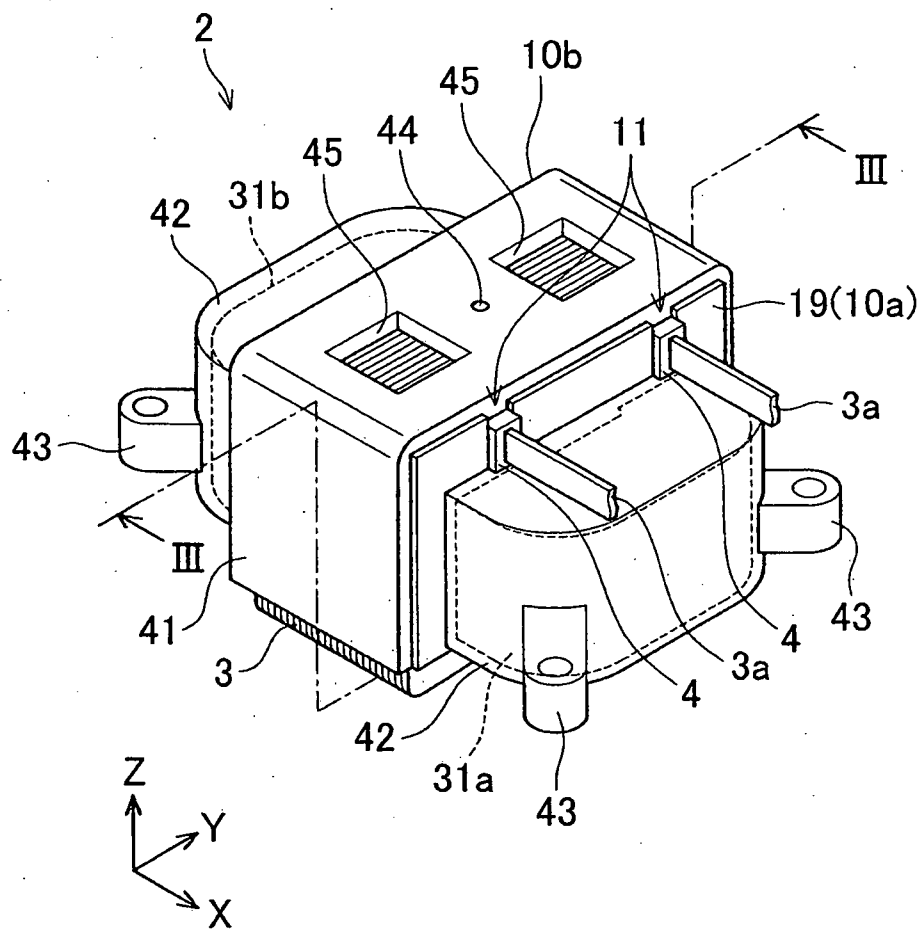


FIG. 3


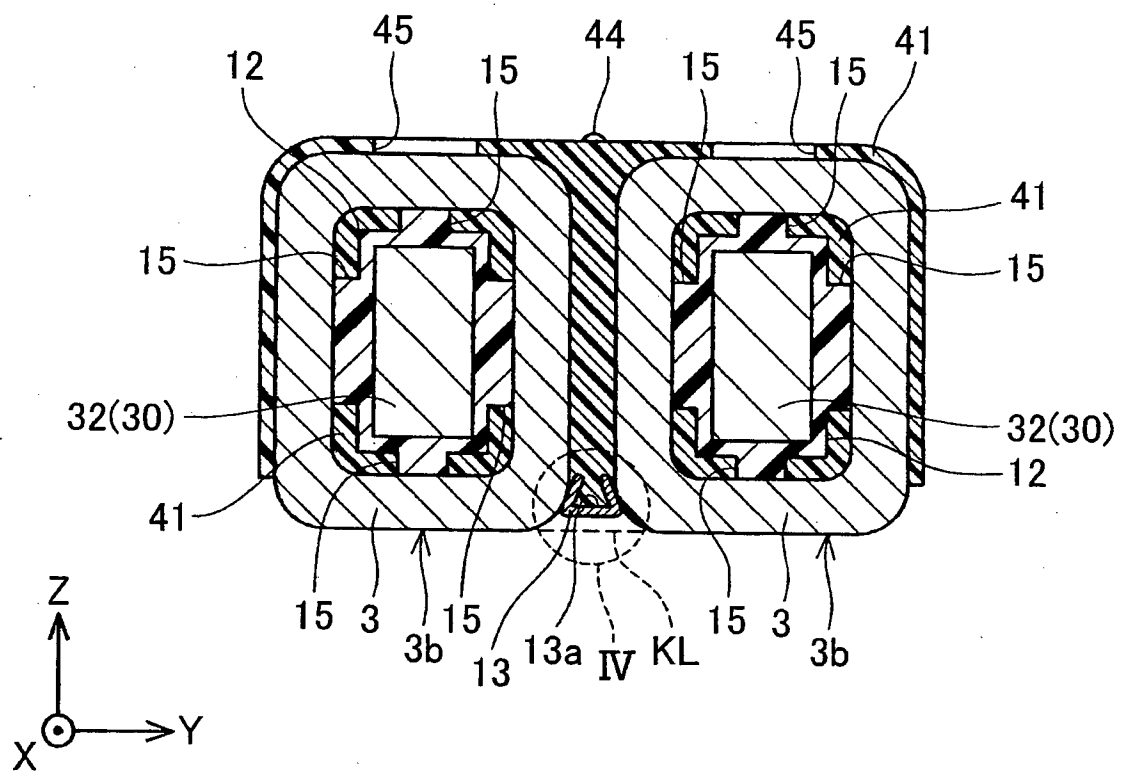


FIG. 4

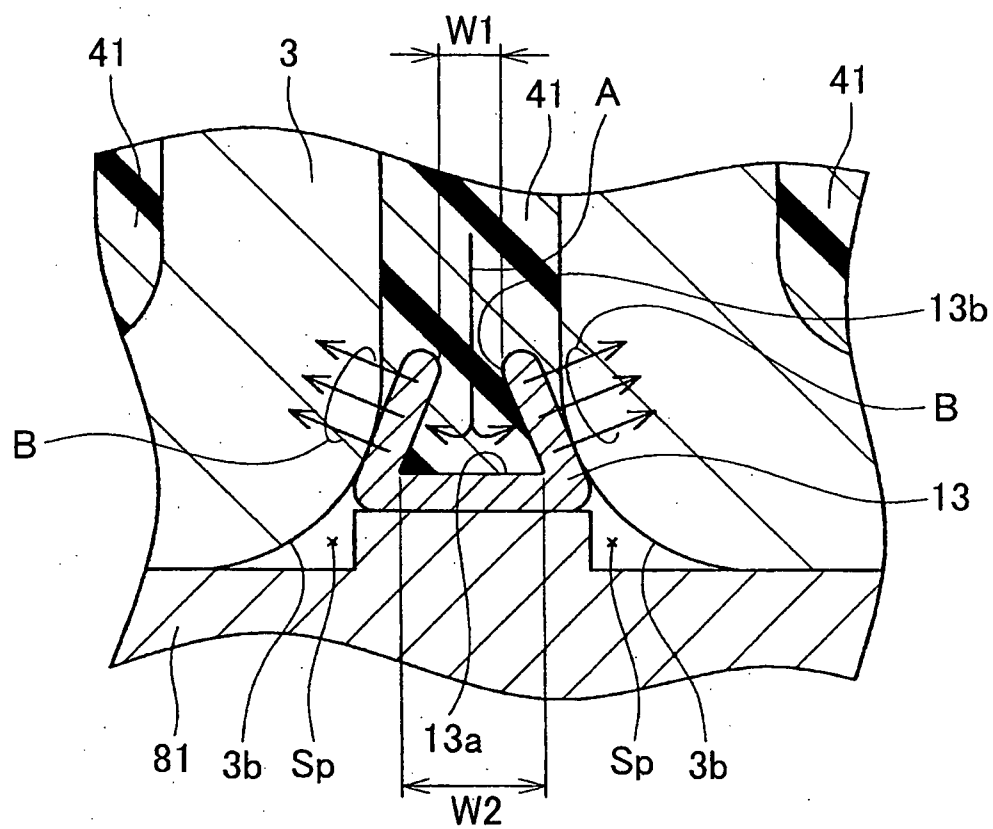

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2014/000440

A. CLASSIFICATION OF SUBJECT MATTER
 INV. H01F27/30 H01F27/32
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2011 029336 A (SUMITOMO ELECTRIC INDUSTRIES) 10 February 2011 (2011-02-10) abstract paragraphs [0023], [0024] -----	1-4
A	US 2010/033284 A1 (YAMAKAMI KAZUHIKO [JP] ET AL) 11 February 2010 (2010-02-11) paragraphs [2226], [0031], [0032] -----	1-4
A	JP 2010 199257 A (DENSO CORP) 9 September 2010 (2010-09-09) abstract -----	1-4



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 May 2014

Date of mailing of the international search report

11/08/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Gols, Jan

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2014/000440

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 2011029336	A	10-02-2011	NONE	

US 2010033284	A1	11-02-2010	CN 101128894 A	20-02-2008
			JP 2006270055 A	05-10-2006
			US 2010033284 A1	11-02-2010
			WO 2006092991 A1	08-09-2006

JP 2010199257	A	09-09-2010	JP 5157956 B2	06-03-2013
			JP 2010199257 A	09-09-2010
