(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
3 January 2014 (03.01.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/004013 A8

(51) International Patent Classification:
G09G 3/00 (2006.01) *H04N 7/14* (2006.01)

(21) International Application Number:
PCT/US2013/044409

(22) International Filing Date:
6 June 2013 (06.06.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/538,916 29 June 2012 (29.06.2012) US

(71) Applicant: **ALCATEL LUCENT** [FR/FR]; 3, avenue Octave Gréard, F-75007 Paris (FR).

(72) Inventors: **BOLLE, Cristian, A.**; 600-700 Mountain Avenue, Murray Hill, NJ 07974-0636 (US). **DUQUE, Alex**; 600-700 Mountain Avenue, Murray Hill, NJ 07974-0636 (US). **RYF, Roland**; 791 Holmdel-Keyport Road, Holmdel, NJ 07733-1661 (US).

(74) Agent: **MURGIA, Gregory, J.**; Alcatel-Lucent USA Inc., Attention: Docket Administrator - Room 3B-212F, 600-700 Mountain Avenue, Murray Hill, NJ 07974-0636 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR IMAGE STABILIZATION IN VIDEOCONFERENCING

(57) Abstract: A terminal comprises a display substrate and an actuator configured to move the display substrate in a cyclic movement over a viewing area. A proximity sensor is configured to generate detection signals. An image controller, configured to receive the detection signal, calculates a cycle time of the cyclic movement of the display substrate and controls at least one of a transmission rate of the display data to the display substrate and the movement of the display substrate caused by the actuator.

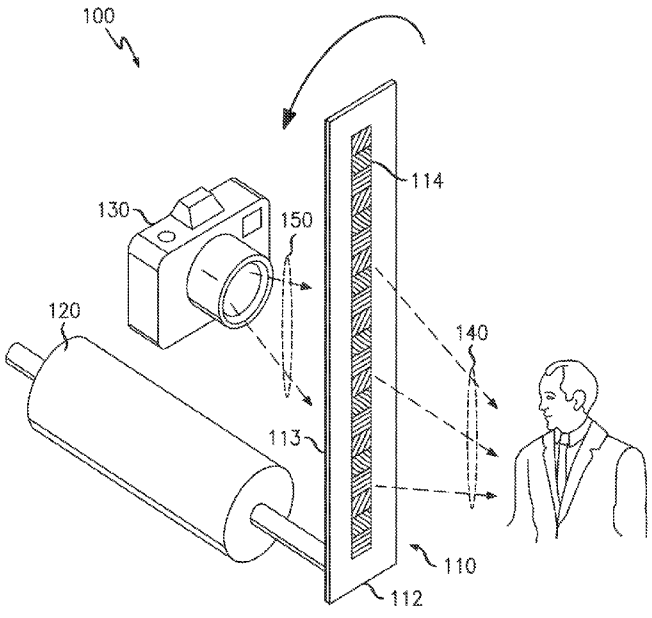


FIG. 1

WO 2014/004013 A8

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(48) Date of publication of this corrected version:
17 July 2014

(15) Information about Correction:
see Notice of 17 July 2014