

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 April 2012 (19.04.2012)

PCT

(10) International Publication Number
WO 2012/049252 A2

(51) International Patent Classification:
C08K 3/00 (2006.01)

(21) International Application Number:
PCT/EP2011/067898

(22) International Filing Date:
13 October 2011 (13.10.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/392,856 13 October 2010 (13.10.2010) US
11157968.6 11 March 2011 (11.03.2011) EP

(71) Applicant (for all designated States except US):
SOLVAY SPECIALTY POLYMERS USA, LLC [US/US]; 4500 McGinnis Ferry Road, Alpharetta, Georgia 30005-3914 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DESIO, Glenn P.** [US/US]; 2853 Interlaken Dr., Marietta, Georgia 30062 (US). **CUEVAS, Amy Marie** [US/US]; 802 Abingdon Way NE, Atlanta, Georgia 30328 (US). **NORFOLK, Linda M.** [US/US]; 845 Timberlake Trail, Cumming, Georgia 30041 (US). **VERFAILLIE, Geert J.** [BE/BE]; 16 Steenweg, B-9661 Parike (BE). **SINGLETARY, Nancy J.** [US/US]; 1820 Highgrove Club Drive, Alpharetta, Georgia 30004 (US).

(74) Agents: **BENVENUTI, Federica** et al.; Solvay Sa, Intellectual Property Department, Rue de Ransbeek, 310, B-1120 Brussels (BE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))



WO 2012/049252 A2

(54) Title: STAIN-RESISTANT ARTICLES

(57) Abstract: The present invention relates to stain- or dye-resistant articles comprising a polymer composition (C) comprising: - at least one semi-aromatic polyamide comprising recurring units resulting from the condensation of terephthalic acid and at least one aliphatic diamine comprising more than 8 carbon atoms; - at least one filler; - from 0.1 to 35 wt. % of at least one white pigment, based on the total weight of the composition; wherein the color of said article has a lightness (L*) of at least 70 in the CIE 1976 (L* a*, b*) color space when measured according to ASTM E308-08.

Stain-resistant articles**REFERENCE TO RELATED APPLICATIONS**

This application claims priority to U.S. application No. 61/392856 filed on 13 Oct 2010, the whole content of this application being incorporated herein by reference for all purposes.

5 FIELD OF THE INVENTION

The present invention broadly relates to low color articles comprising a semi-aromatic polyamide that feature surprisingly anti-staining properties. The present invention relates in particular to portable electronic device housings comprising a polyamide composition featuring anti-staining properties. The invention relates also in particular to the use of a semi-aromatic polyamide in the manufacture of articles for its anti-staining properties.

BACKGROUND OF THE INVENTION

Semi-aromatic polyamides (like those derived from phthalic acids and aliphatic diamines, i.e. polyphthalamides, or those derived from aromatic diamines and aliphatic diacids) are polymers having excellent mechanical, physical and chemical properties which make them useful for a wide variety of different applications. Besides, they generally feature the benefit of being conveniently molded into a variety of articles of varying degrees of complexity and intricacy.

20 In particular, semi-aromatic polyamides are good candidates for the manufacture of articles such as portable electronic devices. Portable electronic devices, such as mobile telephones, personal digital assistants, laptop computers, tablet computers, global positioning system receivers, portable games, radios, cameras, camera accessories, and the like are becoming increasingly widely used globally in many different environments. It is often important that the housings of such devices be made from materials that are able to withstand the rigors of frequent use and can meet challenging aesthetic demands while not interfering with their intended operability. It is often desirable that those materials have good stiffness and high impact resistance, and that they exhibit high dimensional stability when they are formed (as by injection molding, for example) into housings.

Many attempts have been made to offer a polyamide material suitable for the manufacture of portable electronic devices housings. Most of them offer a very good balance of properties useful in these specific applications.

However, these prior art housings still suffer from a significant drawback :
5 they are not resistant to staining agents that are often put in contact with these portable electronic devices housings. Typical staining agents include : makeup (such as lipstick, lip gloss, lip liner, lip plumper, lip balm, foundation, powder, blush), artificial or natural colorants (such as those found in soft drinks, coffee, red wine, mustard, ketchup and tomato sauce), dyes and pigments (such as those
10 found in dyed textiles and leather, used for the manufacture of portable electronic devices housings). In contact with these staining agents, the prior art articles, and in particular the portable electronic devices housings are easily stained.

The staining issue of polyamides is known for a long time but in a different
15 application, namely in the field of carpet and textile fibers. Polyamide fibers are relatively inexpensive and offer a desirable combination of qualities such as durability, comfort, and ease of manufacture into a broad range of colors, patterns, and textures. As a result, polyamide fibers are widely used in the home and industry as carpets, drapery material, upholstery, and clothing. Carpets
20 made from polyamide fibers are a popular floor covering for residential and commercial applications.

Polyamide fibers dye easily with dyes. Consequently, carpets made from polyamide fibers stain easily when exposed to dyes or staining agents that exist in some common food and beverages. The resulting stains cannot be easily
25 removed under ordinary cleaning conditions. The severe staining of carpeting is a major problem for consumers. In fact, surveys show that more carpets are replaced because of staining than because of wear.

Many attempts have been made to offer anti-staining polyamide carpets and textiles that resist common household and common stains, thereby
30 increasing their life. For example, one way of avoiding such staining is to topically apply to the surface of the polyamide filaments materials a specific anti-staining agent. US 6,488,893 provides for example a solution comprising condensation product of sulfonated naphthalene sulphonic acid, and aldehyde and a dihydroxydiphenyl sulfone together with a methacrylic acid polymer that
35 function as stain blockers so as to prevent stains from permanently coloring the

yarn. Topical treatments, however, tend to be costly and non-permanent (washed away with one or more washings).

It would thus be desirable to obtain articles and in particular housings for portable electronic devices that are made from polyamide compositions having
5 excellent stiffness, high dimensional stability and impact resistance while exhibiting also anti-staining properties.

It is thus a first object of the present invention to provide anti-staining polyamide articles. The polymer composition (C) according to the present invention exhibits outstanding properties : good mechanical properties, high
10 temperature resistance, low water absorption, superior chemical resistance. It can also be easily processed and may be molded into thin walls. In addition, the inventors have surprisingly found that the polymer composition (C) according to the present invention features also outstanding anti-staining properties.

DETAILED DESCRIPTION OF THE INVENTION

15 In a first aspect, the present invention relates to a stain- or dye-resistant article comprising a polymer composition (C) comprising :

- at least one semi-aromatic polyamide comprising recurring units resulting from the condensation of terephthalic acid and at least one aliphatic diamine comprising more than 8 carbon atoms ;
- 20 - at least one filler ;
- from 0.1 to 35 wt. % of at least one white pigment, based on the total weight of the polymer composition (C);

wherein the color of said article has a lightness (L^*) of at least 70 in the CIE 1976 (L^* , a^* , b^*) color space when measured according to ASTM E308-08.

25 The present invention provides thus articles having excellent mechanical, physical and chemical properties while being also surprisingly stain- or dye-resistant.

In a second aspect, the present invention relates to a method for conferring anti-staining properties to an article comprising using a semi-aromatic polyamide
30 comprising recurring units resulting from the condensation of terephthalic acid and an aliphatic diamine comprising more than 8 carbon atoms.

The article according to the present invention exhibits outstanding anti-staining properties. More precisely, the article according to the present invention has a stain-resistance rating of 1 on the Stain Rating Scale of the Stain Test
35 Method described below. The staining is herein intended to denote a coloration produced by a staining agent that penetrates a material. In many cases, stains can

be affected by heat and moisture, and may become reactive enough to bond with the underlying material. Extreme heat can cause a chemical reaction on an otherwise removable stain, turning it into a chemical compound that is impossible to remove.

5 The staining agent is intended to denote any agent that causes the material that comes in contact with it to stain. Typically, staining agents comprise at least one dye or pigment. Both dyes and pigments appear to be colored because they absorb and reflect some wavelengths of light preferentially. Typical staining agents include : makeup (such as lipstick, lip gloss, lip liner, lip plumper, lip
10 balm, foundation, powder, blush), artificial or natural colorants (such as those found in soft drinks, coffee, red wine, food), dyes and pigments (such as those found in dyed textiles and leather).

The article

15 The article according to the present invention has a lightness (L^*) of at least 70 in the CIE 1976 (L^* , a^* , b^*) color space when measured according to ASTM E308-08. The procedure used to measure the color and in particular the luminance of the article is detailed here below:

20 The lightness (L^*) was determined using a CE7000 Gretag MacBeth spectrophotometer using Cool White Fluorescent (F2) illuminant, a 10° observer, a 10 nm wavelength interval, a spectral range of from 360 to 700 nm and a D/8 optical geometry configuration with a bandpass correction using table 5.27 of the ASTM E 308-08 (on page 22). Values were measured on CIE Lab coordinates. The three coordinates of CIELAB represent the lightness of the color ($L^* = 0$ yields black and $L^* = 100$ indicates diffuse white ; specular white may
25 be higher), its position between red and green (a^* , negative values indicate green while positive values indicate red) and its position between yellow and blue (b^* , negative values indicate blue and positive values indicate yellow).

30 The article according to the present invention has preferably a lightness (L^*) of at least 72, more preferably at least 74, still more preferably at least 76, even more preferably of at least 78 and most preferably of at least 80.

 The article according to the present invention may be composed of one or more parts. At least one part of the article comprises the polymer composition (C).

35 In a first particular embodiment, the article according to the present invention is an electronic equipment housing and more particularly a portable electronic device housing.

By "portable electronic device" is meant an electronic device that is designed to be conveniently transported and used in various locations. Representative examples of portable electronic devices include mobile telephones, personal digital assistants, laptop computers, tablet computers, radios, cameras and camera accessories, watches, calculators, music players, global positioning system receivers, portable games, hard drives and other electronic storage devices, and the like.

By "portable electronic device housing" is meant a cover, backbone, or the like of the device. The housing may be a single article or comprise two or more components. By "backbone" is meant a structural component onto which other components of the device, such as electronics, microprocessors, screens, keyboards and keypads, antennas, battery sockets, and the like are mounted. The backbone may be an interior component that is not visible or only partially visible from the exterior of the telephone. The housing may provide protection for internal components of the device from impact and contamination and/or damage from environmental agents (such as liquids, dust, and the like). Housing components such as covers may also provide substantial or primary structural support for and protection against impact of certain components having exposure to the exterior of the device such as screens and/or antennas. Examples of such housings include but are not limited to : mobile telephones housings, personal digital assistants housings, laptop computers housings, tablet computers housings, global positioning system receivers housings, portable games housings, radios housings, cameras housings, camera accessories housings, etc.

In a preferred embodiment, the housings of the present invention are mobile telephone housings. By "mobile telephone housing" is meant one or more of the back cover, front cover, antenna housing, and/or backbone of a mobile phone. The housing may be a single article incorporating one or more of the foregoing. By "backbone" is meant a structural component onto which other components of the mobile telephone, such as electronics, screens, battery sockets, and the like are mounted. The backbone may be an interior component that is not visible or only partially visible from the exterior of the telephone.

The articles and in particular the housings for portable electronic devices according to the present invention are made from the compositions using any suitable melt-processing method. In particular, the article according to the present invention may be an injection molded article, an extruded molded article,

a shaped article, a coated article or a casted article. Injection molding is a preferred method.

In a second particular embodiment, the article according to the present invention is selected from:

- 5 - an appliance like http://en.wikipedia.org/wiki/Home_appliance home appliance or household machines such as refrigerators, freezers, blenders, can openers, coffee machines, microwave ovens, convection ovens, mixers, stoves, washing machines, dishwashers, trash compactors and the like ;
- 10 - a countertop referring to a horizontal worksurface in kitchens or other food preparation areas, bathrooms or lavatories, and workrooms in general ;
- furnitures like cabinets, chairs, tables and the like.

The semi-aromatic polyamide

The semi-aromatic polyamide according to the present invention comprises recurring units (R) resulting from the condensation of terephthalic acid and at least one aliphatic diamine comprising more than 8 carbon atoms.

Recurring units (R) are advantageously obtained from the condensation of terephthalic acid and at least one aliphatic diamine comprising more than 8 carbon atoms. Preferably, they are obtained from the condensation of terephthalic acid and at least one aliphatic diamine comprising less than 14 carbon atoms, more preferably less than 13 carbon atoms, even more preferably less than 12 carbon atoms. Excellent results were obtained when using one or more aliphatic diamine comprising 9, 10 or 11 carbon atoms.

Suitable aliphatic diamine comprising more than 8 carbon atoms include, but are not limited to, 1,8-octanediamine, 1,9-nonanediamine, 2-methyl-1,8-octanediamine, 1,10-decanediamine, 1,12-dodecanediamine, 2,2,4-trimethyl-1,6-hexanediamine, 2,4,4-trimethyl-1,6-hexanediamine and 5-methyl-1,9-nonanediamine ; it may also be an alicyclic diamine, e.g. methylcyclohexanediamine and isophoronediamine.

The aliphatic diamine having more than 8 carbon atoms is preferably a C₉-C₁₄ diamine, more preferably a C₉-C₁₂ diamine.

In a particular embodiment, the aliphatic diamine having more than 8 carbon atoms is a C₉ diamine. In such a case, the diamine may be 1,9-nonanediamine (NDA) and/or 2-methyl-1,8-octanediamine (MODA). The 2-methyl-1,8-octanediamine (MODA) may be present from 0 to 50 mole %, based on the total number of moles of the diamine. When the aliphatic diamine having more than 8 carbon atoms is a mix of NDA and MODA, the molar ratio


- 7 -

[(NDA): (MODA)] is advantageously of at least 1, preferably of at least 2, more preferably of at least 3 and still more preferably of at least 4 ; besides, it is advantageously of at most 9, preferably of at most 7, and more preferably of at most 6.

5 Excellent results were obtained when the invented polyamide consisted essentially of:


- a diamine component (a) consisting essentially of a mixture of 1,9-nonanediamine and 2-methyl-1,8-octanediamine in a molar ratio [(NDA) : (MODA)] of about 1.5 or 5.6, and
 - 10 - a dicarboxylic acid component (b) consisting essentially of terephthalic acid.
- Preferred polyamides are those often referred to as PA 9T, PA 10T and PA 11T and mixtures thereof.

PA 9T, when made using 1,9-nonanediamine, is a polyamide the recurring units of which have the following structure :

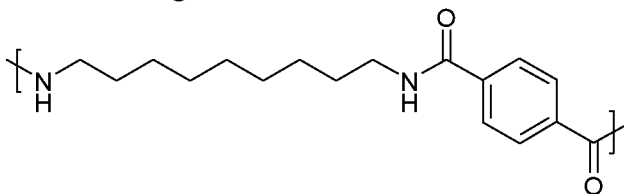


15

PA 10T is a polyamide the recurring units of which have the following structure:

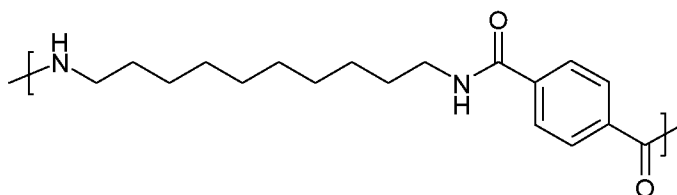

20 PA10T may be prepared by various ways. It is advantageously prepared at least partially from decanediamine derived from a renewable raw material such as castor bean.

PA 11T is a polyamide the recurring units of which have the following structure:

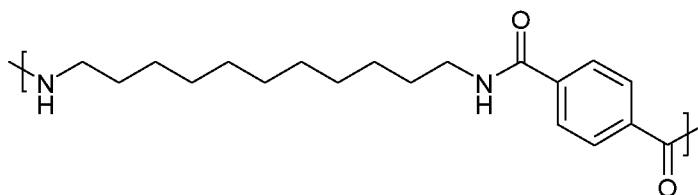

25 The semi-aromatic polyamide according to the present invention may comprise other recurring units than recurring units (R).

The semi-aromatic polyamide according to the present invention may be obtained by the condensation of one or more dicarboxylic acids and one or more diamines, and/or one or more aminocarboxylic acids, and/or ring-opening polymerization products of one or more cyclic lactams.

5 In addition to terephthalic acid (abbreviated as "T" in polyamide designations), suitable dicarboxylic acids include, but are not limited to, succinic acid, glutaric acid, sebacic acid, adipic acid, azelaic acid, 1, 6-cyclohexanedicarboxylic acid, naphthalenedicarboxylic acid and isophthalic acid (abbreviated as "I" in polyamide designations). Preferably, adipic acid is
10 present in an amount of at most 30 mol %, more preferably at most 20 mol %, even more preferably at most 10 mol %, based on the total number of moles of the diacid component. Most preferably the diacid component is free of adipic acid.

Suitable diamines include, but are not limited to, tetramethylenediamine,
15 hexamethylenediamine, octamethylenediamine, nonamethylenediamine, decamethylenediamine, dodecamethylenediamine, 2-methylpentamethylenediamine, 2-methyloctamethylenediamine, trimethylhexamethylenediamine, bis(p-aminocyclohexyl)methane, m-xylylenediamine, and p-xylylenediamine.

20 In a particular embodiment, another aliphatic diamine is used in addition to the aliphatic diamine comprising more than 8 carbon atoms. This additional aliphatic diamine may comprise from 6, 7, 8, 9 or 10 carbon atoms. Excellent results were obtained with PA 6T/10T.

The semi-aromatic polyamide according to the present invention comprises
25 preferably at least 20 wt. %, more preferably at least 40 wt. %, even more preferably at least 50 wt. %, still more preferably at least 60 wt. % and most preferably at least 80 wt. % of recurring units (R) based on the total weight of the semi-aromatic polyamide. Excellent results were obtained when the semi-aromatic polyamide was essentially free or even completely free of recurring
30 units other than recurring units (R).

More than one semi-aromatic polyamide may be present in the polymer composition (C). In such a case, the semi-aromatic polyamide comprising recurring units resulting from the condensation of terephthalic acid and at least one aliphatic diamine comprising more than 8 carbon atoms detailed above is
35 present in at least 20 wt. %, more preferably at least 40 wt. %, even more preferably at least 50 wt. %, still more preferably at least 60 wt. % and most

preferably at least 70 wt. %, based on the total weight of the semi-aromatic polyamides.

The semi-aromatic polyamide according to the present invention has advantageously a high melting point. Its melting point is preferably above
5 200°C, more preferably above 240°C, even more preferably above 280°C and most preferably above 300°C. Excellent results were obtained with a semi-aromatic polyamide featuring a melting point of 316°C.

The semi-aromatic polyamide according to the present invention has advantageously a high heat deflection temperature. Its heat deflection
10 temperature is preferably above 200°C, more preferably above 250°C, even more preferably above 270°C and most preferably above 290°C. Excellent results were obtained with a semi-aromatic polyamide featuring a heat deflection temperature of 295°C.

The semi-aromatic polyamide according to the present invention having
15 advantageously a high heat deflection temperature and a high melting point, it features therefore excellent high temperature resistance.

The semi-aromatic polyamide according to the present invention is preferably present in the polymer composition (C) in an amount of at least
20 10 wt. %, more preferably of at least 20 wt. %, still more preferably of at least 30 wt. % and most preferably of at least 40 wt. %, based on the total weight of the polymer composition (C). On the other hand, the semi-aromatic polyamide according to the present invention is preferably present in the polymer composition (C) in an amount of at most 90 wt. %, more preferably of at most
25 80 wt. %, still more preferably of at most 70 wt. % and most preferably of at most 60 wt. %, based on the total weight of the polymer composition (C). Excellent results were obtained when the semi-aromatic polyamide according to the present invention was present in the polymer composition (C) in about 50 wt. %, based on the total weight of the polymer composition (C).

The filler

30 The polymer composition (C) further comprises at least one filler. The filler may be selected from the group consisting of fibrous fillers, particulate fillers and mixture thereof.

Examples of such filler include, but are not limited to, glass fiber, carbon fiber, glass fibers having a non-circular cross section, glass flakes, carbon fibers,
35 wollastonite, calcined clay, kaolin, and the like.

In a particular embodiment of the present invention, the filler is preferably a particulate filler. Examples of such particulate filler include carbon black, talc, glass balls, calcium silicate, calcium metasilicate, kaolin, chalk, powdered quartz, alumina, boron nitride, mica, aluminium silicate, calcium carbonate, clay and the like.

In another particular embodiment of the present invention, the filler is preferably a fibrous filler.

The fibrous filler may have a circular or a non-circular cross section having a major axis lying perpendicular to a longitudinal direction of the reinforcing agent and corresponding to the longest linear distance in the cross section. The non-circular cross section has a minor axis corresponding to the longest linear distance in the cross section in a direction perpendicular to the major axis. The ratio of the length of the major axis to that of the minor axis is preferably between about 1.5:1 and about 6:1. The ratio is more preferably between about 2:1 and 5:1 and yet more preferably between about 3:1 to about 4:1.

The fibrous reinforcing agent may be glass, carbon fibers, ceramic fibers or other materials. Glass fibers are preferred. The fibrous reinforcing agent may be in the form of long glass fibers, chopped strands, milled short glass fibers, or other suitable forms known to those skilled in the art. Particularly preferred according to the invention are glass fibers having a fiber diameter between 7 and 18 μm , preferably between 9 and 15 μm .

In a further particular embodiment of the present invention, the filler is preferably a mixture of particulate and fibrous filler.

In a preferred embodiment, the polymer composition (C) comprises preferably at least 20 wt. %, more preferably at least 30 wt. %, still more preferably at least 40 wt. % and most preferably at least 45 wt. % of the filler, based on the total weight of the polymer composition (C). On the other hand, the polymer composition (C) comprises preferably at most 80 wt. %, more preferably at most 70 wt. %, still more preferably at most 60 wt. % and most preferably at most 55 wt. % of the filler, based on the total weight of the polymer composition (C).

The pigment

The polymer composition (C) further comprises from 0.1 to 35 wt. % of at least one white pigment, based on the total weight of the polymer composition (C), different from the above described filler.

Among white pigments, the white pigment according to the present invention is preferably selected from titanium dioxide, barium sulfate, zinc sulfide and mixtures thereof. More preferably, the white pigment is titanium dioxide or zinc sulfide.

5 The polymer composition (C) comprises advantageously from 0.1 to 35 wt. %, preferably from 1 to 20 wt. %, more preferably from 2 to 10 wt. % and still more preferably from 3 to 8 wt. % of at least one white pigment based on the total weight of the composition.

10 In addition to the at least one white pigment, the polymer composition (C) may comprise other inorganic and organic pigments. Such pigments are well known from the skilled person and are notably chosen from : iron oxide pigments, chromium oxide green, lead chromate molybdate pigments, cadmium pigments, mixed metal oxide pigments, ultramarine blue, etc.

15 The total amount of pigments (taking into account both white pigments and other pigments) according to the present invention are preferably present in the composition (C) in an amount of at least 0.1 wt. %, more preferably of at least about 0.5 wt. %, yet more preferably of at least about 3 wt. %, or still more preferably of at least about 4 wt. %, based on the total weight of the polymer composition (C). On the other hand, the pigments according to the present
20 invention are preferably present in the polymer composition (C) in an amount of at most 35 wt. %, more preferably of at most 25 wt. %, yet more preferably of at most 15 wt. %, or still more preferably of at most 10 wt. %, and most preferably of at most 8 wt. %, based on the total weight of the composition. Excellent results were obtained when the pigments were present in the polymer
25 composition (C) in about 5 wt. %, based on the total weight of the polymer composition (C).

Optional ingredients

The polymer composition (C) may further comprise other ingredients.

30 For example, the polymer composition (C) may further comprise other polymer(s). In particular, the polymer composition (C) may further comprise other polyamides including aliphatic polyamides such as polyamide 6 ; polyamide 6,6 ; polyamide 4,6 ; polyamide 6,10 ; polyamide 6,12 ; polyamide 11 ; polyamide 12 ; polyamide 9,10 ; polyamide 9,12 ; polyamide 9,13 ; polyamide 9,14 ; polyamide 9,15 ; polyamide 6,16 ;
35 polyamide 9,36 ; polyamide 10,10 ; polyamide 10,12 ; polyamide 10,13 ; polyamide 10,14 ; polyamide 12,10 ; polyamide 12,12 ; polyamide 12,13 ;

polyamide 12,14 ; polyamide 6,14 ; polyamide 6,13 ; polyamide 6,15 ;
polyamide 6,16 ; polyamide 6,13 ; and semi-aromatic polyamides such as
poly(m-xylylene adipamide) (polyamide MXD,6), poly(dodecamethylene
terephthalamide) (polyamide 12,T), poly(nonamethylene terephthalamide)
5 (polyamide 9,T), hexamethylene adipamide/hexamethylene terephthalamide
copolyamide (polyamide 6,T/6,6), hexamethylene terephthalamide.

The polymer composition (C) may optionally further comprise an impact
modifier. Preferred impact modifiers include those typically used for
polyamides, including carboxyl-substituted polyolefins, which are polyolefins
10 that have carboxylic moieties attached thereto, either on the polyolefin backbone
itself or on side chains. By "carboxylic moieties" is meant carboxylic groups
such as one or more of dicarboxylic acids, diesters, dicarboxylic monoesters,
acid anhydrides, and monocarboxylic acids and esters. Useful impact modifiers
include dicarboxyl-substituted polyolefins, which are polyolefins that have
15 dicarboxylic moieties attached thereto, either on the polyolefin backbone itself or
on side chains. By "dicarboxylic moiety" is meant dicarboxylic groups such as
one or more of dicarboxylic acids, diesters, dicarboxylic monoesters, and acid
anhydrides.

The impact modifier may preferably be based on an ethylene/.alpha.-olefin
20 polyolefin. Diene monomers such as 1,4-butadiene ; 1,4-hexadiene ; or
dicyclopentadiene may optionally be used in the preparation of the polyolefin.
Preferred polyolefins include ethylene-propylene-diene (EPDM) polymers made
from 1,4-hexadiene and/or dicyclopentadiene and styrene-ethylene-butadiene-
styrene (SEBS) polymers. As will be understood by those skilled in the art, the
25 impact modifier may or may not have one or more carboxyl moieties attached
thereto.

The carboxyl moiety may be introduced during the preparation of the
polyolefin by copolymerizing with an unsaturated carboxyl-containing monomer.
Preferred is a copolymer of ethylene and maleic anhydride monoethyl ester. The
30 carboxyl moiety may also be introduced by grafting the polyolefin with an
unsaturated compound containing a carboxyl moiety, such as an acid, ester,
diacid, diester, acid ester, or anhydride. A preferred grafting agent is maleic
anhydride. A preferred impact modifier is an EPDM polymer grafted with
maleic anhydride, such as Royaltuf 498, which is commercially available from
35 Chemtura. Blends of polyolefins, such as polyethylene, polypropylene, and

EPDM polymers with polyolefins that have been grafted with an unsaturated compound containing a carboxyl moiety may be used as an impact modifier.

Impact modifier is present in the composition in 0 to about 20 weight percent, or preferably in about 3 to about 20 weight percent, or more preferably in about 5 to about 15 weight percent, based on the total weight of the composition.

The polymer composition (C) may further optionally comprise additional additives such as ultraviolet light stabilizers, heat stabilizers, antioxidants, processing aids, lubricants, flame retardants, and/or conductivity additive such as carbon black and carbon nanofibrils.

In a preferred embodiment, the polymer composition (C) comprises:

- preferably at least 30 wt. % and more preferably at least 40 wt. % of the at least one semi-aromatic polyamide comprising recurring units resulting from the condensation of terephthalic acid and at least one aliphatic diamine comprising more than 8 carbon atoms;
- preferably at least 20 wt. %, more preferably at least 30 wt. %, of the at least one filler;
- from 0.1 to 35 wt. % and preferably from 2 to 10 wt. % of at least one white pigment, based on the total weight of the polymer composition (C).

A further embodiment of the present invention relates to a method for conferring anti-staining properties to an article comprising using a semi-aromatic polyamide comprising recurring units resulting from the condensation of terephthalic acid and an aliphatic diamine comprising more than 8 carbon atoms for the manufacture of said article. Such article may be an injection molded article, an extruded molded article, a shaped article, a coated article or a casted article. For example, such article may be selected from the group consisting of mobile telephone housings, personal digital assistants housings, laptop computers housings, tablet computer housings, global positioning system receiver housings, portable game housings, radio housings, cameras housings or camera accessory housings.

The semi-aromatic polyamide preferably used in the manufacture of articles for its anti-staining properties may be PA 9T, PA 10T, PA 11T or mixtures thereof.

In particular, the present invention relates to a method for conferring anti-staining properties to an article comprising using a composition comprising PA 9T, PA 10T, PA 11T or mixtures thereof for the manufacture of said article. The

- 14 -

Applicant has surprisingly found out that the use of such compositions in the manufacture of articles reduce dramatically their staining when exposed to external staining agents.

Should the disclosure of any patents, patent applications, and publications
5 which are incorporated herein by reference conflict with the description of the present application to the extent that it may render a term unclear, the present description shall take precedence.

EXAMPLES

Makeup was used as the staining agent. More precisely, the makeup was
10 Maybelline Blush 10 Romantic Plum blush.

This staining agent was tested on various 0.3 cm thick molded plaques made of different materials:

PA 6,6 : Zytel[®] 101 commercialized by E. I. du Pont de Nemours and Company

PA 6T/6,6 : AMODEL[®] A-4122 L WH905 commercialized by SOLVAY
15 ADVANCED POLYMERS, L.L.C.

PA6T/6I/6,6 : AMODEL[®] A-1133 NL WH505 commercialized by SOLVAY
ADVANCED POLYMERS, L.L.C.

PA 10,10 : Commercially available from Shandong Dongchen Engineering
Plastic Co.,Ltd.

20 PA 10,12 : Commercially available from Shandong Dongchen Engineering
Plastic Co.,Ltd.

PA 9T : polymer obtained by the condensation of C9 aliphatic diamine and terephthalic acid, supplied by Kuraray.

PA 10T : Vicnyl 700 commercialized by Kingfa.

25 Glass fiber: CSG3PA-820 commercialized by Nitobo.

Colored pigments: a mixture of pigments were used for color matching.

White pigment I: zinc sulfide: Sachtolith[®] HD-L commercialized by Sachtleben
Chemie GmbH.

White pigment II: titanium dioxide: R-105 commercialized by DuPont Titanium
30 Technologies.

Talc: Steamic[®] OOS commercialized by Talc de Luzenac France.

Sebum: Synthetic sebum commercialized by Scientific Services.

Table 1: Materials tested

	CE1	CE2	CE3	CE4	CE5	E1	E2
Polyamide							
PA 6,6	50						
PA 6T/6,6		66					
PA 6T/6I/6,6			58,7				
PA 10,10				46,22			
PA 10,12					46,22		
PA 9T						46,22	
PA 10T							46,22
Filler							
Glass fiber	50	21	34,5	47,26	47,26	47,26	47,26
Pigments							
Colored pigments				0,025	0,025	0,025	0,025
White pigment I				4,755	4,755	4,755	4,755
White pigment II		12	6				
Additives							
Typical PA additives		1	0.5	0,74	0,74	0,74	0,74
Talc			0,3	1	1	1	1

STAINING TEST METHOD

The color of the plaques were measured, and in particular the lightness (L*) of the samples were determined using a CE7000 Gretag MacBeth spectrophotometer using Cool White Fluorescent (F2) illuminant and the 10° observer, as detailed above.

The following test procedure was used to determine the stain-resistance performance of examples of this invention, this test method simulates a potential real life method of staining whereby a person wearing makeup talking on their cell phone may introduce colorants to the plastic cell phone part. Synthetic face oil, sebum, was used to simulate a possible carrier or solvent for the dyes.

A mixture of staining agent is prepared by heating sebum until it is liquid, then mixing 3 parts of the heated sebum to one part of the makeup and finally heating the mixture to maintain liquidity.

The prepared staining agent mixture is applied to the surface of the molded plaques with a cotton swab. The plaques are placed in an environmental

chamber at 65°C and 90 % humidity for 24 hours. The molded plaques are then placed at room temperature before wiping their surface with isopropyl alcohol. Once cleaned, the plaques are finally inspected for staining.

5 The inspection step comprises the measurement of the lightness (L^*), as detailed above. The difference between the original L^* measured and the L^* measured after the staining treatment is calculated.

Stain Rating Scale : the stains can be categorized according to the following standards :

- 1 = no staining = $\Delta L \leq 0.5$
 10 2 = moderate staining = $0.5 < \Delta L < 5$
 3 = heavy staining = $\Delta L > 5$

In other words, a stain-rating of 1 is excellent, showing good stain resistance, whereas 3 is a poor rating, showing persistence of heavy staining. For a substrate to be considered to have adequate stain resistance, it should have a
 15 rating of 1 on the above-described Stain Rating Scale.

Table 2: Staining test results

	CE1	CE2	CE3	CE4	CE5	E1	E2
Initial L^* value	61.6	91.0	93.9	90.9	90.8	89,7	89.4
L^* value after staining treatment	58.4	90.0	92.7	84.3	84	89.7	89.0
Staining rating	2	2	2	3	3	1	1

CLAIMS

1. An article comprising a polymer composition (C) comprising :
- at least one semi-aromatic polyamide comprising recurring units resulting from the condensation of terephthalic acid and at least one aliphatic diamine comprising more than 8 carbon atoms ;
 - at least one filler ;
 - from 0.1 to 35 wt. % of at least one white pigment, based on the total weight of the polymer composition (C) ;
- wherein the color of said article has a lightness (L^*) of at least 70 in the CIE 1976 (L^* , a^* , b^*) color space when measured according to ASTM E308-08.
2. The article according to claim 1, wherein the at least one aliphatic diamine comprises less than 12 carbon atoms.
3. The article according to anyone of the preceding claims, wherein the semi-aromatic polyamide is selected from the group consisting of PA9T, PA10T, PA11T, PA12T and mixtures thereof.
4. The article according to anyone of the preceding claims, wherein the polymer composition (C) comprises at least 40 wt. % of the semi-aromatic polyamide, based on the total weight of the polymer composition (C).
5. The article according to anyone of the preceding claims, wherein the polymer composition (C) comprises at least 20 wt. % of the at least one filler, based on the total weight of the polymer composition (C).
6. The article according to anyone of the preceding claims, wherein the polymer composition (C) comprises at least 1 wt. % of the at least one white pigment, based on the total weight of the polymer composition (C).
7. The article according to anyone of the preceding claims, wherein the at least one filler is glass fiber.

- 18 -

8. The article according to anyone of the preceding claims, wherein the at least one white pigment is selected from titanium dioxide, barium sulfate and zinc sulfide and mixtures thereof.

5 9. The article according to anyone of the preceding claims having a stain-resistance rating of 1 on the Stain Rating Scale of the Stain Test Method.

10. The article according to anyone of the preceding claims being an injection molded article, an extruded molded article, a shaped article, a coated article or a casted article.

10 11. The article according to anyone of the preceding claims, wherein it is an electronic equipment housing.

15 12. The electronic equipment housing according to claim 11, wherein it is a mobile telephone housing, personal digital assistants housing, laptop computers housing, tablet computer housing, global positioning system receiver housing, portable game housing, radio housing, cameras housing or camera accessory housing.

13. Method for conferring anti-staining properties to an article comprising using a semi-aromatic polyamide comprising recurring units resulting from the condensation of terephthalic acid and an aliphatic diamine comprising more than 8 carbon atoms for the manufacture of said article.

20 14. Method according to claim 13, wherein the article is an injection molded article, an extruded molded article, a shaped article, a coated article or a casted article.

25 15. Method according to claims 13 and 14, wherein the article is selected from the group consisting of mobile telephone housings, personal digital assistants housings, laptop computers housings, tablet computer housings, global positioning system receiver housings, portable game housings, radio housings, cameras housings or camera accessory housings.