



(43) International Publication Date
28 November 2013 (28.11.2013)

(51) International Patent Classification:
G08B 13/14 (2006.01)

(21) International Application Number:
PCT/US2012/038783

(22) International Filing Date:
21 May 2012 (21.05.2012)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **EMPIRE TECHNOLOGY DEVELOPMENT LLC** [US/US];
2711 Centerville Road, Suite 400, Wilmington, Delaware
19808 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FIELD, Christopher David** [AU/AU]; 46 Quirk Road, Manly Vale, New South
Wales 2093 (AU).

(74) Agent: **HELMSSEN, Joseph T.**; Pepper Hamilton LLP,
Suite 5000, 500 Grant Street, Pittsburgh, Pennsylvania
15219-0717 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ACOUSTIC TAGS FOR E-WASTE TRACKING

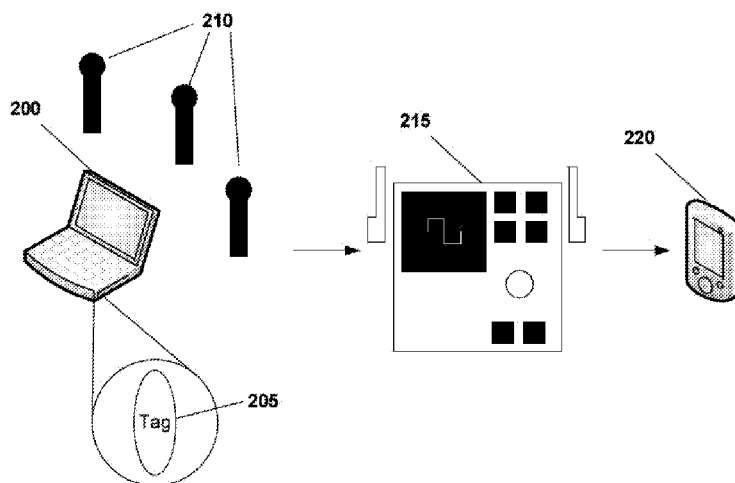


FIG. 2

(57) Abstract: Methods, systems and acoustic tags for tracking, locating and identifying an object are disclosed. An acoustic tag may include a power source and a transmitter in electrical communication with the power source. The transmitter may be configured to transmit an acoustic signal. The power source and the transmitter may be configured to be affixed to and/or embedded in an electronic component. The acoustic signal may include a unique acoustic code that is configured to provide information pertaining to one or more of the electronic component and the recyclability of the electronic component.



ACOUSTIC TAGS FOR E-WASTE TRACKING

BACKGROUND

[0001] Solid waste recycling rates are gradually increasing, but still remain relatively low. For example, while electronic waste (e-waste) constitutes only 5-8 percent of municipal solid waste, it is accumulating at a rate that is three times greater than other types of solid waste. Indeed, the US Environmental Protection Agency has estimated that only 15-20% of e-waste is recycled.

[0002] The remaining e-waste is disposed in landfills and incinerators, resulting in severe environmental consequences. For example, landfilled e-waste can leach toxins into groundwater or nearby bodies of water. Lead can leach from landfills into drinking water supplies, and mercury can leach into surrounding soil. Similarly, incinerated e-waste can release harmful contaminants into the air when e-waste is either crushed or burned. As such, a need exists to be able to tag and track solid e-waste for the purposes of identification, separation of solid components for recycling, and to ensure adequate disposal of hazardous materials.

[0003] Furthermore, ocean dumping of waste products, including e-waste, has become a significant issue globally. This is particularly so in developing countries where environmental regulations are less strict. Conventional line of sight identification code technologies, such as radio frequency identification (RFID) are limited in their ability to detect and track waste products dumped under water. As such, a further need exists to be able to tag and track solid e-waste under water for the above-listed purposes.

SUMMARY

[0004] This disclosure is not limited to the particular systems, devices and methods described, as these may vary. The terminology used in the description is for the purpose of describing the particular versions or embodiments only, and is not intended to limit the scope.

[0005] As used in this document, the singular forms “a,” “an,” and “the” include plural references unless the context clearly dictates otherwise. Unless defined otherwise, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art. Nothing in this disclosure is to be construed as an admission that the embodiments described in this disclosure are not entitled to antedate such disclosure by virtue of prior invention. As used in this document, the term “comprising” means “including, but not limited to.”

[0006] In an embodiment, an acoustic tag for tracking an electronic component may include a power source and a transmitter in electrical communication with the power source that is configured to transmit an acoustic signal. The power source and transmitter are configured to be one or more of affixed to or embedded in the electronic component. The acoustic signal may include a unique acoustic code that is configured to provide information pertaining to one or more of the electronic component and the recyclability of the electronic component.

[0007] In an embodiment, a system for tracking an object may include an acoustic tag affixed to or embedded in the object and configured to transmit an acoustic signal that includes a unique acoustic code that is configured to provide information regarding one or more of the object and the recyclability of the object, one or more signal detection devices that are each configured to detect the acoustic signal, and a digital receiver configured to decode the acoustic signal and compare the decoded signal with one or more entries in a database in order to determine a source of the acoustic signal.

[0008] In an embodiment, a system for tracking an object may include an acoustic tag affixed to or embedded in the object and configured to transmit an acoustic signal that includes a unique acoustic code that is configured to provide information regarding one or more of the object and the recyclability of the object, one or more hydrophones that are each configured to detect an acoustic signal and transmit a detected acoustic signal over a wireless data network, and a digital receiver configured to receive the acoustic signal from the wireless data network, decode the acoustic signal, and compare the decoded signal with one or more entries in a database in order to determine a source of the acoustic signal. At least one hydrophone is located in or on a buoy.

[0009] In an embodiment, a method of locating and identifying an electronic component may include receiving, by a detection device, an acoustic signal from an acoustic tag embedded within or affixed to the electronic component, decoding the acoustic signal using a digital receiver, comparing the decoded signal with one or more entries in a database each corresponding to a unique electronic component, and identifying the electronic device from which the acoustic signal is received based on the comparison.

[0010] In an embodiment, a method of locating and identifying an electronic component may include receiving, by a detection device, an acoustic signal from an acoustic tag embedded within or affixed to the electronic component, decoding the acoustic signal using a digital receiver, determining a signal code represented by the decoded acoustic signal, comparing the signal code with one or more entries in a database each corresponding to a unique electronic component, and identifying the electronic device from which the acoustic signal is received based on the comparison.

BRIEF DESCRIPTION OF THE FIGURES

[0011] FIG. 1 depicts a block diagram of an exemplary acoustic tag for tracking an electronic component according to an embodiment.

[0012] FIG. 2 depicts a block diagram of an illustrative system for tracking an object according to an embodiment.

[0013] FIG. 3 depicts a block diagram for an alternate illustrative system for tracking an object according to an embodiment.

[0014] FIG. 4 depicts a flow diagram for an illustrative method of locating and identifying an electronic component according to an embodiment.

[0015] FIG. 5 depicts a flow diagram for an alternate illustrative method of locating and identifying an electronic component according to an embodiment.

[0016] FIG. 6 depicts a block diagram of illustrative internal hardware that may be used to contain or implement program instructions according to an embodiment.

DETAILED DESCRIPTION

[0017] The following terms shall have, for the purposes of this application, the respective meanings set for the below.

[0018] The present disclosure is directed to an acoustic tag for tracking an electronic component, and methods and systems for using the same. Acoustic tags are affixed to or embedded into solid e-waste components and contain information related to the physical feature or item that it is attached to or to the recyclability of the particular e-waste component.

[0019] Acoustic tags may transmit a unique pre-programmed sound signal in a chosen frequency range at a predetermined time interval. The transmitted signal is designed to be detectable by a microphone or hydrophone (for underwater e-waste locations), matched to a signal code that allows the unique identification of the item being tagged. Each tag contains information unique to the item being tagged including, for example and without limitation, the current location, material attributes, the date of production, the place of origin and the like.

[0020] FIG. 1 depicts a block diagram of an exemplary acoustic tag for tracking an electronic component according to an embodiment. As shown in FIG. 1, the acoustic tag includes a power source **105** and a transmitter **110** in electrical communication with the power source and configured to transmit an acoustic signal. The acoustic signal may include a unique acoustic code that is configured to provide information pertaining to one or more of the electronic component and the recyclability of the electronic component.

[0021] The power source **105** and the transmitter **110** are configured to be one or more of affixed to or embedded in the electronic component. In an embodiment, the power source **105** comprises a battery. In an embodiment, the power source **105** comprises a solar cell. In an embodiment, that power source **105** comprises an inductor.

[0022] In an embodiment, the transmitter **110** comprises a transducer. In such an embodiment, the transducer may include one or more of quartz, barium titanate, lead zirconate titanate (PZT), bismuth sodium titanate, potassium sodium titanate, and combinations thereof. In an embodiment, the transmitter **110** comprises a piezoelectric polymer film. In an embodiment, the transmitter **110** comprises a digital signal processor. In an embodiment, the transmitter **110** may be configured to produce an acoustic pressure wave when a voltage is applied across the transmitter.

[0023] In an embodiment, the transmitter **110** is configured to transmit the acoustic signal at a regular time interval. In an embodiment, the transmitter **110** is configured to transmit the acoustic signal in response to the acoustic tag being activated by one or more of light, movement, an external acoustic signal and the like.

[0024] In an embodiment, the transmitter **110** is configured to transmit the acoustic signal in a frequency range. For example, the frequency range may be about 50 Hz to about 50 kHz. Specific examples of frequencies include about 50 Hz, about 100 Hz, about 500 Hz, about 1 kHz, about 10 kHz, about 20 kHz, about 30 kHz, about 40 kHz, about 50 kHz, and

ranges between any two of these values (such as about 20 kHz to about 40 kHz). Other frequency ranges may be used within the scope of the current disclosure, including, without limitation, infrasonic frequencies and ultrasonic frequencies.

[0025] In an embodiment, the transmitter **110** is configured to transmit a pulse that includes one or more waveforms. Exemplary waveforms transmitted by the transmitter **110** include, without limitation, a constant amplitude sinusoidal waveform, a frequency shifted waveform, a frequency modulated waveform, a pulse train, and the like. In an alternate embodiment, the transmitter **110** may be configured to transmit a time-continuous spectrum having one or more amplitude peaks at corresponding frequencies. These frequencies may be used, for example, to classify the object with which the transmitter **110** is associated.

[0026] In an embodiment, the information provided by the unique acoustic code may include global positioning coordinates corresponding to a location of the electronic component. In an embodiment, the information provided by the unique acoustic code may include one or more of the following: a size of the electronic device, a color of the electronic device, a temperature of the electronic device, a material composition of the electronic device, a date of manufacture of the electronic device, a place of manufacture of the electronic device, and the like. In an embodiment, the acoustic signal is configured to be modifiable based on a current state of the acoustic tag. For example, the acoustic tag may change if the transmitter **110** transmits a tag including GPS coordinates for the electronic component, and the electronic component is in transit.

[0027] FIG. 2 depicts a block diagram of an illustrative system for tracking an object according to an embodiment. As shown in FIG. 2, the system may include an acoustic tag **205** affixed to or embedded in the object **200**, one or more signal detection devices **210**, and a digital receiver **215**. The acoustic tag **205** may be configured to transmit an acoustic signal

that includes a unique acoustic code configured to provide information regarding one or more of the object and the recyclability of the object.

[0028] The acoustic tag **205** may include one or more of the components or materials described above in reference to the acoustic tag of FIG. 1. In addition, the acoustic tag **205** may include a transmitter that operates in accordance with the teachings of the transmitter **110** of FIG. 1, including the time intervals for transmission, the frequency ranges, the waveforms, and the other features described above in reference to FIG. 1.

[0029] The one or more signal detection devices **210** may each be configured to detect an acoustic signal produced by the acoustic tag **205**. In an embodiment, at least one signal detection device **210** may be a microphone. In an embodiment, at least one signal detection device **210** may be a hydrophone. Additional or alternate signal detection devices may also be used within the scope of this disclosure.

[0030] The digital receiver **215** may be configured to decode the acoustic signal and compare the decoded signal with one or more entries in a database in order to determine a source of the acoustic signal. The database may be incorporated into the digital receiver **215** or may be accessible by the digital receiver via, for example and without limitation, a wireless network, such as a Wi-Fi network or a cellular telephone communication network, or a wired network including one or more of a local area network, a wide area network, an intranet, the Internet, or the like. In an embodiment, the digital receiver **215** may be further configured to transmit information pertaining to the source of the acoustic signal to an electronic device **220**, such as a mobile electronic device, a digital display, a computer system, a cloud-based computing system or the like. The information pertaining to the source of the acoustic signal may be displayed on the electronic device **220** or otherwise communicated to a user of the electronic device.

[0031] In an embodiment, the object may be an electronic component, such as a computer system, a mobile device, a television, a gaming system or any other electronic device. In an embodiment, the acoustic tag **205** may interface with one or more speakers incorporated into the object in order to produce the acoustic signal.

[0032] FIG. 3 depicts a block diagram for an alternate illustrative system for tracking an object according to an embodiment. As shown in FIG. 3, the system may include an acoustic tag **305** affixed to or embedded in the object, one or more hydrophones **310**, and a digital receiver **315**, a database **320**, and an electronic device **325**. The acoustic tag **305** may be configured to transmit an acoustic signal. The acoustic signal may include a unique acoustic code configured to provide information regarding one or more of the object and the recyclability of the object.

[0033] The acoustic tag **305** may include one or more of the components or materials described above in reference to the acoustic tag of FIG. 1. In addition, the acoustic tag **305** may include a transmitter that operates in accordance with the teachings of the transmitter **110** of FIG. 1, including the time intervals for transmission, the frequency ranges, the waveforms, and the other features described above in reference to FIG. 1.

[0034] The one or more hydrophones **310** may each be configured to detect an acoustic signal produced by the acoustic tag **305**. The one or more hydrophones **310** may each transmit a detected acoustic signal over a wireless data network, such as a cellular phone network or other wireless network. At least one hydrophone **310** may be located in, on or otherwise attached to a buoy or other floatation device.

[0035] The digital receiver **315** may be configured to receive the acoustic signal from the wireless data network, decode the acoustic signal and compare the decoded signal with one or more entries in a database, such as **320**, in order to determine a source of the acoustic signal. The database **320** may be incorporated into the digital receiver **315** or may be

accessible by the digital receiver via, for example and without limitation, a wireless network, such as a Wi-Fi network or a cellular telephone communication network, or a wired network including one or more of a local area network, a wide area network, an intranet, the Internet, or the like. In an embodiment, the digital receiver **315** may be further configured to transmit information pertaining to the source of the acoustic signal to an electronic device, such as **325**. The electronic device may include, without limitation, a mobile electronic device, a digital display, a computer system, a cloud-based computing system or the like. The information pertaining to the source of the acoustic signal may be displayed on the electronic device **325** or otherwise communicated to a user of the electronic device.

[0036] In an embodiment, the object may be an electronic component, such as a computer system, a mobile device, a television, a gaming system or any other electronic device. In an embodiment, the acoustic tag **305** may interface with one or more speakers incorporated into the object in order to produce the acoustic signal.

[0037] FIG. 4 depicts a flow diagram for an illustrative method of locating and identifying an electronic component according to an embodiment. As shown in FIG. 4, a detection device may receive **405** an acoustic signal from an acoustic tag embedded within or affixed to an electronic component. In an embodiment, the acoustic signal may be a signal in a frequency range, such as about 50 Hz to about 50 kHz. Specific examples of frequencies include about 50 Hz, about 100 Hz, about 500 Hz, about 1 kHz, about 10 kHz, about 20 kHz, about 30 kHz, about 40 kHz, about 50 kHz, and ranges between any two of these values (such as about 20 kHz to about 40 kHz). In an embodiment, the acoustic signal may be a pulse including one or more waveforms. The one or more waveforms may include one or more of the following: a constant amplitude sinusoidal waveform, a frequency shifted waveform, a frequency modulated waveform and a pulse train. In an embodiment, the acoustic signal may be a time-continuous spectrum having one or more amplitude peaks at corresponding

frequencies. In an embodiment, a hydrophone may be used to receive **405** the acoustic signal. Alternately, a microphone may be used to receive **405** the acoustic signal.

[0038] In an embodiment, the acoustic signal may be transmitted from the detection device to the digital receiver. Such an embodiment may be required when the detection device and the digital receiver are not part of the same device. In an alternate embodiment, a single device may incorporate both the detection device and the digital receiver.

[0039] The acoustic signal may be decoded **410** using a digital receiver. The digital receiver may decode **410** the acoustic signal by determining one or more characteristics of the acoustic signal. For example, the digital receiver may determine frequencies having pulses of high amplitude or other similar details regarding the acoustic signal. Such details of the acoustic signal may be used, when decoded, to identify particular information regarding the electronic component from which the acoustic signal originates, including static information, such as information pertaining to the construction of the component, and dynamic features, such as coordinates as determined by a positioning system.

[0040] The decoded signal may be compared **415** with one or more entries in a database. Each entry may correspond to a unique electronic component. For example, the decoded signal may identify a particular spectrum of signals having specific magnitudes at particular frequencies. The database may include an entry that has a similar spectrum as being associated with a particular electronic component. As such, when the decoded signal is compared with the database entry and a match is found, the acoustic signal may be identified **420** as being from the electronic component associated with the database entry.

[0041] In an embodiment, an indication of the identified electronic component may be displayed. For example, the indication of the identified electronic component may be displayed on an electronic device, such as a mobile electronic device or a digital display.

[0042] In an embodiment, the indication of the identified electronic component may be stored on a computer system. In a more particular embodiment, the indication of the identified electronic component may be stored on a cloud-based computing system.

[0043] FIG. 5 depicts a flow diagram for an alternate illustrative method of locating and identifying an electronic component according to an embodiment. As shown in FIG. 5, a detection device may receive **505** an acoustic signal from an acoustic tag embedded within or affixed to the electronic component. In an embodiment, the acoustic signal may be a signal in a frequency range, such as about 50 Hz to about 50 kHz. Specific examples of frequencies include about 50 Hz, about 100 Hz, about 500 Hz, about 1 kHz, about 10 kHz, about 20 kHz, about 30 kHz, about 40 kHz, about 50 kHz, and ranges between any two of these values (such as about 20 kHz to about 40 kHz). In an embodiment, the acoustic signal may be a pulse including one or more waveforms. The one or more waveforms may include one or more of the following: a constant amplitude sinusoidal waveform, a frequency shifted waveform, a frequency modulated waveform and a pulse train. In an embodiment, the acoustic signal may be a time-continuous spectrum having one or more amplitude peaks at corresponding frequencies. In an embodiment, a hydrophone may be used to receive **505** the acoustic signal. Alternately, a microphone may be used to receive **505** the acoustic signal.

[0044] In an embodiment, the acoustic signal may be transmitted from the detection device to the digital receiver. Such an embodiment may be required when the detection device and the digital receiver are not part of the same device. In an alternate embodiment, a single device may incorporate both the detection device and the digital receiver.

[0045] The acoustic signal may be decoded **510** using a digital receiver. The digital receiver may decode **510** the acoustic signal by determining one or more characteristics of the acoustic signal. For example, the digital receiver may determine frequencies having pulses of high amplitude or other similar details regarding the acoustic signal. Such details of

the acoustic signal may be used, when decoded, to identify particular information regarding the electronic component from which the acoustic signal originates, including static information, such as information pertaining to the construction of the component, and dynamic features, such as coordinates as determined by a positioning system.

[0046] A signal code may be determined **515** from the decoded acoustic signal. In particular, the decoded acoustic signal may represent a particular signal code based on its characteristics. For example, the signal code may be determined **515** by identifying peaks for the acoustic signal that exist at particular frequencies. In an embodiment, the signal code may represent an alphanumeric code. Alternately, the signal code may represent a numeric code. In an embodiment, the signal code may be determined **515** according to an aural code standard. For example, the aural code standard may represent information aurally in a manner similar to the way that a Universal Product Code represents information visually. In particular, each frequency peak may represent a value for a particular digit of the signal code, and the particular position to which the value is entered is based on a time at which the frequency peak occurs. The acoustic signal may include a number of frequency peaks equal to the number of placeholders in the aural code. Alternate methods of representing a signal code may also be used within the scope of this disclosure.

[0047] The signal code may be compared **520** with one or more entries in a database. Each entry may correspond to a unique electronic component. For example, the database may include an entry that matches the signal code received from a particular electronic component. As such, when the signal code is compared with the database entry and a match is found, the acoustic signal may be identified **525** as being from the electronic component associated with the database entry.

[0048] In an embodiment, an indication of the identified electronic component may be displayed. For example, the indication of the identified electronic component may be displayed on an electronic device, such as a mobile electronic device or a digital display.

[0049] In an embodiment, the indication of the identified electronic component may be stored on a computer system. In a more particular embodiment, the indication of the identified electronic component may be stored on a cloud-based computing system.

[0050] FIG. 6 depicts a block diagram of exemplary internal hardware that may be used to contain or implement program instructions, such as the process steps discussed above in reference to FIGS. 4 and 5, according to embodiments. A bus **600** serves as the main information highway interconnecting the other illustrated components of the hardware. CPU **605** is the central processing unit of the system, performing calculations and logic operations required to execute a program. CPU **605**, alone or in conjunction with one or more of the other elements disclosed in FIG. 6, is an exemplary processing device, computing device or processor as such terms are used within this disclosure. Read only memory (ROM) **610** and random access memory (RAM) **615** constitute exemplary memory devices (i.e., processor-readable non-transitory storage media).

[0051] A controller **620** interfaces with one or more optional memory devices **625** to the system bus **600**. These memory devices **625** may include, for example, an external or internal DVD drive, a CD ROM drive, a hard drive, flash memory, a USB drive or the like. As indicated previously, these various drives and controllers are optional devices.

[0052] Program instructions, software or interactive modules for providing the interface and performing any querying or analysis associated with one or more data sets may be stored in the ROM **610** and/or the RAM **615**. Optionally, the program instructions may be stored on a tangible computer readable medium such as a compact disk, a digital disk, flash

memory, a memory card, a USB drive, an optical disc storage medium, such as a Blu-ray™ disc, and/or other non-transitory storage media.

[0053] An optional display interface **630** may permit information from the bus **600** to be displayed on the display **635** in audio, visual, graphic or alphanumeric format. Communication with external devices, such as a print device, may occur using various communication ports **640**. An exemplary communication port **640** may be attached to a communications network, such as the Internet or an intranet.

[0054] The hardware may also include an interface **645** which allows for receipt of data from input devices such as a keyboard **650** or other input device **655** such as a mouse, a joystick, a touch screen, a remote control, a pointing device, a video input device and/or an audio input device.

EXAMPLES

EXAMPLE 1: Acoustic Tag for Computer System

[0055] When manufactured, a computer will have an acoustic tag placed within the computer. The acoustic tag is powered by a battery that stores power generated by the motherboard during the period of time in which the computer is being used. Once the computer is discarded, the battery stores sufficient power to enable the acoustic tag to generate an intermittent acoustic signal over an extended period of time. The acoustic signal is initiated in response to the computer being disconnected from a power source for a period of time. The acoustic signal is transmitted on an intermittent basis thereafter until the power stored in the battery is consumed. The acoustic signal identifies the computer as well as positioning information. The acoustic signal is transmitted through speakers that are internal to the computer.

[0056] A receiving device is used to receive the acoustic signal and determine the source of the acoustic signal based on the information transmitted by the acoustic tag. The

positioning information assists in the recovery of the computer from its discarded location. The internal components of the computer are then disposed of or recycled in accordance with pertinent environmental standards.

EXAMPLE 2: Hydrophonic Acoustic Tag for Mobile Electronic Device

[0057] A smart phone is manufactured with an acoustic tag that is capable of transmitting a signal when underwater. The acoustic tag is powered by a battery that stores power received from the mobile device during normal operation. The battery stores sufficient power to enable the acoustic tag to generate an intermittent acoustic signal over an extended period of time. The acoustic signal is initiated in response to the mobile phone being disconnected from a cellular network. The acoustic signal is transmitted on an intermittent basis thereafter until the power stored in the battery is consumed. The acoustic signal identifies the mobile electronic device based on an aural code standard. In other words, the acoustic signal includes manufacturer information and device type information that uniquely identifies the type of device transmitting the acoustic signal. In addition, the acoustic signal transmits positioning coordinates to identify the location of the mobile device. The acoustic signal is transmitted through speakers that are internal to the mobile device.

[0058] A receiving device is used to receive the acoustic signal and determine the source of the acoustic signal based on the information transmitted by the acoustic tag. The positioning information assists in the recovery of the mobile device from its discarded location. If the mobile device is underwater, the presence, location and type of device may be determined using a hydrophone. The mobile device may then be disposed of or recycled in accordance with pertinent environmental standards.

EXAMPLE 3: Acoustic Tag Detection System

[0059] A plurality of microphones are stationed at various locations around a landfill. Each microphone is in operable communication with a wireless transmitter used to transmit information to a centralized digital receiver. When a microphone detects an acoustic signal, the microphone transmits the acoustic signal to the digital receiver for processing. The digital receiver processes the information received from a transmission and compares the processed information with entries in a database to identify a type of electronic device detected by the microphone. In some cases, the microphone may provide location information based on its own identifying information. Alternately, the acoustic signal may include positioning information. Information regarding the location and type of electronic component that was detected are then displayed to a user via a display.

EXAMPLE 4: Mobile Acoustic Tag Detection System

[0060] A microphone is attached to a vehicle. The microphone is in operable communication with a digital receiver that is also located on the vehicle. When the microphone detects an acoustic signal, the microphone transmits the information to the digital receiver for processing. The digital receiver processes the information, compares the processed information with entries in a database, and determines a location from which the acoustic signal originated. Information regarding the location and type of electronic component that was detected are then displayed to a user via a display.

EXAMPLE 5: Hydrophonic Acoustic Tag Detection System

[0061] Hydrophones are attached to buoys floating on top of an aquatic environment. Each hydrophone includes a satellite transmitter for transmitting information that it receives to a centralized digital receiver. The hydrophone further includes a solar cell and a battery for receiving and storing the power that it requires to make such transmissions. When a

hydrophone detects an acoustic signal, the hydrophone transmits the acoustic signal via the satellite transmitter to the digital receiver for processing. The digital receiver processes the information received from a transmission and compares the processed information with entries in a database to identify a type of electronic device detected by the hydrophone. In some cases, the hydrophone may provide location information based on its own identifying information. Alternately, the received acoustic signal may include positioning information. Information regarding the location and type of electronic component that was detected are then displayed to a user via a display.

[0062] In the above detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description, drawings, and claims are not meant to be limiting. Other embodiments may be used, and other changes may be made, without departing from the spirit or scope of the subject matter presented herein. It will be readily understood that the aspects of the present disclosure, as generally described herein, and illustrated in the Figures, can be arranged, substituted, combined, separated, and designed in a wide variety of different configurations, all of which are explicitly contemplated herein.

[0063] The present disclosure is not to be limited in terms of the particular embodiments described in this application, which are intended as illustrations of various aspects. Many modifications and variations can be made without departing from its spirit and scope, as will be apparent to those skilled in the art. Functionally equivalent methods and apparatuses within the scope of the disclosure, in addition to those enumerated herein, will be apparent to those skilled in the art from the foregoing descriptions. Such modifications and variations are intended to fall within the scope of the appended claims. The present disclosure is to be limited only by the terms of the appended claims, along with the full scope

of equivalents to which such claims are entitled. It is to be understood that this disclosure is not limited to particular methods, reagents, compounds, compositions or biological systems, which can, of course, vary. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to be limiting.

[0064] With respect to the use of substantially any plural and/or singular terms herein, those having skill in the art can translate from the plural to the singular and/or from the singular to the plural as is appropriate to the context and/or application. The various singular/plural permutations may be expressly set forth herein for sake of clarity.

[0065] It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims (*e.g.*, bodies of the appended claims) are generally intended as “open” terms (*e.g.*, the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted as “having at least,” the term “includes” should be interpreted as “includes but is not limited to,” etc.). While various compositions, methods, and devices are described in terms of “comprising” various components or steps (interpreted as meaning “including, but not limited to”), the compositions, methods, and devices can also “consist essentially of” or “consist of” the various components and steps, and such terminology should be interpreted as defining essentially closed-member groups. It will be further understood by those within the art that if a specific number of an introduced claim recitation is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the following appended claims may contain usage of the introductory phrases “at least one” and “one or more” to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim recitation to embodiments containing only one such recitation, even

when the same claim includes the introductory phrases "one or more" or "at least one" and indefinite articles such as "a" or "an" (*e.g.*, "a" and/or "an" should be interpreted to mean "at least one" or "one or more"); the same holds true for the use of definite articles used to introduce claim recitations. In addition, even if a specific number of an introduced claim recitation is explicitly recited, those skilled in the art will recognize that such recitation should be interpreted to mean at least the recited number (*e.g.*, the bare recitation of "two recitations," without other modifiers, means at least two recitations, or two or more recitations). Furthermore, in those instances where a convention analogous to "at least one of A, B, and C, etc." is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (*e.g.*, "a system having at least one of A, B, and C" would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). In those instances where a convention analogous to "at least one of A, B, or C, etc." is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (*e.g.*, "a system having at least one of A, B, or C" would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). It will be further understood by those within the art that virtually any disjunctive word and/or phrase presenting two or more alternative terms, whether in the description, claims, or drawings, should be understood to contemplate the possibilities of including one of the terms, either of the terms, or both terms. For example, the phrase "A or B" will be understood to include the possibilities of "A" or "B" or "A and B."

[0066] In addition, where features or aspects of the disclosure are described in terms of Markush groups, those skilled in the art will recognize that the disclosure is also thereby described in terms of any individual member or subgroup of members of the Markush group.

[0067] As will be understood by one skilled in the art, for any and all purposes, such as in terms of providing a written description, all ranges disclosed herein also encompass any and all possible subranges and combinations of subranges thereof. Any listed range can be easily recognized as sufficiently describing and enabling the same range being broken down into at least equal halves, thirds, quarters, fifths, tenths, etc. As a non-limiting example, each range discussed herein can be readily broken down into a lower third, middle third and upper third, etc. As will also be understood by one skilled in the art all language such as “up to,” “at least,” and the like include the number recited and refer to ranges which can be subsequently broken down into subranges as discussed above. Finally, as will be understood by one skilled in the art, a range includes each individual member. Thus, for example, a group having 1-3 cells refers to groups having 1, 2, or 3 cells. Similarly, a group having 1-5 cells refers to groups having 1, 2, 3, 4, or 5 cells, and so forth.

[0068] Various of the above-disclosed and other features and functions, or alternatives thereof, may be combined into many other different systems or applications. Various presently unforeseen or unanticipated alternatives, modifications, variations or improvements therein may be subsequently made by those skilled in the art, each of which is also intended to be encompassed by the disclosed embodiments.

CLAIMS*What Is Claimed Is:*

1. An acoustic tag for tracking an electronic component, the tag comprising:

a power source; and

a transmitter in electrical communication with the power source and configured to transmit an acoustic signal,

wherein the power source and transmitter are configured to be one or more of affixed to or embedded in the electronic component,

wherein the acoustic signal comprises a unique acoustic code that is configured to provide information pertaining to one or more of the electronic component and the recyclability of the electronic component.
2. The acoustic tag of claim 1, wherein the power source comprises a battery.
3. The acoustic tag of claim 1, wherein the power source comprises a solar cell.
4. The acoustic tag of claim 1, wherein the power source comprises an inductor.
5. The acoustic tag of claim 1, wherein the transmitter comprises a transducer.
6. The acoustic tag of claim 5, wherein the transducer comprises quartz, barium titanate, lead zirconate titanate (PZT), bismuth sodium titanate, potassium sodium titanate, and combinations thereof.
7. The acoustic tag of claim 1, wherein the transmitter comprises a piezoelectric polymer film.
8. The acoustic tag of claim 1, wherein the transmitter is configured to produce an acoustic pressure wave when a voltage is applied across the transmitter.

9. The acoustic tag of claim 1, wherein the transmitter comprises a digital signal processor.

10. The acoustic tag of claim 1, wherein the transmitter is configured to transmit the acoustic signal at a regular time interval.

11. The acoustic tag of claim 1, wherein the transmitter is configured to transmit the acoustic signal in response to the acoustic tag being activated by one or more of light, movement, and an external acoustic signal.

12. The acoustic tag of claim 1, wherein the transmitter is configured to transmit the acoustic signal in a frequency range.

13. The acoustic tag of claim 1, wherein the transmitter is configured to transmit the acoustic signal in a frequency range of about 50 Hz to about 50 kHz.

14. The acoustic tag of claim 1, wherein the transmitter is configured to transmit a pulse comprising one or more waveforms.

15. The acoustic tag of claim 14, wherein the one or more waveforms comprise one or more of the following: a constant amplitude sinusoidal waveform, a frequency shifted waveform, a frequency modulated waveform and a pulse train.

16. The acoustic tag of claim 1, wherein the transmitter is configured to transmit a time-continuous spectrum having one or more amplitude peaks at corresponding frequencies.

17. The acoustic tag of claim 1, wherein the information comprises global positioning coordinates corresponding to a location of the electronic component.

18. The acoustic tag of claim 1, wherein the information comprises one or more of the following: a size of the electronic device, a color of the electronic device, a temperature of the electronic device, a material composition of the electronic device, a date of manufacture of the electronic device, and a place of manufacture of the electronic device.

19. The acoustic tag of claim 1, wherein the acoustic signal is configured to be modifiable based on a current state of the acoustic tag.

20. A system for tracking an object, the system comprising:

an acoustic tag affixed to or embedded in the object, wherein the acoustic tag is configured to transmit an acoustic signal, wherein the acoustic signal comprises a unique acoustic code that is configured to provide information regarding one or more of the object and the recyclability of the object;

one or more signal detection devices, wherein each signal detection device is configured to detect the acoustic signal; and

a digital receiver configured to decode the acoustic signal and compare the decoded signal with one or more entries in a database in order to determine a source of the acoustic signal.

21. The system of claim 20, wherein the acoustic tag comprises a battery.

22. The system of claim 20, wherein the acoustic tag comprises a solar cell.

23. The system of claim 20, wherein the acoustic tag comprises an inductor.

24. The system of claim 20, wherein the acoustic tag comprises a transducer.

25. The system of claim 24, wherein the transducer comprises quartz, barium titanate, lead zirconate titanate (PZT), bismuth sodium titanate, potassium sodium titanate, and combinations thereof.

26. The system of claim 20, wherein the acoustic tag comprises a piezoelectric polymer film.

27. The system of claim 20, wherein the acoustic tag is configured to produce an acoustic pressure wave when a voltage is applied across the acoustic tag.

28. The system of claim 20, wherein the acoustic tag comprises a digital signal processor.

29. The system of claim 20, wherein the acoustic tag is configured to transmit the acoustic signal at a regular time interval.

30. The system of claim 20, wherein the acoustic tag is configured to transmit the acoustic signal in response to the acoustic tag being activated by one or more of light, movement, and an acoustic signal.

31. The system of claim 20, wherein the acoustic tag is configured to transmit the acoustic signal in a frequency range.

32. The system of claim 20, wherein the acoustic tag is configured to transmit the acoustic signal in a frequency range of about 50 Hz to about 50 kHz.

33. The system of claim 20, wherein the acoustic tag is configured to transmit a pulse comprising one or more waveforms.

34. The system of claim 33, wherein the one or more waveforms comprise one or more of the following: a constant amplitude sinusoidal waveform, a frequency shifted waveform, a frequency modulated waveform and a pulse train.

35. The system of claim 20, wherein the acoustic tag is configured to transmit a time-continuous spectrum having one or more amplitude peaks at corresponding frequencies.

36. The system of claim 20, wherein the one or more signal detection devices comprise a microphone.

37. The system of claim 20, wherein the one or more signal detection devices comprise a hydrophone.

38. The system of claim 20, wherein the object comprises an electronic component.

39. The system of claim 20, wherein the digital receiver is further configured to transmit information pertaining to the source of the acoustic signal to an electronic device.

40. The system of claim 39, wherein the electronic device comprises a mobile electronic device.

41. The system of claim 39, wherein the electronic device comprises a digital display.

42. The system of claim 39, wherein the electronic device comprises a computer system.

43. The system of claim 39, wherein the electronic device comprises a cloud-based computing system.

44. A system for tracking an object, the system comprising:

an acoustic tag affixed to or embedded in the object, wherein the acoustic tag is configured to transmit an acoustic signal, wherein the acoustic signal comprises a unique acoustic code that is configured to provide information regarding one or more of the object and the recyclability of the object;

one or more hydrophones, wherein each hydrophone is configured to detect an acoustic signal and transmit a detected acoustic signal over a wireless data network, wherein at least one hydrophone is located in or on a floatation device; and

a digital receiver configured to receive the acoustic signal from the wireless data network, decode the acoustic signal, and compare the decoded signal with one or more entries in a database in order to determine a source of the acoustic signal.

45. The system of claim 44, wherein the acoustic tag comprises a battery.

46. The system of claim 44, wherein the acoustic tag comprises a solar cell.

47. The system of claim 44, wherein the acoustic tag comprises an inductor.

48. The system of claim 44, wherein the acoustic tag comprises a transducer.

49. The system of claim 48, wherein the transducer comprises quartz, barium titanate, lead zirconate titanate (PZT), bismuth sodium titanate, potassium sodium titanate, and combinations thereof.

50. The system of claim 44, wherein the acoustic tag comprises a piezoelectric polymer film.

51. The system of claim 44, wherein the acoustic tag is configured to produce an acoustic pressure wave when a voltage is applied across the acoustic tag.

52. The system of claim 44, wherein the acoustic tag comprises a digital signal processor.

53. The system of claim 44, wherein the acoustic tag is configured to transmit the acoustic signal at a regular time interval.

54. The system of claim 44, wherein the acoustic tag is configured to transmit the acoustic signal in response to the acoustic tag being activated by one or more of light, movement, and an acoustic signal.

55. The system of claim 44, wherein the acoustic tag is configured to transmit the acoustic signal in a frequency range.

56. The system of claim 44, wherein the acoustic tag is configured to transmit the acoustic signal in a frequency range of about 50 Hz to about 50 kHz.

57. The system of claim 44, wherein the acoustic tag is configured to transmit a pulse comprising one or more waveforms.

58. The system of claim 57, wherein the one or more waveforms comprise one or more of the following: a constant amplitude sinusoidal waveform, a frequency shifted waveform, a frequency modulated waveform and a pulse train.

59. The system of claim 44, wherein the acoustic tag is configured to transmit a time-continuous spectrum having one or more amplitude peaks at corresponding frequencies.

60. The system of claim 44, wherein the object comprises an electronic component.

61. The system of claim 44, wherein the digital receiver is further configured to transmit information pertaining to the source of the acoustic signal to an electronic device.

62. The system of claim 61, wherein the electronic device comprises a mobile electronic device.

63. The system of claim 61, wherein the electronic device comprises a digital display.

64. The system of claim 61, wherein the electronic device comprises a computer system.

65. The system of claim 61, wherein the electronic device comprises a cloud-based computing system.

66. A method of locating and identifying an electronic component, the method comprising:

receiving, by a detection device, an acoustic signal from an acoustic tag embedded within or affixed to the electronic component;

decoding the acoustic signal using a digital receiver;

comparing the decoded signal with one or more entries in a database, wherein each entry corresponds to a unique electronic component; and

identifying the electronic device from which the acoustic signal is received based on the comparison.

67. The method of claim 66, wherein receiving an acoustic signal comprises receiving the acoustic signal in a frequency range.

68. The method of claim 66, wherein receiving an acoustic signal comprises receiving the acoustic signal in a frequency range of about 50 Hz to about 50 kHz.

69. The method of claim 66, wherein receiving an acoustic signal comprises receiving a pulse comprising one or more waveforms.

70. The method of claim 69, wherein the one or more waveforms comprise one or more of the following: a constant amplitude sinusoidal waveform, a frequency shifted waveform, a frequency modulated waveform and a pulse train.

71. The method of claim 66, wherein receiving an acoustic signal comprises receiving a time-continuous spectrum having one or more amplitude peaks at corresponding frequencies.

72. The method of claim 66, wherein the detection device comprises a hydrophone.

73. The method of claim 66, wherein the detection device comprises a microphone.

74. The method of claim 66, further comprising:

transmitting the acoustic signal from the detection device to the digital receiver.

75. The method of claim 66, further comprising:

displaying an indication of the identified electronic component on an electronic device.

76. The method of claim 66, further comprising:

displaying an indication of the identified electronic component on a mobile electronic device.

77. The method of claim 66, further comprising:

displaying an indication of the identified electronic component on a digital display.

78. The method of claim 66, further comprising:

storing an indication of the identified electronic component on a computer system.

79. The method of claim 66, further comprising:

storing an indication of the identified electronic component to a cloud-based computing system.

80. A method of locating and identifying an electronic component, the method comprising:

receiving, by a detection device, an acoustic signal from an acoustic tag embedded within or affixed to the electronic component;

decoding the acoustic signal using a digital receiver;

determining a signal code represented by the decoded acoustic signal;

comparing the signal code with one or more entries in a database, wherein each entry corresponds to a unique electronic component; and

identifying the electronic device from which the acoustic signal is received based on the comparison.

81. The method of claim 80, wherein receiving an acoustic signal comprises receiving the acoustic signal in a frequency range.

82. The method of claim 80, wherein receiving an acoustic signal comprises receiving the acoustic signal in a frequency range of about 50 Hz to about 50 kHz.

83. The method of claim 80, wherein receiving an acoustic signal comprises receiving a pulse comprising one or more waveforms.

84. The method of claim 83, wherein the one or more waveforms comprise one or more of the following: a constant amplitude sinusoidal waveform, a frequency shifted waveform, a frequency modulated waveform and a pulse train.

85. The method of claim 80, wherein receiving an acoustic signal comprises receiving a time-continuous spectrum having one or more amplitude peaks at corresponding frequencies.

86. The method of claim 80, wherein the detection device comprises a hydrophone.

87. The method of claim 80, wherein the detection device comprises a microphone.

88. The method of claim 80, wherein the signal code comprises an alphanumeric code.

89. The method of claim 80, wherein the signal code comprises a numeric code.

90. The method of claim 80, wherein the signal code is determined according to an aural code standard.

91. The method of claim 80, further comprising:

transmitting the acoustic signal from the detection device to the digital receiver.

92. The method of claim 80, further comprising:

displaying an indication of the identified electronic component on an electronic device.

93. The method of claim 80, further comprising:

displaying an indication of the identified electronic component on a mobile electronic device.

94. The method of claim 80, further comprising:

displaying an indication of the identified electronic component on a digital display.

95. The method of claim 80, further comprising:

storing an indication of the identified electronic component on a computer system.

96. The method of claim 80, further comprising:

storing an indication of the identified electronic component to a cloud-based computing system.

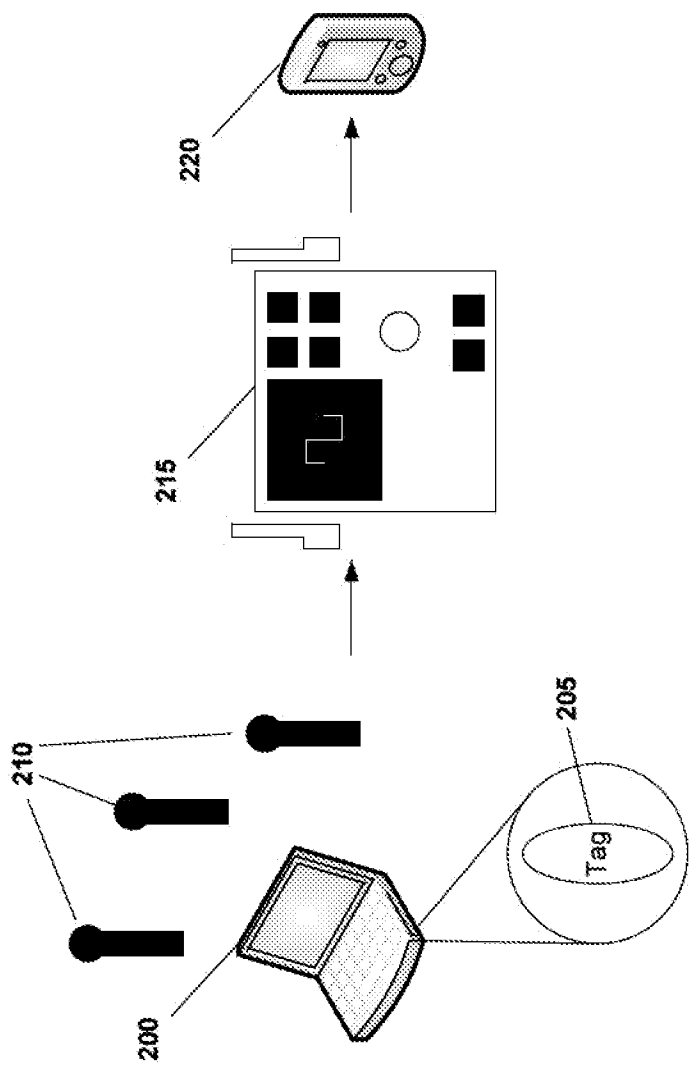


FIG. 2


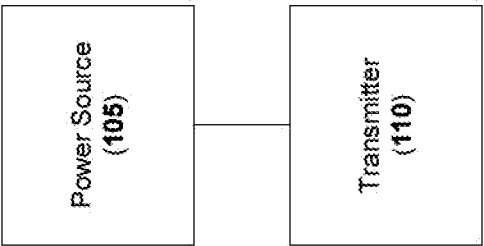


FIG. 1

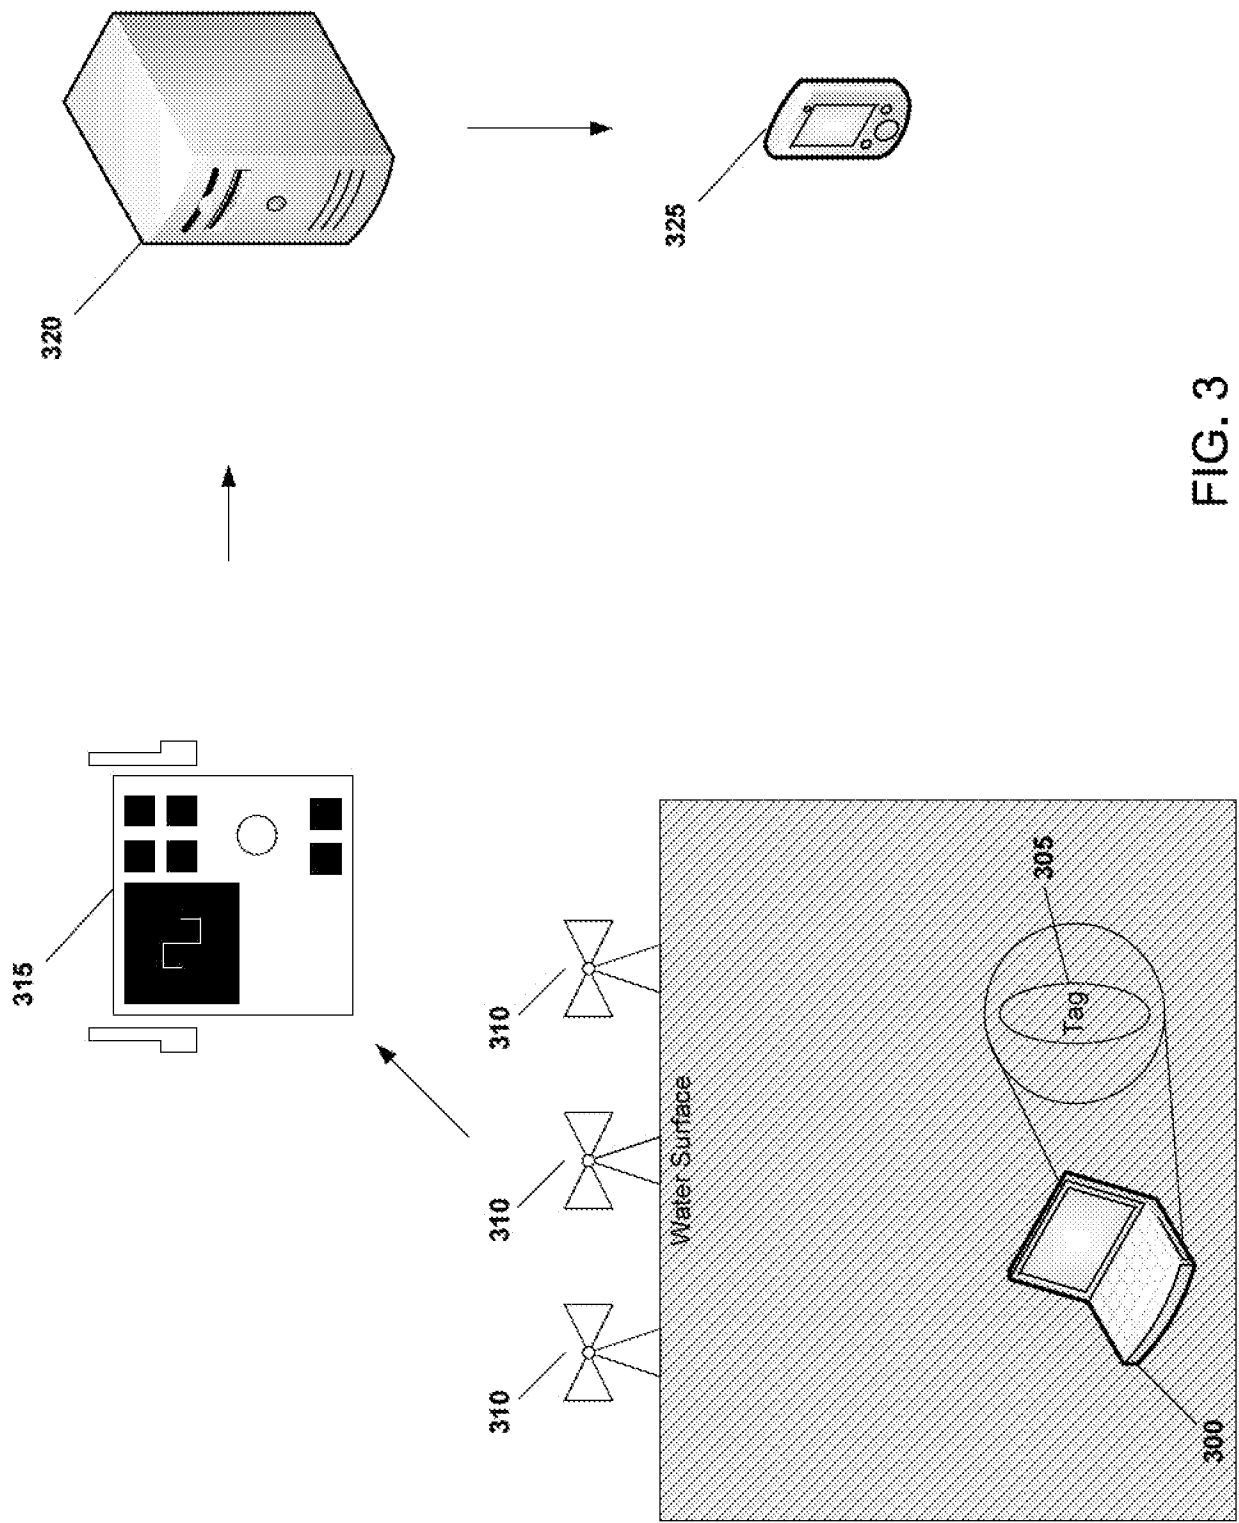

3/5

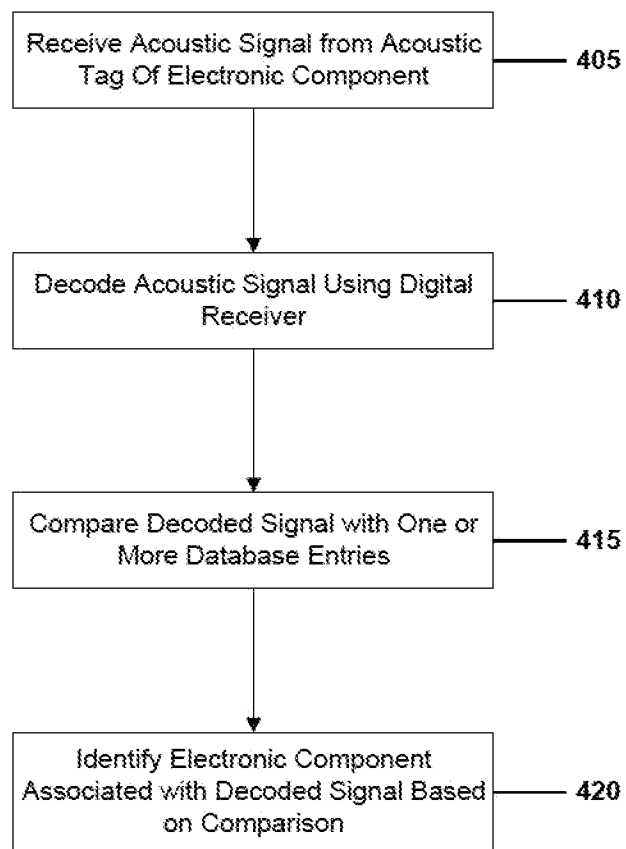


FIG. 4

4/5

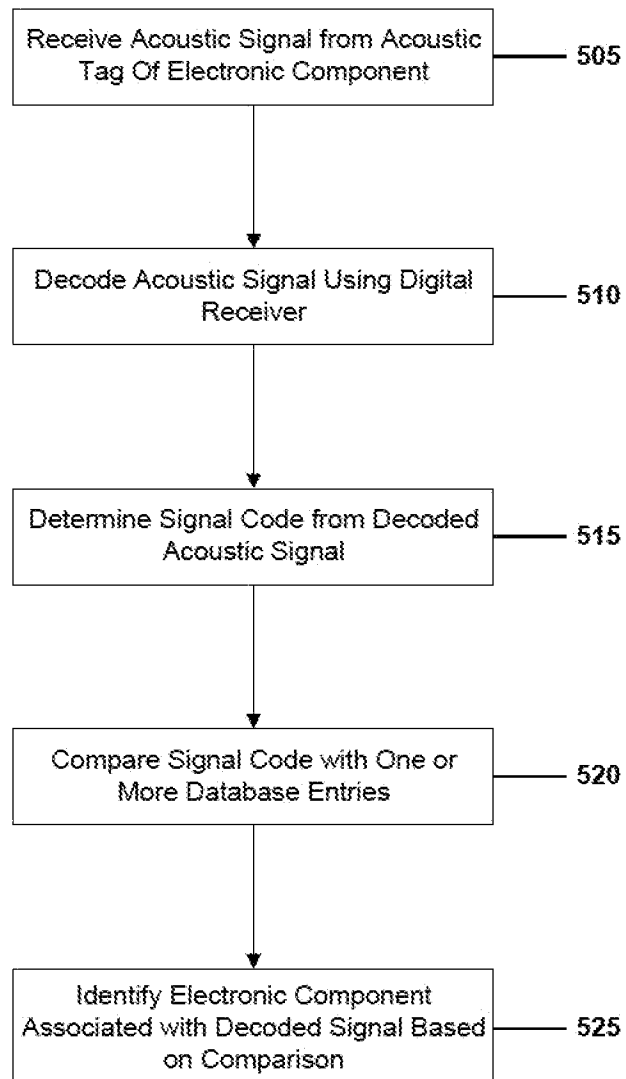


FIG. 5

5/5

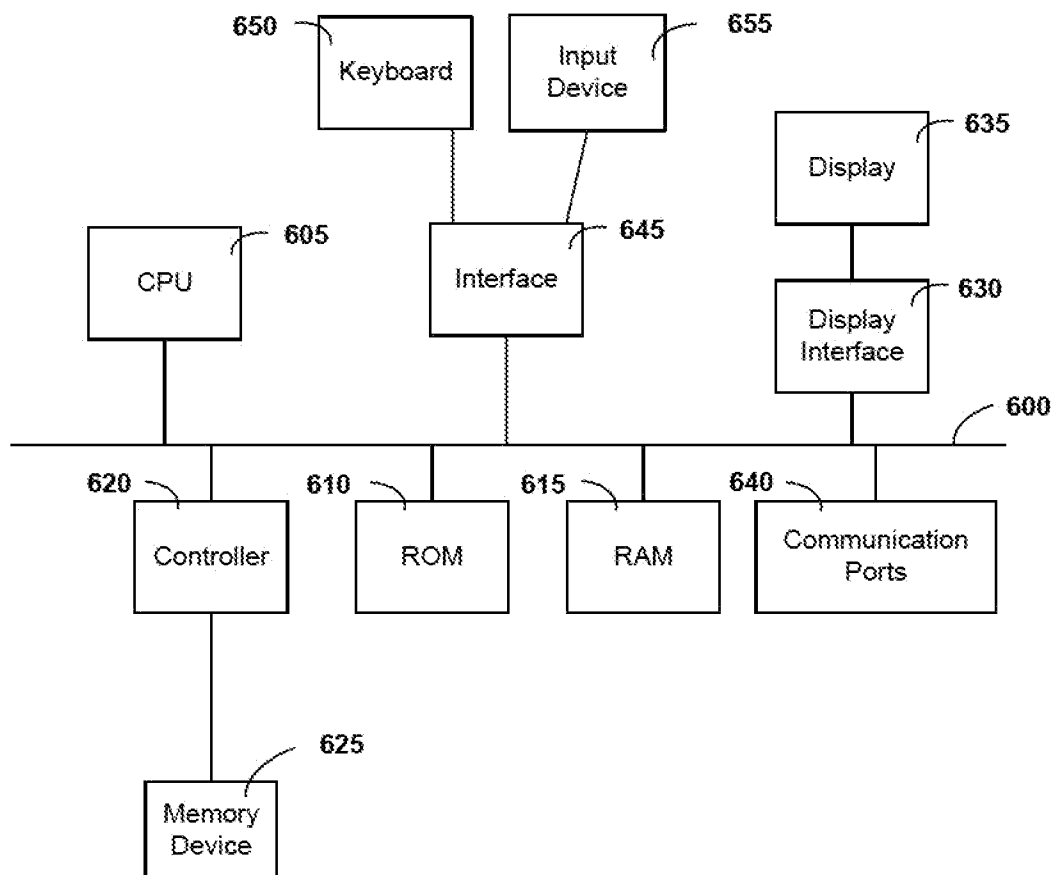


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 12/38783

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G08B 13/14 (2012.01)

USPC - 340/572.1

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC: 340/572.1; IPC(8): G08B 13/14 (2012.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC: 340/286, 384.1, 500, 501, 539.1, 539.22, 539.26, 540, 568.1, 572.1, 572.4; 700/1, 90; 702/1, 57, 127; 709/217, 223 (see terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase(All), GOOGLE SCHOLAR, PubWest (

terms: electronic, e-waste, trash, acoustic, audio, audible, tag, label, identification, indicator, code, recycle, battery, solar, inductor, quartz, barium titanate, lead zirconate titanate, PZT, bismuth sodium titanate, potassium sodium titanate, piezo, unique, pattern, transmit

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2005/0080520 A1 (Kline et al.) 14 April 20yy (14.04.2005), para [0133], [0139], [0150]-[0151], [0239]-[0244], [0266], [0284]-[0288], [0314], [0353], [0364], [0447], [0461], [0485], [0508]-[0516], [0551], [0557], [0605].	1-3, 5, 8-12, 17-19 ----- 4, 6, 7, 13-16
X	US 5,854,589 A (How et al.) 29 December 1998 (29.12.1998), abstract, fig. 3, col 1, ln 23-28, col 1, ln 60 - col 2, ln 5, col 4, ln 1-4, col 7, ln 16 - col 10, ln 46.	1, 5, 7, 8, 11
Y	US 2005/0192727 A1 (Shostak et al.) 01 September 2005 (01.09.2005), para [0271], [0847], [0923], [0943], [0949], [0962], [0980], [1160], [1244], [1160]-[1161], [1288], [1198]-[1199].	4, 6, 7, 13-16
Y	US 6,093,338 A (Tani et al.) 25 July 2000 (25.07.2000), col 3, ln 39-41, col 29, ln 48-58, col 38, ln 10-56.	6

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

06 November 2012 (06.11.2012)

Date of mailing of the international search report

07 DEC 2012

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 12/38783

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:
see continuation sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-19

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 12/38783

continuation of Box III

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I: Claims 1-19 directed to an acoustic tag for tracking an electronic component, the tag comprising a power source; and a transmitter in electrical communication with the power source and configured to transmit an acoustic signal, wherein the power source and transmitter are configured to be one or more of affixed to or embedded in the electronic component, wherein the acoustic signal comprises a unique acoustic code that is configured to provide information pertaining to one or more of the electronic component and the recyclability of the electronic component.

Group II: claims 20-96: directed to a system and method for tracking an object, comprising an acoustic tag affixed to or embedded in the object, wherein the acoustic tag is configured to transmit an acoustic signal, wherein the acoustic signal comprises a unique acoustic code that is configured to provide information regarding one or more of the object and the recyclability of the object; one or more signal detection devices, wherein each signal detection device is configured to detect the acoustic signal; and a digital receiver configured to decode the acoustic signal and compare the decoded signal with one or more entries in a database in order to determine a source of the acoustic signal.

The inventions listed as Groups I - II do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons:

Group I does not recite one or more signal detection devices, wherein each signal detection device is configured to detect the acoustic signal; and a digital receiver configured to decode the acoustic signal and compare the decoded signal with one or more entries in a database in order to determine a source of the acoustic signal as disclosed by Group II.

Groups I-II share the technical feature of an acoustic tag configured to transmit an acoustic signal comprising a unique acoustic signal. However, this shared technical feature does not represent a contribution over the prior art of US 5,854,589 A to How et al. dated 29 December 1998, which teaches a merchant system and user interface (abstract). As the acoustic tag configured to transmit an acoustic signal comprising a unique acoustic signal was known at the time, as evidenced by the teaching of How et al., this cannot be considered a special technical feature that would otherwise unify the groups.

Groups I-II therefore lack unity under PCT Rule 13 because they do not share a same or corresponding special technical feature.