



HU000029494T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 029 494**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 13 717175**(22) A bejelentés napja: **2013. 04. 17.**

(96) Az európai bejelentés bejelentési száma:

EP 20130717175

(97) Az európai bejelentés közzétételi adatai:

EP 2847268 A1 **2013. 11. 14.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2847268 B1 **2016. 06. 08.**(51) Int. Cl.: **C08L 25/06**

(2006.01)

B65D 81/26

(2006.01)

C08J 3/22

(2006.01)

C08K 3/26

(2006.01)

C08L 71/02

(2006.01)

C08K 3/34

(2006.01)

C08K 51/03

(2006.01)

(86) A nemzetközi (PCT) bejelentési szám:

PCT/EP 13/001139

(87) A nemzetközi közzétételi szám:

WO 13167230

(30) Elsőbbségi adatok:

12003706**2012. 05. 09.****EP**

(73) Jogosult(ak):

Clariant International Ltd, 4132 Muttenz (CH)

(72) Feltaláló(k):

Kolditz, Pirko, 22145 Hamburg (DE)**LIEBEHENTSCHEL, Lutz, 22941 Bargteheide (DE)**

(74) Képviselő:

Advopatent Szabadalmi és Védjegy Iroda,
Budapest

(54)

Kompozíció hidrofil polisztirol előállítására

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 847 268 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
08.06.2016 Bulletin 2016/23

(21) Application number: **13717175.7**

(22) Date of filing: **17.04.2013**

(51) Int Cl.:
C08L 25/06 ^(2006.01) **B65D 81/26** ^(2006.01)
C08J 3/22 ^(2006.01) **C08K 3/26** ^(2006.01)
C08K 3/34 ^(2006.01) **C08K 5/103** ^(2006.01)
C08L 71/02 ^(2006.01)

(86) International application number:
PCT/EP2013/001139

(87) International publication number:
WO 2013/167230 (14.11.2013 Gazette 2013/46)

(54) **COMPOSITION FOR THE PRODUCTION OF HYDROPHILIC POLYSTYRENE**
ZUSAMMENSETZUNG FÜR DIE HERSTELLUNG VON HYDROPHILEM POLYSTYROL
COMPOSITION POUR LA PRODUCTION DE POLYSTYRÈNE HYDROPHILE

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **09.05.2012 EP 12003706**

(43) Date of publication of application:
18.03.2015 Bulletin 2015/12

(73) Proprietor: **CLARIANT INTERNATIONAL LTD**
4132 Muttenz (CH)

(72) Inventors:
• **KOLDITZ, Pirko**
22145 Hamburg (DE)

• **LIEBEHENTSCHEL, Lutz**
22941 Bargteheide (DE)

(74) Representative: **Mikulecky, Klaus et al**
Clariant Produkte (Deutschland) GmbH
Patent & License Management Chemicals
Industriepark Höchst, G 860
65926 Frankfurt am Main (DE)

(56) References cited:
EP-A2- 2 289 994 US-A- 4 048 208
US-A- 4 696 950

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a composition in the joint extrusion with polystyrene in order to increase the hydrophilic properties of a processed solid non-foamed or foamed polystyrene material.

[0002] Solid non-foamed or foamed polystyrene is widely used as suitable material for making trays for packaging food, such as meat, fish, vegetables or fruits. These foods being packed in trays usually release water, juice or blood which fills the inside of the packaged tray. From hygienically and visual standpoint it is highly desirable to rapidly absorb these liquids, preferably by a tray material having suitable adsorptive properties.

[0003] In the plastics industry it is customary to use additives in the form of Compounds or masterbatches.

For the purposes of the invention, masterbatches are compositions comprising a polymer and the additive, in which the additive is present in higher concentrations than in the final application and the carrier polymer may or may not be the polymer of the final application. Preferred concentrations of the additives in a masterbatch range of from 0.1 to 90 % by weight, in particular of from 1 to 80 % by weight, especially of from 10 to 75 % by weight, based on the total weight of the masterbatch.

[0004] For the purposes of the invention, Compounds are compositions comprising a polymer and the additive, in which the additive is present in the desired final concentration of the final application or final article and the polymer is the desired polymer of the final application or final article, so that the Compound is merely brought to the desired shape of the final application or final article by means of a physical shaping process.

Masterbatches and/or Compounds which contain hydrophilic additives and are used for producing hydrophilic compositions or articles have to satisfy demanding requirements: the compositions should have a high loading, i.e. a high concentration of the hydrophilic additives, and it should be possible to set the desired contact angle between the polymer surface and water in the final article. Further requirements are good miscibility and compatibility with the polymer of the final application or the final article. Additionally, a high absorption of water or meat juice in foamed polystyrene food trays is wanted. A measurable variable for the absorptive properties of a polystyrene surface for aqueous liquids is the surface angle (static contact angle) of the polystyrene surface to water. The lower the surface angle, the higher is the absorptive property.

[0005] EP 2 289 994 A2 discloses an absorbent masterbatch chip composition for a polystyrene foam tray, wherein the masterbatch chips comprise an organic anionic sulphonate, calcium carbonate and talc.

[0006] The known compositions, however, do not satisfy all present-day requirements of industry, especially their absorptive properties are not sufficient. There is a need for masterbatches and Compounds containing hydrophilic additives which provide for a low static contact angle and are still compatible with the polymeric material with respect to formability and mechanical stability, e.g. density, stiffness and tear strength.

It was found that the following composition Z comprising a polystyrene and a particular mixture of hydrophilic additives surprisingly displays improved properties as to the before described demands.

[0007] Subject of the invention is a composition Z comprising a component B, a component C, a component D, a component E and a component P, wherein the component B is a polyethylene glycol, the component C is a polyglycerol ester, the component D is an earth alkali carbonate, the component E is a phyllosilicate, and the component P is a polystyrene and/or an alloy thereof.

[0008] According to the present invention, composition Z is suitable to enhance the hydrophilicity of polystyrene which means to provide for a polystyrene material which is modified by the particular additives as per the invention in order to obtain a lower static contact angle between the polymer surface and water, and also providing for a higher water absorbing capacity of the additivated polystyrene material compared to the genuine polystyrene material.

[0009] Another subject of the invention is the use of a composition Z, as described before, for manufacturing an absorbent article of solid non-foamed or foamed polystyrene, wherein the absorbed material is preferably an aqueous liquid.

[0010] The composition Z is preferably a masterbatch MB or a Compound as defined before.

The absorbent article is preferably a film, a sheet or a container, e.g. a food tray, which is preferably in contact with water-containing food, e.g. meat, fish, vegetables or fruits.

The absorbed material is preferably water, blood or juice.

[0011] A further subject of the invention is a solid foamed or non-foamed polystyrene article comprising component B, component C, component D, component E and component P as defined above. In a preferred embodiment of the invention, said article is in contact with water-containing food, e.g. meat, fish, vegetables or fruits, and which article is preferably a film, a sheet or a container, e.g. a food tray.

For the purposes of the invention, a hydrophilic solid non-foamed or foamed polystyrene is characterized by a static contact angle of from 5 to 81°, more preferably 30 to 80°, in particular 40 to 79°.

[0012] A further subject of the invention is a process for enhancing the hydrophilicity of solid non-foamed or foamed polystyrene by extruding, kneading, pressing or injection-molding a mixture of components B, C, D, E and P, as defined before.

[0013] Preferably, component B comprises 1, 2, 3, or 4, more preferably 1 or 2, even more preferably 1, polyethylene glycols.

[0014] Preferred polyethylene glycols are polyethylene glycols with a molar mass distribution M_n of from 100 g/mol to 8,000,000 g/mol, preferably of from 150 g/mol to 1,000,000 g/mol, more preferably of from 160 g/mol to 100,000 g/mol, especially of from 180 g/mol to 35,000 g/mol, more especially of from 200 g/mol to 20,000 g/mol.

[0015] Preferred polyethylene glycols are polyethylene glycols with a pH value of from 5 to 7.

Preferred polyethylene glycols are polyethylene glycols with a viscosity at 20 °C (50 % in aqueous solution) of from 50 to 14,000 mPa*s, polyethylene glycols with a viscosity at 20 °C (1 % in aqueous solution) of from 4000 to 15,000 mPa*s, polyethylene glycols with a viscosity at 20 °C (2 % in aqueous solution) of from 400 to 800 mPa*s and polyethylene glycols with a viscosity at 20 °C (5 % in aqueous solution) of from 30 to 50 mPa*s.

[0016] Preferred polyethylene glycols are polyethylene glycols with a hydroxyl value of from 1 to 800 mg KOH/g, more preferably of from 3 to 700 mg KOH/g, even more preferably of from 4 to 650 mg KOH/g, especially of from 5 to 620 mg KOH/g, especially of from 25 to 610 mg KOH/g, or especially of from 530 to 600 mg KOH/g.


[0017] Preferred polyethylene glycols are linear polyethylene glycols with two free hydroxyl end groups.

Component C: Polyglycerolesters

[0018] Polyglycerols consist of glycerol units linked by an ether linkage. Preferred are diglycerols, triglycerols and tetraglycerols. Examples are alpha,alpha-diglycerol, alpha, beta-diglycerol, beta,beta-diglycerol


Formula alpha,alpha-diglycerol

[0019]




Formula alpha,beta-diglycerol

[0020]

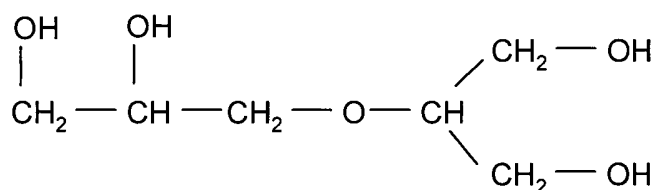


Formula beta,beta-diglycerol

[0021]

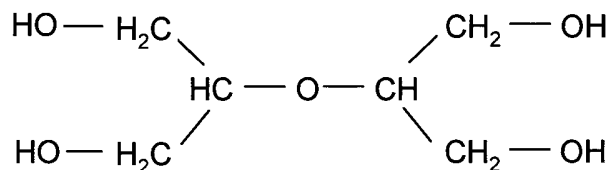

Formula triglycerol

[0022]

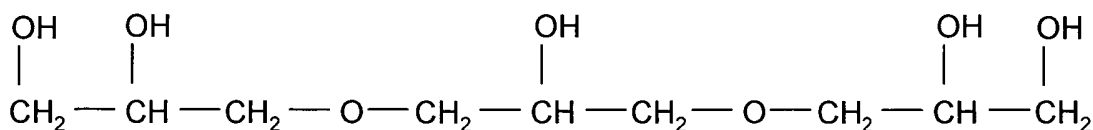


[0023] Preferred for the purpose of the present invention are mono fatty acid esters of said polyglycerols. Expediently a mixture of di-, tri- and tetraglycerols esterified with one fatty acid is used. Minor amounts of penta- to octaglycerol esters may be present. Most preferred are polyglycerol-3-mono fatty acid esters. Polyglycerol-3 typically contains a minimum 80 % di-, tri-, and tetraglycerol.

[0024] Preferred polyglycerolesters of fatty acids have a fatty acid with a chain length of from C_4 to C_{24} , more preferably of from C_6 to C_{20} , in particular of from C_{12} to C_{18} , especially of from C_{16} to C_{18} . Said fatty acids can be saturated or unsaturated. Preferred are saturated and mono-unsaturated fatty acids having a chain length as specified above. Preferred polyglycerolesters of fatty acids are triglycerolesters of fatty acids.


[0025] Expediently, commercially available polyglycerolesters of fatty acids can be used for the purpose of the present invention. Those commercially available products are often mixtures containing more than one polyglycerolester of fatty acid, free fatty acids, and mono-, di-, tri- and tetraglycerolesters of fatty acids.

The triglycerolester content of component C is preferably of from 30 to 100 % by weight, more preferably of from 50 to 99 % by weight, in particular of from 70 to 98 % by weight, based on the total weight of component C.


Most preferred are polyglycerol-3-monostearate, polyglycerol-3-monooleate, polyglycerol-3- monopalmitate, polyglycerol-3- monolaurate Typical examples are polyglycerol monolaurate

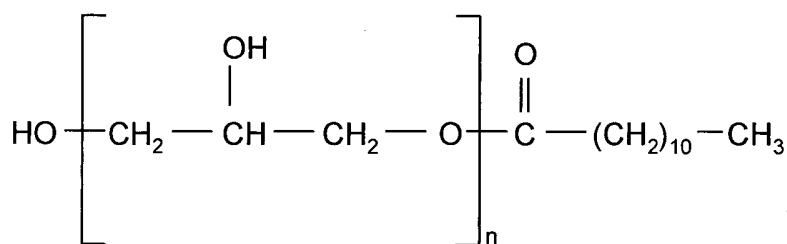

wherein $n = 2$ or 3 ;
and polyglycerol monooleate

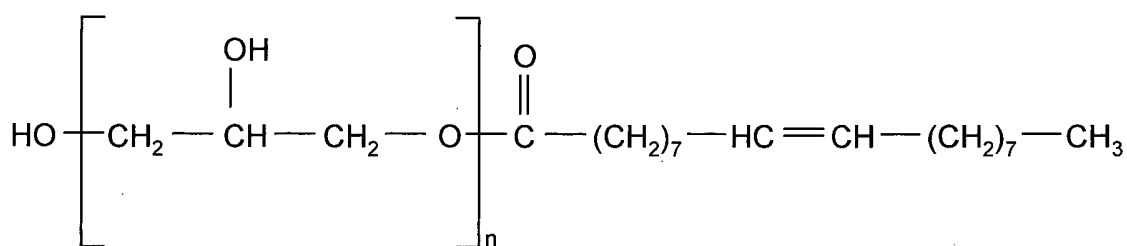

wherein $n = 2$ or 3 ;
and polyglycerol monostearate

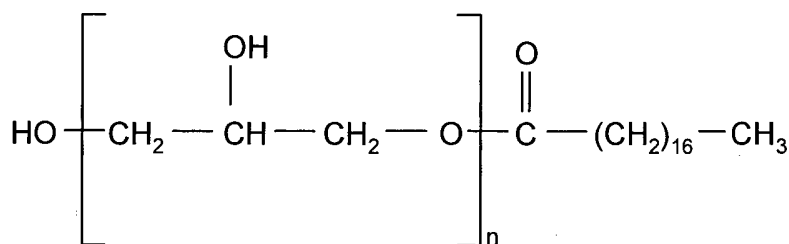

wherein $n = 2$ or 3 .

[0026] Preferably the acid number of component C is of below 5 mg KOH/g, more preferably of below 3 mg KOH/g, even more preferably of below 2 mg KOH/g.

Preferably the iodine value of component B is of below 5 g I_2 /100g, more preferably the below 3 g I_2 /100g, even more preferably below 2 g I_2 /100g.

Preferably the saponification number of component C is from 125 to 155 mg KOH/g.

[0027] Preferably, component D comprises 1, 2, 3 or 4, more preferably 1 or 2, even more preferably 1, earth alkali carbonate.

Preferred carbonates are calcium carbonates ($CaCO_3$, Calcit, or Aragonite), magnesium carbonates ($MgCO_3$, Magnesit) or calcium magnesium carbonates ($CaMg(CO_3)_2$, Dolomit).

Preferred carbonates are natural calcium carbonates, or synthetic precipitated calcium carbonate.

Expediently, commercially available calcium carbonates can be used for the purpose of the present invention. Those commercially available products are often containing contaminations in small amounts, e.g. Fe, Mn, Sr, Pb Cd, Cu, Zn ions, $MgCO_3$, Al_2O_3 , Fe_2O_3 or SiO_2 .

The earth alkali carbonate is expediently used in powderous form, preferably in micronized form having a mean particle size of between 1 and 10 μm .

[0028] Preferably, component E comprises 1, 2, 3 or 4 phyllosilicates, more preferably 1 or 2, even more preferably 1, phyllosilicates. Phyllosilicates are defined as sheet silicates forming parallel sheets of silicate tetrahedra with a Si : O ratio of 2:5 (Nickel-Strunz classification).

Preferred are phyllosilicates of the clay mineral group comprising halloysite, kaolinite, illite, montmorillonite, vermiculite, talc, palygorskite and pyrophyllite, more preferably $Mg_3Si_4O_{10}(OH)_2$ (Talc).

Expediently, commercially available talc can be used for the purpose of the present invention. Those commercially available products are often containing contaminations in small amounts, e.g. Fe, Mn, Ti, Ni, Sr, Pb Cd, Cu, Zn, Mn, Na, K, Cl ions, $MgCO_3$, Al_2O_3 , Fe_2O_3 , FeO, MgO, SiO_2 .

[0029] The phyllosilicates are expediently used in powderous form, preferably in micronized form having a mean particle size of between 1 and 10 μm .

[0030] Preferably, component P comprises 1, 2, 3, or 4, more preferably 1 or 2, even more preferably 1, polystyrenes.

[0031] Polystyrene can be a styrene homopolymer, an alkylstyrene homopolymer, preferably a C_1 - C_4 -alkylstyrene homopolymer, for example α -methylstyrene homopolymer; a styrene copolymer, especially a high impact polystyrene (HIPS). High impact polystyrenes (HIPS) are generally prepared by polymerization by grafting mixtures of styrene and optionally of one or more copolymerizable vinyl monomers, preferably mixtures of styrene, methylstyrene, ethylstyrene, butylstyrene, halostyrenes, vinylalkylbenzenes, such as vinyltoluene, vinylxylene, acrylonitrile, methacrylonitrile, lower alkyl esters of methacrylic acid, in the presence of a rubbery polymer trunk comprising copolymers chosen from polybutadiene, polyisoprene, rubbery styrene-diene copolymers, acrylic rubber, nitrile rubber and olefinic rubbers, such as propylene diene monomer rubber (PDM) and propylene rubber (PR). In the high impact polystyrene, the rubbery polymer trunk normally constitutes from 5 to 80 % by weight, preferably 5 to 50 % by weight, of the total weight of the grafted polymer. In addition, it is also possible to use styrene-butadiene-styrene (SBS) copolymers and styrene butadiene rubbers (SBR). It is also possible to use mixtures or alloys of the above styrene polymers.

The preferred density of component P is of from 1.0 to 1.1 g/cm³, more preferably of from 1.02 to 1.06 g/cm³, even more preferably of from 1.03 to 1.05 g/cm³. Preferred polystyrenes are polystyrenes with a MFR at 200 °C/5 kg according to ISO 1133 of from 0.1 to 300 g/10 min, more preferably of from 1 to 200 g/10 min, even more preferably of from 5 to 100 g/10 min, especially of from 10 to 50 g/10 min, more especially of from 15 to 35 g/10 min, in particular of from 20 to 30 g/10 min.

[0032] The composition Z expediently comprises of from 0.06 to 90 % by weight of the sum of the components B,C,D and E, preferably Z comprises of from 0.5 to 80 % by weight of the sum of the components B,C,D and E, more preferably Z comprises of from 1.0 to 70 % by weight of the sum of the components B,C,D and E, even more preferably Z comprises of from 1.25 to 50 % by weight of the sum of the components B, C, D and E, especially Z comprises of from 1.5 to 25 % by weight of the sum of the components B, C, D and E, with the % by weight being based on the total weight of the composition Z.

[0033] The composition Z preferably comprises the component B and component C with a weight ratio of component B and component C of from 0.1 to 10.0, preferably of from 0.2 to 5.0, more preferably of from 0.3 to 1.0, even more preferably of from 0.4 to 0.8., especially of from 0.5 to 0.6.

[0034] If the composition Z is a masterbatch MB, Z expediently comprises

0.2 to 20	% by weight of component B,
0.4 to 40	% by weight of component C,
0.2 to 20	% by weight of component D,

EP 2 847 268 B1

(continued)

0.1 to 10 % by weight of component E,
10 to 99.1 % by weight of component P,

5

with the weight % being based on the total weight of composition Z.

[0035] If the composition Z is a masterbatch MB, Z expediently comprises

10

1.5 to 20 % by weight of component B,
3 to 40 % by weight of component C;
1.5 to 20 % by weight of component D,
0.75 to 10 % by weight of component E;
10 to 93.25 % by weight of component P;

15

preferably, the composition Z as a Masterbatch MB comprises

20

3 to 15 % by weight of component B,
6 to 30 % by weight of component C;
3 to 15 % by weight of component D,
1.5 to 7.5 % by weight of component E;
32.5 to 86.5 % by weight of component P.

25

[0036] If the composition Z is a Compound, Z expediently comprises

30

0.0167 to 1.47 % by weight of component B,
0.0333 to 2.94 % by weight of component C;
0.0167 to 1.47 % by weight of component D,
0.00835 to 0.735 % by weight of component E;
93.385 to 99.92495 % by weight of component P;

preferably, the composition Z as a Compound comprises

35

0.07 to 1 % by weight of component B,
0.14 to 2 % by weight of component C;
0.07 to 1 % by weight of component D,
0.035 to 0.5 % by weight of component E;
95.5 to 99.69 % by weight of component P;

40

more preferably, the composition Z as a Compound comprises

45

0.25 to 0.75 % by weight of component B,
0.5 to 1.5 % by weight of component C;
0.25 to 0.75 % by weight of component D,
0.125 to 0.375 % by weight of component E;
96.63 to 98.88 % by weight of component P;

50

even more preferably, the composition Z as a Compound comprises

55

0.3 to 0.7 % by weight of component B,
0.6 to 1.4 % by weight of component C;
0.3 to 0.7 % by weight of component D,
0.15 to 0.35 % by weight of component E;
96.85 to 98.65 % by weight of component P;

especially, the composition Z as a Compound comprises

0.4 to 0.5	% by weight of component B,
0.8 to 1	% by weight of component C;
0.4 to 0.5	% by weight of component D,
0.2 to 0.25	% by weight of component E;
97.75 to 98.2	% by weight of component P;

the % by weight being in each case based on the total weight of the composition Z.

[0037] The composition Z can contain further substances, preferably

- colorants, with organic and inorganic dyes and pigments being possible as colorants; as organic pigments, preference is given to using azo or diazo pigments, coated azo or diazo pigments or polycyclic pigments; preferred polycyclic pigments are diketopyrrolopyrrole, phthalocyanine, quinacridone, perylene, dioxazine, anthraquinone, thioindigo, diaryl or quinophthalone pigments; as inorganic pigments, preference is given to using metal oxides, mixed oxides, aluminium sulphates, chromates, metal powders, pearl-effect pigments (mica), luminous pigments, titanium oxides, cadmium-lead pigments, iron oxides, carbon black, silicates (other than component E), nickel titanates, cobalt pigments or chromium oxides suitable for pigmentation;
- dispersing aids, preferred dispersants are polar acid esters of C₁₀-C₃₀ alcohols;
- fillers (other than component D and E) such as silica, zeolites, silicates, e.g. aluminium silicates, sodium silicate, calcium silicates
- auxiliaries, preferably metal soaps, foaming agents, nucleating agents (other than component D and E), peroxides;
- alkylamines, ethoxylated alkylamines, glyceryl esters or mixtures (blends) thereof;
- UV absorbers and hindered amine light stabilizer (HALS) compounds, slip agents, antifogging agents, anticondensation agents and/or suspension stabilizers, flame retardants; antioxidants or other customary plastics additives; ionic liquids;

or mixtures of these.

Said further substances are meant to be different from any of the components B, C, D, E and P.

[0038] These further substances are expediently present from 0 to 60 %, preferably 0.01 to 40 %, more preferably 0.1 to 30 %, even more preferably 1 to 20 %, especially 2 to 10 % by weight, based on the total weight of the composition Z. In the case that the polystyrene is a foamed polystyrene, a preferred further substance is a chemical foaming agent.

[0039] The composition Z can be produced by physically mixing the components B, C, D, E and P and optionally any of the further substances with one another.

The mixing of the components can occur in one step or in a plurality of steps.

As mixing apparatuses for physical mixing, it is possible to use the mixing apparatuses customary in the plastics industry, preferably an apparatus selected from the group consisting of extruders, kneaders, presses, injection-moulding machines and blade mixers. When the composition Z is a masterbatch MB, the mixing apparatuses are preferably extruders, kneaders and/or blade mixers. When the composition Z is a compound, the mixing apparatuses are preferably extruders, presses and injection-moulding machines, particularly preferably extruders.

Mixing preferably occurs continuously or batchwise, particularly preferably continuously, in the case of a masterbatch MB preferably by extrusion or kneading, particularly preferably by extrusion, and in the case of a compound preferably by extrusion or injection moulding or pressing, particularly preferably by extrusion.

Mixing is preferably carried out at a temperature of from 80 to 260 °C, more preferably of from 120 to 250 °C, even more preferably of from 150 to 230 °C, especially of from 180 to 220 °C.

The mixing time is preferably of from 5 sec to 10 h.

The mixing time in the case of continuous mixing is preferably of from 5 sec to 1 h, more preferably of from 10 sec to 15 min.

[0040] The mixing time in the case of batchwise mixing is preferably of from 1 min to 10 h, more preferably of from 2 min to 8 h, in particular of from 2 min to 5 h, especially of from 2 min to 1 h, particularly preferably of from 2 to 15 min.

[0041] In the case of Compounds, the components B, C, D, E and P are preferably mixed in the form of a masterbatch MB with polystyrene P. Furthermore, a premix of the masterbatch MB with pelletized polystyrene is preferably used for physical mixing.

[0042] The compositions Z, both in the form of a masterbatch MB or in the form of a compound, are surprisingly characterized by a low static contact angle.

[0043] For the production of foamed polystyrene articles, e.g. food trays, polystyrene is extruded with foaming agents. The foaming agents can be either a physical foaming agent, e.g. a gas like CO₂, N₂, isopentane, hydrofluorocarbons, or a chemical foaming agent which decomposes in the melted polymer during processing liberating a gas, e.g. CO₂ or

EP 2 847 268 B1

N₂. In both processes the gas has to be thoroughly dispersed and dissolved in the polymer melt under pressure in the extruder barrel. When the melt exits the extruder through the die, the pressure drops and the gas expands the melt creating a cellular structure in the polymer. Foam extruded polystyrene articles produced in the so called direct gassed extrusion can achieve foam densities of from 15 kg/m³ to 500 kg/m³.

5

Test methods:

[0044] Determination of the molar mass distribution M_n is done by gel permeation chromatography (GPC) according to DIN 55672.

10 Determination of the viscosity at 20 °C of a 1 %, 2 %, 5 % or 50 % aqueous solution in accordance with ISO 6388.

Determination of the density in accordance with ISO 1183 .

Determination of the MFR at 200 °C and 5 kg weight in accordance with ISO 1133.

Determination of the tensile modulus in accordance with ISO 527-1/-2.

15 Determination of the static contact angle is carried out by carefully putting a drop of distilled water with a defined volume on the surface of the polystyrene sheet.

The angle formed between the solid/liquid interface and the liquid/vapor interface is referred to as the static contact angle Theta. After 5s of resting time, a photo is taken and the static contact angle is determined with an image processing software by looking at the profile of the drop and measuring two-dimensionally the angle formed between the solid and the drop profile with the vertex at the three-phase line as shown in the graphic (Fig. 1).

20 **[0045]** Substances used:

Component B: Polyethylene glycol, with a hydroxyl value of from 28 to 39 mg KOH/g, and an average molecular weight of 3,350 g/mol;

25 Component C: Polyglycerol(3)monostearate, with an acid number of from 0 to 2 mg KOH/g, a iodine number of from 0 to 2 mg I₂/100g and a saponification number of about 135 mg KOH/g;

Component D: micronized calcium carbonate, with a statistic mean diameter of 5.5 µm;

30 Component E: talc, mg-silicate, CAS 14807-96-6 with a statistic mean diameter of 6 µm;

Component P1: general purpose polystyrene homopolymer having an MFR at 200 °C / 5 kg of from 20 to 28 g/10 min and a tensile modulus of from 3000 to 3400 MPa.

35 Component P2: high impact, rubber modified polystyrene having an MFR at 200 °C / 5 kg of from 4.0 to 6.0 g/10 min and a tensile modulus of from 1600 to 2000 MPa.

Component A (Comparison): sodium C₁₂-C₁₈-alkyl sulphonate.

40 **[0046]** In the following examples percentages are weight percent based on the total weight of the mixture or the article, unless indicated otherwise; parts are parts by weight; "Comp." means Comparative Example.

Comparative Example 1 (representing the teaching of EP 2 289 994 A2)

45 **[0047]** 15 parts of component A, 15 parts of component D, 7.5 parts of component E and 62.5 parts of component P1 are homogenized together on a twin-screw extruder (temperature of the extruder: 220 to 230 °C). A masterbatch MB1 is obtained.

Comparative Example 2

50

[0048] 15 parts of component C, 15 parts of component D, 7.5 parts of component E and 62.5 parts of component P1 are homogenized together on a twin-screw extruder (temperature of the extruder: 220 to 230 °C). A masterbatch MB2 is obtained.

55 Comparative Example 4

[0049] 15 parts of component B, 15 parts of component D, 7.5 parts of component E and 62.5 parts of component P1 are homogenized together on a twin-screw extruder (temperature of the extruder: 220 to 230 °C). A masterbatch MB4

EP 2 847 268 B1

is obtained.

Example 5

5 **[0050]** 5 parts of component B, 10 parts of component C, 15 parts of component D, 7.5 parts of component E and 62.5 part of component P1 are homogenized together on a twin-screw extruder (temperature of the extruder: 220 to 230 °C). A masterbatch MB5 is obtained.

Example 7

10

[0051] 5 parts of component B, 10 parts of component C, 15 parts of component D, 7.5 parts of component E, 32.5 parts of component P1 and 30 parts of component P2 are homogenized together on a twin-screw extruder (temperature of the extruder: 220 to 230 °C). A masterbatch MB7 is obtained.

15

Comparison Example 9 (representing the teaching of EP 2 289 994 A2)

20

[0052] 21 parts of component A, 20 parts of component D, 5.0 parts of component E and 34 parts of component P1 and 20 parts of component P2 are homogenized together on a twin-screw extruder (temperature of the extruder: 220 to 230 °C). A masterbatch MB9 is obtained.

25

30

Example	Masterbatch Designation	Component [% by weight]						
		A	B	C	D	E	P1	P2
Comp. 1	MB1	15	0	0	15	7.5	62.5	0
Comp. 2	MB2	0	0	15	15	7.5	62.5	0
Comp. 4	MB4	0	15	0	15	7.5	62.5	0
5	MB5	0	5	10	15	7.5	62.5	0
7	MB7	0	5	10	15	7.5	32.5	30
Comp. 9	MB9	21	0	0	20	5	34	20

Comparison Example 21

35

[0053] 10 parts of a masterbatch MB1 produced as described in Comparison Example 1 were homogenized and mixed with 90 parts of component P1 on a flat film extruder (Collin). With a rotational speed of 100 rpm and a temperature of 220 - 230 °C a flat film FF21 with a thickness of 100 μm was obtained.

40

Comparison Example 22

[0054] 10 parts of a masterbatch MB2 produced as described in Comparison Example 2 were homogenized and mixed with 90 parts of component P1 on a flat film extruder (Collin). With a rotational speed of 100 rpm and a temperature of 220 - 230 °C a flat film FF22 with a thickness of 100 μm was obtained.

45

Comparison Example 24

50

[0055] 10 parts of a masterbatch MB4 produced as described in Example 4 were homogenized and mixed with 90 parts of component P1 on a flat film extruder (Collin). With a rotational speed of 100 rpm and a temperature of 220 - 230 °C a flat film FF24 with a thickness of 100 μm was obtained.

Example 25

55

[0056] 10 parts of a masterbatch MB5 produced as described in Example 5 were homogenized and mixed with 90 parts of component P1 on a flat film extruder (Collin). With a rotational speed of 100 rpm and a temperature of 220 - 230 °C a flat film FF25 with a thickness of 100 μm was obtained.

Example 27

[0057] 10 parts of a masterbatch MB7 produced as described in Example 7 were homogenized and mixed with 90 parts of component P1 on a flat film extruder (Collin). With a rotational speed of 100 rpm and a temperature of 220 - 230 °C a flat film FF27 with a thickness of 100 μm was obtained.

Comparison Example 29

[0058] 7.14 parts of a masterbatch MB9 produced as described in Comparison Example 9 were homogenized and mixed with 52.86 parts of component P1 and 40 parts of component P2 on a flat film extruder (Collin). With a rotational speed of 100 rpm and a temperature of 220 - 230 °C a flat film FF29 with a thickness of 100 μm was obtained.

Table 2

Example	Flat Film Designation	Static contact angle [°]
Comp. 21	FF21	89
Comp. 22	FF22	82
Comp. 24	FF24	82
25	FF25	78
27	FF27	79
Comp.29	FF29	89

Claims

1. A composition Z comprising a component B, a component C, a component D, a component E and a component P , wherein
the component B is a polyethylene glycol,
the component C is a polyglycerol ester,
the component D is an earth alkali carbonate,
the component E is a phyllosilicate,
and the component P is a polystyrene and/or an alloy thereof.
2. The composition Z as claimed in claim 1, comprising of from 0.06 to 90 % by weight of the sum of the components B,C,D and E, with the % by weight being based on the total weight of the composition Z.
3. The composition Z as claimed in claim 1 or 2, wherein the composition Z comprises of from 1.25 to 50 % by weight of the sum of the components B, C, D, and E, with the % by weight being based on the total weight of the composition Z.
4. The composition Z as claimed in any of claims 1 to 3, wherein the composition Z comprises the component B and component C in a weight ratio of component B to component C of from 0.1 to 10.0.
5. The composition Z as claimed in any of claims 1 to 4, wherein the composition Z comprises the component B and component C in a weight ratio of component B to component C of from 0.3 to 1.0.
6. The composition Z as claimed in any of claims 1 to 5, wherein the composition Z is a masterbatch MB and comprises

0.2 to 20	% by weight of component B,
0.4 to 40	% by weight of component C,
0.2 to 20	% by weight of component D,
0.1 to 10	% by weight of component E,
10 to 99.1	% by weight of component P,

with the weight % being based on the total weight of composition Z.

7. The composition Z as claimed in any of claims 1 to 6, wherein the composition Z is a masterbatch MB and comprises

1.5 to 20	% by weight of component B,
3 to 40	% by weight of component C;
1.5 to 20	% by weight of component D,
0.75 to 10	% by weight of component E;
10 to 93.25	% by weight of component P;

with the weight % being based on the total weight of composition Z.

8. The composition Z as claimed in any of claims 1 to 5, wherein the composition Z is a Compound and comprises

0.0167 to 1.47	% by weight of component B,
0.0333 to 2.94	% by weight of component C;
0.0167 to 1.47	% by weight of component D,
0.00835 to 0.735	% by weight of component E;
93.385 to 99.92495	% by weight of component P;

with the weight % being based on the total weight of composition Z.

9. The composition Z as claimed in any of claims 1 to 8, wherein component P is a styrene homopolymer, an alkylstyrene homopolymer or a styrene copolymer.

10. The composition Z as claimed in claim 9, wherein the styrene copolymer is a high impact polystyrene, a styrene-butadiene-styrene or a styrene butadiene rubber.

11. The composition Z as claimed in any of claims 1 to 10, wherein component C is a polyglycerol fatty acid ester.

12. A process for preparing a composition Z as claimed in any of claims 1 to 11, wherein the components B, C, D, E and P are mixed together.

13. Use of a composition Z as claimed in any of claims 1 to 11 for manufacturing an absorbent article of solid non-foamed or foamed polystyrene.

14. A solid foamed or non-foamed polystyrene article comprising a composition Z as defined in any of claims 1 to 11.

15. The article as claimed in claim 14, which is a film, a sheet or a container, preferably a food tray.

Patentansprüche

1. Zusammensetzung Z, umfassend eine Komponente B, eine Komponente C, eine Komponente D, eine Komponente E und eine Komponente P, worin
die Komponente B ein Polyethylenglycol ist,
die Komponente C ein Polyglycerolester ist,
die Komponente D ist ein Erdalkalicarbonat,
die Komponente E ein Phyllosilicat ist,
und die Komponente P ein Polystyren und/oder eine Legierung davon ist.

2. Zusammensetzung Z wie in Anspruch 1 beansprucht, umfassend 0,06 bis 90 Gew.-% der Summe der Komponenten B, C, D und E wobei sich die Gew.-% auf das Gesamtgewicht der Zusammensetzung Z beziehen.

3. Zusammensetzung Z wie in Anspruch 1 oder 2 beansprucht, wobei die Zusammensetzung Z von 1,25 bis 50 Gew.-% der Summe der Komponenten B, C, D und E umfasst, wobei die Gew.-% sich auf das Gesamtgewicht der Zusammensetzung Z beziehen.

4. Zusammensetzung Z wie in einem beliebigen der Ansprüche 1 bis 3 beansprucht, wobei die Zusammensetzung Z die Komponente B und die Komponente C in einem Gewichtsverhältnis von Komponente B zu Komponente C von 0,1 bis 10,0 umfasst.
5. Zusammensetzung Z wie in einem beliebigen der Ansprüche 1 bis 4 beansprucht, wobei die Zusammensetzung Z die Komponente B und die Komponente C in einem Gewichtsverhältnis von Komponente B zu Komponente C von 0,3 bis 1,0 umfasst.
6. Zusammensetzung Z wie in einem beliebigen der Ansprüche 1 bis 5 beansprucht, wobei die Zusammensetzung Z ein Masterbatch MB ist und
0,2 bis 20 Gew.-% der Komponente B,
0,4 bis 40 Gew.-% der Komponente C,
0,2 bis 20 Gew.-% der Komponente D,
0,1 bis 10 Gew.-% der Komponente E,
10 bis 99,1 Gew.-% der Komponente P,
umfasst, wobei die Gew.-% sich auf das Gesamtgewicht der Zusammensetzung Z beziehen.
7. Zusammensetzung Z wie in einem beliebigen der Ansprüche 1 bis 6 beansprucht, wobei die Zusammensetzung Z ein Masterbatch MB ist und
1,5 bis 20 Gew.-% der Komponente B,
3 bis 40 Gew.-% der Komponente C,
1,5 bis 20 Gew.-% der Komponente D,
0,75 bis 10 Gew.-% der Komponente E,
10 bis 93,25 Gew.-% der Komponente P,
umfasst, wobei die Gew.-% sich auf das Gesamtgewicht der Zusammensetzung Z beziehen.
8. Zusammensetzung Z wie in einem beliebigen der Ansprüche 1 bis 5 beansprucht, wobei die Zusammensetzung Z eine Verbindung ist und
0,0167 bis 1,47 Gew.-% der Komponente B,
0,0333 bis 2,94 Gew.-% der Komponente C,
0,0167 bis 1,47 Gew.-% der Komponente D,
0,00835 bis 0,735 Gew.-% der Komponente E,
93,385 bis 99,92495 Gew.-% der Komponente P,
umfasst, wobei die Gew.-% sich auf das Gesamtgewicht der Zusammensetzung Z beziehen.
9. Zusammensetzung Z wie in einem beliebigen der Ansprüche 1 bis 8 beansprucht, wobei die Komponente P ein Styren-Homopolymer, ein Alkylstyren-Homopolymer oder ein Styren-Copolymer ist.
10. Zusammensetzung Z wie in Anspruch 9 beansprucht, wobei das Styren-Copolymer ein hochschlagfestes Polystyren, ein Styren-Butadien-Styren oder ein Styren-Butadien-Kautschuk ist.
11. Zusammensetzung Z wie in einem beliebigen der Ansprüche 1 bis 10 beansprucht, wobei die Komponente C ein Polyglycerol-Fettsäureester ist.
12. Verfahren zur Herstellung einer Zusammensetzung Z wie in einem beliebigen der Ansprüche 1 bis 11 beansprucht, wobei die Komponenten B, C, D, E und P miteinander vermischt sind.
13. Verwendung einer Zusammensetzung Z wie in einem beliebigen der Ansprüche 1 bis 11 beansprucht zur Herstellung eines Absorptionsartikels aus festem, nichtgeschäumtem oder geschäumtem Polystyren.
14. Fester, geschäumter oder nicht-geschäumter Polystyrenartikel, umfassend eine Zusammensetzung Z wie in einem beliebigen der Ansprüche 1 bis 11 beansprucht.
15. Artikel wie in Anspruch 14 beansprucht, welcher eine Folie, eine Tafel oder ein Behälter, vorzugsweise ein Essenstablett, ist.

Revendications

1. Composition Z comprenant un composant B, un composant C, un composant D, un composant E et un composant P ,
le composant B étant un polyéthylène glycol,
le composant C étant un ester de polyglycérol,
le composant D étant un carbonate alcalino-terreux,
le composant E étant un phyllosilicate,
et le composant P étant un polystyrène et/ou un alliage de celui-ci.
2. Composition Z selon la revendication 1, comprenant de 0,06 à 90 % en poids de la somme des composants B, C, D et E, le % en poids étant basé sur le poids total de la composition Z.
3. Composition Z selon la revendication 1 ou 2, la composition Z comprenant de 1,25 à 50 % en poids de la somme des composants B, C, D, et E, le % en poids étant basé sur le poids total de la composition Z.
4. Composition Z selon l'une quelconque des revendications 1 à 3, la composition Z comprenant le composant B et le composant C dans un rapport en poids du composant B au composant C de 0,1 à 10,0.
5. Composition Z selon l'une quelconque des revendications 1 à 4, la composition Z comprenant le composant B et le composant C dans un rapport en poids du composant B au composant C de 0,3 à 1,0.
6. Composition Z selon l'une quelconque des revendications 1 à 5, la composition Z étant un mélange maître MB et comprenant
0,2 à 20 % en poids de composant B,
0,4 à 40 % en poids de composant C,
0,2 à 20 % en poids de composant D,
0,1 à 10 % en poids de composant E,
10 à 99,1 % en poids de composant P
le % en poids étant basé sur le poids total de composition Z.
7. Composition Z selon l'une quelconque des revendications 1 à 6, la composition Z étant un mélange maître MB et comprenant
1,5 à 20 % en poids de composant B,
3 à 40 % en poids de composant C ;
1,5 à 20 % en poids de composant D,
0,75 à 10 % en poids de composant E ;
10 à 93,25 % en poids de composant P ;
le % en poids étant basé sur le poids total de composition Z.
8. Composition Z selon l'une quelconque des revendications 1 à 5, la composition Z étant un composé et comprenant
0,0167 à 1,47 % en poids de composant B,
0,0333 à 2,94 % en poids de composant C ;
0,0167 à 1,47 % en poids de composant D,
0,00835 à 0,735 % en poids de composant E ;
93,385 à 99,92495 % en poids de composant P ;
le % en poids étant basé sur le poids total de composition Z.
9. Composition Z selon l'une quelconque des revendications 1 à 8, dans laquelle le composant P est un homopolymère de styrène, un homopolymère d'alkylstyrène ou un copolymère de styrène.
10. Composition Z selon la revendication 9, dans laquelle le copolymère de styrène est un polystyrène choc, un caoutchouc styrène-butadiène-styrène ou styrène-butadiène.
11. Composition Z selon l'une quelconque des revendications 1 à 10, dans laquelle le composant C est un ester d'acide gras de polyglycérol.
12. Procédé de préparation d'une composition Z selon l'une quelconque des revendications 1 à 11, dans lequel les composants B, C, D, E et P sont mélangés conjointement.

EP 2 847 268 B1

13. Utilisation d'une composition Z selon l'une quelconque des revendications 1 à 11 pour la fabrication d'un article absorbant de polystyrène solide non expansé ou expansé.

5 **14.** Article de polystyrène solide expansé ou non expansé comprenant une composition Z telle que définie dans l'une quelconque des revendications 1 à 11.

15. Article selon la revendication 14, qui est un film, une feuille ou un récipient, de préférence un plateau à aliments.

10

15

20

25

30

35

40

45

50

55

Figure

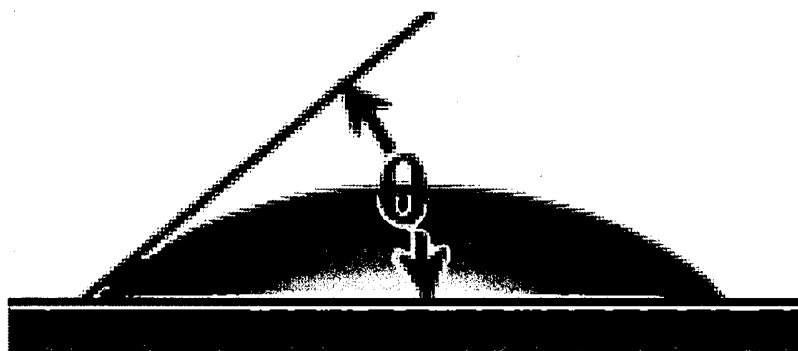


Fig. 1: Static contact angle Theta

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2289994 A2 [0005]

Az EP 2 847 268 címe:

Kompozíció hidrofil polisztirol előállítására

Szabadalmi igénypontok

1. A Z kompozíció, amely B komponenst, C komponenst, D komponenst, E komponenst és P komponenst tartalmaz, ahol

a B komponens poli(etilén-glikol),

a C komponens poliglicerín-észter,

a D komponens alkáli földfém-karbonát,

az E komponens filloszilikát

és a P komponens polisztirol és/vagy annak ötvözet.

2. Az 1. igénypont szerinti Z kompozíció, amely a B, C, D és E komponensekből összesen 0,06-90 súly % mennyiséget tartalmaz, ahol a súly % a Z kompozíció teljes súlyára vonatkozik.

3. Az 1. vagy 2. igénypont szerinti Z kompozíció, amely a B, C, D és E komponensekből összesen 1,25-50 súly % mennyiséget tartalmaz, ahol a súly % a Z kompozíció teljes súlyára vonatkozik.

4. Az 1.-3. igénypont bármelyike szerinti Z kompozíció, amely a B komponenst és a C komponenst 0,1-10,0 súlyarányban tartalmazza, a B komponenst a C komponenshez viszonyítva.

5. Az 1.-4. igénypont bármelyike szerinti Z kompozíció, amely a B komponenst és a C komponenst 0,3-1,0 súlyarányban tartalmazza, a B komponenst a C komponenshez viszonyítva.

6. Az 1.-5. igénypont bármelyike szerinti Z kompozíció, ahol a Z kompozíció az MB mestersarzs, amely tartalmaz

0,2-20 súly % B komponenst,

0,4-40 súly % C komponenst,

0,2-20 súly % D komponenst,

0,1-10 súly % E komponenst,

10-99,1 súly % P komponenst,

ahol a súly % a Z kompozíció teljes súlyára vonatkozik.

7. Az 1.-6. igénypont bármelyike szerinti Z kompozíció, ahol a Z kompozíció az MB mestersarzs, amely tartalmaz

1,5-20 súly % B komponenst,

3-40 súly % C komponenst,

1,5-20 súly % D komponenst,

0,75-10 súly % E komponenst,

10-93,25 súly % P komponenst,

ahol a súly % a Z kompozíció teljes súlyára vonatkozik.

8. Az 1.-5. igénypont bármelyike szerinti Z kompozíció, ahol a Z kompozíció keverék, amely tartalmaz

0,0167-1,47 súly % B komponenst,

0,0333-2,94 súly % C komponenst,

0,0167-1,47 súly % D komponenst,

0,00835-0,735 súly % E komponenst,

93,385-99,92495 súly % P komponenst,

ahol a súly % a Z kompozíció teljes súlyára vonatkozik.

9. Az 1.-8. igénypont bármelyike szerinti Z kompozíció, ahol a P komponens sztírol homopolimer, alkil-sztírol homopolimer vagy sztírol kopolimer.

10. Az 1.-9. igénypont bármelyike szerinti Z kompozíció, ahol a sztírol kopolimer nagy ütészilárdságú poliszttírol, sztírol-butadién-sztírol vagy sztírol-butadién kaucsuk.

11. Az 1.-10. igénypont bármelyike szerinti Z kompozíció, ahol a C komponens poliglicerinsavészter.

12. Eljárás az 1.-11. igénypont bármelyike szerinti Z kompozíció előállítására, ahol a B, C, D, E és P komponenseket összekeverjük.

13. Az 1.-11. igénypont bármelyike szerinti Z kompozíció felhasználása szilárd, nem-habosított vagy habosított poliszttírolból álló, nedvszívó termék előállítására.

14. Szilárd, habosított vagy nem-habosított poliszttírol termék, amely az 1.-11. igénypont bármelyike szerinti Z kompozíciót tartalmazza.

15. A 14. igénypont szerinti termék, amely film, lap vagy tartály, előnyösen élelmiszertálca.