

(19) **DANMARK**

(10) **DK/EP 1993902 T4**



Patent- og
Varemærkestyrelsen

(12) **Oversættelse af ændret
europæisk patentskrift**

-
- (51) Int.Cl.: **B 63 B 17/00 (2006.01)** **B 66 C 13/02 (2006.01)** **B 66 F 7/20 (2006.01)**
B 66 F 11/04 (2006.01)
- (45) Oversættelsen bekendtgjort den: **2019-04-23**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om opretholdelse af patentet i ændret form: **2019-01-16**
- (86) Europæisk ansøgning nr.: **07768911.5**
- (86) Europæisk indleveringsdag: **2007-02-28**
- (87) Den europæiske ansøgnings publiceringsdag: **2008-11-26**
- (86) International ansøgning nr.: **NL2007050080**
- (87) Internationalt publikationsnr.: **WO2007120039**
- (30) Prioritet: **2006-03-01 NL 1031263**
- (84) Designerede stater: **AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR**
- (73) Patenthaver: **Ampelmann Holding B.V., Kluyverweg 1, 2629 HS Delft, Holland**
- (72) Opfinder: **VAN DER TEMPEL, Jan, Oranje Plantage 23, 2611 TK Delft, Holland**
SALZMANN, David Julio Cerda, Noordeinde 146-f, 2514 GP Den Haag, Holland
KOCH, Jillis, Westeinde 3b, 2512 GS Den Haag, Holland
GERNER, Frederik, Westeinde 3b, 2512 GS Den Haag, Holland
GÖBEL, Arie Jan, Generaal Spoorlaan 489, 2285 TA Rijswijk, Holland
- (74) Fuldmægtig i Danmark: **NORDIC PATENT SERVICE A/S, Bredgade 30, 1260 København K, Danmark**
- (54) Benævnelse: **FARTØJ, BEVÆGELSESPLOTTET, FREMGANGSMÅDE TIL KOMPENSERING FOR ET FARTØJS BEVÆGELSER OG ANVENDELSE AF EN STEWART-PLATFORM**
- (56) Fremdragne publikationer:
US-A- 3 912 227
US-A- 5 605 462
US-B1- 6 659 703
US-B2- 6 568 082
STEWART, D.: 'A PLATFORM WITH SIX DEGREES OF FREEDOM' PROCEEDINGS OF THE INST. OF MECHAN. ENGINEERS(UK) vol. 180, no. 15, pages 371 - 378
VAN DER TEMPEL, J. ET AL: 'DER AMPELMANN; SAFE AND EASY ACCESS TO OFFSHORE WIND TURBINES' EWEA, CONFERENCE & EXHIBITION WIND ENERGY 2004, LONDON,
VAN DER TEMPEL, J. ET AL: 'SCALE MODEL TESTING OF THE AMPELMANN; SAFE AND EASY ACCESS TO OFFSHORE WIND TURBINES' PROCEEDINGS OF THE COPENHAGEN OFFSHORE WIND EN. CONFERENCE 26 October 2005 - 28 October 2005, pages 1 - 7
MAST, E.H.M. ET AL: 'A PHD PROGRAM ON LARGE-SCALE OFFSHORE WIND ENERGY IN THE NETHERLANDS' PHD@SEA. COPENHAGEN OFFSHORE WIND 2005,

Fortsættes ...

'SWELLS NEUTRALISED DURING OFFSHORE MAINTENANCE' PRESS RELEASE DER TU DELFT no. 16, 16
February 2005,
COMPASS PUBLICATIONS: 'IXSEA SPONSORS AMPELMANN PROJECT' SEA TECHNOLOGY June 2005,
ARLINGTON, VA22209 US,
VAN DER TEMPEL, J. ET AL: 'A SAFETY-BASED DESIGN PHILOSOPHY FOR THE AMPELMANN' THE 44
PROCEEDINGS OF THE EUROP. WIND EN. CONF., EWEC 2006, BRUSSELS, pages 1 - 6
'RESEARCH AREA 5; INSTALLATION, OPERATIONS AND MAINTENANCE, RL-5 PROJECT 2004-012
PHD@SEA; DEVELOPMENT OF AN ACCESS SYSTEM FOR OFFSHORE WIND TURBINES' WE@SEA.
WINDENERGIE OP ZEE, RESEARCH REPORTS AND PUBLICATIONS
GB-A- 2 163 402
US-A- 5 947 740

DESCRIPTION

[0001] The invention relates to a vessel with a motion compensation platform.

[0002] The invention also relates to a motion platform.

[0003] The invention further relates to a method for compensating motions of a vessel.

[0004] The invention also relates to the use of a Stewart platform according to any of the methods of claims 12 - 14.

[0005] A vessel with a Stewart platform for compensating motions of a ship is already known. The platform comprises a surface, borne on six hydraulic cylinders, and motion sensors. During use, with the aid of the sensors, the motions of the respective ship are measured. With the aid of these measurements, the orientation of the hydraulic cylinders is driven continuously so that the surface remains approximately stationary relative to the fixed world. In this manner, motions of the ship are compensated and for instance people or loads can be transferred from the ship onto a stationary offshore construction, or vice versa.

[0006] One of the objects of the invention is to improve a motion platform, in particular a vessel with motion platform.

[0007] Another object of the invention is to improve the safety of the use of a vessel and/or motion platform.

[0008] At least one of these and other objects are achieved with a vessel with a motion compensation platform, which platform is provided with at least one carrier for bearing, moving and/or transferring a load, actuators for moving the at least one carrier relative to the vessel, preferably in six degrees of freedom, a control system for driving the actuators, and motion sensors for measuring motions of the vessel relative to an element in the surrounding area, which measurements are used as input for the control system. Here, at least one at least partly passive pressure element is provided for furnishing, during use, a pressure on the carrier for at least partly bearing this.

[0009] The at least partly passive pressure element applies a counterpressure to the carrier, whereby the actuators can be at least partly relieved. As a result, the actuators can be driven with relatively lighter pressure differences, thereby achieving greater precision.

[0010] The at least one object mentioned and/or other objects are also achieved with a motion platform particularly suitable for a vessel as described in any one of claims 1 - 9, which platform is provided with at least one carrier for bearing, moving and/or transferring a load, actuators, for moving the carrier, preferably in six degrees of freedom, relative to at least one fixed point of the actuators, and a control system, the control system being designed for driving

the actuators for said relative movement of the carrier, while at least one at least partly passive pressure element is provided for at least partly compensating the mass of the load.

[0011] In addition, the at least one object mentioned and/or other objects are achieved with a method for compensating motions of a vessel, wherein the motions of the vessel are measured, wherein a carrier with a load is driven so that the carrier is held substantially stationary relative to an element in the surrounding area, while the gravity of a load is at least partly compensated through the application of a substantially constant counterpressure to the carrier.

[0012] Preferably, a Stewart platform is used, while the carrier is at least partly borne by at least one substantially passive pressure element, in particular pneumatic means.

[0013] It is noted that in US patent No. 5 947 740, which is considered to be the closest prior art, a motion platform for a simulator is described which, in addition to six actuators, comprises a continuously (i.e. actively) driven hydraulic cylinder for taking away the load of the weight from the other actuators. When moving the platform and setting it at different angles, the pressure on the hydraulic cylinder is measured continuously and adjusted actively to the pressure variations. Contrary to this known pressure element, the at least one pressure element according to the invention is at least partly passive. The at least one pressure element is also particularly suitable for a motion platform for compensating motions of the vessel, that is, holding the platform, at least a carrier, approximately stationary relative to an element in the surroundings such as, for instance, the fixed world, such as, for instance, an offshore construction, a quay or the surrounding water, and/or a floating element such as another vessel, etc. In case of a defect in the active drive of the actuators, for instance, the at least one pressure element will remain functional, thereby increasing the safety of the vessel while it remains of relatively limited complexity.

[0014] In clarification of the invention, exemplary embodiments of a vessel, motion platform, method and use according to the invention will be further elucidated with reference to the drawing. In the drawing:

Fig. 1 shows a vessel not according to the invention with a part of a windmill;

Fig. 2 shows a block diagram of an embodiment according to the invention;

Fig. 3 shows a schematic view of a moving vessel not according to the invention;

Fig. 4 shows a schematic view of a motion platform according to the invention;

Fig. 5 shows a schematic view of a motion platform according to the invention with an enlargement of a cross-section of a part of a hydraulic pneumatic cylinder;

Figs. 6 and 7 show a schematic view of different motion platforms according to the invention.

[0015] In this description, identical or corresponding parts have identical or corresponding reference numerals. In the drawing, embodiments are given only as examples. The parts used there are mentioned merely as an example and should not be construed to be limitative in any manner. Other parts too can be utilized within the framework of the present invention.

[0016] Fig. 1 schematically shows an embodiment of a vessel 1 according to the invention. With this vessel 1, a load such as for instance people, animals, goods and/or other loads can be transferred from the vessel 1 to a frame or base of, for instance, a windmill 2 at sea 3, and vice versa. For transfer, the vessel 1 is provided with a motion compensation platform 4. This platform will compensate motions of the vessel 1 for the purpose of holding the load relatively still relative to the windmill 2, so that for instance people such as windmill construction personnel can transfer relatively safely. The motions of the vessel 1 that can be compensated may comprise linear motions such as surge (vessel moves from front to back), heave (up and down) and sway (sideways), and rotating motions such as yaw (bow from left to right) roll (the vessel 1 rolls from left to right) and pitch (bow up and down). Naturally, the motions of the vessel 1 are often combinations of these linear and rotational motions.

[0017] This transferring from or to the vessel 1 should of course not be limited to the transfer from and/or to windmills 2. In principle, transferring can be carried out between the vessel 1 and any other surrounding element 2. The vessel 1 is suited for transferring, for instance, people, animals and/or loads to, in principle, any offshore construction, such as platforms at sea 3 and/or other constructions in the water 3, etc. In certain embodiments, a vessel 1 according to the invention is designed for transferring to any part connected to the fixed world, such as a quay, a levee, cliffs, steep rocks, (sea)floor etc. In certain embodiments, a vessel 1 has been made suitable for transferring to other moving elements and/or floating elements, such as, for instance, other vessels. To that end, with the aid of, for instance, a camera, optical sensor or the like, the motions of such a moving element can be registered and be compensated by the active components in the motions of the carrier.

[0018] In the embodiment shown, the motion compensation platform 4 is provided with six hydraulic cylinders 5 and a carrier 6. Such a motion platform 4 is known as simulation platform, as "Stewart" platform. The carrier 6 of such a platform 4 is typically movable in six degrees of freedom. In operation, the carrier 6 will be held, within the invention, substantially stationary relative to the windmill 2 by the hydraulic cylinders 5, by means of active drive. To that end, in/on the motion platform 4, and/or in/on the vessel 1, sensors such as motion sensors 7 and a control system 8 are provided, which are shown in Fig. 2. The sensors 7 measure the motions of the vessel 1, for instance the rocking of the vessel 1 in the water 3. With the aid of these measurements, during use, the hydraulic cylinders 5 are driven in order to hold the carrier 6 comparatively stable relative to the windmill 2. Processing these measurements and actively driving the hydraulic cylinders 5 are tasks of the control system 8. To this end, the control system 8 may comprise a microprocessor 13 and a memory 14. In the embodiment shown in Fig. 1, also, pneumatic means 9 are provided with which, during use, a passive compressive force is exerted on the carrier 6, preferably approximately against the gravitational force of the load and the carrier 6, so that the hydraulic cylinders 5 are, at least partly, relieved. With this,

the required power of the hydraulic cylinders 5 decreases and, in principle, relatively large loads can be borne. Also, for instance shocks of the carrier 6 with load that may be caused by extreme wave motions can be at least partly absorbed by pneumatic means 9. In this description, 'passive' can be understood to mean not driven, at least not continuously driven, or the pneumatic means 9 will be able to react to the relative motions of the carrier 6 without being driven, virtually without the bearing force provided by the carrier being influenced. Naturally, the pneumatic means 9 can be driven, at least in part, during specific periods, for instance for adjusting the pressure in the pneumatic means 9 upon initiation, or with a changing load.

[0019] In the embodiment shown in Fig. 1, the pneumatic means 9 comprise at least one pneumatic cylinder 10 which is placed approximately in the centre of the motion compensation platform 4 and is connected via pipes 15 to a pressure compensator in the form of an accumulator 11 for buffering the compressed air, and a compressor 12 for compressing air. After filling with compressed air in the pneumatic cylinder 10 and the accumulator 11, after provision of a load, the cylinder 10 will remain pressurized and it can continue bearing at least a part of the load. The pneumatic cylinder 10 has the property of passively moving along in its longitudinal direction. Motions of the carrier 6 in the longitudinal direction of the cylinder 10 are followed by compression and expansion of the air in the cylinder 10 and the accumulator 11. Small pressure losses in the pneumatic cylinder 10 through, for instance, friction can be measured and compensated with the aid of, for instance, the compressor 12 and/or the control system 8. Such pneumatic means 9 are known per se from the so-called 'heave compensation' systems. By placing this longitudinal direction in the direction of gravity, a great force, e.g. that of the weight of the carrier 6 and the load, will be continuously absorbed by the passive pneumatic means 9, and hence also in the case of a defect in the active elements of the motion compensation platform 4 such as, for instance, the sensors 7, the control system 8 and/or the hydraulic cylinders. In particular embodiments, the pneumatic means 9 are advantageously placed in other directions, for instance for compensating the tilting motions of the carrier 6 after, for instance, a defect. In this way, upon a defect of an element such as a cylinder 5, the pneumatic means 9 can prevent the motion compensation platform from making a relatively unsafe motion, such as, for instance, collapsing. Defects that might occur are, for instance, power supply failure or valves in the active hydraulic system becoming wedged. Naturally, also, other, preferably passive, pressure systems 9 can be utilized within the framework of the Invention. In certain embodiments, instead of and/or in addition to pneumatic means 8, that is the cylinder 10, at least one spring can be utilized as passive element 10, for instance a spiral and/or gas spring. The pneumatic means 9 can, in principle, comprise different types of pressure elements such as, for instance, hydraulic means and/or elastic means and/or a pulling element, etc. Naturally, one or more pressure elements can be utilized. Depending on, for instance, the expected use, desired precision and/or economic considerations, one particular type, one particular amount and/or positioning can be selected. A passive pressure system 9 provides security in that it will, in principle, not fail and can remain functional without continuous actuation. Also, such a passive system 9 can remain of limited complexity.

[0020] As stated, the pneumatic means 9 relieve the hydraulic cylinders 5. In particular embodiments, this results in that less oil has to be circulated for holding the carrier 6 stable upon motions of the vessel 1. In one embodiment, the pneumatic means 9 may be set, with the aid of the compressor 12, for providing a compressive force that absorbs at least a large part of the weight of the carrier 6 and the load. Partly because of the mass inertia of the carrier 6 and the load, and the constant pressure provided by the cylinder 10 and the accumulator 11 on the carrier 6, in one embodiment, the carrier 6 will tend to remain approximately stationary relative to the fixed world. Consequently, the hydraulic cylinders 5 can compensate the motions of the vessel 1 with relatively small forces, i.e., hold the carrier 6 approximately stationary relative to an element in the surrounding area.

[0021] In one embodiment, the pneumatic means 9 are also designed for preventing the reinforcement of particular motions of the vessel 1, for instance through the forces exerted by the hydraulic cylinders 5 on the vessel 1. As indicated in an exaggerated, schematic manner in Fig. 3, it may for instance be so that if the vessel tilts towards a particular side, a hydraulic cylinder 5a stretches to compensate this tilting. At any moment, in particular at the moment the vessel tilts back again, it may be so that the cylinder 5a is still being driven so as to stretch, whereby a force F is exerted on the side of the vessel 1. This may cause reinforcement of particular motions of the vessel 1. As already explained, with the pneumatic means 11, in particular the pneumatic cylinder 10 in Fig. 3, the forces of and on the hydraulic cylinders 5 will remain relatively limited. That is why in certain embodiments, this reinforcement of motions remains limited during use of the vessel. In a further embodiment, an algorithm is included in the control system 8, which can anticipate a delay and/or reversal of a motion of the vessel 1, so that the hydraulic cylinders 5 can be driven while anticipating the respective motion of the vessel 1. In this manner too, the reinforcement of the motions of the vessel 1 mentioned is prevented.

[0022] In particular embodiments, the motion sensors 7 comprise known motion sensors 7 such as for measuring motions of the vessel 1, for instance accelerometers or dynamometers. With known accelerometers, the motion of the vessel 1 relative to the fixed world can be measured. Also, in particular embodiments, other types of sensors 7 can be utilized, such as for instance cameras, GPS (Global Positioning System), sensors utilizing electromagnetic waves, sonic waves, etc. The sensors 7 may measure the position of the vessel 1 relative to one or more elements in the surrounding area, such as for instance another vessel 1 and/or the fixed world. The information the control system 8 receives from the motions sensors 7 is processed via, for instance, preprogrammed algorithms so that the hydraulic cylinders 5 can be driven for holding the carrier 6 approximately stationary relative to the respective at least one element in the surrounding area.

[0023] In particular embodiments, the control system 8 comprises, in addition to algorithms for driving the hydraulic cylinders 5, a drive for anticipating specific motions of the vessel 1. Through recognition of, for instance, a specific order in the motions of the vessel 1, the control system 8 drives the cylinders 5 proactively. In this manner, the forces of the hydraulic cylinders 5 on the vessel 1 can remain as small as possible and motions of the vessel 1 can be

prevented from being unfavourably influenced, at least being reinforced.

[0024] The operation of an embodiment of the motion platform 4 is approximately as follows. When the vessel 1 is close to the windmill 2, the platform 4 is activated. The pressure in the pneumatic means 9 is increased with the aid of the compressor 12 to approximately the weight of the carrier 6 and a load thereon, so that carrier 6 and load, or a part thereof, are borne by the pneumatic means 9. This may be carried out in cooperation with measurements from the hydraulic cylinders 5 and/or the motion sensors 7, with which the weight and or the motion of the vessel 1, respectively, can be measured relatively simply. Naturally, also, other weight meters and/or methods for measuring the weight and/or motions can be utilized for setting the desired pressure in the pneumatic means 9. In addition, the velocities and accelerations of the motions of the vessel 1 are measured with the motion sensors 7, which measurements are used as input for the control system 8. Through continuous adjustment of the six cylinders 5, the carrier 6 will be able to virtually stand still relative to the windmill 2. After that, a hatch or gangplank connected to the platform 4 and/or the windmill 2 can be lowered so that personnel and/or the load can be transferred safely.

[0025] In certain embodiments, the pneumatic means comprise several pneumatic cylinders 10. As shown in Fig. 4, one pneumatic cylinder 10 can be provided per hydraulic cylinder 5. Here, in the event of a defect in a hydraulic cylinder 5, a possible undesired motion of this cylinder 5 will be prevented by the respective pneumatic cylinder 10. According to this same principle, the hydraulic cylinder 5 and the pneumatic cylinder 10 can be integrated, as shown in Fig. 5. Here, the integrated cylinder 5, 10 comprises, for instance, an integrated piston with a passive, preferably pneumatic piston part 16 and an actively driven, preferably hydraulic piston part 17. It will be clear that, within the framework of the invention, several hydraulic 5 and/or pneumatic cylinders 10 can be placed. In the embodiments of Figs. 4 and 5, the passive cylinder 10, or the passive part of the cylinder 16, bears the largest part of the load and the active cylinder 5, or the active part of the cylinder 17, adjusts the carrier 6.

[0026] As shown in the schematic embodiment of Fig. 6, it is also possible to have several pneumatic cylinders 10 furnish pressure on or adjacent the centre of the carrier 6. With this, the safety can be even further increased. Also, upon, for instance, a tilting motion as represented in Fig. 3, the pneumatic cylinder 10 positioned best to that end can compensate a vessel motion reinforcing motion of a hydraulic cylinder 5. To this end, the pneumatic cylinders 10 can also be positioned in an approximately upright manner and distributed below the carrier 6, as highly schematically represented in Fig. 7.

[0027] These and many comparable variations, as well as combinations thereof, are understood to fall within the framework of the invention as outlined by the claims. Naturally, different aspects of the different embodiments and/or combinations thereof can be combined with each other and be exchanged within the framework of the invention. Therefore, the embodiments mentioned should not be understood to be limitative.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US5947740A [0013]

PATENTKRAV

1. Fartøj (1) med en bevægelseskompenserende platform (4) til overførsel af en last fra og/eller til et fartøj, hvilken platform (4) er forsynet med:
 - 5 mindst en bærer (6) til at understøtte, bevæge og overføre en last, aktuatorer (5) til at bevæge den mindst ene bærer (6) i forhold til fartøjet (1) i seks frihedsgrader, et styringssystem til at drive aktuatorerne (5), og bevægelsessensorer (7) til at måle fartøjets (1) bevægelser i forhold til mindst et element i det omgivende område, hvilke målinger anvendes som input til styringssystemet,
 - 10 **kendetegnet ved, at** der er tilvejebragt mindst et i det mindste delvist passivt trykelement (9) til under brug at tilvejebringe et tryk på bæreren (6) for i det mindste delvist at understøtte denne, hvor platformen er en platform af Steward-type, hvor bæreren er båret på seks hydrauliske cylindre, hvor hver aktuator (5) har en drivretning, og hvor for hver drivretning mindst et tilsvarende trykelement (10) er designet til påføring af tryk i en parallel retning.
 - 15
2. Fartøj (1) ifølge krav 1, hvor det mindst ene trykelement (10) indbefatter pneumatiske midler (9).
3. Fartøj (1) ifølge krav 1 eller 2, hvor det mindst ene trykelement (10) er konstrueret til
20 under brug at påføre et i det væsentlige konstant modtryk på bæreren (6) med lasten, hvilket omtrent kompenserer for tyngdekraften på bæreren (6) med lasten.
4. Fartøj (1) ifølge et hvilket som helst af kravene 1 til 3, hvor det mindst ene trykelement (10) er konstrueret til i det mindste delvist at kompensere for retningen af tyngdekraften på
25 bæreren (6) og/eller lasten.
5. Fartøj (1) ifølge et hvilket som helst af de foregående krav, hvor der er tilvejebragt en trykbeholder til at dæmpe trykvariationer på det mindst ene trykelement (10).
- 30 6. Fartøj (1) ifølge et hvilket som helst af de foregående krav, hvor der er tilvejebragt en trykkompensator (11) til at kompensere for ændringer i trykket i det mindst ene trykelement (10), navnlig ændringer i mængden af trykfluid og/eller lasten.
7. Bevægelsesplatform af Steward-typen (4) til et fartøj (1) som beskrevet i et hvilket som

helst af kravene 1 til 8, hvilken platform (4) er forsynet med mindst en bærer (6) til at understøtte, bevæge og/eller overføre en last, aktuatorer (5) til at bevæge bæreren (6), fortrinsvis i seks frihedsgrader, i forhold til mindst et fast punkt af aktuatorerne (5), og et styringssystem (8), hvilket styringssystem (8) er konstrueret til at drive aktuatorerne (5) til den relative bevægelse af bæreren (6),

kendetegnet ved, at der er tilvejebragt mindst et i det mindste delvist passivt trykelement (10) til i det mindste delvist at kompensere for lastens tyngdekraft, hvor bæreren er båret på seks hydrauliske cylindre, hvor hver aktuator (5) har en drivretning, og hvor for hver drivretning mindst et tilsvarende trykelement (10) er designet til påføring af tryk i en parallel retning.

8. Bevægelsesplatform ifølge krav 7, konstrueret som bevægelseskompenserende platform (4) og forsynet med bevægelsessensorer (7) til at måle relative bevægelser af sensorerne (7) i forhold til et omgivende område, hvilke målinger anvendes som input til styringssystemet (8), hvilket styringssystem (8) er konstrueret til at drive aktuatorerne (5) til at holde bæreren (6) i det væsentlige stationær i forhold til det omgivende område.

9. Fremgangsmåde til at kompensere et fartøjs (1) bevægelser ved anvendelse af en platform af Steward-typen, hvor en bærer bæres på seks hydrauliske cylindre, hvor bevægelser af fartøjet (1) måles, når bæreren (6) med en last drives sådan, at bæreren (6) holdes i det væsentlige stationær i forhold til mindst et element (2) i det omgivende område, mens tyngdekraften på lasten i det mindste delvist kompenseres ved at tilvejebringe et i det væsentlige konstant modtryk på bæreren (6),

hvor bæreren (6) er en del af en bevægelsesplatform (4), hvilken platform (4) endvidere omfatter aktuatorer (5) til bevægelse af bæreren (6), fortrinsvis i seks frihedsgrader, i forhold til mindst ét fastsat punkt for aktuatorerne (5), og et styringssystem (8), hvilket styringssystem (8) er designet til at drive aktuatorerne (5) for den relative bevægelse af bæreren (6), hvor mindst ét mindst delvist passivt trykelement (10) er tilvejebragt til i det mindste delvist at kompensere for lastens tyngdekraft,

hvor hver aktuator (5) har en drivretning, og hvor for hver drivretning mindst ét tilsvarende trykelement (10) er designet til at påføre tryk i en parallel retning.

10. Fremgangsmåde ifølge krav 9, hvor lasten overføres fra bæreren (6) til det mindst ene element (2) i det omgivende område eller omvendt.

DRAWINGS

DK/EP 1993902 T4

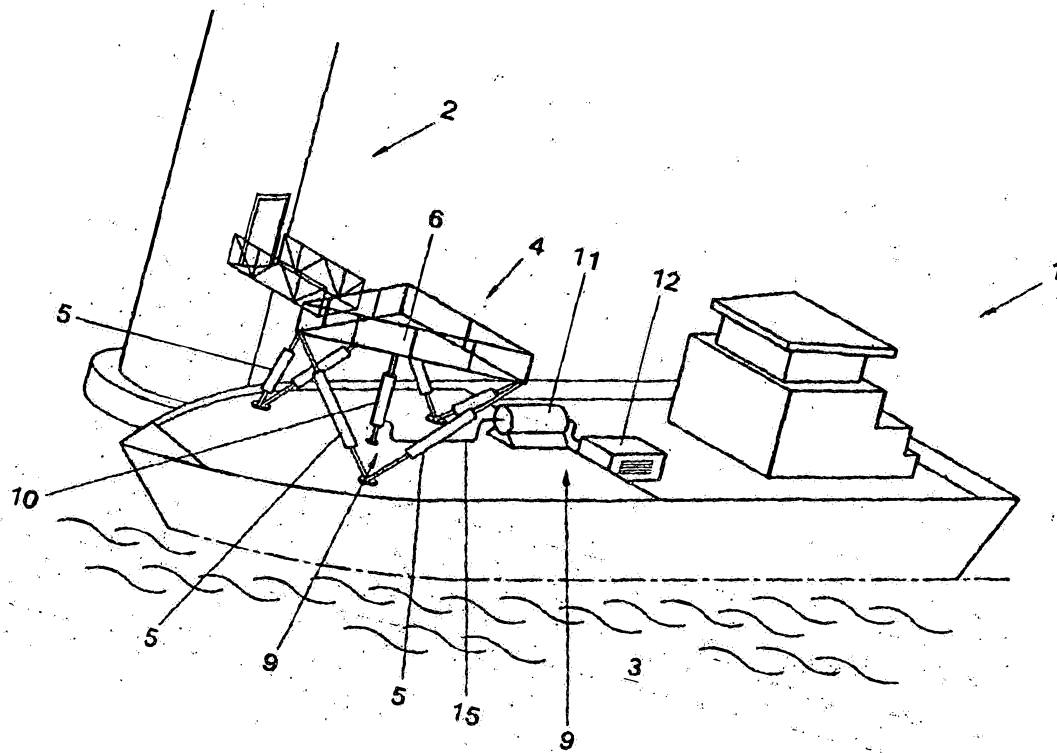


Fig. 1

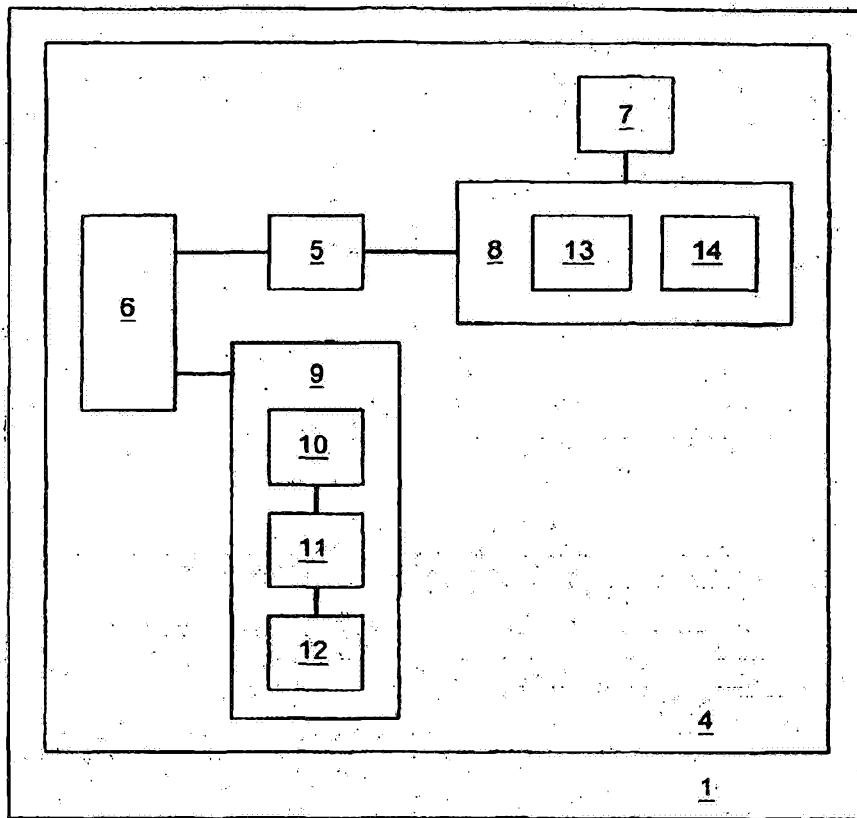
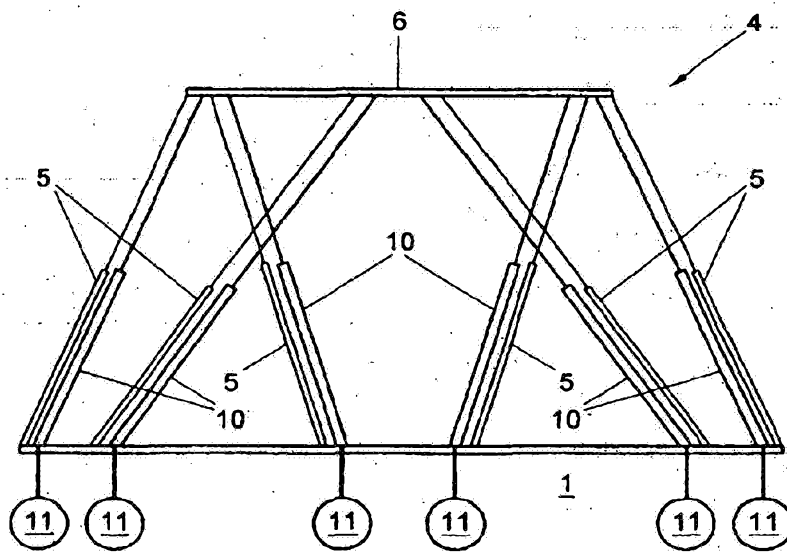
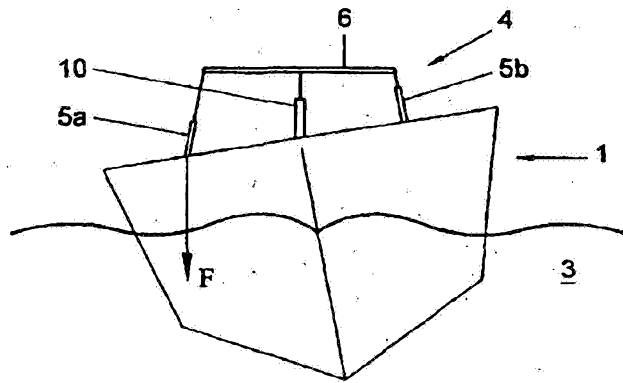


Fig. 2



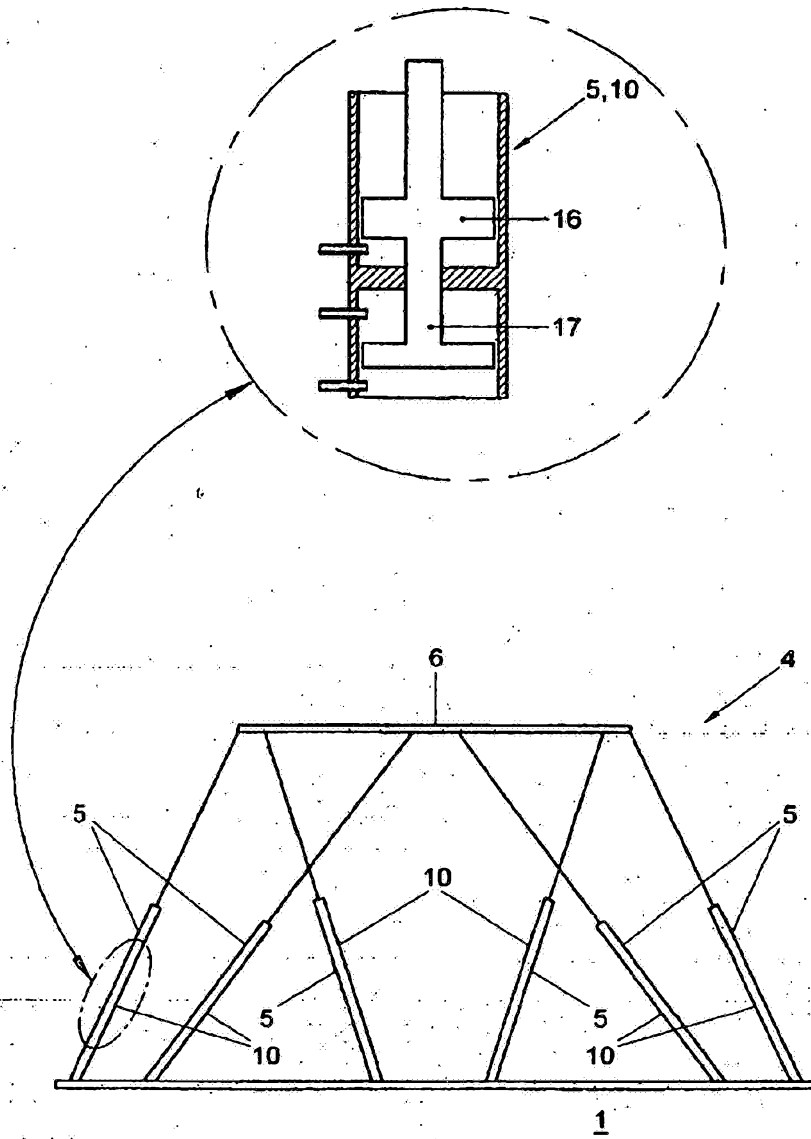


Fig. 5

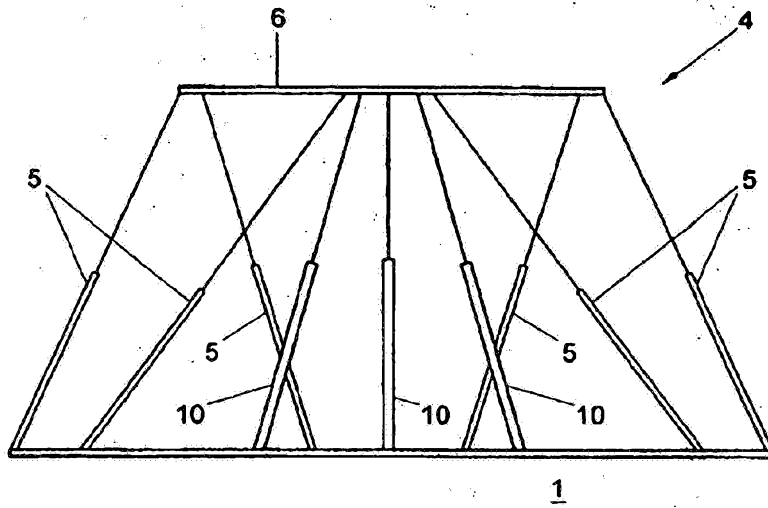


Fig. 6

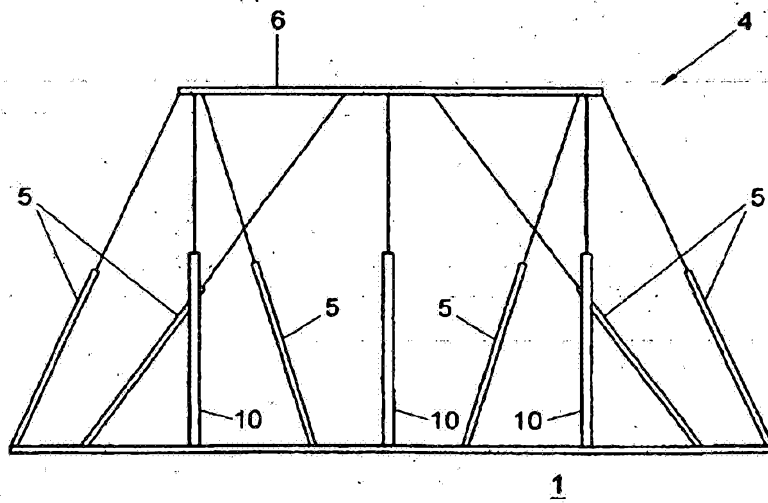


Fig. 7