



(11) **EP 1 405 942 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
27.10.2010 Bulletin 2010/43

(51) Int Cl.:
D03D 47/48 (2006.01) **D03D 51/44** (2006.01)
D03D 51/08 (2006.01)

(21) Application number: **03020622.1**

(22) Date of filing: **10.09.2003**

(54) **Method of tuck-in operation of a shuttleless loom and a tuck-in device**

Verfahren zum Einlegen der Schussfadenenden in einer schützenlosen Webmaschine und
Einlegevorrichtung

Méthode de rentrage des extrémités de trame sur métier sans navette et dispositif de rentrage

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **02.10.2002 JP 2002290357**

(43) Date of publication of application:
07.04.2004 Bulletin 2004/15

(73) Proprietor: **TSUDAKOMA KOGYO KABUSHIKI
KAISHA**
Kanazawa-shi,
Ishikawa-ken 921-8650 (JP)

(72) Inventor: **Sawada, Shigeharu**
Kanazawa-shi
Ishikawa-ken 921-8650 (JP)

(74) Representative: **Goddar, Heinz J.**
Forrester & Boehmert
Pettenkoferstrasse 20-22
80336 München (DE)

(56) References cited:
EP-A- 1 087 046 EP-A- 1 130 145
EP-A- 1 174 532

- **PATENT ABSTRACTS OF JAPAN** vol. 015, no. 306
(C-0856), 6 August 1991 (1991-08-06) -& JP 03
113051 A (TOYOTA AUTOM LOOM WORKS LTD),
14 May 1991 (1991-05-14)
- **PATENT ABSTRACTS OF JAPAN** vol. 2002, no.
06, 4 June 2002 (2002-06-04) -& JP 2002 054053 A
(TSUDAKOMA CORP), 19 February 2002
(2002-02-19)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 405 942 B1

Description

[0001] The invention relates to a method of allowing a tuck-in device of a shuttleless loom inoperative in response to an instruction from a loom and the tuck-in device.

[0002] Besides JP-A-2002 054053 (EP 1087046 A2) that discloses the displacement of a weft to a working zone of a guide nozzle without retaining the weft on an engaging means, JP-A 2001-159053 (first prior art) discloses a weft holding device of a tuck-in device, wherein the weft holding device of the tuck-in device injects air from a tuck-in nozzle (release port) provided inside a slit of a block body which leaves open in three directions at the stoppage time of a weft, thereby removing the weft from a cutting area of a cutter to prevent the weft from being cut so that a weft end is not tucked in a shedding of a warp.

[0003] According to the device of the first prior art, even if a signal representing injection of air from the tuck-in nozzle is outputted in response to a weft cut detection signal, it takes time when the closing valve actually operates to inject air, so that the weft stays in a cutting area when the cutter operates, and hence the weft is cut. Accordingly, there occurs that the weft is tucked in the shedding of the warp by the injection of air through another tuck-in nozzle (guide hole).

[0004] Further, JP-A 3-113051 (second prior art) discloses a technique relating to a method of and a device for performing tuck-in operation in a shuttleless loom. According to this technique, a weft end is gripped and tucked in by a needle, wherein a weft is disposed within an operation area of the needle by injecting air at the stoppage time of the loom other than a weft stoppage, and the tuck-in operation is performed, while the weft is prevented from being disposed within the operation area of the needle by stopping the injection of the air at the stoppage time of the loom caused by the weft stoppage, thereby preventing the weft from being retained by the needle and tucked-in.

[0005] However, in the technique of the second prior art, although the weft end is not held in the operation area of the needle by the injection of air at the time of weft stoppage, the needle still swings, and hence the weft end contacted the needle is drawn into and tacked in the shedding 34 of the warp when the needle retracts.

[0006] Accordingly, it is an object of the invention to easily draw out a defective weft from a woven cloth in the case of the loom stoppage cause such as a weft stoppage where the weft end is preferably not to be tucked in the shedding of the warp.

[0007] To achieve the above object, the invention assumes a tuck-in device 2 of a shuttleless loom for folding back a weft end 37 of a weft 16 inside a shedding 34 of a warp 33 by injecting an air flow 32 after gripping the weft end 37 of the weft 16.

[0008] Particularly, a method of performing a tuck-in operation by the tuck-in device 2 of the shuttleless loom

for folding back a weft end 37 inside a shedding 34 of a warp 33 allowing injection of the air flow 32 inoperative in response to an instruction from a loom 1 based on a stoppage cause of the loom 1 not to fold back the weft end 37 inside the shedding 34 of the warp 33.

[0009] The invention further provides a proper device for embodying the above method.

Fig. 1 is a plan view showing a state where a main part of a tuck-in device built in a loom (shuttleless loom) according to an embodiment of the invention;

Fig. 2 is a side view of the main part (block body) of the tuck-in device of the invention;

Fig. 3 is a block diagram of an airflow supply device of the tuck-in device of the invention;

Fig. 4 is a timing diagram showing operations of constituent members of the tuck-in device relative to a main shaft rotary angle of the loom at the time of normal tuck-in operation;

Fig. 5 is a timing diagram showing operations of constituent members of the tuck-in device relative to the main shaft rotary angle of the loom at the time of non tuck-in operation;

Fig. 6(a) and Fig. 6(b) are views explaining the main part (block body) of the tuck-in device according to the embodiment of the invention at the time of non tuck-in operation, wherein Fig. 6 (A) is a plan view and Fig. 6 (B) is a side view;

Fig. 7 is a timing diagram showing operations of constituent members of the tuck-in device according to another embodiment of the invention relative to the main shaft rotary angle of the loom at the time of non tuck-in operation; and

Fig. 8 is a view explaining the main part (block body) of the tuck-in device according to another embodiment of the invention, wherein Fig. 8 (A) is a plan view and Fig. 8 (B) is a side view.

[0010] Figs. 1 and 2 show an embodiment where a tuck-in device 2 of the invention is built in a loom (shuttleless loom) 1. The tuck-in device 2 is disposed at a weaving end of a weft insertion or the weaving end of a weft arrival side. Further, a plurality of cloths are woven, the tuck-in device 2 is also disposed between woven cloths. Fig. 1 shows the tuck-in device 2 disposed only at the weft arrival side. The tuck-in device 2 comprises a cutter 7 for cutting a weft 16, a block body 3 disposed between the cutter 7 and a woven cloth end 31 of a woven cloth 5, and an airflow supply device 4 for supplying air to a gripping nozzle 12, a first tuck-in nozzle 18 and a second tuck-in nozzle 19 integrally provided in the block body 3. Further, there is provided an ejector 39, positioned opposite to the block body 3 while intervening the cutter 7, for drawing a cut end of the weft 16 which was cut by the cutter 7.

[0011] The block body 3 has a slit 9 which leaves open in three directions, namely, leaves open at a front side thereof opposite to a reed 8, the cutter 7 side and the

woven cloth 5 side. Tapered guide surfaces 10 are positioned on an inner wall thereof at the front entrance thereof and they are gradually enlarged in a slit width toward the reed 8. The slit 9 has a gripping nozzle 12 on an upper wall 11 of its inner wall and an airflow entrance port 14 on a lower wall 13 of its inner wall, and these gripping nozzle 12 and airflow entrance port 14 penetrate the inner wall of the slit 9 from upper and lower surfaces of the block body 3 and oppose each other. The gripping nozzle 12 is connected to the airflow supply device 4 through a gripping pipe 15 and receives air from the airflow supply device 4 and injects it toward the airflow entrance port 14 when it operates. In this embodiment, although the gripping nozzle 12 is provided on the upper wall 11 and the airflow entrance port 14 is provided on the lower wall 13, the airflow entrance port 14 may be provided on the upper wall 11 and the gripping nozzle 12 may be provided on the lower wall 13.

[0012] Further, the slit 9 has the first tuck-in nozzle 18 on its innermost wall 17. Still further, two second tuck-in nozzles 19 are provided up and down on the outer wall of the block body 3 at the woven cloth end 31 side while intervening the slit 9 therebetween. When viewing the two second tuck-in nozzles 19 from the reed 8 side, the two second tuck-in nozzles 19 penetrate the block body 3 in a slanted manner while intervening the slit 9 therebetween, and the central lines of nozzle holes of the second tuck-in nozzles 19 cross each other in a shedding 34 of a warp 33 if they are extended.

[0013] One first tuck-in nozzle 18 and two second tuck-in nozzles 19 are structured to receive air from the airflow supply device 4 through a first tuck-in pipe 26 and a second tuck-in pipe 27.

[0014] Fig. 3 shows an injection control system of the tuck-in device 2. In Fig. 3, the airflow supply device 4 comprises a pressure air source 20, pressure regulators 21 a, 21 b, closing valves 22, 23, 24 and a closing valve controller 25. The pressure air source 20 is connected to the gripping nozzle 12 via the pressure regulator 21 a, the closing valve 22 and the gripping pipe 15. Air supplied from the pressure air source 20 is branched at the pressure regulator 21 b. The pressure air source 20 is connected to the first tuck-in nozzle 18 via the pressure regulator 21 b, the closing valve 23 and the first tuck-in pipe 26, and also connected to the second tuck-in nozzle 19 via the pressure regulator 21 b, the closing valve 24, the second tuck-in pipe 27. The closing valve controller 25 opens and closes the closing valves 22, 23, 24 in response to a main shaft rotary angle signal of a loom issued by an encoder 29 connected to a main shaft 28 of the loom based on an injection timing set by a main controller 35, and controls injection of air to be supplied to the gripping nozzle 12, the first tuck-in nozzle 18 and the second tuck-in nozzle 19.

[0015] The main controller 35 performs control necessary for stopping a tuck-in operation in the manner of changing opening and closing control of the closing valves 22, 23, 24 upon reception of a weft stoppage signal

from a weft detection sensor 36. The weft detection sensor 36 is disposed on the side end of a reed holder 38 for detecting the weft end 37 of the weft 16, and generating a weft stoppage signal at the time of defective picking, and supplying this weft stoppage signal to the main controller 35.

[0016] When picking, the weft 16 is picked in the shedding 34 of the warp 33 and the weft 16 is beaten by the reed 8 and is beaten in a cloth fell 6 of the woven cloth 5. At this time, the weft 16 enters the slit 9 and it is cut by the cutter 7 at its tip. The cut weft end of the weft 16 is drawn by the ejector 39 and subjected to a discard process. Thereafter, at the next picking time, the tuck-in device 2 sequentially injects air through the gripping nozzle 12, the first tuck-in nozzle 18, and the second tuck-in nozzles 19, whereby a tuck-in operation is performed by an airflow produced at this time to fold back the weft end 37 of the weft 16 together with the airflow in the shedding 34 formed at the next picking time.

[0017] Fig. 4 is a timing diagram showing an air injection timing of respective nozzles relative to the main shaft rotary angle of the loom at the time of normal tuck-in operation. At the time of normal tuck-in operation, the gripping nozzle 12 injects air toward the airflow entrance port 14 for a given period of time to form a first airflow 30 so that the weft end 37 of the weft 16 cut by the cutter 7 is pulled in the airflow entrance port 14 inside the slit 9 and gripped at the locations of the slit 9 and the airflow entrance port 14.

[0018] Then, the first tuck-in nozzle 18 injects air toward the reed 8 upon elapse of a given period of time from the start of injection by the gripping nozzle 12 (formation of the first airflow 30) to form an air flow 32a as a part of the air flow 32, while the second tuck-in nozzle 19 injects air toward the shedding 34 of the warp 33 upon elapse of a given period of time from the start of injection by the first tuck-in nozzle 18 (formation of the air flow 32a) to form an air flow 32b as a part of the air flow 32, thereby folding back the weft end 37 inside the shedding 34 of the warp 33. In such a manner, the tuck-in device 2 performs a tuck-in operation by folding back the weft end 37 inside the shedding 34 of the warp 33.

[0019] The first airflow 30 is not only formed by the airflow injected from the gripping nozzle 12 but also may be formed by an airflow drawn in the drawing pot of the airflow entrance port 14 and by a plurality of different airflows.

[0020] The air flow 32 is formed by only the airflow injected from the injection port and is not formed by the airflow drawn in the drawing port. The air flow 32 is preferable to be formed by the plurality of airflows 32a, 32b which are differentiated in a direction of injection as set forth above so as to expedite a tuck-in operation, but it may be formed by a single airflow. Further, in this example, the plurality of airflows may be combined with each other while injection timings thereof are differentiated from each other.

[0021] Fig. 5 is a timing diagram showing air injection

timings of respective nozzles relative to the main shaft rotary angle of the loom at the time of non tuck-in operation caused by the weft stoppage. When the weft 16 does not reach the weft detection sensor 36 due to defective picking, for example, due to short picking, the weft detection sensor 36 can not detect the weft 16 so that it outputs a weft stoppage signal to the main controller 35 as a cause of the weft stoppage. The main controller 35 outputs a valve opening inhibition signal of the closing valves 23, 24 to the closing valve controller 25 upon reception of the weft stoppage signal. At this time, although the closing valve controller 25 allows the gripping nozzle 12 to inject air, it keeps the closing valves 23, 24 in a closed state, and inhibits the first tuck-in nozzle 18 and the second tuck-in nozzle 19 to inject air. Further, the injection by the gripping nozzle 12 may last longer than that during the normal period of time, for example, it may continue or last, for example, until the completion of injection of air by the second tuck-in nozzle 19 at the normal time. Meanwhile, the cutter 7 cuts the weft 16 inside the slit 9 after beating in the same manner as the normal picking time.

[0022] Figs. 6(a) and 6(b) show the behavior of the weft 16 in the slit 9 of the block body 3 at the time of non tuck-in operation. The weft end 37 advanced inside the slit 9 by the beating of the reed 8 is cut by the cutter 7, then it is inserted in the airflow entrance port 14 by the first airflow 30 from the gripping nozzle 12, and thereafter pulled inside and gripped by the airflow entrance port 14. Thereafter, the main controller 35 stops the injection of air by the gripping nozzle 12.

[0023] In such a manner, the closing valve controller 25 breaks off the opening of the closing valve 23 of the first tuck-in nozzle 18 and the closing valve 24 of the second tuck-in nozzle 19 in response to the instruction from the loom 1 based on the weft stoppage causing the stoppage of the loom 1, thereby not forming the air flow 32 (32a, 32b) so that the weft end 37 stays in the airflow entrance port 14 and hence it is not tucked in the shedding 34 of the warp 33. Meanwhile, even if the first airflow 30 from the gripping nozzle 12 is stopped, the weft end 37 is held in the airflow entrance port 14.

[0024] Although the non tuck-in operation is reliably performed by allowing both the airflows 32a, 32b inoperative in such a manner, either or both the airflows 32a, 32b may present as weak airflows to the extent substantially not to perform the tuck-in operation at the time of non tuck-in operation. Accordingly, "non-operation of the air flow 32 (32a, 32b)" has to be construed to include the presence of a weak airflow to the extent substantially not to perform the tuck-in operation as well as the complete non-operation. Further, in the case where the air flow 32 is formed of a plurality of airflows like this example, when the injection of one of the airflows (e.g., 32b) alone is inhibited as non-operation, the weft end 37 is not folded back in the shedding 34 by the other airflows (e.g., 32a) alone so that the entire air flow 32 is substantially rendered inoperative. Accordingly, "non-operation of the air

flow 32 (32a, 32b)" has to be construed to include the case where the air flow 32 is formed of the plurality of airflows, the case where all the airflows are rendered inoperative and the case where only a part of the airflows is rendered inoperative.

[0025] Owing to the non tuck-in operation, after the loom 1 is stopped, an operator performs pick finding of the cloth fell 6 by rotating the loom 1 in reverse, thereby extracting a defective weft 16, which is not tucked in the shedding 34, from the cloth fell 6 of the woven cloth 5.

[0026] If a defective weft removing device is provided on a picking side, not shown, the defective weft removing device receives an instruction from an operator or an instruction from the loom 1, thereby taking the defective weft 16 therein to automatically remove the defective weft 16 from the cloth fell 6 of the woven cloth 5. The defective weft 16 is displaced outside a cutting area by the airflow from an exclusive nozzle between a picking nozzle, not shown, and the woven cloth 5 at the picking side, so as to facilitate the extraction of the defective weft 16 or a cutter is rendered inoperative, and hence the defective weft 16 remains to be connected to the weft 16 inside the picking nozzle.

[0027] Further, in this embodiment, the tuck-in device 2 performs the injection of the first airflow 30 by the gripping nozzle 12, the injection of the air flow 32 (32a, 32b) by the first and second tuck-in nozzles 18 and 19 at a given timing as shown in Fig. 4 as made as usual, thereby performing the tuck-in operation in the case of the other stoppage cause of the loom 1, for example, a warp stoppage and a manual stoppage of the loom 1.

[0028] Fig. 7 is a timing diagram showing air injection timing of respective nozzles relative to a main shaft rotary angle of a loom at the time of non tuck-in operation according to another embodiment of the invention. A method of performing non tuck-in operation of a shuttleless loom according to the embodiment in Fig. 7 is characterized in that a weft end 37 in a slit 9 is not folded back inside a shedding 34 of a warp 33 by injecting a first airflow 30 from a gripping nozzle 12 during the injection of at least an air flow 32 (32a, 32b) by a first tuck-in nozzle 18 and a second tuck-in nozzle 19 in response to an instruction from a loom 1 based on a stoppage cause of a loom 1.

[0029] A main controller 35 outputs a valve opening continuation signal to a closing valve controller 25 upon reception of a weft stoppage signal, and the closing valve controller 25 keeps the closing valve 22 in the opening state during a period of time longer than a normal operation time, and injects the first airflow 30 from the gripping nozzle 12 during the injection of at least the air flow 32 (32a, 32b) by the first tuck-in nozzle 18 and the second tuck-in nozzle 19. Meanwhile, the opening of the closing valve 23 of the first tuck-in nozzle 18 and the opening of the closing valve 24 of the second tuck-in nozzle 19 are respectively performed for a period of time in the same manner as the normal tuck-in operation, thereby forming the air flow 32 (32a, 32b).

[0030] Fig. 8 shows a behavior of a weft 16 at a slit 9 of a block body 3 at the time of non tuck-in operation in the embodiment shown in Fig. 7. The weft end 37 which advanced in the slit 9 by the beating of the reed 8 is cut by the cutter 7, then it is inserted in an airflow entrance port 14 by the first airflow 30 from the gripping nozzle 12, and thereafter pulled in and gripped by the airflow entrance port 14. Since the injection of the first airflow 30 from the gripping nozzle 12 continues until the completion of the injection of the air flow 32 (32a, 32b) from the first tuck-in nozzle 18 and the second tuck-in nozzle 19, the weft end 37 is pulled in and gripped by the first airflow 30 and stays in the airflow entrance port 14, and it is not tucked in the shedding 34 of the warp 33 even if the air flow 32 (32a, 32b) is formed.

[0031] At this time, the injecting pressure of the first airflow 30 from the gripping nozzle 12 is increased compared with that at the normal time to prevent the weft end 37 from being tucked in the shedding 34 of the warp 33 when the weft end 37 bows to the injection pressure of the air flow 32 (32a, 32b), or the injection pressure of air flow 32 (32a, 32b) is decreased so that the weft end 37 is allowed to stay in the airflow entrance port 14 with assurance to prevent the weft end 37 from being tucked in the shedding 34 of the warp 33. Further, if the injection period of the air flow 32 (32a, 32b) is shortened, the continuous injection time of the first airflow 30 can be shortened, thereby preventing an air pressure of a pressure air source 20 from being lowered temporarily.

[0032] Since the closing valve controller 25 opens the closing valve 22 of the gripping nozzle 12 during the opening of at least the closing valves 23, 24 of the tuck-in nozzles 18, 19 in response to the instruction from the loom 1 based on the stoppage cause of the loom 1 (weft stoppage), even if the air flow 32 (32a, 32b) is formed, the weft end 37 stays in the airflow entrance port 14 and an operator rotates the loom 1 in reverse to perform the pick finding, thereby extracting the defective weft 16, which is not tucked in the shedding 34 of the warp 33, from the woven cloth 5 with ease.

[0033] In this embodiment, the operation to prevent the weft end 37 from being tucked in the shedding 34 of the warp 33 by the injection of the air flow 32 (32a, 32b) by keeping the gripping of the weft end 37 by the first airflow 30 is performed by taking over the operation state of the first airflow 30 at the normal time so that the weft end 37 is prevented from being tucked in the shedding 34 of the warp 33 not owing to the delay of the operation of a control system because the operation itself is not changed.

[0034] The operation to prevent the weft end 37 from being tucked in the shedding 34 of the warp 33 by the injection of the air flow 32 (32a, 32b) while gripping the weft end 37 by the first airflow 30 does not always continue from the operation to pull in and grip the weft end 37 in the airflow entrance port 14. In the case where the injection of the air flow 32 (32a, 32b) starts while delayed from the completion of the first airflow 30 at the normal

time or in the case where the injection of the air flow 32 (32a, 32b) is temporarily interrupted, the operation to prevent the weft end 37 from being tucked in the shedding 34 of the warp 33 may be interrupted in the middle of the operation thereof. The manner of operation shown in Fig. 7 is a preferable example for continuing the formation of the first airflow 30 until the completion of the air flow 32 (32a, 32b). In this case, the operation to prevent the weft end 37 from being tucked in the shedding 34 of the warp 33 by the injection of the air flow 32 while gripping the weft end 37 by the first airflow 30 is performed by taking over the operation state of a normal airflow, and the closing valve 22 is not operated in the middle of the operation, and hence there is an advantage that the weft end 37 is prevented from being tucked in the shedding 34 of the warp 33 not owing to the delay of the operation.

[0035] According to the first aspect of the invention, in the case where the defective weft is required to be extracted from the cloth fell of the woven cloth owing to the stoppage cause of the loom such as the weft stoppage and the like, the airflow to fold back the weft end is not injected in response to the instruction from the loom, so that the weft end is not tucked in the shedding of the warp, thereby removing the defective weft from the woven cloth with ease. Particularly, since (1) the operation per se for folding back the weft end in the shedding of the warp is rendered inoperative, there is no likelihood that the weft end is erroneously tucked in the shedding of the warp, (2) since the injection of airflow is made after the gripping of the weft, it is possible to cope with the instruction from the loom in good time, and (3) since the non- operation of injection of the airflow is performed by continuing the inoperative state of the injection, and the state of the injection is not changed during that period of time, so that the weft end is not tucked in the shedding 34 of the warp not owing to the delay of the changing operation, and hence the weft end is not reliably tucked in the shedding of the warp.

[0036] According to the second aspect of the invention, when it is required to extract the defective weft from the cloth fell of the woven cloth owing to the stoppage cause of the loom such as the weft stoppage and the like, the state for gripping the weft end by the first airflow is effected during the injection of at least airflow, so that the weft end is not tucked in the shedding of the warp, thereby removing the defective weft from the woven cloth with ease. Particularly, the gripping operation for preventing the weft end from being tucked in the shedding of the warp by the injection of the airflow among the weft end gripping operations by the first airflow is made after the normal gripping operation by the first airflow, and hence it is possible to cope with the instruction from the loom in good time, thereby reliably preventing the weft end from being tucked in the shedding of the warp.

[0037] According to the apparatus of the third aspect of the invention, it can reasonably realize the method of the first aspect of the invention, thereby obtaining the same effect as the method of the first aspect of the in-

vention.

[0038] According to the apparatus of the fourth aspect of the invention, it can reasonably realize the method of the second aspect of the invention, thereby obtaining the same effect as the method of the first aspect of the invention.

[0039] According to the fifth aspect of the invention, since the slit, the gripping nozzle, the first tuck-in nozzle, and the second tuck-in nozzle are respectively disposed in the block body in a reasonable state, a normal tuck-in operation is sequentially effected by airflows, and also non tuck-in operation of the weft can be reliably executed when the first tuck-in nozzle and the second tuck-in nozzle are not operated.

Claims

1. A method of performing a tuck-in operation in a tuck-in device (2) of a shuttleless loom provided with one or more tuck-in nozzles (18, 19) and an air flow supply device (4) comprising a pressure air source (20), closing valves (23, 24), and a closing valve controller (25) for controlling the closing valves (23, 24), for folding back a weft end (37) of a picked weft (16) inside a shedding (34) of a warp (33) by injecting an air flow (32) from the tuck-in nozzles (18, 19) after gripping the weft end (37) of the picked weft (16), **characterized by** the step of allowing injection of the air flow (32) inoperative in response to an instruction from a loom (1) based on a stoppage cause of the loom (1) not to fold back the weft end (37) inside the shedding (34) of the warp (33).

2. A tuck-in device (2) of a shuttleless loom provided with one or more tuck-in nozzles (18, 19) and an airflow supply device (4):

wherein the airflow supply device (4) comprises a pressure air source (20), closing valves (23, 24) which open or close to permit or not permit the pressurized air in the pressure air source (20) to be supplied or not supplied from the pressure air source (20) to the tuck-in nozzles (18, 19), and a closing valve controller (25) for controlling the closing valves (23, 24);

wherein a weft end (37) of a picked weft (16) is folded back inside a shedding (34) of a warp (33) by injecting airflow from the tuck-in nozzles (18, 19) after the weft end (37) of the picked weft (16) is gripped;

characterized in that

the closing valve controller (25) stops the opening of at least one of the closing valves (23, 24) of the tuck-in nozzles (18, 19) in response to an instruction from a loom (1) based on the stoppage cause of the loom (1) not to fold back the

weft end (37) inside the shedding (34) of the warp (33).

5 Patentansprüche

1. Verfahren zum Ausführen eines Einlegevorgangs in einer Einlegevorrichtung (2) einer schützenlosen Webmaschine, die mit einer oder mehreren Einlegedüsen (18, 19) und einer Luftstromzufuhreinrichtung (4) mit einer Druckluftquelle (20), Schließventilen (23, 24) und einer Schließventilsteuerung (25) zum Steuern der Schließventile (23, 24) versehen ist, zum Umschlagen eines Schussfadenendes (37) eines ergriffenen Schussfadens (16) in das Innere eines Fachs (34) eines Kettfadens (33) durch Injizieren eines Luftstroms (32) von den Einlegedüsen (18, 19) nach dem Ergreifen des Schussfadenendes (37) des ergriffenen Schussfadens (16),

gekennzeichnet durch den Schritt des

Zulassen einer Unwirksamkeit der Injektion des Luftstroms (32) in Antwort auf einen Befehl der Webmaschine (1) basierend auf einem Unterbrechungsgrund der Webmaschine (1), um das Schussfadenende (37) nicht in das Innere des Fachs (34) des Kettfadens (33) umzuschlagen.

2. Eine Einlegevorrichtung (2) einer schützenlosen Webmaschine, die mit einer oder mehreren Einlegedüsen (18, 19) und einer Luftstromzufuhreinrichtung (4) versehen ist:

wobei die Luftstromzufuhreinrichtung (4) eine Luftdruckquelle (20), Schließventile (23, 24), die öffnen oder schließen um es der Druckluft in der Druckluftquelle (20) zu erlauben oder nicht zu erlauben, von der Luftdruckquelle (20) zu den Einlegedüsen (18, 19) zugeführt zu werden oder nicht zugeführt zu werden und eine Ventilschließsteuerung (25) zum Steuern der Schließventile (23, 24) aufweist;

wobei ein Schussfadenende (37) eines ergriffenen Schussfadens (16) in das Fach (34) der Webmaschine (33) umgeschlagen wird durch Injizieren eines Luftstroms von den Einlegedüsen (18, 19), nachdem das Schussfadenende (37) des ergriffenen Schussfadens (16) ergriffen ist;

dadurch gekennzeichnet, dass

die Schließventilsteuerung (25) das Öffnen wenigstens eines der Schließventile (23, 24) der Einlegedüsen (18, 19) in Antwort auf einen Befehl der Webmaschine (1) basierend auf einem Unterbrechungsgrund der Webmaschine (1) stoppt, um das Schussfadenende (37) nicht in das Fach (34) des Kettfadens (33) umzuschlagen.

Revendications

1. Procédé permettant de réaliser une opération de rentrage d'un dispositif de rentrage (2) d'un métier sans navette équipé d'une ou de plusieurs buses de rentrage (18, 19) et d'un dispositif d'alimentation en écoulement d'air (4) comportant une source en air comprimé (20), des soupapes de fermeture (23, 24), et un dispositif de commande de soupape de fermeture (25) destiné à commander les soupapes de fermeture (23, 24), procédé permettant de replier une extrémité de trame (37) d'une trame duitée (16) à l'intérieur d'une foule (34) d'une chaîne (33) par injection d'un écoulement d'air (32) en provenance des buses de rentrage (18, 19) après la saisie de l'extrémité de trame (37) de la trame duitée (16),
caractérisé par l'étape consistant à permettre à une injection de l'écoulement d'air (32) de ne pas fonctionner en réaction à une instruction provenant d'un métier (1) en raison d'une cause d'arrêt du métier (1) ordonnant de ne pas replier l'extrémité de trame (37) à l'intérieur de la foule (34) de la chaîne (33).

5
10
15
20
2. Dispositif de rentrage (2) d'un métier sans navette équipé d'une ou de plusieurs buses de rentrage (18, 19) et d'un dispositif d'alimentation en écoulement d'air (4) :

25

dans lequel le dispositif d'alimentation en écoulement d'air (4) comporte une source en air comprimé (20), des soupapes de fermeture (23, 24) qui s'ouvrent ou qui se ferment pour permettre ou ne pas permettre à l'air sous pression dans la source en air comprimé (20) à être fourni ou à ne pas être fourni en provenance de la source en air comprimé (20) jusqu'aux buses de rentrage (18, 19), et un dispositif de commande de soupape de fermeture (25) destiné à commander les soupapes de fermeture (23, 24) ;

dans lequel une extrémité de trame (37) d'une trame duitée (16) est repliée à l'intérieur d'une foule (34) d'une chaîne (33) par injection d'un écoulement d'air en provenance des buses de rentrage (18, 19) une fois que l'extrémité de trame (37) de la trame duitée (16) a été saisie ;

caractérisé en ce que

le dispositif de commande de soupape de fermeture (25) arrête l'ouverture d'au moins l'une des soupapes de fermeture (23, 24) des buses de rentrage (18, 19) en réaction à une instruction provenant d'un métier (1) en raison d'une cause d'arrêt du métier (1) ordonnant de ne pas replier l'extrémité de trame (37) à l'intérieur de la foule (34) de la chaîne (33).

30
35
40
45
50
55

FIG.3

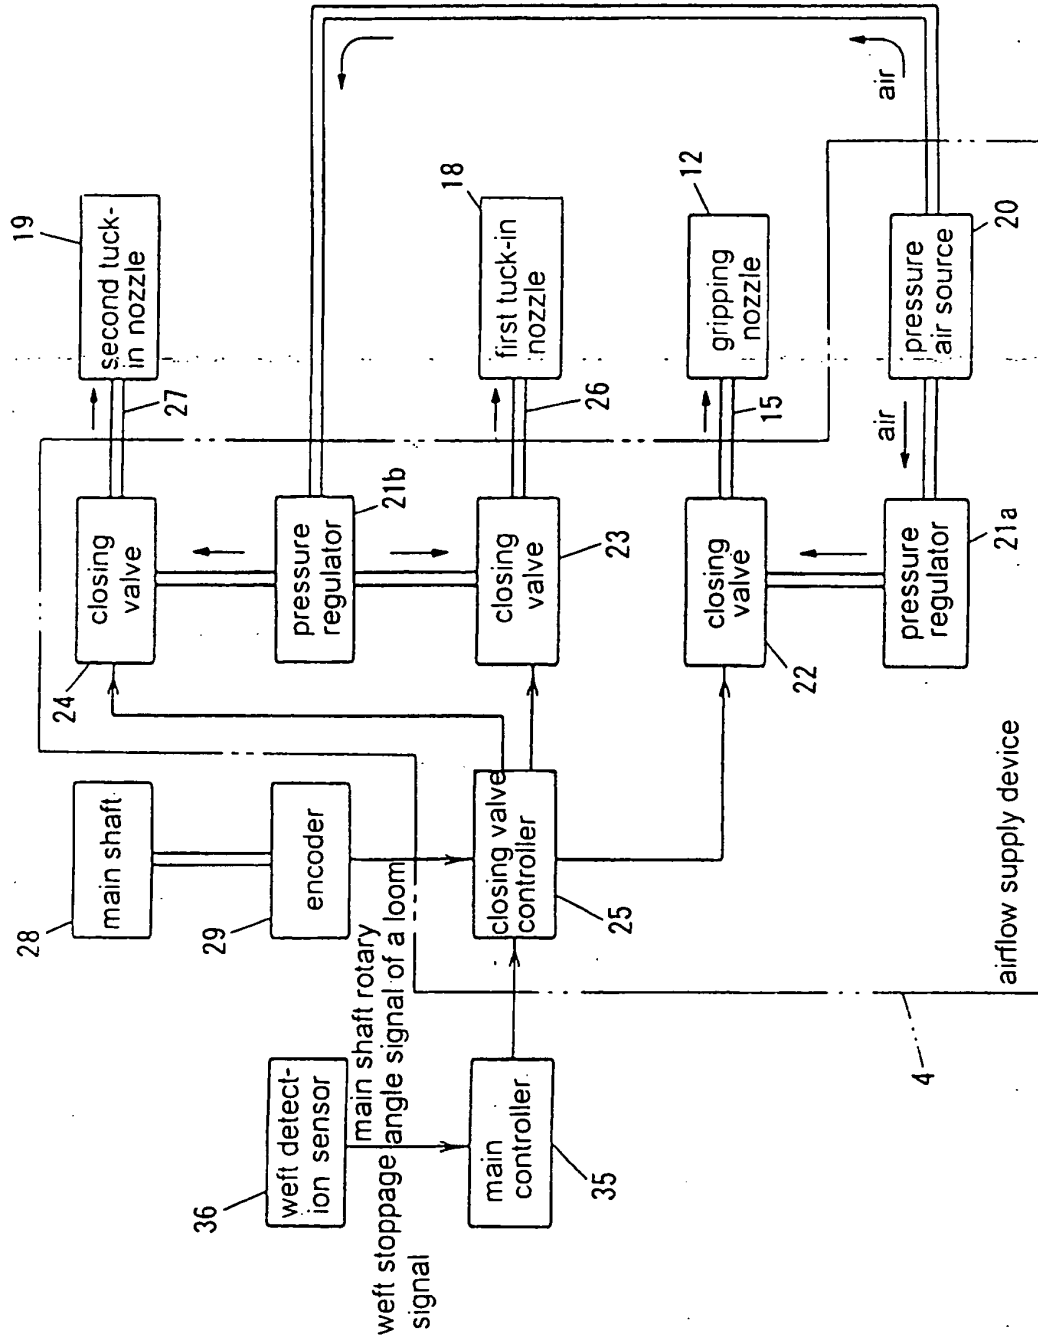


FIG.4

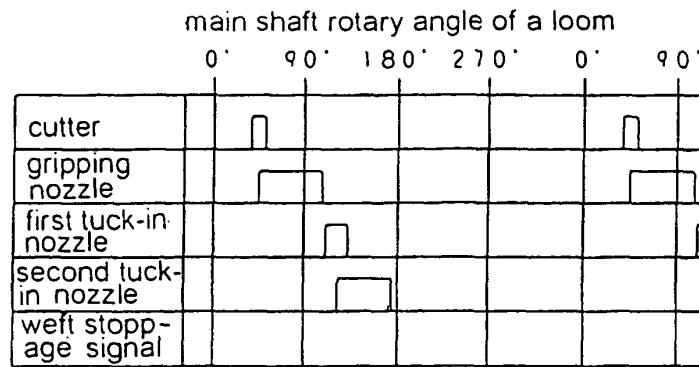


FIG.5

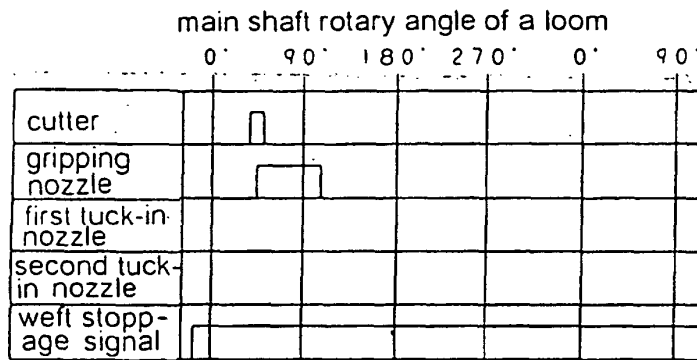


FIG.6

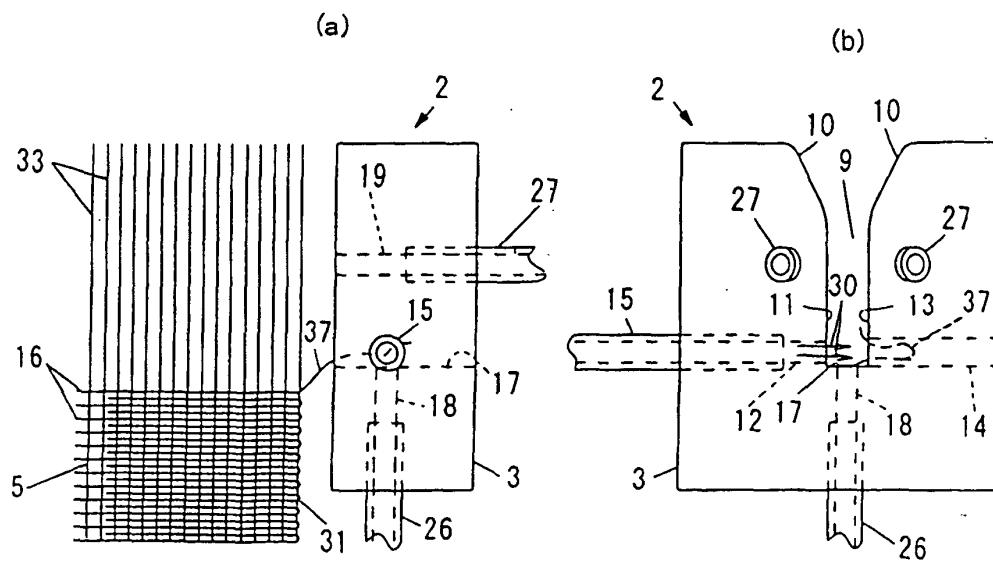


FIG.7


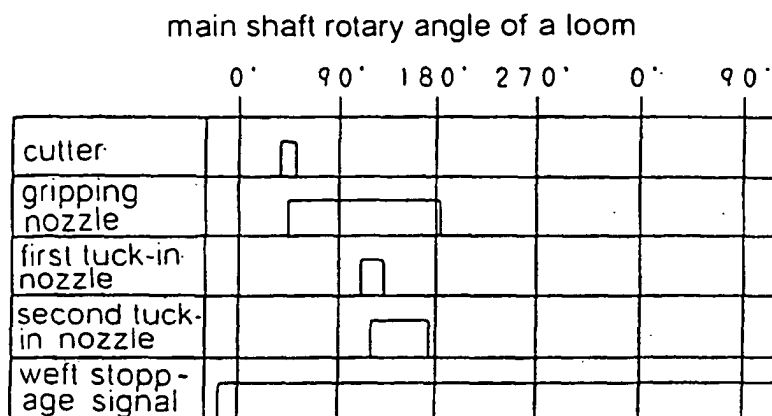


FIG.8

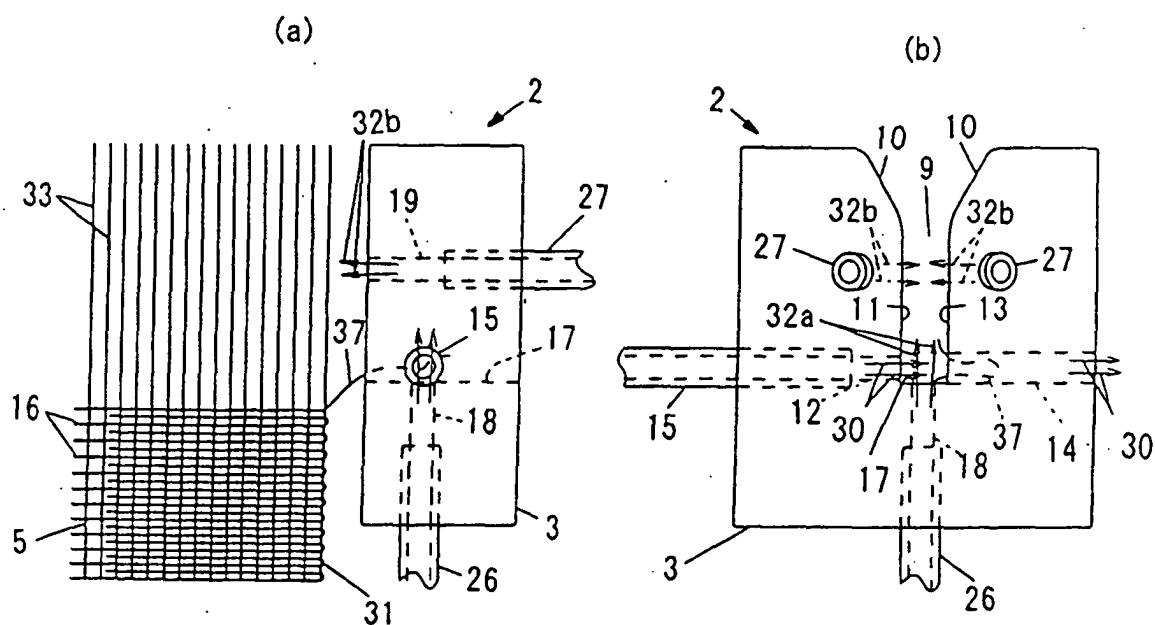

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2002054053 A [0002]
- EP 1087046 A2 [0002]
- JP 2001159053 A [0002]
- JP 3113051 A [0004]