



- (51) **International Patent Classification:**
A61F 13/15 (2006.01) *A61F 13/532* (2006.01)
B65B 9/04 (2006.01)
- (21) **International Application Number:**
PCT/EP2012/071072
- (22) **International Filing Date:**
24 October 2012 (24.10.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
11186336.1 24 October 2011 (24.10.2011) EP
11186337.9 24 October 2011 (24.10.2011) EP
11196129.8 29 December 2011 (29.12.2011) EP
11196130.6 29 December 2011 (29.12.2011) EP
- (71) **Applicants (for all designated States except US):** **BOSTIK SA** [FR/FR]; 16-32 Rue Henri-Regnault, F-92400 Courbevoie (FR). **BASF SE** [DE/DE]; Carl-Bosch Strasse 38, 67056 Ludwigshafen (DE).
- (72) **Inventor; and**
- (71) **Applicant (for US only):** **CHARTREL, Jean-François** [FR/FR]; 160 Rue de l'Abbé Dehue, F-60400 Cuts (FR).
- (74) **Agents:** **AUGUST & DEBOUZY** et al.; 6/8 Avenue de Messine, F-75008 Paris (FR).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]


(54) **Title:** NOVEL PROCESS FOR PREPARING AN ABSORBENT ARTICLE

Fig. 3

(57) **Abstract:** The present invention is directed to a novel process for preparing an absorbent article, wherein the process comprises providing a first sheet layer (2); conforming said first layer on a first roll C2, whereby longitudinal corrugations are formed on the layer; conforming said corrugated layer (2) on a second roll C3, whereby a pattern of pockets (4, 4a) is obtained; providing a pre-metered amount of SAP particulate material (6) into said pockets; providing a second sheet layer (7) material and affixing it for sandwiching with the first sheet layer; and finishing the absorbent article.




Fig. 12

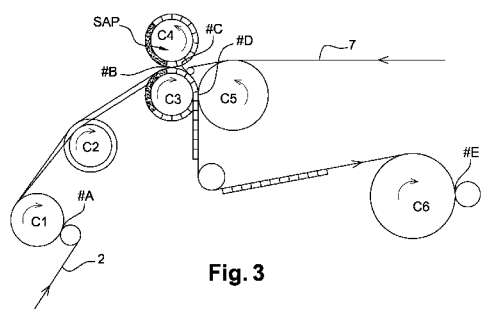

Published:

— *with international search report (Art. 21(3))*

5 **NOVEL PROCESS FOR PREPARING AN ABSORBENT ARTICLE**

10 **RELATED APPLICATIONS**

The present application claims priority from EP11196129 filed 29 December 2011, EP11196130 filed 29 December 2011, EP11186336 filed 24 October 2011 and EP11186337 filed 24 October 2011.

FIELD OF THE INVENTION

15 The present invention is directed to a novel process for preparing an absorbent article. More specifically, the present invention is directed to a process for filling super absorbent polymer into recesses formed on a supporting, travelling layer.

BACKGROUND OF THE INVENTION

20 Absorbent articles are known and commonly used in personal care absorbent products such as diapers, training pants, sanitary napkins, incontinence garments, bandages and the like. The invention also relates to a process for making said article.

Nowadays, the absorbing element in the article is comprised of high
25 absorbency materials such as superabsorbents (Super Absorbent Polymers –SAP-), which form the diaper's absorbent core.

While the SAP has many advantages, it is also difficult to dose, given the fact that SAP is available as a powder. The problem is not acute for uniform layers dispensing devices, but becomes very relevant when SAP
30 patterns are required.

EP-A-1621166 discloses a process for producing absorbent core structures, comprising the steps of:

- providing a carrier material;
- providing a support for said carrier material, the support having a
35 support pattern;
- providing a carrier material holding means (especially vacuum applying means);

- positioning said carrier over said support means, whereby said carrier contacts said support;
- providing a pre-metered amount of SAP particulate material;
- providing a cover material for sandwiching with the carrier;

5 and wherein

- said carrier material is supported only in the region of the support pattern of the support means;
- said carrier material is deformed by said carrier holding means such that indentations are formed in the unsupported regions:
- 10 - said SAP particulate material being transferred to said carrier material into said indentations thereby forming a primary pattern of particulate material.

EP-A-1621167, a companion application of the above EP-A-1621166, discloses a process for producing absorbent core structures, comprising substantially the same steps, and wherein the process comprises the steps of:

- providing a SAP particulate material;
- providing a transfer device for receiving said SAP particulate material in a receiving region and transferring it to an discharging region;
- 20 - said transfer device comprising a first pattern forming means.

In the above processes, the pattern is formed by the indentations formed in the unsupported regions. This provides for a poor uniformity, and the depth of the clusters formed by the indentations is rather limited. Also, the entire pattern is formed during one operation. The dispensing of the SAP particulate material makes use of a feeding hopper, this being derived from the helio-cylindrical printing system. The volume of the delivered SAP cannot be changed, while the SAP particulate material can vary because of different suppliers. Any change requires a change in the engraving of the dispensing roll. Further, high speeds are not possible with such systems. Last, in order to have a dosing that is reliable, it is necessary to compact the SAP in the discharging regions, which does not facilitate the complete release into the clusters and provides for attrition and shearing forces applied by the hopper to the SAP, which is a fragile material and subject then to degradation.

35 The above techniques thus still do not completely solve the problems of the distribution of SAP in cavities formed in the absorbent article.

Consequently, there is a need for an improved process for forming liquid-absorbing article containing SAP where the SAP is distributed

according to a given pattern, and where the SAP is delivered in a fast and reliable manner.

SUMMARY OF THE INVENTION

The invention thus provides a process for manufacturing an absorbent article (1), said article comprising:

- a first sheet layer (2) presenting an array of absorbent receiving pockets (4, 4a);
 - masses (6) of superabsorbent material, which masses are placed in said absorbent receiving pockets (4, 4a);
 - a second sheet layer (7) placed on top of the first layer;
- said process comprising the steps of
- providing a first sheet layer (2);
 - conforming said first layer on a first roll C2, whereby longitudinal corrugations are formed on the layer;
 - conforming said corrugated layer (2) on a second roll C3, said second roll C3 comprising recesses (91a, 91b, 91c) corresponding to the array of absorbent receiving pockets (4, 4a), whereby a pattern of pockets (4, 4a) is obtained;
 - providing a pre-metered amount of SAP particulate material (6);
 - providing a second sheet layer (7) material and affixing it for sandwiching with the first sheet layer;
 - finishing the absorbent article, and
- said step of conforming on a first roll C2 being obtained by friction of the sheet layer (2) on the corresponding corrugated surface of said roll C2.

According to one embodiment, the process further comprises unrolling sheet layer (2) from roll C1, where roll C2 has a rotating speed (peripheral) that is 5 to 20% above the speed of roll C1.

According to one embodiment, the process further comprises the step of unstressing the sheet between rolls C2 and C3.

According to one embodiment, the roll C1 has a rotating speed which is higher than the rotating speed of roll C3, where roll C1 has a rotating speed (peripheral) that is 5 to 20% above the speed of roll C3. According to one embodiment, the process further comprises the step of pinching the sheet between roll C2 and counter roll CC2, where the roll C2 and counter roll CC2 have grooves (71a, 71 b, 71c, 71d) and ribs (81a, 81b, 81c, 81d) cooperating with each other.

According to one embodiment, the step of forming the pockets comprises holding the layer (2) and/or (7) into the second roll C3 by applying vacuum.

5 According to one embodiment, said pre-metered amount of SAP material is delivered from a delivering unit placed above roll C3, whereby the pre-metered amount of SAP is filled in a pattern of pockets.

According to one embodiment, the process further comprises the step of:

- 10 - providing bonding beads (5), preferably adhesive beads, between the pockets.

According to one embodiment, the process further comprises the step of:

- 15 - providing adhesive layers (3) and/or (8) between the first and second layers, whereby said layers are bonded.

According to one embodiment, the process further comprises the step of:

- calendering into the absorbent article (1).

According to one embodiment, the sheet layer (2) and/or (7) is/are non-woven.

20 According to one embodiment, the sheet layer (2) is impervious to liquids and the sheet layer (7) allows penetration of liquids into the masses of superabsorbent material.

The process is especially suited for manufacturing a diaper, training pant, sanitary napkin, incontinence garment or bandage comprising manufacturing an absorbent article according to any one of the preceding claims, and converting said article into said diaper, training pant, sanitary napkin, incontinence garment or bandage.

30 The invention thus allows the formation of arrays of pockets at two distinct locations in the process. Unlike the prior art recited above, the respective walls of the pockets are formed in two separate steps in the process. This allows a better shaping of the pockets, and control of their geometry. Also, pockets of large dimensions, including pockets with large depths can be easily manufactured.

BRIEF DESCRIPTION OF THE FIGURES

35 Figure 1 represents the formation of the absorbent article of the invention.

Figure 2 represents a schematic illustration of the top view of an absorbent article according to the invention

Figure 3 represents an overall view of the process of the invention for the manufacture of the article.

Figure 4 represents the bottom layer supply step

Figure 5 represents the adhesive layer (3) distribution step.

5 Figure 6 represents the forming of the sheet layer (2) onto roll C2

Figure 7 represents an enlarged view of roll C2.

Figure 8 represents the beads deposition step.

Figures 9a and 9b represent the roll C3 for two different embodiments of the invention

10 Fig. 9c and 9 represent the respective discs, corresponding to fig.9a and 9b.

Figure 10 represents the SAP distribution step and the calendering step, as well as the optional ADL deposition step.

Figure 11 represents the finishing step.

15 Figure 12 represents a perspective view of roll C2 and counter roll CC2.

DESCRIPTION OF EMBODIMENTS OF THE INVENTION

The invention is now disclosed in more details below, in a non-limiting manner.

20 Reference is made to figure 1 which discloses the formation of the absorbent article of the invention according to one embodiment.

In an initial step, a first sheet layer (2) is provided. This first layer will serve as the bottom layer. It may be impervious to liquids, but this is not necessary in case of the presence of an impervious backsheet in the diaper
25 for example.

This layer then receives a layer of adhesive (3). This adhesive is typically a hot-melt, as will be disclosed in more details below. The adhesive may be present on the entire surface or only at the vicinity of the sealed area. It is preferred that the adhesive be present on the entire surface (in a
30 continuous or discontinuous manner). With this embodiment, the adhesive will receive the SAP and will adhere to it so that most of the SAP will be caused to adhere to the surface of the sheet layer. This will improve the SAP position and further prevent SAP from slipping within the disposable diaper.

The sheet layer (2) with the adhesive layer (3) is then formed into the
35 desired shape. Different techniques may be used to form the shape of the pocket (4, 4a), as will be disclosed in more details below. In the embodiment that is disclosed, the step is disclosed in relation with the machine direction,

forming bands, a specific step with respect to the transverse direction is applied later on.

Adhesive beads (5) (also known as adhesive ropes) are then applied at a location between the pockets (4, 4a) previously formed, as illustrated in
5 Fig. 2, which is a top view of an absorbent core with pockets in rectangular shape and beads in the machine direction (MD) and transverse direction (TD). Standard techniques are used.

The beads ensure structural strength by keeping the sheet layers bonded during use.

10 The step of forming the pockets in the transverse direction is then performed; this step is optional but preferred. The step of adhesive beads deposition can be performed before or after the step of forming the transverse direction forms for the pockets. It may also be performed at about the same time.

15 The pockets thus formed can have various shapes and forms. For example, the pockets can be rectangular or square in shape with varying lengths of their respective sides. For example the length may vary from 10mmx10mm to 10mmx80mm, including 20mmx20mm to 20mmx60mm or 20mmx20mm to 40mmx40mm or 20mmx40mm with varying shapes, in any
20 direction. The depth of the final pocket depends e. g. on the mass of SAP material to be filled in. For example for baby diapers a depth from 1mm to 5mm (once finally formed, i.e. calendered) may be preferred. Any other desired geometric forms and patterns are conceivable. Particular preference is also given to the application of one or more continuous strips in machine
25 running direction, the strips running parallel to one another.

Thus a longitudinal pocket is possible; in this case the pocket will be elongated, e.g. from 10-80mmx100-400mm.

The SAP is then placed in the thus-formed pockets, using an appropriate dosing device, as will be disclosed in more details below.

30 The second sheet layer (7) receives first an adhesive layer (8). The second sheet layer is typically water-permeable so as to allow the fluids to penetrate through and reach the SAP. This second sheet will typically serve as the top layer. The adhesive layer will not be complete or will be porous, so as to allow transfer of fluid through the sheet layer. The adhesive layer (8) is
35 optional and may be omitted.

The second sheet layer (7) with the adhesive layer (8) is then affixed onto the first sheet layer (2) with the pockets (4, 4a) containing the SAP (6)

and bearing the beads (5). This is done in an area (9) in the vicinity of the beads (5)

Calendering is then performed on the sandwich thus formed, ensuring the bonding of the two sheet layers.

5 For example, a pressure sensitive adhesive is applied directly on the bottom layer of the assembly (a nonwoven). The same adhesive is also applied directly on the top layer of the assembly (a nonwoven. The top layer was mounted on the bottom layer and pressed using a pressure roll. In another embodiment, the previous assembly was reiterated but inserting
10 between the adhesive-coated top and bottom layers, a bead of adhesive. The same method is used to create the assembly, making sure that the adhesive bead is placed in the middle of the pressed laminate.

SAP is maintained in a very efficient way in the pockets formed in the invention, being prevented from slipping and/or aggregating at one place in
15 the article.

The steps for manufacturing the article of the invention and the various elements thereof are disclosed in more details below.

The SAP that is used in the invention is any product that is able to absorb water to a significant amount. A typical SAP will absorb water from 10
20 to 50 times its dry volume, typically from 20 to 40 times (the ratio can be higher if expressed in terms of weight ratios). For example, 15g of SAP may retain 400cc of fluid (tested as 4 successive wettings, 4x100 cc). BASF is exemplary of a company supplying SAP. SAP is generally available as a powder, with varying particle size (e.g. more than 60% of the particles flow
25 through a mesh from 100µm to 850µm). Typically SAPs are (meth)acrylic polymer, especially alkali metal salts of polyacrylic acids. Core-shell polymers can be used, where the inner is absorbing and the outer is an osmotic membrane. SAPs are well known for the skilled man.

The production of fluid-absorbing polymer particles (Super Absorbent
30 Polymers –SAP-) is likewise described in the monograph "Modern Superabsorbent Polymer Technology", F. L. Buchholz and A. T. Graham, Wiley-VCH, 1998, pages 71 to 103.

The SAP may also be the one disclosed in WO2010/133529, from page 6 line 1 to page 15 line 16, incorporated herein, by reference.

35 The SAP load may vary within broad limits. For example, for a baby diaper, the amount of SAP usually used is from 8 to 20 g, preferably from 11 to 18 g, more preferably from 12 to 15g.

The invention also uses sheet layers, one typically as a bottom layer and one typically as a top layer. Typically, both sheets are non-woven. Non-woven can be manufactured using different technologies and one can cite staple non-woven, spunbonded non-woven, spunlaid non-woven, air-laid
5 non-woven, and the like. Bonding can be mechanical (e.g. entanglement), thermal, ultrasonic, chemical, and the like. Non-woven are well-known for the man skilled in the art. The non-woven used can be standard or can be structured, and can also be already embossed if needed.

The non-woven can be pervious to liquids or impervious to liquids. The
10 skilled man will select the fibers to be used to match the requirements. Hydrophilization of fibers is known to render fibers suitable for the manufacture of liquid-pervious non-woven.

Fibers can be customary synthetic or semi-synthetic fibers, such as polyesters, polyolefins and rayon, or customary natural fibers, such as cotton.
15 In the case of nonwoven materials, the fibers can be bonded by binders such as polyacrylates. Preferred materials are polyester, rayon, polyethylene and polypropylene. Examples of liquid-pervious layers are described, for example, in WO 99/57355 A1 and EP 1 023 883 A2.

Examples of liquid-impervious layer are layers consisting typically of
20 hydrophobic polyethylene or polypropylene; other material can be used such as polyester and polyamide.

Multilayer structures are also possible, so as to provide for a specific aspect or feel on one side of the sheet and specific properties on the other side, e.g. with respect to adhesion.

25 References EP1609448, as well as US2008/0045917 provide for disclosure of such non-wovens.

The top layer will be permeable to liquids, so as to allow the liquid being entrapped by the SAP. A possible non-woven for the top layer will be one with polyethylene or polypropylene fibers having received a
30 hydrophilization treatment, or rayon or any other suitable fibers. The Livedo reference above contains a disclosure of possible top layers. The surface weight can vary between wide ranges, such as from 5 to 100 g/m², preferably from 10 to 50 g/m².

The bottom sheet layer will be impervious to liquids, as is usually the
35 case, but not necessarily. A possible layer is a non-woven layer. A possible non-woven for the bottom layer will be one with polypropylene or polyester fibers, as is well-known for the skilled man. The Livedo reference above contains a disclosure of possible bottom sheet layers. The surface weight

can vary between wide ranges, such as from 5 to 100 g/m², preferably from 10 to 50 g/m². The bottom sheet layer will also have a porosity to air that will be controlled. This will assist in forming the pockets and filling in the SAP, as will become more apparent below.

5 The adhesives used in the invention are known for the skilled man. The first type of adhesive is used for the beads. The adhesive for the beads is typically a hot-melt. It may be typically a PSA (Pressure Sensitive Adhesive). The preferred adhesive is thus a HMPSA. Exemplary HMPSA that may be used for the beads is an SBS-based adhesive with hydrogenated
10 hydrocarbon resins and naphthenic oil. The process for adhesive deposition is known to the skilled man, and the lines can be continuous or broken, preferably continuous. The linear weight is from 0.1 to 5g/linear meter.

 Beads can be present in the machine direction (MD), transverse direction (TD) or both. The beads ensure geometrical stability of the
15 absorbent article. The beads also ensure a draining function. The liquid can migrate within the thickness of the sheet layer esp. the non-woven. At the beads level, the liquid will be guided along the pathways defined by the beads, and draining pathways will then be defined. This ensures a more uniform distribution of the fluid over the entire absorbent article.

20 Similar adhesives are used for adhesives layers (3) and (8) (if present). The adhesives may not be the same for the top layer and the bottom layer. The adhesive may be deposited using techniques known to the skilled man. The coating can be total or partial (multi lines, multi dots, according to specific patterns, MD, TD, spiral spray, porous coating, foam
25 coating, and the like). The adhesive, if used on the top layer, will be such that fluids will be able to go through the top layer. Hence, the coating for the top layer is usually an open coating. The surface weight will usually be from 5 to 60 g/m², preferably from 10 to 20 g/m². Adhesives used with the sheet layers (beads or deposited on the sheet layer) are preferably not
30 hydrosoluble.

 Hot melts are preferred, especially Pressure Sensitive Adhesives (PSA, especially HMPSA).

 Very generally speaking, and without this being limiting, the hot melt adhesives comprise:

35 (a). Polymers such as EVA, PE, PP, EEA (ethylene ethyl acrylate) and the thermoplastic elastomers or rubbers which are (block) styrene copolymers such as SIS, SIBS, SEPS, SBS, SEBS, or butadiene-based polymers or, yet again, ethylene-propylene copolymers such as EPR, and

Olefin Block Copolymer OBC. A chemical modification such as maleic anhydride modification is possible.

A typical average molar mass in weight MW is between 60 kDa and 400 kDa for the polymer.

5 They can make up from 10 to 80%, preferably 15 to 40% of the formulation and their purpose is to provide: mechanical strength, flexibility, barrier properties, brilliance and viscosity control.

(b). tackifying resins which can be polar or non-polar resins. Polar resins can be (i) rosins of natural or modified origin, such as for example the
10 rosin extracted from the gum of pinewood, their polymerized, dimerized, dehydrogenated, hydrogenated derivatives or esterified by monoalcohols or polyols like glycol, glycerol, pentaerythritol; (ii) terpenic resins generally resulting from the hydrocarbon polymerization terpenic in the presence of catalysts of Friedel-Crafts like the mono-terpene (or pinene), the alpha-methyl styrene, and possibly modified by phenol action. Non-polar resins can
15 be (iii) resins obtained by hydrogenation, polymerization or copolymerization (with an aromatic hydrocarbon) of mixtures of unsaturated aliphatic hydrocarbons resulting from oil cuts; (iv) terpenic resins generally resulting from the terpenic hydrocarbon polymerization in the presence of catalysts of
20 Friedel-Crafts such as for example mono-terpene (or pinene), copolymers containing natural terpenes, for example styrene/terpene, the alpha-methyl styrene/terpene and the vinyl toluene/terpene.

Tackifying resins can be natural (rosin esters, terpene or terpene-phenolic esters), or oil-based, aliphatic or aromatic.

25 They make typically up from 10 to 80%, preferably 30 to 60%, of the formulation. They increase the hot tack, adherence and control cohesion.

(c). Paraffins and waxes, which can make up from 0 to 20% of the formulation. They play a role in providing barrier, rigidity and hot melt hardness properties.

30 (d). Plasticizers such as oils which can make up some 0 to 30% of the formulation. They control hot melt flexibility and viscosity.

(e). Anti-oxidants which may make up from 0.2 to 2% of the formulation. They stabilize the components when hot and when cold.

(f). Fillers which may make up part of the formulation when particular
35 properties are desired such as UV-resistance (oxidation resistance), flame proofing, anti-allergy properties, rheology modification, etc.

An hot-melt may have the following composition: 15 to 40% thermoplastic polymer, 30 to 60% tackifying resin, 30% or lower of other constituents: plasticizing oil, anti-oxidation agents, additives etc.

Residual tack can be controlled by adjusting the ingredients and the
5 formulation.

An adhesive may also be used with the SAP. This may assist in reducing the SAP movements. This can be, as disclosed above an HMA, HMPSA. It may also be water based (WB), and for example it can be a WBPSA. The adhesive used together with the SAP can be hydrosoluble. This
10 adhesive can be deposited at the same time the SAP is placed in the formed pockets. This embodiment will allow a tighter holding of the particles or grains of SAP, which is beneficial for the process and/or design.

With reference to figure 3, an overall view of the process is provided. In figure 3 are represented the rolls C1, C2, C3, C4, C5 and C6, and associated slender rolls for rolls C1, C3 and C6. Nip points A, B, C D and E,
15 corresponding respectively to the nip between rolls C1 and slender roll, C3 and C4, C3 and slender roll, C3 and C5, and C6 and slender roll are also shown in figure 2. Are also represented sheets (2) and (7) when supplied from appropriate sources. Each sub-step of figure 1 can also be found in a
20 corresponding manner in figure 3. Each step will then be disclosed in a more detailed manner below. One will understand that the optional steps in figure 1 are similarly optional in figure 3.

With reference to figure 4, the initial bottom layer supply step is disclosed. Sheet layer (2) is unrolled under mild tension up to a nip point #A
25 between roll C1 and associated slender roll. Roll C1 is preferably smooth and comprises for example a rubber sheath (or sleeve).

With reference to figure 5, the sheet layer (2) (bottom layer) will receive an adhesive layer (3). This adhesive can be HMPSA and is represented by the deposition of glue G1. This takes place while the bottom
30 layer is on roll C1, after nip point A. This adhesive will serve the purpose of retaining as much as possible the SAP that will be distributed in the pockets at point #B (see below). The adhesive coating is performed using standard techniques, as indicated above. The surface weight of the adhesive layer (3) is standard in the art. In one embodiment, the adhesive is deposited as a
35 foamed product. A foamed product will offer, for a given thickness, savings in adhesive amount, a higher tackiness, a lower cohesion (entrapping of SAP), and a lower flow (SAP particles coating should be avoided since their specific surface is one driving factor for the liquid absorption).

With reference to figure 6, the sheet layer (2) (bottom layer) is formed onto a roll C2 so as to impart the lengthwise profile of the pockets. Roll C1 has a rotating speed which is higher than the rotating speed of roll C3 (peripheral rotating speed is 5 to 20% higher, preferably 10 to 20%). The difference in rotating speed allows material to be present for forming the vertical walls of the pockets. Roll C2 will have a rotating speed slightly above the speed of roll C1 (peripheral rotating speed is 5 to 20% higher, preferably 10 to 20%) so as to generate a tension necessary for the forming. The friction being higher in the upper part of roll C2 will also ensure tensioning the bottom layer during deposition of the adhesive beads (below). Roll C2 can receive a non skid coating.

In figure 7, the roll C2 has grooves 71a, 71 b, 71c, 71d. Each groove has a valley, represented here with a square shape, but tapered valleys are possible, and the angles can be smoothed if desired. Is represented valley 72a corresponding to groove 71a. A corresponding peak 73a is represented, between two adjacent valleys. The web that is obtained after roll C2 hence exhibits ribs or corrugations. The web will match the groove due to the difference in friction between the top and the bottom of the grooves and the difference in winding speeds. The difference in winding speeds between the different rolls allows material to match the inner of the grooves. Roll C3 has the lowest winding speed, then roll C1 has an intermediate winding speed and finally roll C2 is the roll having the greatest winding speed among the three. The width of the web is reduced due to the formation of ribs/corrugations in the grooves; the difference in rotating speeds provides for a relaxation of the web tension and allows for such formation. The sheet layer (2) (with the adhesives (3) and/or (5)) is unstressed between rolls C2 and C3, where roll C3 has a rotating speed below the one of roll C2, as previously indicated. The difference in rotating speeds between rolls C2 and C3 is dictated by the amount (or length) of sheet layer that is necessary to form the other part of the vertical walls of the pockets. The two nip points #A and #D (calendering, see below, nip point #D is not represented on fig.6) will act as fixed points to impart the geometry to the sheet between the two nip points.

Roll C2 can be obtained by stacking discs of varying thicknesses and diameters (corresponding to width and depth of the pockets). This allows changing rapidly the geometry of the article without the need to revert to a complete change of set of rolls.

With reference to figure 8, the beads deposition is disclosed. Lengthwise beads are deposited using standard techniques. Because roll C2 has an adapted speed, the tension on the outer surface is suited for receiving the adhesive beads. The beads may not need to be necessarily linear, or continuous. They can be in the form of zigzags, and can be as dots. Beads deposition takes place on the sheet at locations corresponding to, or close to, the peaks 73a.

An alternative embodiment is one where the adhesive beads are replaced by another bonding process. As bonding process, one can use the heat-sealing, the ultrasound sealing, sewing, carding the two non-woven together. Bonding without adhesives is carried out generally after the calendering step.

With reference to figure 6 (see above), the pockets formation is disclosed, where the pockets are formed mainly by roll C3. In a manner similar to the forming according to MD (Machine Direction), the forming of the pockets in the TD (Transverse Direction) is carried out using a roll C3 formed from stacking discs with selected geometry, forming a matrix.

With reference to figure 9a, a roll C3 is disclosed which is a matrix. The bottom part of the recesses (91a, 91b, 91c) in the roll C3 is equipped with holes, allowing applying a vacuum. Applying a vacuum will serve attracting the sheet layer so as to conform it to the shape of the matrix, to define the pockets. The air porosity (Gurley porosity) of the bottom layer non-woven will be adapted such that the vacuum applied in the central part of the roll C3 is sufficient to press the sheet against the roll by suction. The applied vacuum will also serve when the SAP is distributed into the pockets thus formed (see below). The applied vacuum can be obtained with an inner drum or mandrel inserted into the roll, which can be segmented so as to apply vacuum only to those part of the roll in need thereof. The sector with the vacuum can thus represent between 30° and 180°, preferably between 60° and 120°.

A vacuum sector can be of the type disclosed in the prior art documents mentioned above, see EP-A-1621166 and EP-A-1621167. Roll C3 can be varied in dependence on the desired shape or geometry of the pockets.

Fig 9b represents a roll C3 with elongated shapes, rather than matrix shapes.

The roll C3 can be obtained in a manner similar to roll C2, i.e. by using discs that are stacked on an axis. Fig. 9c and 9d represent the respective discs, corresponding to fig. 9a and 9b.

With reference to figure 10, is disclosed the distribution of the SAP. SAP is distributed from roll C4, which is counter-rotating with respect to roll C3. Rotating speeds of rolls C3 and C4 are adapted one to the other. The two rolls are usually not in contact, a small gap existing between the two, so as to adapt for varying thicknesses for the bottom layer (2). One possible technique for dispensing SAP is the one disclosed in document US7744713, incorporated herein by reference. Vacuum being applied in the forming roll, this will also assist the SAP to be kept in place (with the Gurley porosity of the bottom layer being adapted to let the vacuum have an effect on holding in place the SAP).

With reference to figure 10 is also disclosed the bringing into contact of the top layer (sheet layer (7)). The top layer is displayed facing the bottom layer at a nip point #C, before calendering. Point #C is preferably as close as possible to nip point #B, so as to avoid polluting adhesive parts (if any) with the powdery SAP. The top layer (7) is brought under tension on the top of the pockets formed before and is tensioned by passing over a slender roll (which may have a banana shape). Tension is preferably applied to as to minimize the effect of the vacuum on the top layer to be applied (tension will avoid waves that could otherwise form due to the vacuum). The slender roll may also comprise rigs, so as to form a top layer with pleats within the thickness (to provide for further expansion).

With reference to figure 10, is also disclosed the calendering step. A pressure is applied between rolls C3 and C5 to proceed with the fixing of the top layer onto the bottom layer, whereby closed pockets (4a) are formed.

Is also represented as a further, optional, embodiment, the providing of the acquisition distribution layer ADL (11). This layer is supplied at nip point #C so as to be formed into a sandwich at that point. This ADL will preferably receive adhesives on both faces, but can also be fixed using any of the bonding system discussed above.

With reference to figure 11, is disclosed the finishing step. The compacting is carried out during winding under tension of the finished product. A pressing roll C6 is used to impart pressure at point #E during winding.

Two optional steps can be present (not shown).

The first optional step is the coating of the top layer (7) with an adhesive layer (8). Coating is an open coating, so as to ensure that the top layer will keep breathability and liquid uptake properties. Coating can be carried out as porous coat, spiral-spray coating, multi lines, pattern coating, and the like. Coating methods are well known to the skilled man.

The second optional step is the spraying of adhesive for holding and/or agglomerating the particles of SAP. This spraying can be performed with an airless technique (low pressure) or air-mix. This would be applied onto the SAP particles once deposited into the pockets, substantially immediately after the SAP has been distributed from roll C4 (and before the top layer is affixed).

While the above disclosure has been given with the bottom layer receiving the SAP, it is possible, albeit less preferred, to invert the two sheet layers in the apparatus described above.

When beads are present in both the MD and TD, the process disclosed above can be amended as follows. A high-speed nozzle can be arranged at the vicinity of roll C5, where the nozzle is able to deposit a band of adhesive of small width, according to the sequence of the manufacturing, usually driven by the forming roll C3. A plurality of nozzles may be needed.

Alternatively, a process known as offline process can be used. In such a situation, the bottom part of the cores are manufactured off-line (i.e. until roll C3 and C4, but before roll C5 (calendering), and then brought onto the final manufacturing line in a perpendicular manner (the final manufacturing line being the line where the absorbent article or core is inserted into a diaper for example). Beads are applied and then the top layer is applied. Calendering and cutting is then performed.

The process can be reversed, where the top layer and the bottom layers are swapped. It is also possible that pockets be formed in both layers; in such a case there will be two forming devices on the line.

A further embodiment is disclosed below, where the respective sheets are inverted. As mentioned above, the process can be reversed, where the top layer and the bottom layers are swapped.

In this embodiment depicted at figure 12, the forming of the corrugations is assisted with a counter-roll placed on top of roll C2. The counter roll CC2 and the roll C2 can be matched through a proper driving device. Said device can be gears, or a belt (notched or not). Alternatively, the matching can be simply obtained by friction, roll CC2 being free on its axis.

This embodiment is used to further form the corrugations, by pinching the sheet between two facing, corresponding, surfaces of cooperating rolls. This is represented on figure 12, where C2 and CC2 are represented according to a cross-section (along the longitudinal axis). As can be seen, roll
5 CC2 comprises ribs 81a, 81b, 81c, 81d cooperating with the grooves 71a, 71b, 71c, 71d (only valley 72a and peak 73a are represented) of roll C2.

For this embodiment, the sheet 2 which is the one that is formed on rolls C2 and CC2 does not receive any adhesive coat in this situation, which enables the two rolls C2 and CC2 to interact and pinch the sheet 2. The
10 pockets will then be formed on this sheet 2 without the adhesive rather on the sheet 2 with the adhesive as in the previous embodiment. For this, the sheet 7 will receive the adhesive layer (3) and the beads (5), notably at the stage of roll C5 for example.

Apart from the inversion (and associated steps for the adhesive
15 deposition) and the additional steps for the counter roll CC2, the process is performed in substantially the same way.

The absorbent article or absorbent core of the invention can be used in a variety of products. It may be associated with a layer of fluff or cellulose layer, an acquisition/distribution layer, or both; it can also be used stacked
20 one over the other in 2 or more layers, where the patterns of pockets may be aligned or offset, and the like, creating 3D draining network. The absorbent article or core of the invention can generally speaking be used as part of personal care products, especially diapers.

CLAIMS

1. A process for manufacturing an absorbent article (1), said article comprising:
- 5 - a first sheet layer (2) presenting an array of absorbent receiving pockets (4, 4a);
- masses (6) of superabsorbent material, which masses are placed in said absorbent receiving pockets (4, 4a);
- a second sheet layer (7) placed on top of the first layer;
- 10 said process comprising the steps of
- providing a first sheet layer (2);
- conforming said first layer on a first roll C2, whereby longitudinal corrugations are formed on the layer;
- conforming said corrugated layer (2) on a second roll C3, said second roll C3 comprising recesses (91a, 91b, 91c) corresponding to the array of absorbent receiving pockets (4, 4a), whereby a pattern of pockets (4, 4a) is obtained;
- 15 - providing a pre-metered amount of SAP particulate material (6);
- 20 - providing a second sheet layer (7) material and affixing it for sandwiching with the first sheet layer;
- finishing the absorbent article, and
- said step of conforming on a first roll C2 being obtained by friction of the sheet layer (2) on the corresponding corrugated surface of said roll C2
- 25
2. The process of claim 1, further comprising unrolling sheet layer (2) from roll C1, where roll C2 has a rotating speed (peripheral) that is 5 to 20% above the speed of roll C1.
- 30
3. The process of claim 1 or 2, further comprising the step of unstressing the sheet between rolls C2 and C3.
- 35
4. The process of claim 3; where roll C1 has a rotating speed which is higher than the rotating speed of roll C3, where roll C1 has a rotating speed (peripheral) that is 5 to 20% above the speed of roll C3.

- 5 **5.** The process of any one of claims 1 to 4, further comprising the step of pinching the sheet between roll C2 and counter roll CC2, where the roll C2 and counter roll CC2 have grooves (71a, 71 b, 71c, 71d) and ribs (81a, 81b, 81c, 81d) cooperating with each other.
- 10 **6.** The process of any one of claims 1 to 5, wherein the step of forming the pockets comprises holding the layer (2) and/or (7) into the second roll C3 by applying vacuum.
- 15 **7.** The process of any one of claims 1 to 6, wherein said pre-metered amount of SAP material is delivered from a delivering unit placed above roll C3, whereby the pre-metered amount of SAP is filled in a pattern of pockets.
- 20 **8.** The process of any one of the preceding claims, further comprising the step of:
 - providing bonding beads (5), preferably adhesive beads, between the pockets.
- 25 **9.** The process of any one of the preceding claims, further comprising the step of:
 - providing adhesive layers (3) and/or (8) between the first and second layers, whereby said layers are bonded.
- 30 **10.** The process of any one of the preceding claims, further comprising the step of:
 - calendering into the absorbent article (1).
- 35 **11.** The process of any one of the preceding claims, wherein the sheet layer (2) and/or (7) is/are non-woven.
- 12.** The process of any one of the preceding claims, wherein the sheet layer (2) is impervious to liquids and the sheet layer (7) allows penetration of liquids into the masses of superabsorbent material.
- 13.** A process for manufacturing a diaper, training pant, sanitary napkin, incontinence garment or bandage comprising

manufacturing an absorbent article according to any one of the preceding claims, and converting said article into said diaper, training pant, sanitary napkin, incontinence garment or bandage.

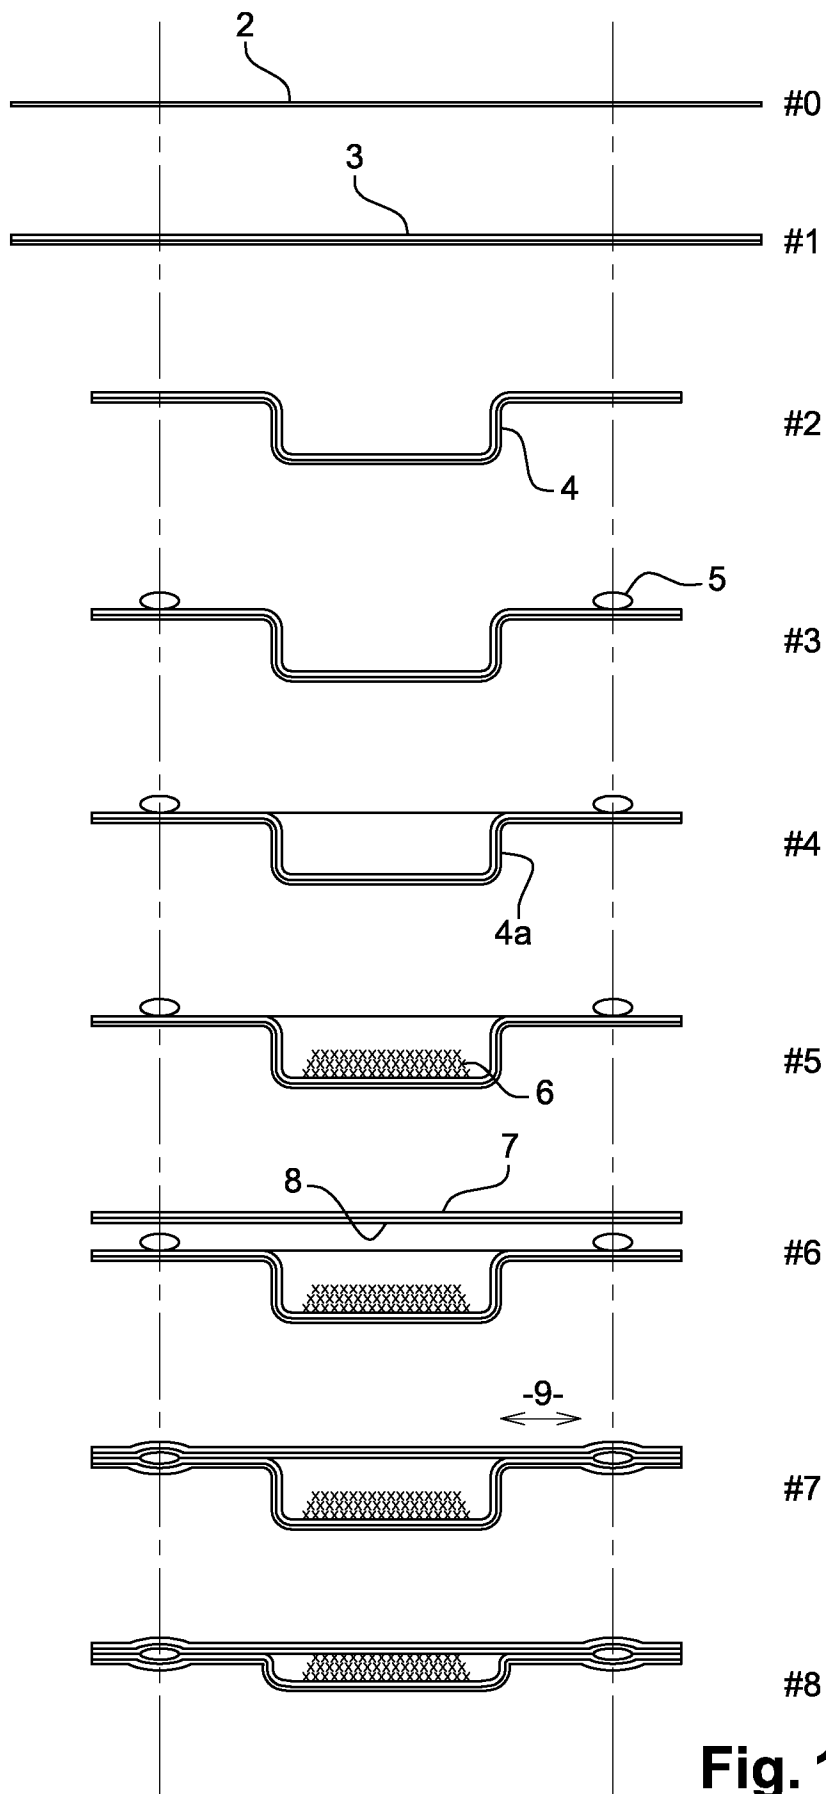
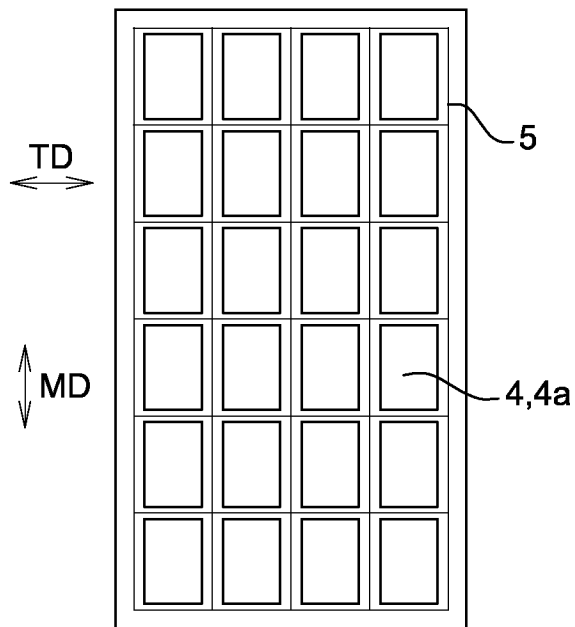
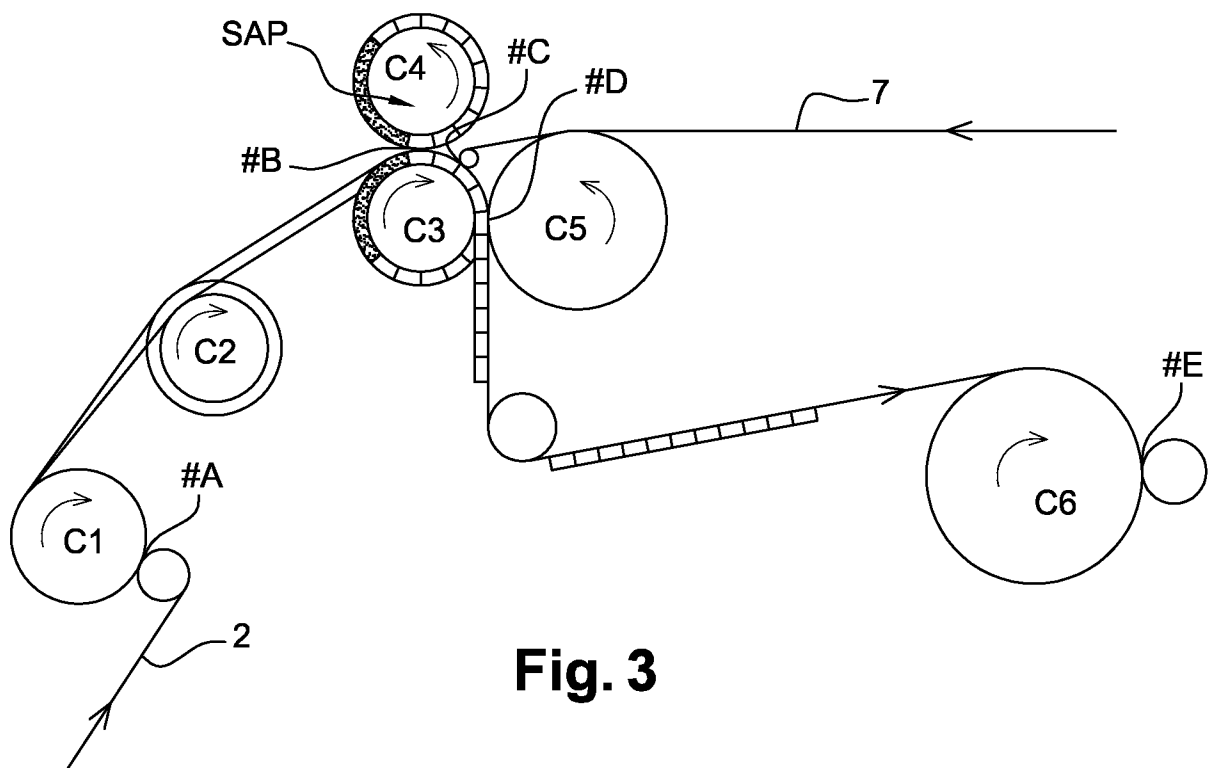
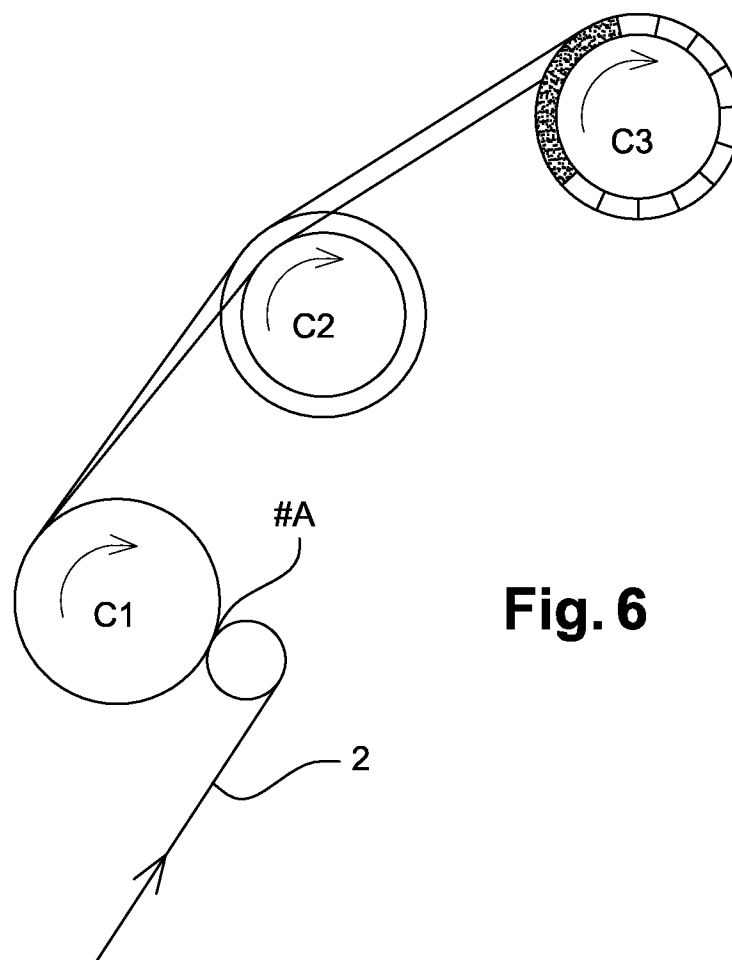
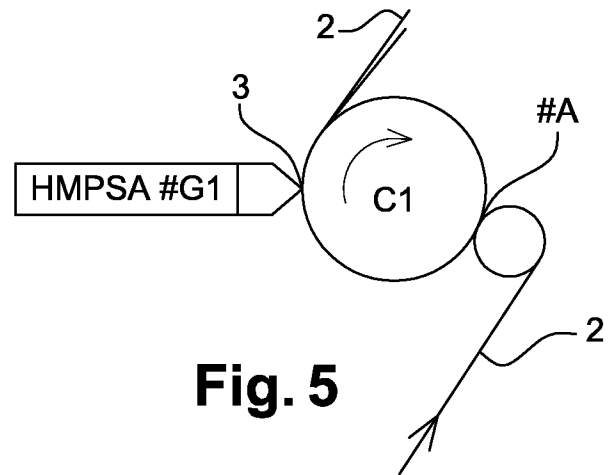
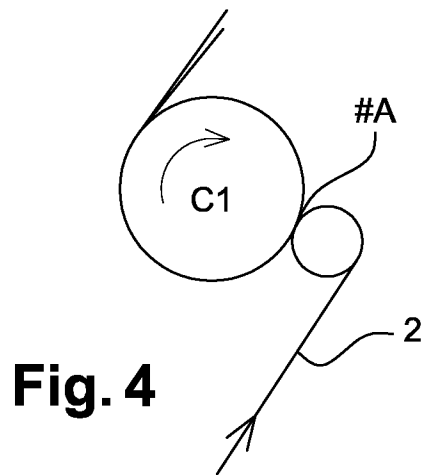


Fig. 1

**Fig. 2****Fig. 3**



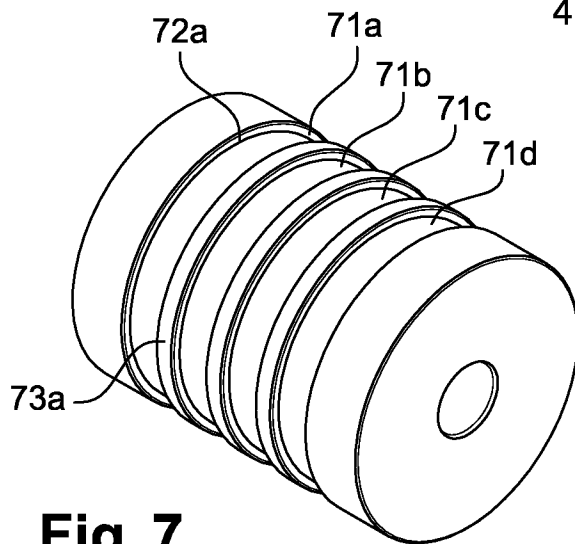


Fig. 7

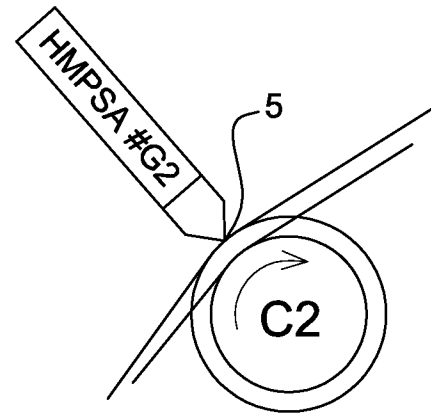


Fig. 8

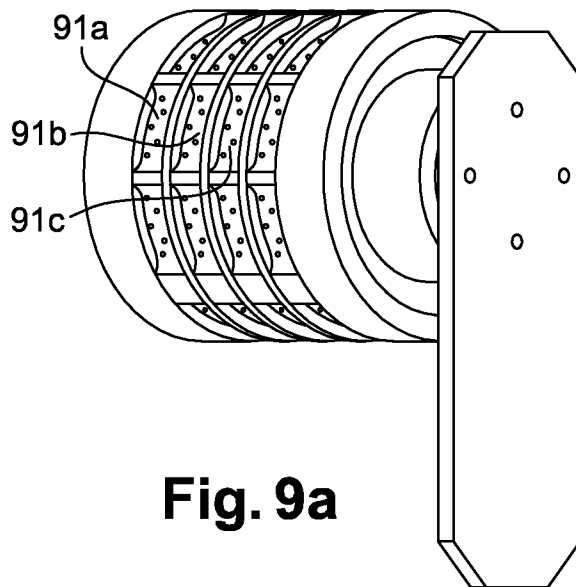


Fig. 9a

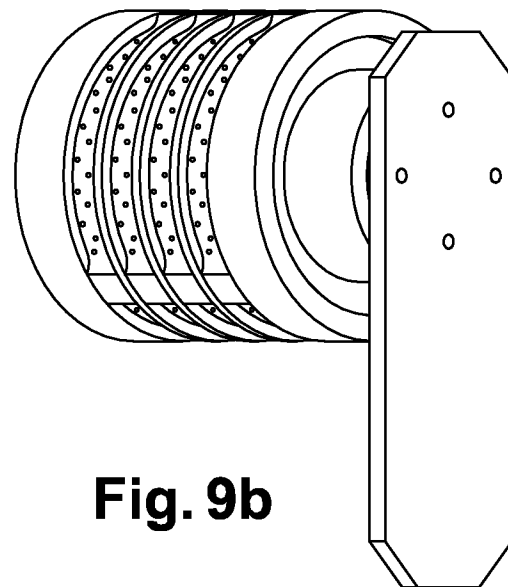


Fig. 9b

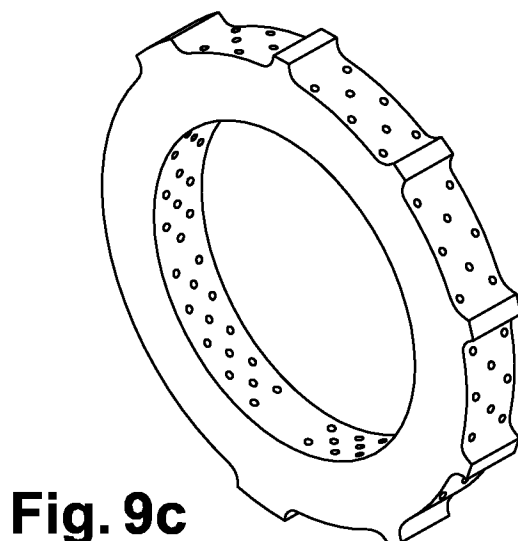


Fig. 9c

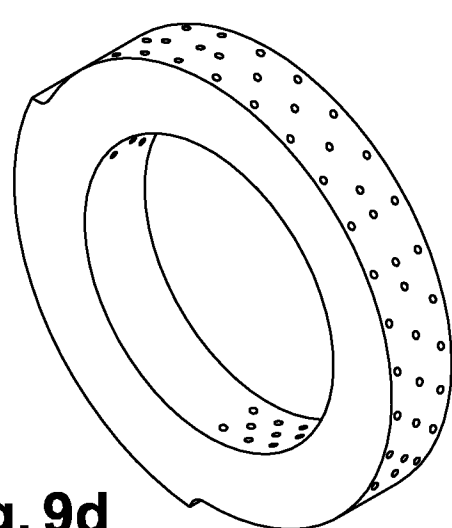


Fig. 9d

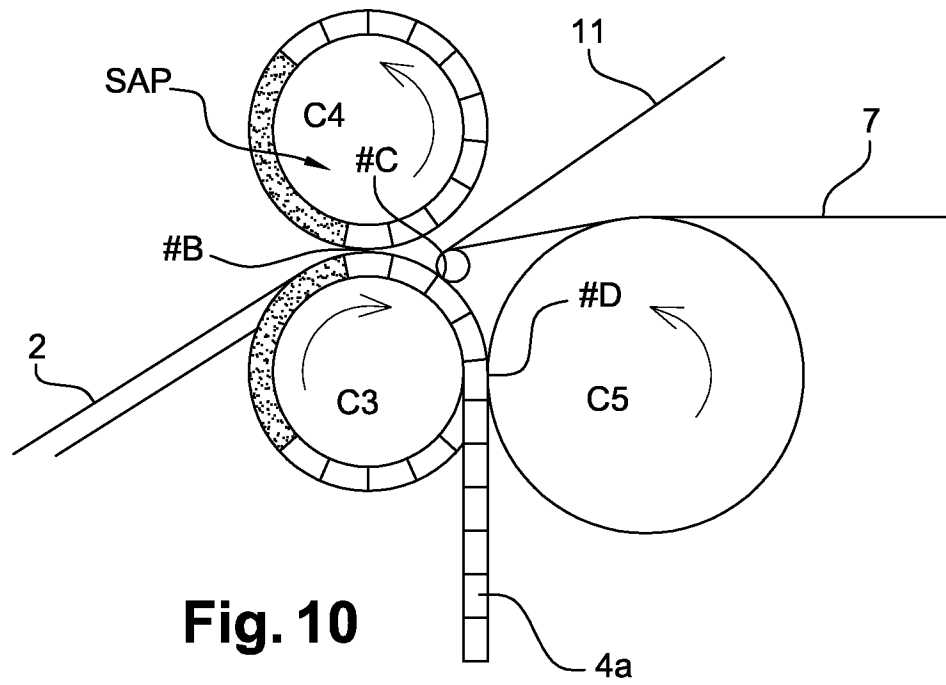


Fig. 10

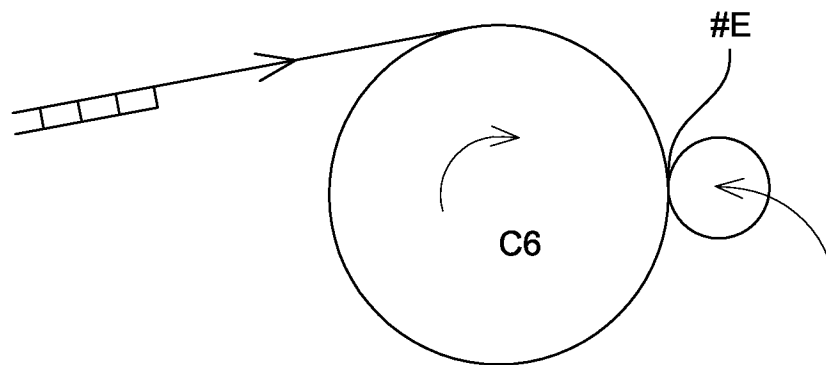


Fig. 11

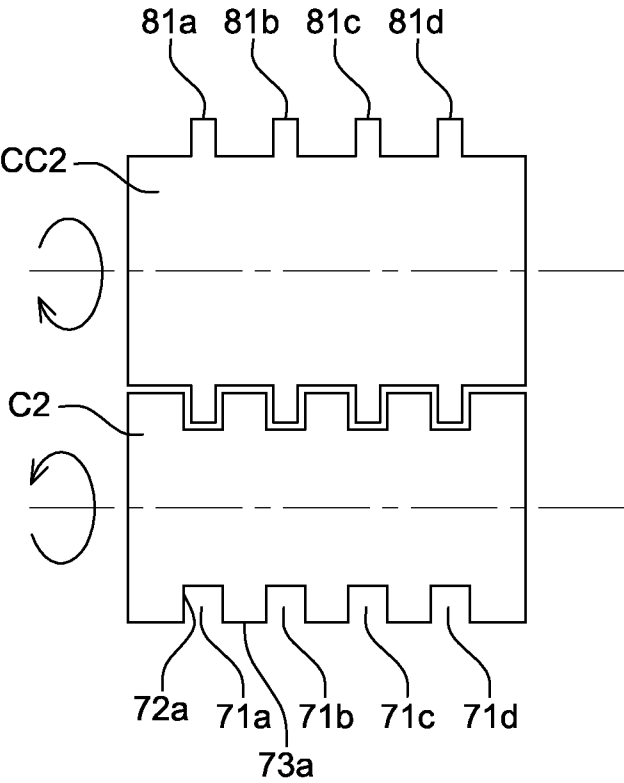


Fig. 12

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/071072

A. CLASSIFICATION OF SUBJECT MATTER INV. A61F13/15 B65B9/04 A61F13/532 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) A61F B65B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 892 535 A (BJOERNBERG STEN [SE] ET AL) 9 January 1990 (1990-01-09) * figures; column 1, lines 6-21, 45-52; column 2, lines 6-9, 35-68; column 3, lines 1-25; column 5, line 14 - column 7, line 18; column 7, lines 48-52, 59-68; column 8, lines 1-16, 28-38; 56-68 * -----	1,3-13
A	EP 1 621 166 A1 (PROCTER & GAMBLE [US]) 1 February 2006 (2006-02-01) the whole document -----	1-13
A	US 5 494 622 A (HEATH MARK G [US] ET AL) 27 February 1996 (1996-02-27) the whole document ----- <div style="text-align: center;">-/-</div>	1,6-13
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex. </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center; font-size: 1.2em;">13 November 2012</div>		Date of mailing of the international search report <div style="text-align: center; font-size: 1.2em;">29/11/2012</div>
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center; font-size: 1.2em;">Barenbrug, Theo</div>

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/071072

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 433 715 A (TANZER RICHARD W [US] ET AL) 18 July 1995 (1995-07-18) the whole document -----	1,6-13
A	US 2006/202379 A1 (BENTLEY RACHELLE [US] ET AL) 14 September 2006 (2006-09-14) the whole document -----	1-13
A	US 2010/062165 A1 (SUZUKI MIGAKU [JP] ET AL) 11 March 2010 (2010-03-11) paragraphs [0018], [0019], [0225], [0467] -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/071072

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4892535	A	09-01-1990	AT 84698 T 15-02-1993
		DE 3877771 T3 23-01-1997	
		DK 32090 A 05-04-1990	
		EP 0394274 A1 31-10-1990	
		JP 2703596 B2 26-01-1998	
		JP H03502531 A 13-06-1991	
		NO 900556 A 06-04-1990	
		US 4892535 A 09-01-1990	
		WO 8901325 A1 23-02-1989	
EP 1621166	A1	01-02-2006	AR 050687 A1 15-11-2006
		AU 2005269401 A1 09-02-2006	
		BR PI0513820 A 20-05-2008	
		CA 2575467 A1 09-02-2006	
		CN 101018521 A 15-08-2007	
		EP 1621166 A1 01-02-2006	
		EP 2286776 A1 23-02-2011	
		ES 2351793 T3 10-02-2011	
		JP 4995082 B2 08-08-2012	
		JP 2008507384 A 13-03-2008	
		KR 20070029270 A 13-03-2007	
		US 2006021695 A1 02-02-2006	
		WO 2006015138 A1 09-02-2006	
		ZA 200700388 A 25-09-2008	
US 5494622	A	27-02-1996	CA 2138680 A1 13-01-1996
		US 5494622 A 27-02-1996	
US 5433715	A	18-07-1995	AU 677451 B2 24-04-1997
		AU 8018194 A 22-05-1995	
		CA 2117125 A1 30-05-1995	
		DE 69417051 D1 15-04-1999	
		DE 69417051 T2 23-09-1999	
		EP 0725616 A1 14-08-1996	
		ES 2127947 T3 01-05-1999	
		FR 2711518 A1 05-05-1995	
		GB 2283680 A 17-05-1995	
		JP 3434296 B2 04-08-2003	
		JP H09504207 A 28-04-1997	
		PH 30532 A 27-06-1997	
		US 5433715 A 18-07-1995	
		WO 9511652 A1 04-05-1995	
		ZA 9407442 A 11-05-1995	
US 2006202379	A1	14-09-2006	CN 101032436 A 12-09-2007
		EP 1700586 A2 13-09-2006	
		JP 2006247398 A 21-09-2006	
		US 2006202379 A1 14-09-2006	
US 2010062165	A1	11-03-2010	AT 531758 T 15-11-2011
		AU 731439 B2 29-03-2001	
		AU 5412098 A 03-07-1998	
		CA 2264153 A1 18-06-1998	
		CN 1244881 A 16-02-2000	
		CN 1506119 A 23-06-2004	
		EP 0947549 A1 06-10-1999	
		EP 2295493 A1 16-03-2011	
		EP 2305749 A1 06-04-2011	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/071072

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 2330152 A1	08-06-2011
		ES 2376643 T3	15-03-2012
		HK 1024494 A1	09-02-2007
		ID 22845 A	09-12-1999
		IL 130178 A	31-08-2005
		NZ 336395 A	23-02-2001
		RU 2186797 C2	10-08-2002
		TR 9901328 T2	22-04-2002
		US 8268424 B1	18-09-2012
		US 2010062165 A1	11-03-2010
		US 2010062934 A1	11-03-2010
		US 2010063470 A1	11-03-2010
		WO 9825999 A1	18-06-1998
