(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number
WO 01/27552 A1

(51) International Patent Classification[7]: F28D 21/00, 9/00

(21) International Application Number: PCT/US00/27013

(22) International Filing Date: 2 October 2000 (02.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/158,533 8 October 1999 (08.10.1999) US
09/470,165 22 December 1999 (22.12.1999) US

(71) Applicant: CARRIER CORPORATION [US/US]; Carrier Parkway, P.O. Box 4800, Syracuse, NY 13221 (US).

(72) Inventors: DOBBS, Gregory, M.; 73 Riverview Road, Glastonbury, CT 06033-3137 (US). FREIHAUT, James, D.; 8 Woodcock Lane, South Windsor, CT 06074 (US).

(74) Agent: HABELT, William, W.; Carrier Corporation, Intellectual Property Department, Carrier Parkway, P.O. Box 4800, Syracuse, NY 13221 (US).


(81) Designated State *(national)*: JP.

(84) Designated States *(regional)*: European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

**Published:**
— *With international search report.*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: A PLATE-TYPE HEAT EXCHANGER

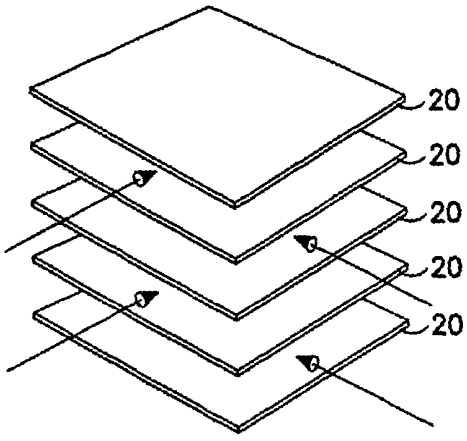


(57) Abstract: The present invention is a plate-type heat exchanger wherein the plates (20) are constructed of ionomer membranes, such as sulfonated or carboxylated polymer membranes, which are capable of transferring a significant amount of moisture from one side of the membrane to the other side.

WO 01/27552 A1

# A PLATE-TYPE HEAT EXCHANGER

## Cross Reference to Related Applications

This application claims benefit of U.S. Provisional Application No. 60/158,533, filed October 10, 1999.

## Technical Field

This invention relates to a plate-type exchanger and more particularly, to a plate-type heat exchanger wherein the plates comprise a polymer membrane having enhanced moisture transfer properties.

## Background Art

Heating, ventilation and air conditioning (HVAC) systems typically recirculate air, exhaust a portion of the re-circulating air, and simultaneously replace such exhaust air with fresh air. In order to maintain an air temperature and humidity level within a certain space at or near a set point, it is desirable to condition the fresh air the temperature and humidity level set point. Unfortunately, the temperature and humidity of fresh air often differ substantially from those of the set points. For example, during hot and humid periods, such as the summer months, the incoming fresh air typically has a higher temperature and/or humidity level than desired. Additionally, during cold and/or dry periods, such as the winter months, the incoming fresh air typically has a lower temperature and humidity level than desired. The HVAC system must, therefore, condition the fresh air before introducing it to the room.

HVAC systems are typically designed according to the worst climatic conditions for the geographic area in which the HVAC system will be located. Such worst case climatic conditions are referred to as a cooling and heating "design day." Conditioning the fresh air during such extreme climatic conditions creates a significant load on the HVAC system. System designers, therefore, typically design the HVAC system with sufficient capacity to maintain the set point during the design day conditions. In order to create the required capacity, the HVAC system may include oversized equipment. Alternatively, as discussed in U.S. Patent No. 4,051,898, which is hereby incorporated by reference, in order to reduce the load on the HVAC system, system designers often incorporate ventilators within the HVAC system. Reducing the ventilation load on the HVAC system decreases its capacity requirements, which, in turn, allows the designers to specify smaller sized equipment, thereby leading to a more efficient design.

Referring to Fig. **1**, a ventilator **10** typically includes a plate-type heat exchanger **12** which creates alternating flow passages for the fresh air stream and exhaust air stream to pass therethrough. The flow passages are typically either parallel or perpendicular to one another. This figure illustrates a cross flow heat exchanger because the alternating flow passages are perpendicular to one another. Specifically, one air stream enters the ventilator **10** through opening **11**, passes through the plate-type heat exchanger **12**, and exits the ventilator **10** through opening **13**, and the other air stream enters the ventilator **10** through opening **15**,

passes through the plate-type heat exchanger **12**, and exits the ventilator **10** through opening **17**. However, if the alternating flow passages are parallel to one another and the air streams are in the same direction, then the heat exchanger is referred to as a co-flow heat exchanger. Additionally, if the alternating flow passages are parallel to one another but the air streams directly oppose one another, then the heat exchanger is referred to as a counterflow heat exchanger.

Regardless of the direction of the flow patterns, as the air streams pass through the passageway and along opposite sides of the plates, the heat or energy in one air stream is transferred to the other air stream. Depending upon the material of the plates **20**, they can transfer sensible heat or both sensible and latent heat. Specifically, if the plates **20** are constructed of a material that is only capable of transferring sensible heat, then the ventilator is referred to as a heat recovery ventilator (HRV). If, however, the plates **20** are constructed of a material that is capable of transferring latent heat, as well as sensible heat, then the ventilator is referred to as an energy recovery ventilator (ERV). For example, metal plates, such as aluminum plates, absorb a portion of the thermal energy in one air stream and transfer such energy to the other air stream by undergoing a temperature change without allowing any moisture to pass therethrough. Therefore, a ventilator constructed of metal plates is referred to as a HRV. Although plates **20** constructed of paper typically have a lower thermal conductivity than metal, paper may be capable of transferring some sensible heat. These plates, however, are capable of transferring some latent

heat because such materials are capable of transferring moisture between air streams. A ventilator having plates constructed of material capable of transferring moisture between air streams is, therefore, referred to as an ERV.

It is generally understood that an ERV is more versatile and beneficial than an HRV. However, materials such as paper limit the plate's ability to transfer a larger portion of the latent heat from one air stream to the other air stream. Therefore, it is desirable to produce an ERV with a plate having a greater latent heat transfer efficiency. The cost of the more efficient material, however, cannot disrupt the cost benefit of including an ERV within a HVAC system. As discussed hereinbefore, utilizing a ventilator to pre-condition the fresh air is an alternative to increasing the size of the HVAC system. Specifically, pre-conditioning the fresh air allows the system designers to utilize a design day having more moderate parameters, which, in turn, make possible the inclusion of smaller, less costly equipment. Such equipment will also consume less energy, thereby making it less expensive to operate. Hence, including an ERV within a HVAC system is perceived as a low cost method for increasing the system's overall operating efficiency. However, if the cost of a more efficient plate material significantly increases the first cost of the ERV, then including an ERV within a HVAC system decreases its financial benefit. Therefore, it is desirable that the plates within the plate-type heat exchanger be constructed of a low cost material, as well as a material that has the ability to effectively transfer latent heat.

Another alternative to increasing the plate material's ability to transfer latent heat is to pressurize the ERV because pressurizing the ERV increases the plate's ability to transfer latent heat from one air stream to the other by increasing the water concentration difference across the plate. A typical HVAC system, however, currently operates at about ambient pressure. Therefore, pressurizing the HVAC system and more particularly, the ERV, would require adding additional equipment, such as a compressor, to the HVAC system. Although pressurizing the ERV would increase its efficiency, adding the necessary equipment to pressurize the ERV would increase the HVAC system's overall cost. Again, including an ERV within a HVAC system is currently perceived as a low cost method for increasing its overall efficiency because doing so decreases the size and operating cost of the HVAC system. Pressurizing the HVAC system, alternatively, would only increase the size of such system by additional equipment, thereby eliminating the cost benefit of adding an ERV to an HVAC system.

What is needed is a plate-type heat exchanger wherein the plates are constructed of a cost effective material, other than paper, that is capable of transferring a larger percentage of the available latent heat in one air stream to the other air streams, while maintaining the ERV's ability to operate at about ambient pressure.

**Disclosure of Invention**

The present invention is a plate-type heat exchanger wherein the plates are ionomer membranes, such as

sulfonated or carboxylated polymer membranes, which are capable of transferring a significant amount of moisture from one of its side to the other. Because the ionomer membrane plates are capable of transferring a significant amount of moisture, the plate-type heat exchanger is capable of transferring a large percentage of the available latent heat in one air stream to the other air streams. Therefore, a heat exchanger having ionomer membrane plates is more efficient than a heat exchanger constructed of paper plates. Utilizing such a material not only improves the latent effectiveness factor of the ERV, but does so without pressuring the HVAC system or adding additional equipment, thereby improving the cost benefit of including an ERV within an HVAC system.

Accordingly the present invention relates to a plate-type heat exchanger, including a plurality of parallel plates spaced apart from one another to thereby form alternating first and second passageways for a first gas stream and a second gas stream to pass therethrough, respectively, the plates being comprised of a ionomer membrane having four sides, a means for spacing apart the parallel plates from one another, a means for sealing two opposing sides of the first passageways thereby allowing the first gas stream to pass therethrough in a first direction, and a means for sealing two opposing sides of the first passageways thereby allowing the second gas stream to pass therethrough in a second direction.

In an alternate embodiment of the present invention, the ionomer membranes may be sulfonated or carboxylated polymer membranes, which can be produced by sulfonating or carboxylating hydrocarbon or perfluronated polymers. Therefore, in a further embodiment of the present

invention, the sulfonated or carboxylated polymer membrane shall comprise a perfluronated backbone chemical structure. In an even further alternate embodiment of the present invention, the sulfonated or carboxylated polymer membrane shall comprise a hydrocarbon backbone chemical structure.

Both the sulfonated polymer membrane, comprising the perfluoronated backbone chemical structure, and the sulfonated polymer membrane, comprising the hydrocarbon chemical structure, significantly improve the plate-type heat exchanger's ability to transfer latent heat between air streams in comparison to the currently available plate-type heat exchangers comprising paper plates because both types of sulfonated polymer membranes have the ability to transfer a significantly greater amount of moisture. Additionally, the sulfonated polymer membrane comprising the hydrocarbon backbone structure is typically less expensive to manufacture than a sulfonated polymer membrane comprising a perfluoronated backbone structure because fluorine chemical processing is typically more expensive than ordinary hydrocarbon organic chemistry. Therefore, although there is a cost benefit for including an ERV having a plate-type heat exchanger constructed of sulfonated polymer membranes with a perfluoronated backbone structure into an HVAC system, utilizing plates constructed of sulfonated polymer membranes having a hydrocarbon backbone would further increase the ERV's cost benefit.

The foregoing features and advantages of the present invention will become more apparent in light of the following detailed description of exemplary embodiments thereof as illustrated in the accompanying drawings.

**Brief Description of Drawings**

Fig. 1 illustrates a ventilator comprising a prior art plate-type heat exchanger having a plurality of alternating counter flow passageways therein.

Fig. 2 illustrates a plurality of ionomer membrane plates for constructing a plate-type heat exchanger.

Fig. 3 illustrates the plurality of ionomer membrane plates illustrated in Fig. 2 along with spacer bars located along two sides of each plate for spacing apart the plates and sealing the passageways therebetween.

Fig. 4 illustrates an alternate means for sealing the passageways by creating flanges on opposing sides of the ionomer membrane plates.

Fig. 5 is a plate-type heat exchanger of the present invention constructed of parallel spaced ionomer membrane plates.

Fig. 6 is an alternate embodiment of the plate-type heat exchanger of the present invention further comprising continuous corrugated sheets interposed between the ionomer membrane plates.

Fig. 7 is an alternate embodiment of the plate-type heat exchanger of the present invention wherein corrugated lattice structural sheets are interposed between the ionomer membrane plates to create the alternating passageways.

Fig. 8 is a sheet of a lattice structure.

Fig. 8A is an enlargement of a portion of the corrugated lattice structure sheet in Fig. 8.

Fig. 9 is a cross section of the plate-type heat exchanger illustrated in Fig. 7, taken along line 9-9.

Fig. 10 is a cross section of the plate-type heat exchanger illustrated in Fig. 7, taken along line 10-10.

Fig. 11 is a side view of a ionomer membrane plate interposed between two planar lattice sheets.

Fig. 12 depicts a planar lattice sheet.

Fig. 13 illustrates a corrugated lattice structural sheet interposed between two planar lattice sheets, wherein the ionomer membrane plates are adjacent the opposite sides of the planar lattice sheets.

Fig. 14 is an alternate embodiment of the plate-type heat exchanger of the present invention comprising webbed sheets adjacent to the ionomer membrane plates.

Fig. 15 is a cross section of the plate-type heat exchanger illustrated in Fig. 14, taken along line 15-15.

Fig. 16 is a cross section of the plate-type heat exchanger illustrated in Fig. 15, taken along line 16-16.

Fig. 17 is a cross section of the plate-type heat exchanger illustrated in Fig. 15, taken along line 17-17.

Fig. 18 is an alternate embodiment of the webbed supported ionomer membrane plate wherein one webbed sheet is adjacent the ionomer membrane plate.

Fig. 19 is a further embodiment of the webbed supported ionomer membrane plate wherein the webbed sheet is embedded within the ionomer membrane plate.

Fig. 20 is an ionomer membrane interposed between two layers of polytetrafluroehtylene.

Fig. 21 is an ionomer membrane adjacent one layer of polytetrafluroehtylene.

Fig. 22 is an alternate embodiment of the plate-type heat exchanger of the present invention wherein webbed


sheets are interposed between the ionomer membrane plates to create the alternating passageways.

Fig. 23 is a cross section of the plate-type heat exchanger illustrated in Fig. 22, taken along line 23-23.


Fig. 24 is a cross section of the plate-type heat exchanger illustrated in Fig. 22, taken along line 24-24.

**Best Mode for Carrying out the Invention**

Referring to Fig. 2, there is shown a plurality of plates 20 spaced apart from one another to form passageways (i.e., gaps or spaces) between the plates 20. The plates 20 are constructed of an ionomer membrane, which has a high moisture transfer characteristic. An ionomer membrane shall mean a membrane composed of an ion containing polymer, such as a sulfonated polymer membrane or a carboxylated polymer membrane that is capable of transferring moisture from one of its sides to the other. A sulfonated polymer membrane shall mean a layer of polymer comprising a sulfonated ion ($SO_3^-$) within its chemical structure. The sulfonated ion ($SO_3^-$) is typically located within the side chain of a polymer having a perfluoronated or hydrocarbon backbone structure. Examples of a generic chemical structure for a sulfonated polymer membrane comprising a perfluoronated backbone chemical structure includes the following:




and

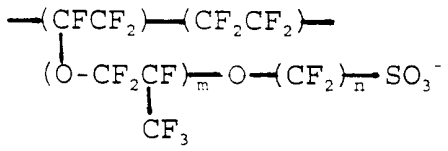


wherein, m and n are comparable variables;

and




Moreover, examples of commercially available sulfonated polymer membranes having a perfluoronated chemical structure include those membranes manufactured by W. L. Gore & Associates, Inc., of Elkton, MD and distributed under the tradename GORE-SELECT and those perfluoronated membranes manufactured by E. I. du Pont de Nemours and Company and distributed under the tradename NAFION.

An example of a generic chemical structure for a sulfonated polymer membrane comprising a hydrocarbon backbone chemical structure includes the following:

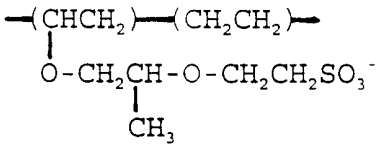


and

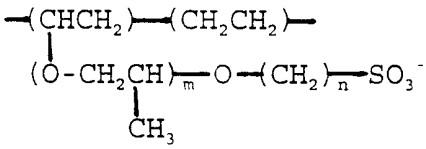

wherein, m and n are comparable variables;

and



Moreover, an example of a commercially available sulfonated polymer membrane having a hydrocarbon backbone chemical structure includes the polymer membrane manufactured by the Dais Corporation, of Odessa, FL, and distributed under the product name DAIS 585. The cost of sulfonated polymer membranes comprising a hydrocarbon backbone chemical structure is currently about one percent (1%) to ten percent (10%) of the cost of sulfonated polymer membranes comprising a perfluoronated backbone chemical structure. Therefore, it is especially preferable for the plates **20** of a plate-type heat exchanger to be constructed of sulfonated polymer membranes comprising a hydrocarbon backbone chemical structure because incorporating such plates into an ERV improves its latent effectiveness factor while minimizing its cost.

The sulfonated polymer membranes do not necessarily require a hydrocarbon or perfluoronated backbone chemical structure. Rather, the backbone could be a block or random copolymer. The desirable thickness of the sulfonated polymer membranes is dependent upon the their physical properties, which are controlled by the chemical backbone structure, length of side chains, degree of sulfonation, and ionomic form (i.e., acid, salt, etc.). However, such block or random copolymer must have the ionic sulfonate group ($SO_3$). Additionally, the polymer membrane may be fully or partially sulfonated. Altering the degree of sulfonation affects the polymer membrane's ability to transfer moisture, and it is generally preferable to have a high degree of sulfonation within the polymer membrane.

It may also be preferable to utilize a carboxylate polymer membrane in lieu of a sulfonated polymer membrane if the carboxylate polymer membrane is able to transfer moisture from one of its sides to the other side. A carboxylate polymer membrane shall mean a layer of polymer comprising a carboxylate ion ($CO_2^-$) within its chemical structure, wherein the carboxylate ion ($CO_2^-$) is typically located within the side chain of the polymer. An example of a generic chemical structure for a carboxylate polymer membrane would include the examples of a generic chemical structure for a sulfonated polymer membrane described hereinbefore and wherein the $SO_3^-$ ion is replaced with a $CO_2^-$ ion. Although the remainder of this discussion shall refer to sulfonated polymer membranes, it shall be understood that other ionomer membranes, such as carboxylated polymer membranes, could be used as the material from which the plates **20** are constructed.

Referring to Fig. **3**, each plate **20** typically is rectilinear having alternate pairs of sides (i.e., four sides). Spacer bars **22** are interposed between alternating plates **20** and located along two opposing sides of such plates **20**, thereby forming an array of first passageways **26**. The spacer bars **22** seal (e.g., closes or blocks) and define the first passageways **26** such that a first gas stream passes therethrough in a direction indicated by the arrow marked **A**. In the same respect, spacer bars **24** are interposed between alternate pairs of plates **20**, other than those pairs that contain spacer bars **22**, and are located along two opposing sides of such plates **20**, thereby forming an array of second passageways **28**. The spacer bars **24** seal and define the

second passageways **28** such that a second gas stream passes therethrough in a direction indicated by the arrow marked **B**, which is substantially perpendicular to the arrow **A**. Although the spacer bars **22** and the spacer bars **24** are perpendicular to one another, thereby depicting a cross flow heat exchanger, it shall be understood that the spacer bars **22**, **24** can be oriented to create a parallel or a counter flow heat exchanger. Provided the plates **20** have sufficient stiffness, the spacer bars **22**, **24** not only serve as a means for sealing the sides of the plates **20** to create the alternating passageways **26**, **28**, but also simultaneously serve as a means for spacing the plates **20** apart from one another.

As discussed in U.S. Patent No. 5,785,117, which is hereby incorporated by reference, an additional means for sealing the sides of the plates **20** to create the alternating passageways **26**, **28**, may include creating a flange with the opposite sides of the plates **20**. Specifically, referring to Fig. **4**, two opposing sides of a plate **20** are bent in one direction at approximately 90° to create flanges **52**. The other two opposing sides of the same plate **20** are also bent in the opposite direction at approximately 90° to create flanges **54**. The next adjacent plate **20** has two sets of opposing sides wherein, one set has flanges **56** bent in one direction at approximately 90° and the other set has flanges **58** bent in the opposite direction at approximately 90°. When these two plates are adjacent to one another, the flanges **54** and the flanges **56** overlap to create passageway **28** and seal the sides of such passageway. When the next pair of plates **20** are adjacent to one another, the flanges **52** and the flanges **58** overlap and create passageway **26** and seal

the sides of such passageway. Although not shown, a further means for sealing a pair of plates **20** to create a passageway may include placing an adhesive tape or a face plate, or another type of obstruction between the space between of two plates **20**.

Referring to Fig. **5**, once the sealing means and the plates **20** are assembled to create the passageways **26**, **28**, the plate-type heat exchanger **12a** is formed. Although this figure depicts a plate-type heat exchanger **12a** having a total of six alternating passageways **26**, **28**, the plate-type heat exchanger **12a** may have as few as two passageways, or as many passageways as are required to transfer the desirable amount of heat from one gas stream to the other. Fig. **5** illustrates a plate-type heat exchanger **12a** having a sealing means located at the sides of the plates **20**, thereby leaving the remainder of each plate **20** unsupported. Hence, it is preferable that the plates **20** have sufficient rigidity (i.e., stiffness) to prevent them from fluttering while the gas streams pass through the passageways **26**, **28**. Creating a plate **20** with such rigidity, however, may require increasing the thickness of the plates **20**, which, in turn, may reduce its thermal efficiency. Therefore, it may be desirable to reduce the thickness of the plates **20** and insert an alternate means for providing the spacing of the parallel plates.

Referring to Fig. **6**, there is shown an alternate embodiment of the plate-type heat exchanger **12b** of the present invention. Unlike the plate-type heat exchanger **12a** in Fig. **5**, which does not provide support across the width of the plate **20**, the plate-type heat exchanger **12b**

in Fig. 6 includes a continuous corrugated sheet **30** interposed between the plates **20**, thereby preventing the plates **20** from fluttering as the gas streams pass through the passageways **26**, **28**. The continuous corrugated sheet **30** is typically constructed of paper but may also be constructed of metal or plastic. The continuous corrugated sheet **30** also serves as an alternate means for spacing the plates **20** apart from one another. Specifically, the alternating peaks **32**, **34** of the continuous corrugated sheet **30** contact the plates **20** and create a passageway for gas stream to flow in the same direction as the corrugations. Moreover, the continuous corrugated sheet **30** not only serves as a means of spacing apart the plates **20**, but also simultaneously serves as a means for sealing two opposite sides of the gap between the plates **20**. In other words, as the alternating peaks **32**, **34** of the continuous corrugated sheet **30** contact the plates **20**, the contact points act as a seal line and prevent the gas stream from flowing across the continuous corrugated sheet **30**.

Referring to Fig. 7, there is shown an alternate embodiment of the plate-type heat exchanger **12c** of the present invention. The plate-type heat exchanger **12c** in Fig. **7** replaces the continuous corrugated sheet **30** within the plate-type heat exchanger **12c** illustrated in Fig. **6**, with a corrugated lattice structural sheet **36**. Referring to Fig. **8**, there is shown a three dimensional view of the corrugated lattice structural sheet **36**, as described in U.S. Patent Nos. 5,527,590, 5,679,467, and 5,962,150, which are hereby incorporated by reference. Referring to Fig. **8A**, there is shown an enlarged view of a portion of the corrugated lattice structural sheet **36** in Fig. **8**,

constructed from a plurality of uniformly stacked pyramids in a three dimensional array. Each pyramid is constructed of intersecting cross members **60** that intersect at the vertex **61** of the pyramid. An example of such a corrugated lattice structural sheet includes that which is manufactured by Jamcorp of Wilmington, MA and distributed under the tradename LATTICE BLOCK MATERIAL (LBM). The corrugated lattice structural sheet **36** is typically constructed of metal, plastic, or rubber.

Unlike the continuous corrugated sheet **30**, which contacts the plate **20** along the entire length of its the peaks **32** and valleys **34**, the corrugated lattice structural sheet **36** only contacts the plate **20** at the vertices **61** of the pyramids, thereby reducing the surface area of the sheet that contacts the plate **20** and increasing the plate's **20** effectiveness for transferring energy from one passageway to the other. Moreover, referring back to Fig. **6**, in order to transfer the heat in the portion of the passageway **26** marked **38** to the portion of the passageway **28** marked **40**, the heat must pass through both the continuous corrugated sheet **30** and the plate **20**. Therefore, the inclusion of the continuous corrugated sheet **30** between the plates **20** limits the amount of available surface area for the latent heat to directly pass through the plate **20** from passageway **26** to passageway **28**.

Referring to Figs. **9** and **10**, which are cross sections of the plate-type heat exchanger **12c** illustrated in Fig. **7** taken along lines **9-9** and **10-10** respectively, in order to transfer heat from passageway **26** to passageway **28**, the heat need only pass through the plate **20**. Because the corrugated lattice structural sheet **36**

is an open structure, the gas stream is able to flow freely throughout the passageways **26**, **28**. Additionally, because the corrugated lattice structural sheet **36** only makes point contact with the plate **20**, the majority of surface area on the plate **20** is available to transfer heat from one passageway to the other. Compared to the continuous corrugated sheet **30**, the corrugated lattice structural sheet **36** is a more efficient means for spacing apart the plates **20** from one another. Furthermore, the design of the lattice structural sheet **36** may mix (i.e., stir) the gas stream as it passes through the passageways **26**, **28**, thereby increasing the effectiveness factor of the plate-type heat exchanger **12c**. However, because the corrugated lattice structural sheet **36** is an open structure, the plate-type heat exchanger **12c** requires a means for sealing two opposing sides of the passageways **26**, **28**, thereby allowing the gas streams to pass therethrough in respective first and second directions. The sealing means may comprise spacer bars **22**, **24** as illustrated in Fig. **3** and **4** or any other sealing means discussed hereinbefore.

Referring to Fig. **11**, there is shown an alternate embodiment of the present invention. Specifically, Fig. **11** is a side view of a plate **20** interposed between two planar lattice sheets **52**. Although this figure illustrates a planar lattice sheet **52** adjacent to both sides of the plate **20**, it may be sufficient that a single planar lattice sheet **52** be adjacent to one side of the plate **20** if the mechanical characteristics of the plate **20** and/or the planar lattice sheet **52** provide adequate structural support. Referring to Fig. **12**, there is shown a top view of a planar lattice sheet **52**, which is

constructed of a plurality of segments **54** forming an array of two dimensional trigonal structures, wherein the segments **54** intersect at intersection points **56**. The planar lattice sheet **52** in Fig. **12** differs from the corrugated lattice structural sheet **36** in Fig. **8A** in that the corrugated lattice structural sheet **36** typically forms three-dimensional pyramid-type structures at the intersection points of the cross members, while the planar lattice sheet **52** typically forms a two-dimensional trigonal structure from overlapping segments **54**. In other words, the height of the corrugated lattice structural sheet **36** is the height of the vertex of the pyramid type structures formed therein, but the height of the planar lattice sheet **52** is equal to the thickness of the segments **54**. Therefore, the corrugated lattice structural sheet **36** is typically thicker than the planar lattice sheet **52**. The area indicated by reference numeral **58** is open space. Therefore, placing the sheet **20** between two planar lattice sheets **52** supports the sheet **20** and maintains its flat profile while allowing the gas streams to access the maximum amount of surface area on the plate **20** as the two gas streams pass through the passageways **26**, **28**.

Referring to Fig. **13**, if both the planar lattice sheets **52** and the corrugated lattice structural sheet **36** are incorporated into a plate-type heat exchanger, it is preferable to coordinate their respective designs. Specifically, it is preferable that the vertex **61** of pyramids in the corrugated lattice structural sheet **36** align (i.e., contact or connect) with the intersection points **56** of the segments **54** in the planar lattice sheet **52**. Hence, two plates **20** are supported by adjacent

planar lattice sheets **52**, and a corrugated lattice structural sheet **36** is interposed between the planar lattice sheets **52**, thereby providing maximum support for the plate-type heat exchanger **12c** and allowing the maximum amount of energy transfer between the gas streams in the passageways **26**, **28**.

Referring to Fig. **14**, there is shown an alternate embodiment of the plate-type heat exchanger **12d** of the present invention. Unlike the plate-type heat exchanger **12b** in Fig. 6 and the plate-type heat exchanger **12c** in Fig. 7, the plate-type heat exchanger **12d** in Fig. **14** does not include a partial obstruction, such as the continuous corrugated sheet **30** and corrugated lattice structural sheet **36**, within the passageways **26**, **28** to support the plates **20** or keep them apart from one another. Rather, the plates **20** in the plate-type heat exchanger **12d** of Fig. **14** are supported by a sheet of webbed netting **42**. The webbed netting **42** is typically constructed of plastic, which is compatible with the sulfonated polymer membrane such that webbed netting **42** will adhere to the membrane regardless of whether the webbed netting **42** is adjacent the membrane or embedded therein. The strand thickness and the spacing between the nodes are chosen to provide the required stiffness to the sulfonated polymer membrane, while maximizing the membrane's surface area that is exposed to the gas stream. Referring to Figs. **15** and **16**, which are cross sections of the plate-type heat exchanger **12d** illustrated in Fig. **14** taken along lines **15-15** and **16-16** respectively, the plate **20** is interposed between sheets of webbed netting **42**, which reinforces the plate **20**. Referring to Fig. **17**, which is a cross section of the plate-type heat exchanger illustrated in Fig. **15**

taken along line **17-17**, this figure illustrates the top view of the webbed netting **42** laid over the plate **20**. Referring back to Fig. **15** and **16**, because the passageways **26**, **28** are unobstructed, the plate-type heat exchanger **12d** requires a means for sealing two opposing sides of the passageways **26**, **28**, thereby allowing the gas streams to pass therethrough in respective first and second directions. The sealing means may comprise spacer bars **22**, **24** as illustrated in Fig. **3** and **4**, or any other sealing means discussed hereinbefore.

Referring to Fig. **18**, there is shown another alternate embodiment of the webbed supported plate illustrated in Fig. **15** and **16**. Unlike plate **20** illustrated in Fig. **15** and **16** which is supported by a sheet of webbed netting **42** on both sides, the plate **20** in Fig. **18** is only supported by one sheet of webbed netting **42** adjacent the plate **20**. Although Fig. **18** depicts the sheet of webbed netting **42** on top of the plate **20**, the webbed netting **42** may also be placed below the plate **20**. Therefore, depending upon the stiffness of the plate **20** and the webbed netting **42**, the plate **20** may be supported by one or two sheets of webbed netting **42** that are situated above and/or below the plate **20**.

Referring to Fig. **19**, there is shown another alternate embodiment of the webbed supported plate. This figure illustrates the webbed netting **42** embedded within the plate **20**, thereby increasing the stiffness of the plate **20**. If the sulfonated polymer membrane is typically made from an extrusion process, this structure may be formed by casting the sulfonated polymer over the webbed netting **42**.

Referring to Fig. **20**, there is shown another alternate embodiment of the present invention which replaces the layers of webbed netting **42** with layers of plastic **46** to provide additional support to the plate **20**. Specifically, the plate **20**, which is constructed of a sulfonated polymer membrane, is interposed between two layers of plastic **46**, such as polytetrafluroehtylene (PTFE), expanded polytetrafluoroethylene (ePTFE), polypropylene, or other porous (i.e., open cell) polymer film that permits air permeation while minimizing the pressure drop of the passing air stream. Referring to Fig. **21**, depending upon the stiffness of the plastic layer **46** and the plate **20**, the plastic layer **46** may be adjacent to one side of the plate **20**, and the adjacent side may be on the top or bottom of the plate **20**.

Referring to Fig. **22** there is shown another alternate embodiment of the plate-type heat exchanger **12e** that includes an alternate layer of webbed netting **48** between the plates **20**. Specifically, the layer of webbed netting **48** includes nodes **50** that have a diameter equal to the height of the passageways **26**, **28**. The nodes **50** are the intersection points of the strands. Therefore, referring to Figs. **23** and **24**, which are cross sections of the plate-type heat exchanger **12e** illustrated in Fig. **22** taken along lines **23-23** and **24-24** respectively, the layer of webbed netting **48** is interposed between the plates **20** such that the nodes **50** contact the plates **20**. This contact serves as a means for spacing apart the plates **20**, which are also supported by the webbed netting **48**. Because the nodes **50** are distributed within the layer of webbed netting **48**, the nodes **50** do not form a seal with

the plates **20**. Hence, the layer of webbed netting **48** is an open structure, thereby requiring the plate-type heat exchanger **12e** to include a means for sealing two opposing sides of the passageways **26**, **28** to the gas streams to pass therethrough in respective first and second directions. The sealing means may comprise spacer bars **22**, **24** as illustrated in Fig. **3** and **4** or any other sealing means discussed hereinbefore.

Although the invention has been described and illustrated with respect to the exemplary embodiments thereof, it should be understood by those skilled in the art that the foregoing and various other changes, omissions and additions may be made without departing from the spirit and scope of the invention.

## Claims

**What is claimed is:**

1. A plate-type heat exchanger, comprising:

(a) a plurality of parallel plates spaced apart from one another thereby forming alternating first and second passageways for a first gas stream and a second gas stream to pass therethrough, respectively, said plates comprising an ionomer membrane having four sides;

(b) means for spacing apart said parallel plates from one another;

(c) means for sealing two opposing sides of said first passageways thereby allowing the first gas stream to pass therethrough in a first direction; and

(d) means for sealing two opposing sides of said second passageways thereby allowing the second gas stream to pass therethrough in a second direction.

2. The plate-type heat exchanger of claim 1 wherein said ionomer membrane is a sulfonated polymer membrane.

3. The plate-type heat exchanger of claim 2 wherein said sulfonated polymer membrane comprises a perfluoronated backbone chemical structure.

4. The plate-type heat exchanger of claim 2 wherein said sulfonated polymer membrane comprises a hydrocarbon backbone chemical structure.

5. The plate-type heat exchanger of claim 1 wherein said ionomer membrane is a carboxylated polymer membrane.

6. The plate-type heat exchanger of claim 1 wherein said spacing apart means and said sealing means for said first passageway are the same.

7. The plate-type heat exchanger of claim 6 wherein said spacing apart means and said sealing means for said first passageway is a continuous corrugated sheet interposed between said parallel plates that form said first passageway.

8. The plate-type heat exchanger of claim 1 wherein said spacing apart means and said sealing means for said second passageway are the same.

9. The plate-type heat exchanger of claim 8 wherein said spacing apart means and said sealing means for said second passageway is a continuous corrugated sheet interposed between said parallel plates that form said second passageway.

10. The plate-type heat exchanger of claim 1 wherein said sealing means for said first passageways comprise two spacer bars affixed to opposing sides of said parallel plates that form said first passageway.

11. The plate-type heat exchanger of claim 1 wherein said sealing means for said second passageways comprise two spacer bars affixed to opposing sides of said parallel plates that form said second passageway.

**12.** The plate-type heat exchanger of claim 11 wherein said sealing means for said first passageways comprise two additional spacer bars affixed to opposing sides of said parallel plates that forms said first passageways, wherein said additional spacer bars for sealing said first passageways are perpendicular to said spacer bars for sealing said second passageways.

**13.** The plate-type heat exchanger of claim 11 wherein said sealing means for said first passageways comprise two additional spacer bars affixed to opposing sides of said parallel plates that form said first passageways, wherein said additional spacer bars for sealing said first passageways are parallel to said spacer bars for sealing said second passageways.

**14.** The plate-type heat exchanger of claim 1 wherein said sealing means for said first passageways comprises creating flanges on opposing sides of said parallel plates that overlap and form said first passageway.

**15.** The plate-type heat exchanger of claim 1 wherein said sealing means for said second passageways comprises creating flanges on opposing sides of said parallel plates that overlap and form said second passageway.

**16.** The plate-type heat exchanger of claim 1 wherein said spacing apart means comprises two spacer bars affixed to opposing sides of said parallel plates.

**17.** The plate-type heat exchanger of claim 1 wherein said spacing apart means comprises a corrugated lattice structural sheet.

**18.** The plate-type heat exchanger of claim 1 wherein said parallel plates further comprise a webbed sheet adjacent said ionomer membranes.

**19.** The plate-type heat exchanger of claim 1 wherein said parallel plates further comprise said ionomer membranes interposed between two webbed sheet.

**20.** The plate-type heat exchanger of claim 1 wherein said parallel plates further comprise a webbed sheet embedded within said ionomer membranes.

**21.** The plate-type heat exchanger of claim 1 wherein said parallel plates further comprise a sheet of polytetrafluroethylene adjacent one side of said ionomer membranes.

**22.** The plate-type heat exchanger of claim 21 wherein said parallel plates further comprise an other sheet of polytetrafluroehtylene adjacent an other side of said ionomer membranes.

FIG.1
Prior Art

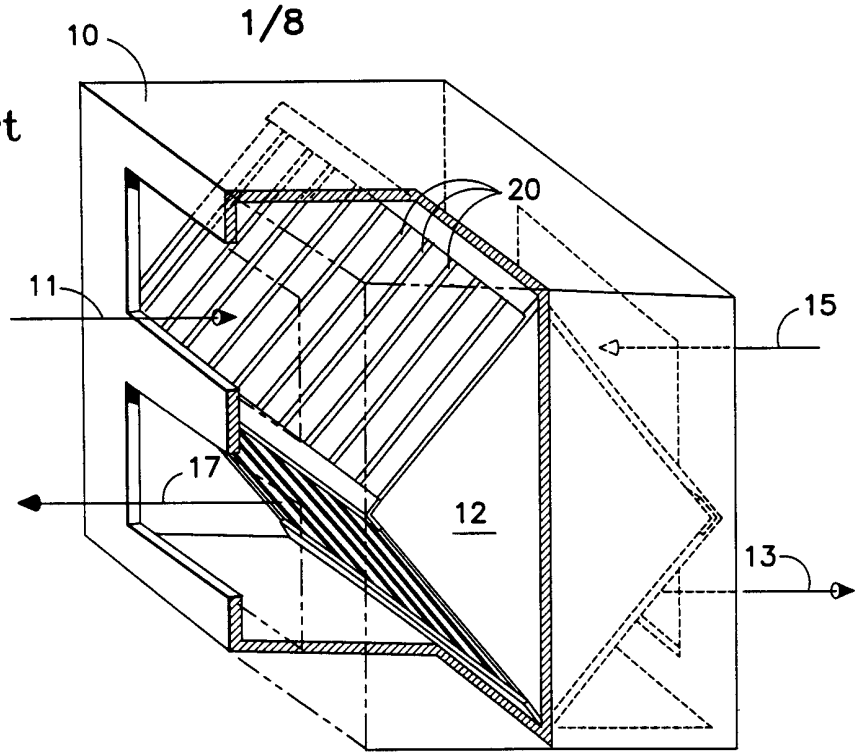



FIG.2

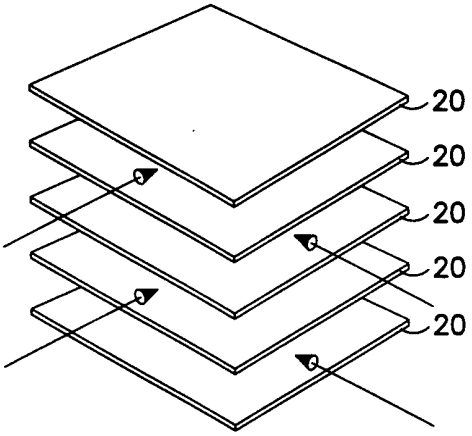
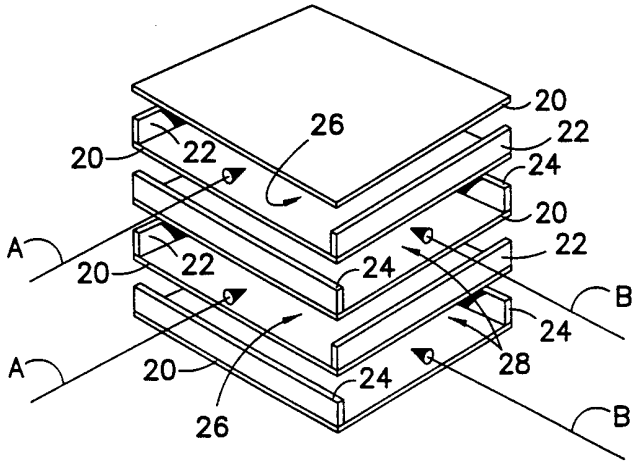



FIG.3



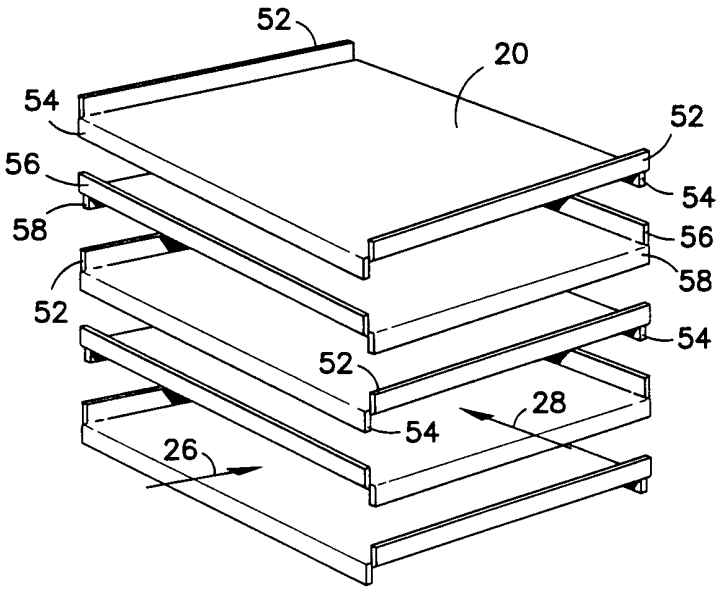
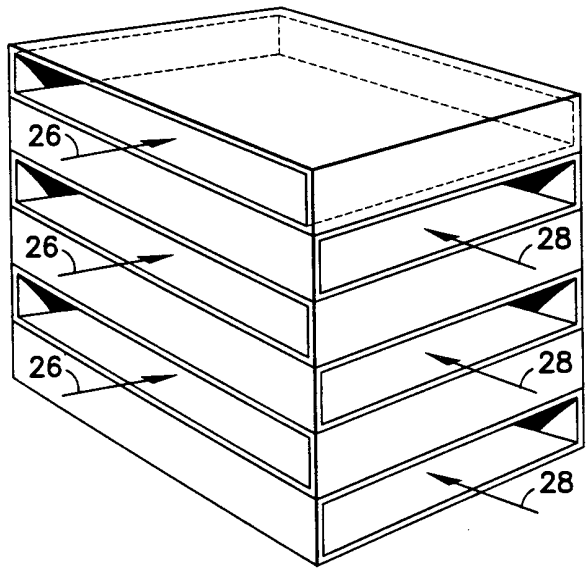



FIG.4

FIG.5



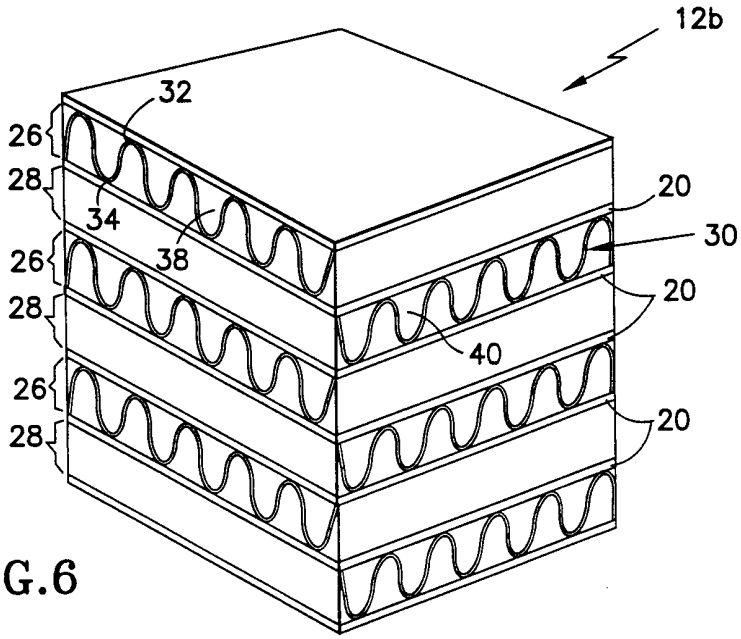
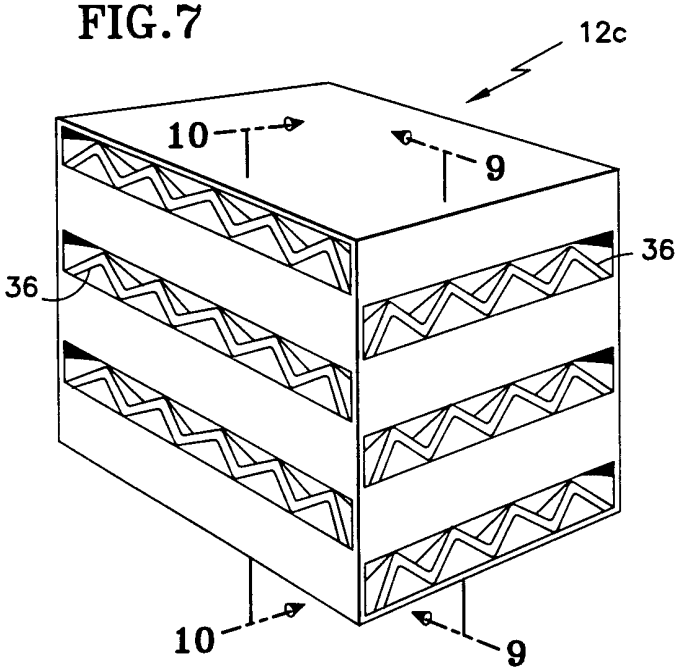




FIG.6

FIG.7



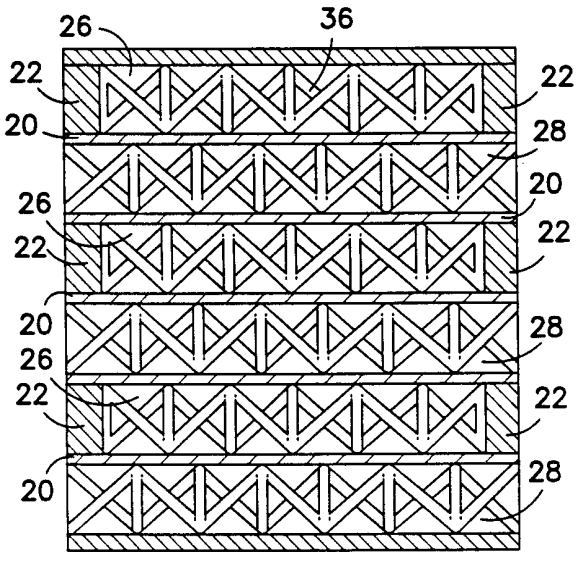




FIG.9

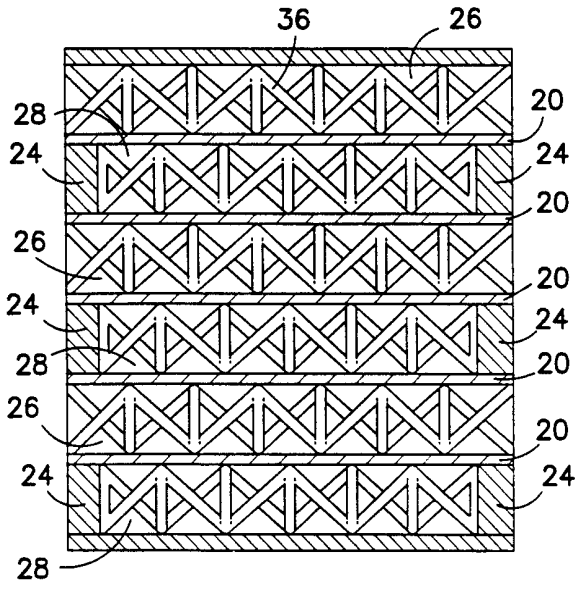
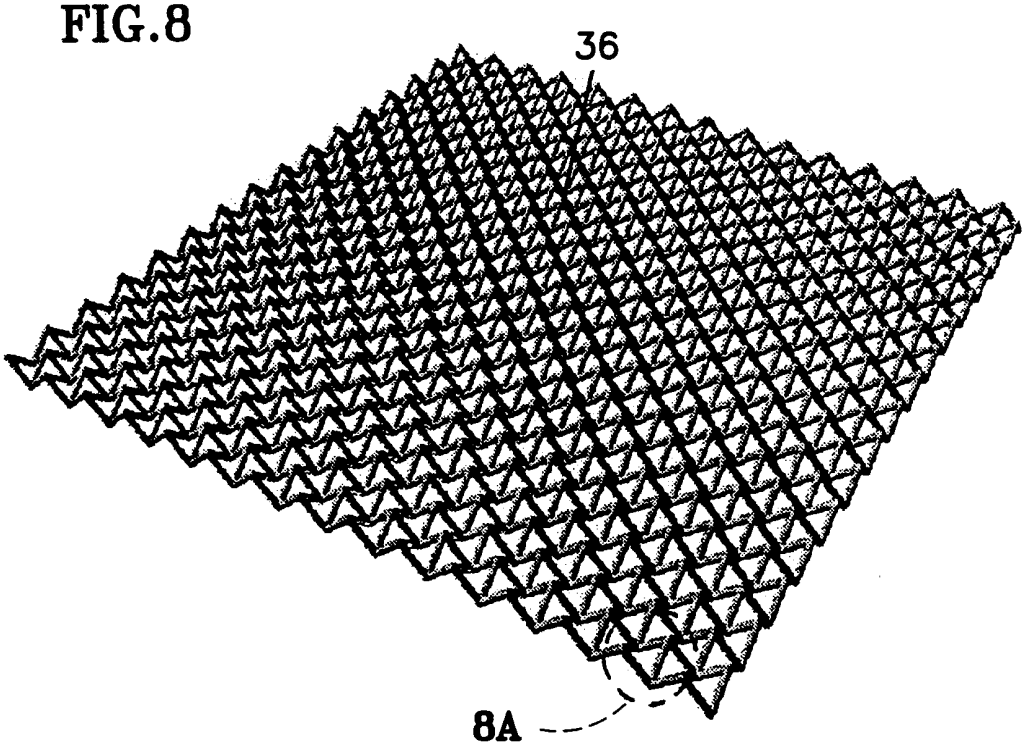



FIG.10

FIG.8



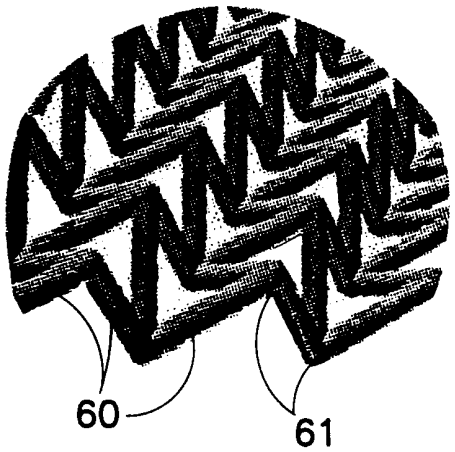




FIG.8A

FIG.11

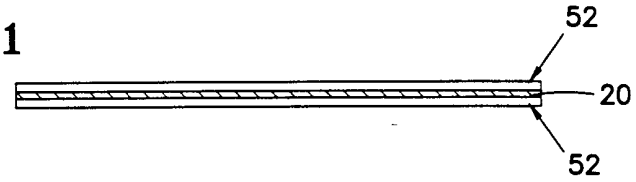



FIG.12

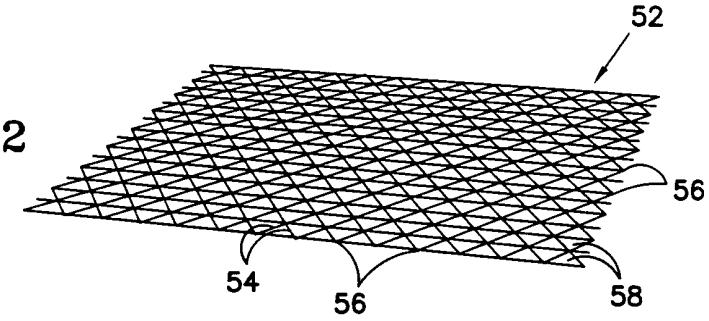



FIG.13

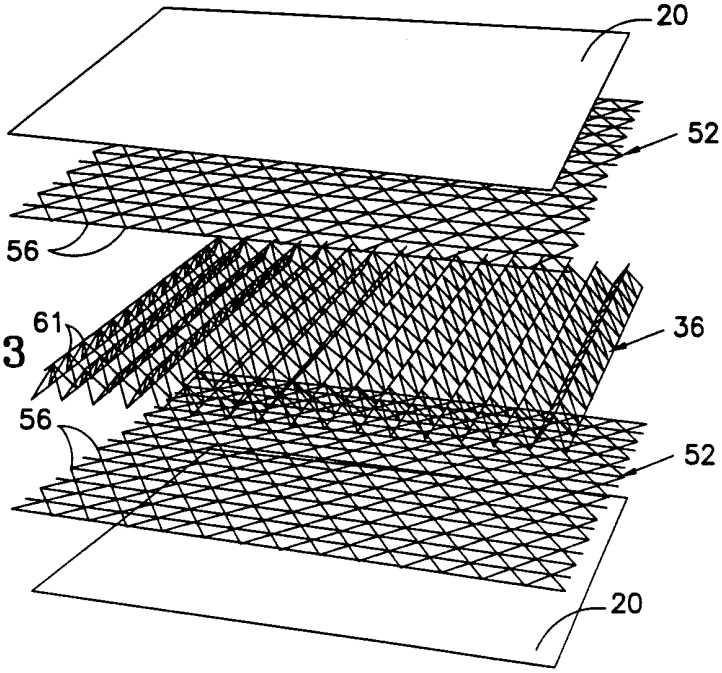


FIG.14

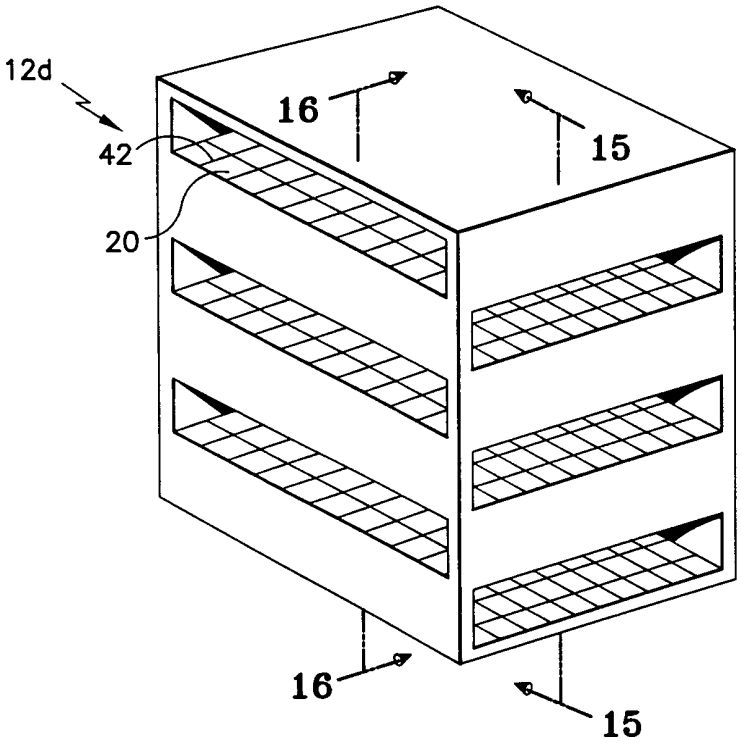



FIG.15

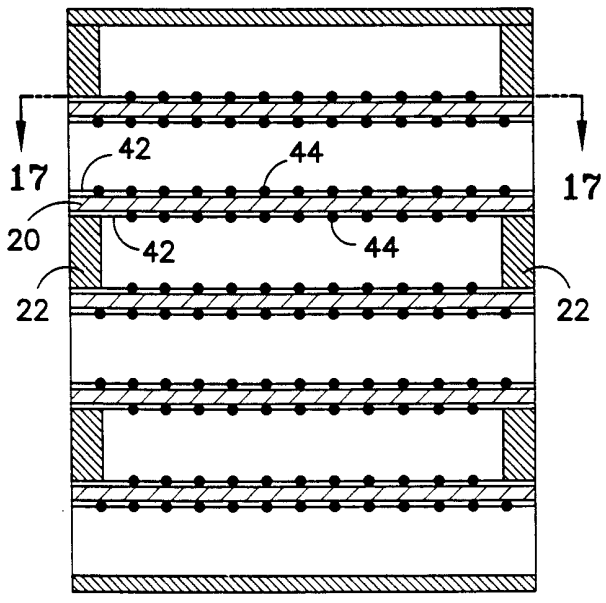



FIG.16

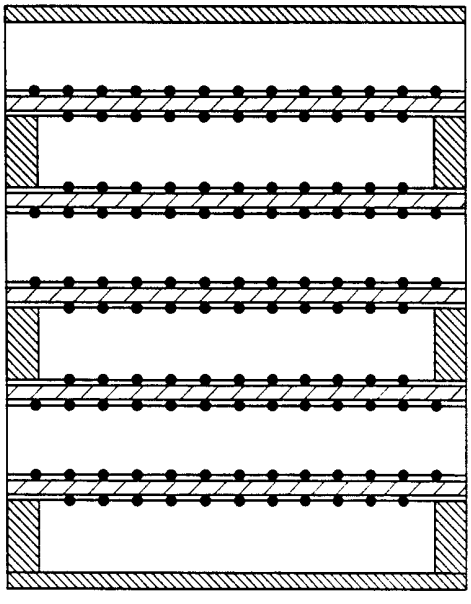


FIG.17

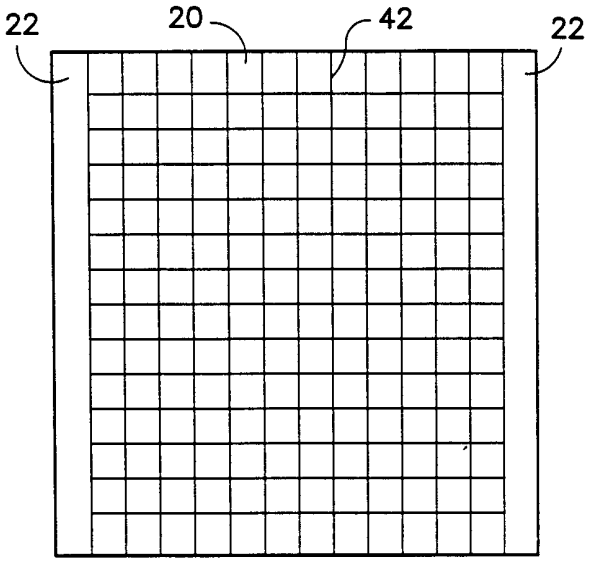



FIG.18





FIG.19






FIG.20




FIG.21



FIG.22

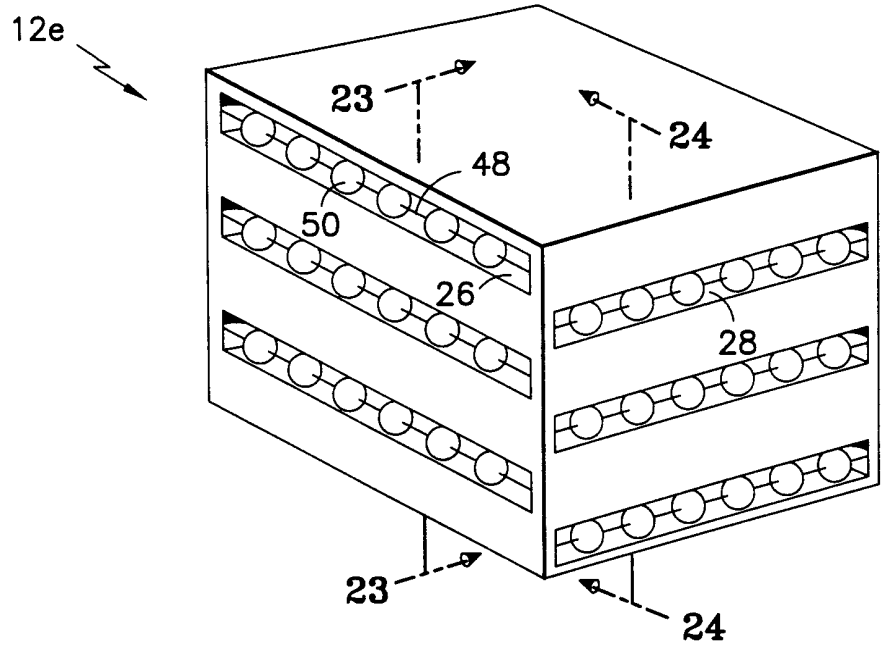

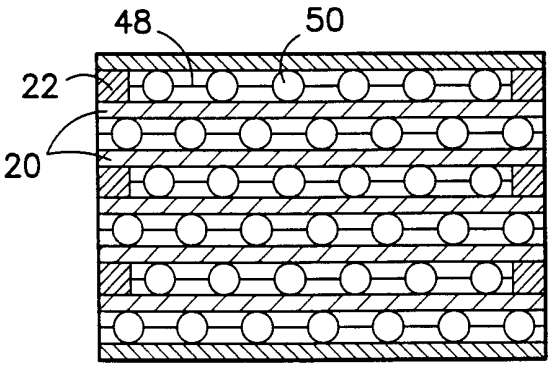




FIG.23

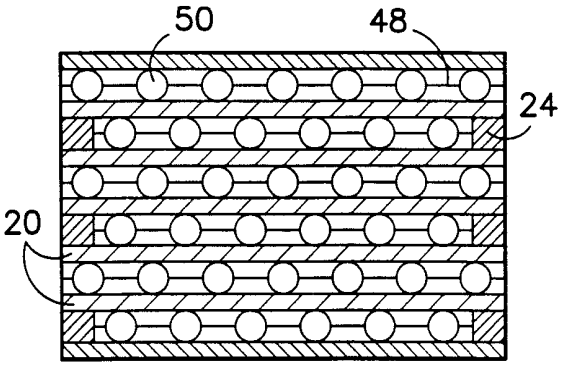



FIG.24

# INTERNATIONAL SEARCH REPORT

Inter ɔnal Application No
PCT/US 00/27013

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F28D21/00 F28D9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 F28D F24F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category ° | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|---|---|---|
| X<br>Y | FR 2 230 403 A (DU PONT)<br>20 December 1974 (1974-12-20)<br>page 21, line 24 -page 24, line 22;<br>figures | 1-3,6,8,<br>10-13,16<br>4,5,7,9,<br>14,15,<br>17-22 |
| Y | US 4 789 386 A (VAUGHN WALTER L ET AL)<br>6 December 1988 (1988-12-06)<br>abstract | 4,5 |
| Y | US 4 051 898 A (YOSHINO MASATAKA ET AL)<br>4 October 1977 (1977-10-04)<br>cited in the application<br>abstract; figure 12 | 7,9 |

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

| Date of the actual completion of the international search | Date of mailing of the international search report |
|---|---|
| 18 December 2000 | 27/12/2000 |

| Name and mailing address of the ISA | Authorized officer |
|---|---|
| European Patent Office, P.B. 5818 Patentlaan 2<br>NL – 2280 HV Rijswijk<br>Tel. (+31–70) 340–2040, Tx. 31 651 epo nl,<br>Fax: (+31–70) 340–3016 | Van Dooren, M |

1

Form PCT/ISA/210 (second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Inter ɔnal Application No
PCT/US 00/27013

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category ° | Citation of document, with indication,where appropriate, of the relevant passages | Relevant to claim No. |
|---|---|---|
| Y | US 5 785 117 A (GRINBERGS PETER KARL)<br>28 July 1998 (1998-07-28)<br>cited in the application<br>abstract; figures | 14,15 |
| Y | US 5 527 590 A (PRILUCK JONATHAN)<br>18 June 1996 (1996-06-18)<br>cited in the application<br>abstract; figures 1-5 | 17 |
| Y | EP 0 591 116 A (ELECTROLUX AB)<br>6 April 1994 (1994-04-06)<br>column 2, line 25 -column 3, line 16;<br>figures | 18-20 |
| Y | DE 196 39 965 A (GORE W L & ASS GMBH)<br>2 April 1998 (1998-04-02)<br>claims 4,13 | 21,22 |
| A | US 5 160 511 A (LOVELOCK JAMES E)<br>3 November 1992 (1992-11-03) | |

1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter onal Application No
PCT/US 00/27013

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---|---|---|
| FR 2230403 A | 20-12-1974 | DE 2425261 A | 19-12-1974 |
| | | IT 1012822 B | 10-03-1977 |
| | | JP 50031464 A | 27-03-1975 |
| | | NL 7407020 A | 27-11-1974 |
| US 4789386 A | 06-12-1988 | NONE | |
| US 4051898 A | 04-10-1977 | JP 48017178 B | 28-05-1973 |
| | | CA 930353 A | 17-07-1973 |
| | | DE 2013184 A | 17-09-1970 |
| | | DE 7010393 U | 04-07-1974 |
| | | FR 2035112 A | 18-12-1970 |
| | | FR 2035112 B | 13-07-1973 |
| | | GB 1302561 A | 10-01-1973 |
| US 5785117 A | 28-07-1998 | CA 2227911 A | 10-08-1998 |
| US 5527590 A | 18-06-1996 | DE 19527618 A | 06-02-1997 |
| | | US 5679467 A | 21-10-1997 |
| | | US 5962150 A | 05-10-1999 |
| | | AU 5647796 A | 26-02-1997 |
| | | BR 9610090 A | 05-01-1999 |
| | | CN 1192173 A | 02-09-1998 |
| | | CZ 9800234 A | 14-04-1999 |
| | | DE 19542510 A | 22-05-1997 |
| | | WO 9704897 A | 13-02-1997 |
| | | EP 0842000 A | 20-05-1998 |
| | | HU 9802346 A | 01-02-1999 |
| | | JP 11514928 T | 21-12-1999 |
| | | NO 980397 A | 26-03-1998 |
| | | PL 324801 A | 22-06-1998 |
| | | SK 12298 A | 05-08-1998 |
| EP 0591116 A | 06-04-1994 | SE 470479 B | 24-05-1994 |
| | | DE 69311869 D | 07-08-1997 |
| | | DE 69311869 T | 27-11-1997 |
| | | DK 591116 T | 22-09-1997 |
| | | ES 2103460 T | 16-09-1997 |
| | | JP 6190249 A | 12-07-1994 |
| | | SE 9202790 A | 29-03-1994 |
| | | US 5401403 A | 28-03-1995 |
| DE 19639965 A | 02-04-1998 | AU 4624697 A | 17-04-1998 |
| | | DE 19704508 A | 13-08-1998 |
| | | WO 9813124 A | 02-04-1998 |
| | | EP 0929357 A | 21-07-1999 |
| | | NO 991485 A | 26-05-1999 |
| US 5160511 A | 03-11-1992 | DE 3872378 A | 30-07-1992 |
| | | DE 3872378 D | 30-07-1992 |
| | | DE 3872378 T | 10-12-1992 |
| | | EP 0331702 A | 13-09-1989 |
| | | WO 8902447 A | 23-03-1989 |
| | | HK 116093 A | 05-11-1993 |
| | | JP 2501391 T | 17-05-1990 |