



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C09D 157/00, 161/32	A1	(11) International Publication Number: WO 98/07796 (43) International Publication Date: 26 February 1998 (26.02.98)
(21) International Application Number: PCT/EP97/04111 (22) International Filing Date: 29 July 1997 (29.07.97) (30) Priority Data: 8/221552 22 August 1996 (22.08.96) JP (71) Applicants (for all designated States except US): BASF LACKE + FARBEN AG [DE/DE]; Glasuritstrasse 1, D-48165 Münster (DE). NOF CORPORATION [JP/JP]; Yebisu Garden Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo 150 (JP). (72) Inventors; and (75) Inventors/Applicants (for US only): NUKITA, Akito [JP/JP]; 473, Shimokuratacho, Totsuka-ku, Yokohama-shi, Kanagawa 244 (JP). SHIBATO, Kishio [JP/JP]; 6-2, Katabuki, Kanazawa-ku, Yokohama-shi, Kanagawa 244 (JP). LÜER, Ingo [DE/DE]; Ziebelandstrasse 9D, D-97209 Veitshöchheim (DE). (74) Agent: KLUTH, Bernhard; BASF Lacke + Farben AG, Patente/Lizenzen/Dokumentation, Postfach 61 23, D-48136 Münster (DE).		(81) Designated States: BR, CA, CN, KR, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: HEAT-HARDENABLE PAINT COMPOSITIONS $\text{CH}_2=\overset{\text{X}^1}{\underset{ }{\text{C}}}-\overset{\text{O}}{\underset{ }{\text{C}}}-\text{O}-(\text{CH}_2)_j-\overset{\text{X}^2}{\underset{ }{\text{CH}}}-\overset{\text{X}^3}{\underset{ }{\text{CH}}}-\text{O}-[\overset{\text{O}}{\underset{ }{\text{C}}}(\text{CH}_2)_m\text{O}]_n-\text{H} \quad (1)$ (57) Abstract The invention relates to a heat-hardenable paint composition which contains (A) vinyl based copolymer of hydroxyl group value from 20 to 200 mg KOH/g, being a copolymer of from 5 to 70 wt.% hydroxyl group containing vinyl based monomer which can be represented by general formula (1) and from 95 to 30 wt.% other vinyl based monomer (a-2), and (B) 1,3,5-triazine-2,4,6-triscarbamic acid ester which can be represented by general formula (2): C₃N₃(NHCOOR)₃ or an oligomer thereof, in which the mol ratio of hydroxyl groups originating from the aforementioned (A) component: NHCOOR groups originating from the aforementioned (B) component in the composition is from 1:3 to 3:1. In general formula (1), X¹, X² and X³ each independently represent a hydrogen atom or a methyl group. Moreover j is an integer of value from 0 to 2, m is an integer of value from 3 to 5, and n is an integer of value from 0 to 5. However, j and n cannot both be 0. In general formula (2), R represents an alkyl group which has from 1 to 20 carbon atoms, an aryl group which has from 6 to 20 carbon atoms or an aralkyl group which has from 7 to 20 carbon atoms, and these groups may be the same or different.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Heat-hardenable paint compositions

This invention concerns heat-hardenable paint compositions and, more precisely, it concerns heat-hardenable paint compositions which are suitable as top-coat paints for use on automobiles.

In recent years, the deterioration in the external appearance of paint films due to chemical and physical causes, such as etching by acid rain and scratching during cleaning of the paint film for example, has been seen as a problem in the field of automobile paints, for example.

Acrylic-melamine based top-coat paint compositions in which ϵ -caprolactone modified acrylic resin and specified low molecular weight polyols are used conjointly in the essential structural material of the paint film and in which soft segments are introduced by hardening with an alkoxy monomeric melamine (for example, Japanese Patent Kokai 64-66274, (1989)) have been suggested as a means of resolving these problems.

However, the abovementioned paint compositions are such that the paint film forming resin itself is modified with ϵ -caprolactone and so the paint film is

- 2 -

softened and the scratch resistance can be improved, but the acid resistance is inadequate because alkoxy monomeric melamine is used, and this is inappropriate for dealing with severe acid rain in the future.

5

Furthermore, top-coat paint compositions which have ϵ -caprolactone modified acrylic resin and non-yellowing type blocked polyisocyanate compounds as essential components (for example, Japanese Patent
10 Kokai H2-305873 (1990)) have also been suggested with the same end in view.

However, although both scratching resistance and acid resistance are improved with the abovementioned compositions, a blocked isocyanate compound is used for
15 the crosslinking agent and so the paint film in fact liable to yellowing even though it is said to be a non-yellowing type, and in practice the non-yellowing properties are inadequate.

20 On the other hand, hardenable compositions which contain poly-functional hydroxyl group containing materials, 1,3,5-triazine-2,4,6-tris-carbamic acid esters, and acid hardening catalysts have been disclosed in Japanese Patent Kokai H6-228305 (1994),
25 and it is stated that paint films which release little formaldehyde and which have excellent acid resistance are obtained.

- 3 -

However, these compositions are inadequate in terms of weather resistance and thermal stability, and paint film defects such as cracking and loss of gloss due to exposure to ultraviolet radiation are liable to occur with paint films which have been formed under hardening conditions of temperature above 140°C in particular.

The aim of this invention is to provide heat-hardenable paint compositions with which paint films which have excellent scratching resistance, acid resistance, yellowing resistance and weather resistance can be formed in order to resolve the problems outlined above.


15

The present invention provides the following heat-hardenable paint compositions:

- (1) Heat-hardenable paint composition which contains (A) vinyl based copolymer of hydroxyl group value from 20 to 200 mg KOH/g, being a copolymer of from 5 to 70 wt% hydroxyl group containing vinyl based monomer (a-1) which can be represented by general formula (1) which is indicated below and from 95 to 30 wt% other vinyl based monomer (a-2), and (B) 1,3,5-triazine-2,4,6-triscarbamic acid ester which can be represented by the general formula (2) which is indicated below, or an oligomer thereof, characterized in that the mol

ratio of hydroxyl groups originating from the
aforementioned (A) component : NHCOOR groups
originating from the aforementioned (B) component in
the composition is from 1 : 3 to 3 : 1.

5 General Formula (1)

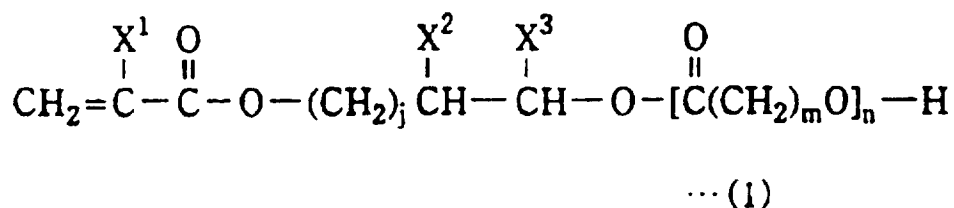

(In this formula, X^1 , X^2 and X^3 each independently
represent a hydrogen atom or a methyl group. Moreover
10 j is an integer of value from 0 to 2, m is an integer
of value from 3 to 5, and n is an integer of value from
0 to 5. However, j and n cannot both be 0.)

General Formula (2)




15 (In this formula, R represents an alkyl group which has
from 1 to 20 carbon atoms, an aryl group which has from
6 to 20 carbon atoms or an aralkyl group which has from
7 to 20 carbon atoms, and these groups may be the same
or different.)

20 (2) Heat-hardenable paint composition which contains
(C) vinyl based copolymer of hydroxyl group value from
20 to 200 mg KOH/g, being a copolymer which contains
from 5 to 70 wt% structural units (c-1) which can be
represented by general formula (3) which is indicated

below and from 95 to 30 wt% other structural units (c-2) derived from vinyl based monomer, and (B) 1,3,5-triazine-2,4,6-triscarbamic acid ester which can be represented by the general formula (2) which is indicated below, or an oligomer thereof, characterized in that the mol ratio of hydroxyl groups originating from the aforementioned (C) component : NHCOOR groups originating from the aforementioned (B) component in the composition is from 1 : 3 to 3 : 1.

10 General Formula (3)

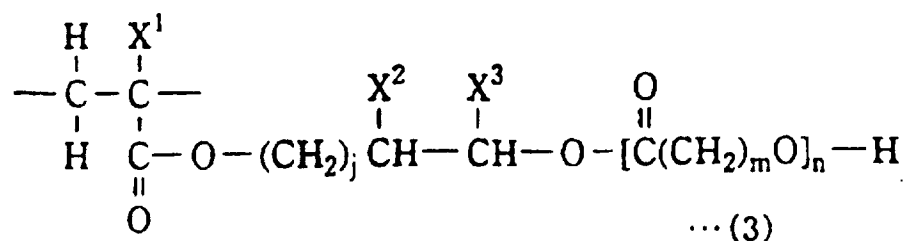

(In this formula, X^1 , X^2 and X^3 each independently represent a hydrogen atom or a methyl group. Moreover j is an integer of value from 0 to 2, m is an integer of value from 3 to 5, and n is an integer of value from 0 to 5. However, j and n cannot both be 0.)

General Formula (2)



20 (In this formula, R represents an alkyl group which has from 1 to 20 carbon atoms, an aryl group which has from 6 to 20 carbon atoms or an aralkyl group which has from 7 to 20 carbon atoms, and these groups may be the same or different.)

In this invention, the term "(meth)acrylic" signifies "acrylic" and/or "methacrylic".

5 x^1 , x^2 and x^3 in the aforementioned general formula (1) or (3) are hydrogen atoms or methyl groups, and they may be the same or different. Furthermore, j is an integer of value from 0 to 2, m is an integer of value from 3 to 5 and n is an integer of value from 0
10 to 5. However, j and n cannot both be 0 at the same time. If n exceeds 5 then the solvent resistance of the paint film obtained is reduced and so this is undesirable.

15 Actual examples of the aforementioned hydroxyl group containing monomers which can be represented by general formula (1) include hydroxypropyl (meth)acrylate and hydroxybutyl (meth)acrylate, for example, as monomers in which n is 0, and the lactone
20 modified vinyl based monomers where a lactone has been added to a hydroxyl group containing vinyl based monomer, such as hydroxyethyl (meth)acrylate, hydroxypropyl (meth)acrylate or hydroxybutyl (meth)acrylate for example, as monomers in which n is
25 from 1 to 5.

ϵ -Caprolactone, β -methyl- δ -valerolactone,

γ -valerolactone, δ -valerolactone, δ -caprolactone, γ -caprolactone, β -propiolactone and γ -butyrolactone, for example, can be cited for the abovementioned lactones.

5 The aforementioned lactone modified vinyl based monomers can be manufactured by adding from 1 to 5 mol of the abovementioned lactones to 1 mol of the aforementioned hydroxyl group containing vinyl based monomers. If, in this case, the lactones are added in
10 an amount exceeding 5 mol then the solvent resistance after paint film formation is poor and this is undesirable. The method whereby ϵ -caprolactone is reacted in the presence of a catalyst with a hydroxy group containing vinyl based monomer, as disclosed in
15 Japanese Patent Kokai 63-118317 (1988) for example, and other known methods, can be adopted for the method of addition.

 Commercial products can be used for the afore-
20 mentioned hydroxyl group containing vinyl based monomer (a-1) which can be represented by the general formula (1) and, for example, "Praxel" manufactured by the Daiseru Kagaku Co. or "TONE" manufactured by the Union Carbide Co. (both trade names) can be used as lactone
25 modified vinyl based monomers.

 A single type of hydroxyl group containing vinyl based monomer (a-1) can be used alone, or two or more

types can be used in combination.

C₁-18 alkyl or cycloalkyl esters of (meth)acrylic acid, such as methyl (meth)acrylate, ethyl (meth)acrylate, propyl (meth)acrylate, n-butyl (meth)acrylate, i-butyl (meth)acrylate, t-butyl (meth)acrylate, 2-ethylhexyl (meth)acrylate, cyclohexyl (meth)acrylate, n-octyl (meth)acrylate, lauryl (meth)acrylate, tridecyl (meth)acrylate and stearyl (meth)acrylate; and also styrene, styrene derivatives, acrylonitrile, acrylamide, vinyltoluene, vinyl acetate, glycidyl (meth)acrylate, acrylic acid, methacrylic acid and 2-hydroxyethyl (meth)acrylate, for example, can be cited as other vinyl based monomers (a-2) which can be copolymerized with the hydroxyl group containing vinyl based monomer (a-1).

One of the other vinyl based monomers (a-2) can be used alone, or two or more types can be used in combination.

20

In this invention, the vinyl based copolymer which is used for component (A) is a copolymer of from 5 to 70 wt%, and preferably from 10 to 60 wt%, hydroxy group containing vinyl based monomer (a-1) which can be represented by the aforementioned general formula (1) and from 95 to 30 wt%, and preferably from 90 to 40 wt%, of the other vinyl based monomer (a-2). In those

cases where the proportion of hydroxyl group containing vinyl based monomer (a-1) is less than 5 wt% the scratching resistance of the paint film is inadequate, and if the amount exceeds 70 wt% then the hardness of the paint film is inadequate and the solvent resistance is reduced and so this is undesirable.

The hydroxyl group value of the vinyl based copolymer (A) used in the invention is from 20 to 200 mg KOH/g, and preferably from 40 to 180 mg KOH/g. In those cases where the hydroxyl group value is less than 20 mg KOH/g the solvent resistance of the hardened paint film is reduced, and in those cases where it exceeds 200 mg KOH/g the flex resistance of the hardened paint film is reduced and so this is undesirable.

The vinyl based copolymer (A) is obtained by copolymerizing the aforementioned hydroxyl group containing vinyl based monomer (a-1) and the other vinyl based monomer (a-2). Known methods can be used for the polymerization, and polymerization methods such as solution polymerization, non-aqueous dispersion polymerization and bulk polymerization, for example, can be adopted, and solution polymerization is especially desirable.

In this invention, the vinyl based copolymer which is used as the (C) component is a copolymer which contains from 5 to 70 wt%, and preferably from 10 to 60 wt%, of structural units (c-1) which can be
5 represented by the aforementioned general formula (3) and from 95 to 30 wt%, and preferably from 90 to 40 wt%, of other structural units (c-2) which are derived from vinyl based monomer. In those cases where the proportion of structural units (c-1) is less than 5 wt%
10 the scratching resistance of the paint film is inadequate, and if it exceeds 70 wt% then the hardness of the paint film is inadequate and the solvent resistance is reduced and so this is undesirable.

15 Furthermore, the hydroxyl group value of the vinyl based copolymer (C) used in the invention is from 20 to 200 mg KOH/g, and preferably from 40 to 180 mg KOH/g. In those cases where the hydroxyl group value is less than 20 mg KOH/g the solvent resistance of the
20 hardened paint film is reduced, and in those cases where it exceeds 200 mg KOH/g the flex resistance of the hardened paint film is reduced, and so this is undesirable.

25 The structural units (c-1) represented by the aforementioned general formula (3) are structural units derived from hydroxyl group containing vinyl based

monomers (a-1) which can be represented by the afore-mentioned general formula (1), and they are also structural units which are derived by adding lactones to the vinyl based monomers which contain hydroxyl groups as will be described hereinafter. Furthermore, the structural units (c-2) are structural units derived from the aforementioned other vinyl based monomers (a-2), and they have a structure which can be represented by general formula (4) below.

10 General Formula 4



(In this formula, R^1 is a hydrogen atom or a methyl group, and R^2 is the residual group of the other vinyl based monomer (a-2).)

The vinyl based copolymer (C), as in the case of the vinyl based copolymer (A), is obtained by copolymerizing the aforementioned hydroxyl group containing vinyl based monomer (a-1) and the other vinyl based monomer (a-2). Furthermore, it can be obtained by adding the aforementioned lactones to the hydroxyl groups of the copolymer after obtaining the vinyl based copolymer which contains hydroxyl groups by copolymerizing a vinyl based monomer which contains

hydroxyl group, such as hydroxypropyl (meth)acrylate, hydroxybutyl (meth)acrylate or hydroxyethyl (meth)acrylate for example, and the aforementioned other vinyl based monomer (a-2).

5

The known methods can be adopted for the addition of lactones and, for example, the method in which the aforementioned lactones are dripped into and mixed with a solution of the copolymer in the presence
10 of an organometallic compound catalyst, such as dibutyltin dilaurate or tetrabutyl titanate for example, or an acid such as carboxylic acid, phosphoric acid or sulfonic acid, and a ring-opening addition reaction carried out at a temperature of from 80 to 160°C can be
15 used.

The (B) component used in the invention is a crosslinking component, and a 1,3,5-triazine-2,4,6-triscarbamic acid ester which can be represented by the
20 aforementioned general formula (2), an oligomer thereof, or a mixture of these can be used.

Alkyl groups which have from 1 to 20 carbon atoms, such as the methyl, ethyl, n-propyl, isopropyl,
25 n-butyl, isobutyl, sec-butyl, tert-butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tetradecyl, heptadecyl and eicosyl groups; aryl groups

which have from 6 to 20 carbon atoms, such as the phenyl, tolyl, naphthyl and anthryl groups and the substituted aryl groups where alkyl group have been substituted on the aromatic rings of these groups; and
5 aralkyl groups which have from 7 to 20 carbon atoms such as the benzyl and phenethyl groups and the substituted aralkyl groups where alkyl groups have been substituted in the aromatic rings of these groups, can be cited as actual examples of R in the aforementioned
10 general formula (2).

The R groups in the aforementioned general formula (2) may be the same or different.

From among the 1,3,5-triazine-2,4,6-triscarbamic
15 acid esters which can be represented by the aforementioned general formula (2), the compounds in which R is an alkyl group which has from 1 to 8 carbon atoms are preferred, and 2,4,6-tris(methoxycarbonylamino)-1,3,5-triazine which can be represented by
20 $C_3N_3(NHCOOCH_3)_3$, 2,4,6-tris(butoxycarbonylamino)-1,3,5-triazine which can be represented by $C_3N_3(NHCOOC_4H_9)_3$, and mixtures of these, are especially desirable.

Furthermore, oligomers where compounds which can
25 be represented by general formula (2) have been partially condensed with diols can also be used for the (B) component. Examples of the diols which can be used

here include ethylene glycol, diethylene glycol, propylene glycol, propanediol, butanediol, pentanediol, hexanediol and neopentyl glycol.

5 The compounding proportions of the (A) component (or (C) component) and the (B) component are such that the mol ratio of hydroxyl groups originating from the (A) component (or (C) component) : NHCOOR groups originating from the (B) component is from 1 : 3 to
10 3 : 1, and preferably from 1 : 2 to 2 : 1.

 The solvent resistance of the hardened paint film is reduced in those cases where the abovementioned mol ratio is below 1 : 3 and so this is undesirable, while in those cases where the mol ratio exceeds 3 : 1
15 the water resistance of the hardened paint film is reduced and so this is undesirable.

 The (A) or (C) component hydroxyl group containing vinyl based copolymer has the hydroxyl
20 groups arranged in locations displaced from the main chain by soft segments and so crosslinking bonds which are flexible are formed by crosslinking such a copolymer with a carbamic acid ester based hardening agent which can be represented by the aforementioned
25 general formula (2) which is the (B) component. Consequently, the hardened paint films which are obtained have excellent scratching resistance.

- 15 -

Furthermore, the crosslinking bonds which are formed with a carbamic acid ester based hardening agent are chemically stable and so they have excellent acid resistance and weather resistance. Moreover, the
5 carbamic acid ester (B) does not cause yellowing of the paint film.

Other hardening components which can react with hydroxyl groups, as well as the (B) component, can also
10 be compounded as auxiliary crosslinking components in a paint composition of this invention. Blocked isocyanate resin, amino resin, melamine resin, silanol resins and alkoxysilane resins, for example, can be cited as other hardening agent components which can
15 react with hydroxyl groups. However, it is desirable for realizing satisfactorily the effect of this invention that the other hardening component is included in an amount of less than 20 wt% of the total resin solid fraction, and in those cases where blocked
20 isocyanate resins are compounded as auxiliary crosslinking components in particular it is desirable that the amount should be less than 15 wt% in consideration of the yellowing of the paint film.

25 Furthermore, hardening catalysts other than the abovementioned components can be compounded in a paint composition of this invention in order to obtain

hardened paint films more efficiently. Examples of hardening catalysts include tin based catalysts such as dibutyltin dilaurate, dibutyltin diacetate and tin octanoate; sulfonic acid based catalysts such as p-toluenesulfonic acid, dodecylbenzenesulfonic acid, 5 dinonylnaphthalenesulfonic acid and dinonylnaphthalenedisulfonic acid; and also phosphoric acid based catalysts and carboxylic acid based catalysts, and one type can be used alone or mixtures 10 of two or more types can be used.

Moreover, the additives which are used conventionally in paints, including colorants such as pigments and dyes, pigment dispersants, viscosity 15 adjusting agents, anti-run agents, leveling agents, anti-gelling agents, ultraviolet absorbers and radical scavengers, for example, can also be added to a paint composition of this invention, as required, within ranges such that the purpose of the invention is not 20 lost.

Paint compositions of this invention can be manufactured by mixing the aforementioned (A) and (B) components, or the (C) and (B) components, and the 25 other components, as required.

The paint compositions of this invention can be compounded with colored pigments, metallic pigments,

- 17 -

dyes or physical pigments, for example, and used as colored paints (solid color finish) or metallic paints for example. Furthermore, they can also be used as clear paints in which little or no pigment is
5 compounded.

No particular limitation is imposed upon the objects which can be painted with a paint comprising a paint composition of this invention, and it is possible
10 to paint metals, such as steel sheets and surface treated steel sheets, and plastics, for example, and they can be used to paint directly onto these materials or they can be painted as top-coat paints onto painted surfaces where a primer or a primer/mid-coat paint has
15 been applied to the material which is to be painted. In practical terms, they can be used as top-coat paints for automobiles and other vehicles, buildings and structures for example.

20 A film thickness of some 10 to 60 μm as a dry film thickness is preferred, and the preferred baking conditions for hardening the paint film are a temperature of from about 100°C to about 180°C and a time of some 10 to 120 minutes.

25

Paints comprising a paint composition of this invention can be used for one-coat one-bake painting,

two-coat one-bake painting, three-coat two-bake painting or three-coat one-bake painting for example, and they can be painted using the normal methods of painting, for example air spray painting, airless spray painting, electrodeposition painting or dip painting, to provide the aforementioned dry film thickness, and a hardened paint film can be formed under the aforementioned baking conditions. In those cases where the paints comprising a paint composition of this invention are used as top coat clear paints, any type of paint, such as a solvent based paint, a high-solid paint or a water based paint for example, can be used for the colored base coat.

The hydroxyl group containing vinyl based copolymers which are used for the main resin in this invention have the hydroxyl groups arranged in locations displaced from the main chain by soft segments and the crosslinking bonds which are formed with the carbamic acid ester based hardening agent are flexible and chemically stable. Moreover, the carbamic acid esters represented by general formula (2) do not cause yellowing of the paint film.

The heat-hardenable paint composition of this invention contains specified amounts of the abovementioned hydroxyl group containing vinyl based copolymers and hardening agents and so it is possible

to form paint films which have excellent scratching resistance, acid resistance, yellowing resistance and weather resistance.

5 The invention is described in more detail below by means of examples of manufacture, illustrative examples and comparative examples, but the invention is not limited in any way by these examples.

Manufacture of Vinyl Based Copolymers

10 Example of Manufacture 1

 Xylene (370 parts by weight) was introduced into a four-necked flask which had been fitted with a thermometer, a stirrer, a reflux condenser and a dropping funnel and the temperature was raised to 140°C.

15 Next, a mixture of which the composition is indicated below was added dropwise from the dropping funnel at a constant rate over a period of 2 hours. After completing the drip feed, the mixture was maintained at the reflux temperature for a period of 1 hour and then

20 the contents of the flask were cooled to 100°C. Then, 2 parts by weight of tert-butylperoxy-2-ethylhexanoate and 10 parts by weight of xylene were added and, by maintaining at a temperature of 100°C, with stirring, for a period of 2 hours, the (A) component hydroxyl

25 group containing vinyl based copolymer solution A-1 of residue on heating 60%, resin hydroxy group value 100 mg KOH/g and weight average molecular weight 10,000 was

obtained.

Praxel FM-1	*1	261 parts by weight
2-Ethylhexyl methacrylate		39 parts by weight
5 n-Butyl methacrylate		300 parts by weight
tert-Butyl peroxybenzoate		20 parts by weight

*1 Praxel FM-1: Trade name of a compound of the
aforementioned general formula (1) in which X^1 is a
methyl group, X^2 and X^3 are hydrogen atoms, j is 0, m
10 is 5 and n is 1, manufactured by the Daiseru Kagaku Co.

Example of Manufacture 2

Xylene (370 parts by weight) was introduced into
a four-necked flask which had been fitted with a
15 thermometer, a stirrer, a reflux condenser and a
dropping funnel and the temperature was raised to 140°C.
Next, a mixture of which the composition is indicated
below was added dropwise from the dropping funnel at a
constant rate over a period of 2 hours. After
20 completing the drip feed, the mixture was maintained at
the reflux temperature for a period of 1 hour and then
the contents of the flask were cooled to 100°C. Then, 2
parts by weight of tert-butylperoxy-2-ethylhexanoate
and 10 parts by weight of xylene were added and, by
25 maintaining at a temperature of 100°C, with stirring,
for a period of 2 hours, the (A) component hydroxyl
group containing vinyl based copolymer solution A-2 of

residue on heating 60%, resin hydroxy group value 150 mg KOH/g and weight average molecular weight 10,000 was obtained.

5	4-Hydroxybutyl acrylate	232 parts by weight
	2-Ethylhexyl methacrylate	240 parts by weight
	n-Butyl methacrylate	128 parts by weight
	tert-Butyl peroxybenzoate	20 parts by weight

10 Example of Manufacture 3

Xylene (370 parts by weight) was introduced into a four-necked flask which had been fitted with a thermometer, a stirrer, a reflux condenser and a dropping funnel and the temperature was raised to 140°C.

15 Next, a mixture of which the composition is indicated below was added dropwise from the dropping funnel at a constant rate over a period of 2 hours. After completing the drip feed, the mixture was maintained at the reflux temperature for a period of 1 hour and then
20 the contents of the flask were cooled to 100°C. Then, 1 part by weight of tert-butylperoxy-2-ethylhexanoate and 10 parts by weight of xylene were added and it was maintained at a temperature of 100°C, with stirring, for a period of 2 hours.

25

	2-Hydroxyethyl methacrylate	139 parts by weight
	Methyl methacrylate	80 parts by weight

- 22 -

isobutyl methacrylate	15 parts by weight
tert-Butyl peroxybenzoate	5 parts by weight

Next, 3 parts by weight of dibutyltin dilaurate
5 and 11 parts by weight of xylene were added, and then
366 parts by weight of ϵ -caprolactam were added dropwise
from the dropping funnel at a constant rate over a
period of 1 hour. After the drip feed had been
completed, the reaction was continued at a temperature
10 of 100°C and the reaction was completed when the residue
on heating reached 60%, and the (C) component hydroxyl
group containing vinyl based copolymer solution C-1 of
resin hydroxyl group value was 100 mg KOH/g and weight
average molecular weight 20,000 was obtained.

15

Example of Manufacture 4

Xylene (370 parts by weight) was introduced into
a four-necked flask which had been fitted with a
thermometer, a stirrer, a reflux condenser and a
20 dropping funnel and the temperature was raised to 140°C.
Next, a mixture of which the composition is indicated
below was added dropwise from the dropping funnel at a
constant rate over a period of 2 hours. After
completing the drip feed, the mixture was maintained at
25 the reflux temperature for a period of 1 hour and then
the contents of the flask were cooled to 100°C. Then, 2
parts by weight of tert-butylperoxy-2-ethylhexanoate

- 23 -

and 10 parts by weight of xylene were added and, by maintaining at a temperature of 100°C, with stirring, for a period of 2 hours, the hydroxyl group containing vinyl based copolymer solution a-4 of residue on heating 60%, resin hydroxy group value 100 mg KOH/g and weight average molecular weight 10,000 was obtained.

	2-Hydroxyethyl methacrylate	139 parts by weight
	2-Ethylhexyl methacrylate	411 parts by weight
10	n-Butyl methacrylate	50 parts by weight
	tert-Butyl peroxybenzoate	20 parts by weight
	[0046]	

Illustrative Examples 1 to 5

a) Preparation of Clear Paints

15 Clear paints of the compositions shown in Table 1 were prepared and diluted to the painting viscosity (Ford Cup #4, 25 seconds at 20°) using a thinner ["Sorbesso #100 (trade name, aromatic hydrocarbon of boiling point 150 - 170°C manufactured by the Esso Co.)/n-butanol = 8/2 by weight] and used to form the paint films indicated below.

b) Formation of Paint Films

Cationic electrodeposition paint ("Aqua No.4200", trade name, manufactured by the Nippon Yushi Co.) was electrodeposition painted onto zinc phosphate treated mild steel sheet to a dry film thickness of

- 24 -

20 μm and then baked at a temperature of 175°C for 25 minutes, and then a mid-coat paint ("Hiepico No.100 White", trade name, manufactured by the Nippon Yushi Co.) was spray painted in such a way as to provide a
5 dry film thickness of 40 μm and baked at 140°C for 30 minutes and a mid-coat painted sheet was obtained.

In Examples 1 to 4, a solvent type base-coat paint ("Belcoat No.6000 White", trade name, manufactured by the Nippon Yushi Co.) was air spray painted into this mid-coat painted sheet to a dry film thickness of 20 μm and then set for 5 minutes at room temperature, and then each of the aforementioned clear paints prepared in a) was air spray painted in such a way as to provide a dry film thickness of 40 μm and then baked at 140°C for 30 minutes.

10

On the other hand, in Example 5 a water based base-coat paint (a white based paint prepared using titanium oxide for the pigment using the same method as that disclosed in Example 1 of Japanese Patent Kokai H8-10690 (1996)) was air spray painted onto similar electrodeposition/mid-coat painted sheet to that described above so as to provide a dry film thickness of 20 μm and, after flashing for 10 minutes at 80°C, the aforementioned clear paints prepared in a) were air spray painted in such a way as to provide a dry film thickness of 40 μm and baked at 140°C for 30 minutes.

Moreover, specimens were obtained by the direct painting of the clear coat paint onto "Hiepico No.100 Black" (trade name, manufactured by the Nippon Yushi Co.) for the scratching resistance tests of Examples 1 to 5.

On carrying out each of the tests shown in Table 3 with the sheets obtained as samples, all of the examples shown in Table 3 exhibited excellent scratching resistance, acid resistance, yellowing
5 resistance and weather resistance.

Comparative Examples 1 and 2

a) Preparation of Clear Paints

The clear paints of the compositions shown in
10 Table 2 were prepared and diluted to the painting viscosity (Ford Cup #4, 25 seconds at 20°) using a thinner ["Sorbesso #100 (trade name, aromatic hydrocarbon of boiling point 150 - 170°C, manufactured by the Esso Co.)/n-butanol = 8/2 by weight] and used to
15 form the paint films indicated below.

b) Formation of Paint Films

In the same way as in Examples 1 to 4, solvent type base-coat paint ("Belcoat No.6000, White", trade
20 name, manufactured by the Nippon Yushi Co.) was air spray painted to provide a dry film thickness of 20 µm onto cationic electrodeposition/mid-coat painted sheet and, after setting for 5 minutes at room temperature, each of the aforementioned clear paints prepared in a)
25 was air spray painted so as to provide a dry film thickness of 40 µm and baked at 140°C for 30 minutes.

The paint film performance was investigated

- 27 -

using the specimens obtained. The results are shown in Table 3.

Table 1

5 (Amount Compounded, Units: Part by Weight)

		Example				
		1	2	3	4	5
A-1	*1	44.2	74.9	-	-	74.9
A-2	*2	-	-	-	79.6	-
C-1	*3	-	-	44.2	-	-
a-4	*4	-	-	-	-	-
B-1	*5	53.7	22.8	53.7	18.1	22.8
b-2	*6	-	-	-	-	-
Tinuvin 384	*7	1.0	1.1	1.0	1.2	1.1
Tinuvin 292	*8	0.5	0.6	0.5	0.6	0.6
DBTDL	*9	0.3	0.3	0.3	0.3	0.3
BYK 306	*10	0.3	0.3	0.3	0.2	0.3
TOTAL		100.0	100.0	100.0	100.0	100.0
OH group: NHCOOR*11		1 : 2	1 : 1	1 : 2	2 : 1	1 : 1
Base-Coat		ST	ST	ST	ST	WB

ST: Solvent Type, WB: Water Based

Table 2

(Amount Compounded, Units: Part by Weight)

		Comparative Example	
		1	2
A-1	*1	-	65.0
A-2	*2	-	-
C-1	*3	-	-
a-4	*4	74.9	-
B-1	*5	22.8	-
b-2	*6	-	33.5
Tinuvin 384	*7	1.1	0.7
Tinuvin 292	*8	0.6	0.4
DBTDL	*9	0.3	0.3
BYK 306	*10	0.3	0.1
TOTAL		100.0	100.0
OH group: NHCOOR*11		1:1	
Base-Coat		Solvent Type	Solvent Type

Notes for Tables 1 and 2

- 5 *1 A-1: Vinyl based copolymer solution A-1 of Example of Manufacture 1
- *2 A-2: Vinyl based copolymer solution A-2 of Example of Manufacture 2
- *3 C-1: Vinyl based copolymer solution A-3 of Example

- 29 -

of Manufacture 3

*4 a-4: Vinyl based copolymer solution a-4 of Example of Manufacture 4

*5 B-1: n-Butanol solution of 2,4,6-
5 tris(butoxycarbonylamino)-1,3,5-triazine, this compound has been disclosed in Japanese Patent Kokai H6-228305 (1994).

*6 b-2: Blocked isocyanate (HDI) manufactured by the Sumitomo Bayer Urethane Co., blocked isocyanate for
10 which the isocyanate groups of hexamethylenediisocyanate have been blocked with an oxime derivative, Desmodure BL-3175, manufactured by the Sumitomo Bayer Urethane Co., trade name, NCO% = 11.1%, solid fraction 75%.

15 *7 Tinuvin 384: Trade name, manufactured by the Ciba Geigy Co., a benzotriazole based ultraviolet absorber

*8 Tinuvin 292: Trade name, manufactured by the Ciba Geigy Co., a hindered amine based radical
20 scavenger.

*9 DBTDL: Dibutyltin dilaurate

*10 BYK 306: A leveling agent, BYK 306 manufactured by the Bikkemy Co. (trade name)

*11 OH group : NHCOOR

25 This shows the mol ratio of hydroxyl groups originating from the (A) component : NHCOOR groups originating from the (B) component in the paint

composition.

Table 3

		Examples					Comparative Examples	
		1	2	3	4	5	1	2
Scratching								
Resistance	*1	○	○	○	○	○	X	○
Acid								
Resistance	*2	○	○	○	○	○	○	○
Pencil								
Hardness	*3	H	H	H	H	H-F	H	H
Yellowing								
Resistance	*4	○	○	○	○	○	○	X
Accelerated								
Weather								
Resistance	*5	○	○	○	○	○	X	○

5 Notes for Table 3

*1 Scratching Resistance: Muddy water (JIS Z-8901-84, a mixture of type 8 dust/water/neutral detergent = 10/99/1 by weight) was coated with a brush onto the sample and then the sample was washed with the washing wheel brush in an automobile washer at 150 rpm for 10 seconds and rinsed with running

- 31 -

water. This operation was repeated twice and the extent of scratching of the sample surface was observed visually.

○: Hardly any scratching to be seen

5 Δ: Slight scratching was seen

X: Pronounced scratching was seen

*2 Acid Resistance: After placing 0.2 ml of 40 wt% aqueous sulfuric acid solution in the form of a spot on the sample it was heated to 60°C for 15 minutes and then rinsed with water, and the extent of marking was assessed visually.

○: No abnormality

X: Water mark present

*3 Pencil Hardness: Pencil scratching tests were carried out in accordance with JIS K5400 ((1992) 8.4.2) in a constant temperature, constant humidity room at 20°C and 75% RH.

*4 Yellowing Resistance: After coating the clear coat paint onto the base coat paint to a fixed film thickness (40 μm) using a wet-on-wet system, the sample was baked for 90 minutes at 160°C and the state of yellowing of the paint film was observed visually.

○: Hardly any yellowing of the paint film to be seen

X: Pronounced yellowing of the paint film

*5 Accelerated Weather Resistance: The gloss, color

change and staining of the paint film were assessed visually after testing samples for 3,000 hours with a Sunshine Carbon Arc Lamp (JIS K-5400 (1990) 9.8.1). The evaluation was made with the standards indicated below.

○: Virtually no change to be seen in the paint film.

X: Water staining and color changes seen on the paint surface, and a marked lowering of the gloss.

It is clear from the results shown in Table 3 that the paint films of Examples 1 to 5 all had excellent scratching resistance, acid resistance, hardness, yellowing resistance and weather resistance.


On the other hand, no hydroxyl group containing vinyl based monomer which could be represented by the aforementioned general formula (1) was used in Comparative Example 1 and so the scratching resistance was poor.

Furthermore, a blocked isocyanate was used for the hardening agent in Comparative Example 2 and so the yellowing resistance was poor.

Claims

1. Heat-hardenable paint composition which contains (A) vinyl based copolymer of hydroxyl group value from 20 to 200 mg KOH/g, being a copolymer of from 5 to 70 wt% hydroxyl group containing vinyl based monomer (a-1) which can be represented by general formula (1) which is indicated below and from 95 to 30 wt% other vinyl based monomer (a-2), and (B) 1,3,5-triazine-2,4,6-triscarbamic acid ester which can be represented by the general formula (2) which is indicated below, or an oligomer thereof, characterized in that the mol ratio of hydroxyl groups originating from the aforementioned (A) component : NHCOOR groups originating from the aforementioned (B) component in the composition is from 1 : 3 to 3 : 1.

General Formula (1)

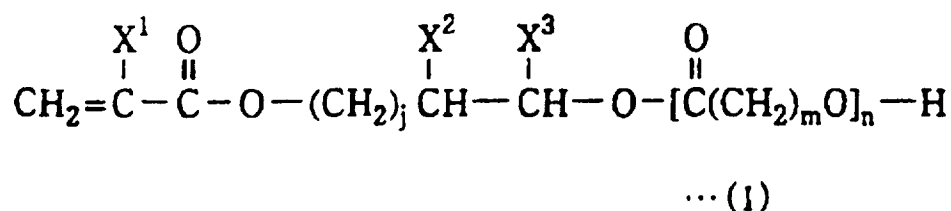

- (In this formula, X^1 , X^2 and X^3 each independently represent a hydrogen atom or a methyl group. Moreover j is an integer of value from 0 to 2, m is an integer of value from 3 to 5, and n is an integer of value from 0 to 5. However, j and n cannot both be 0.)


General Formula (2)



(In this formula, R represents an alkyl group which has from 1 to 20 carbon atoms, an aryl group which has from 6 to 20 carbon atoms or an aralkyl group which has from 7 to 20 carbon atoms, and these groups may be the same or different.)

2. Heat-hardenable paint composition which contains
10 (C) vinyl based copolymer of hydroxyl group value from 20 to 200 mg KOH/g, being a copolymer which contains from 5 to 70 wt% structural units (c-1) which can be represented by general formula (3) which is indicated below and from 95 to 30 wt% other structural units
15 (c-2) derived from vinyl based monomer, and (B) 1,3,5-triazine-2,4,6-triscarbamic acid ester which can be represented by the general formula (2) which is indicated below, or an oligomer thereof, characterized in that the mol ratio of hydroxyl groups originating
20 from the aforementioned (C) component : NHCOOR groups originating from the aforementioned (B) component in the composition is from 1 : 3 to 3 : 1.

General Formula (3)

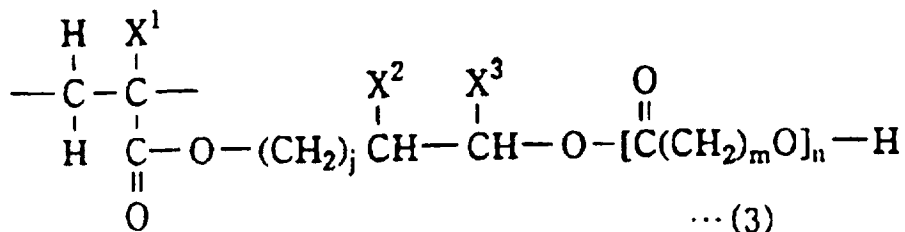

5 (In this formula, X^1 , X^2 and X^3 each independently represent a hydrogen atom or a methyl group. Moreover j is an integer of value from 0 to 2, m is an integer of value from 3 to 5, and n is an integer of value from 0 to 5. However, j and n cannot both be 0.)

10 General Formula (2)



(In this formula, R represents an alkyl group which has from 1 to 20 carbon atoms, an aryl group which has from 6 to 20 carbon atoms or an aralkyl group which has from
 15 7 to 20 carbon atoms, and these groups may be the same or different.)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 97/04111

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C09D157/00 C09D161/32

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C09D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 604 922 A (AMERICAN CYANAMID CO) 6 July 1994 cited in the application see example 2 -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

26 November 1997

Date of mailing of the international search report

09/12/1997

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Schueler, D

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 97/04111

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0604922 A	06-07-94	US 5574103 A	12-11-96
		CA 2112415 A	30-06-94
		JP 6228305 A	16-08-94
		US 5593735 A	14-01-97
