United States Patent [19]

Banjavich et al.

[11] **3,924,618**

[45] ***Dec. 9, 1975**

[54] **CLOSED CIRCUIT, FREE-FLOW, UNDERWATER BREATHING SYSTEM**

[75] Inventors: **Mark P. Banjavich**, New Orleans; **Anthony V. Gaudiano**, Metairie, both of La.

[73] Assignee: **Taylor Diving & Salvage Co., Inc.**, Belle Chasse, La.

[*] Notice: The portion of the term of this patent subsequent to Apr. 9, 1991, has been disclaimed.

[22] Filed: **Dec. 28, 1973**

[21] Appl. No.: **429,045**

Related U.S. Application Data

[62] Division of Ser. No. 198,105, Nov. 12, 1971, Pat. No. 3,802,427.

[52] **U.S. Cl.** **128/142.3;** 61/69

[51] **Int. Cl.²** **A62B 7/02**

[58] **Field of Search** ..... 128/142.3, 142.2, 140 R, 128/142, 142.4, 142.5, 142.7, 145, 145.5, 145.6, 145.8, 146, 146.3–146.5, 146.7, 147, 204, 212; 61/69

[56] **References Cited**

UNITED STATES PATENTS

813,431	2/1906	Iwanami et al.	128/145
3,370,585	2/1968	O'Neill	128/142.2
3,570,481	3/1971	Woodberry, Jr.	128/142.2
3,595,226	7/1971	Newcombe	128/142.2
3,802,427	4/1974	Benjavich et al.	128/142.3
3,859,994	1/1975	Almquist et al.	128/142.3

FOREIGN PATENTS OR APPLICATIONS

1,093,392	11/1967	United Kingdom	128/142.3

Primary Examiner—Robert W. Michell
Assistant Examiner—Lee S. Cohen
Attorney, Agent, or Firm—James E. Cockfield

[57] **ABSTRACT**

Method and apparatus entailing an underwater breathing system in which (1) a continuously flowing supply of reconditioned gas is supplied to a diver through flexible umbilical means extending from an underwater enclosure, in which (2) a return tank means receives gas from the umbilical means and a supply tank means supplies reconditioned gas to the umbilical means, in which (3) both the return tank means and supply tank means are located remote from the diver, and (4) in which a surface located source of breathable gas is continuously available.

8 Claims, 7 Drawing Figures

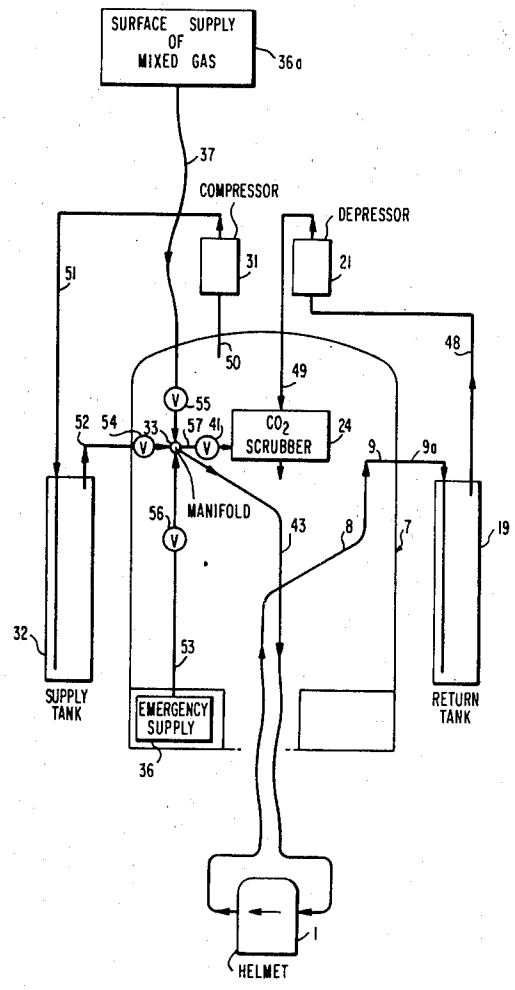


FIG 1

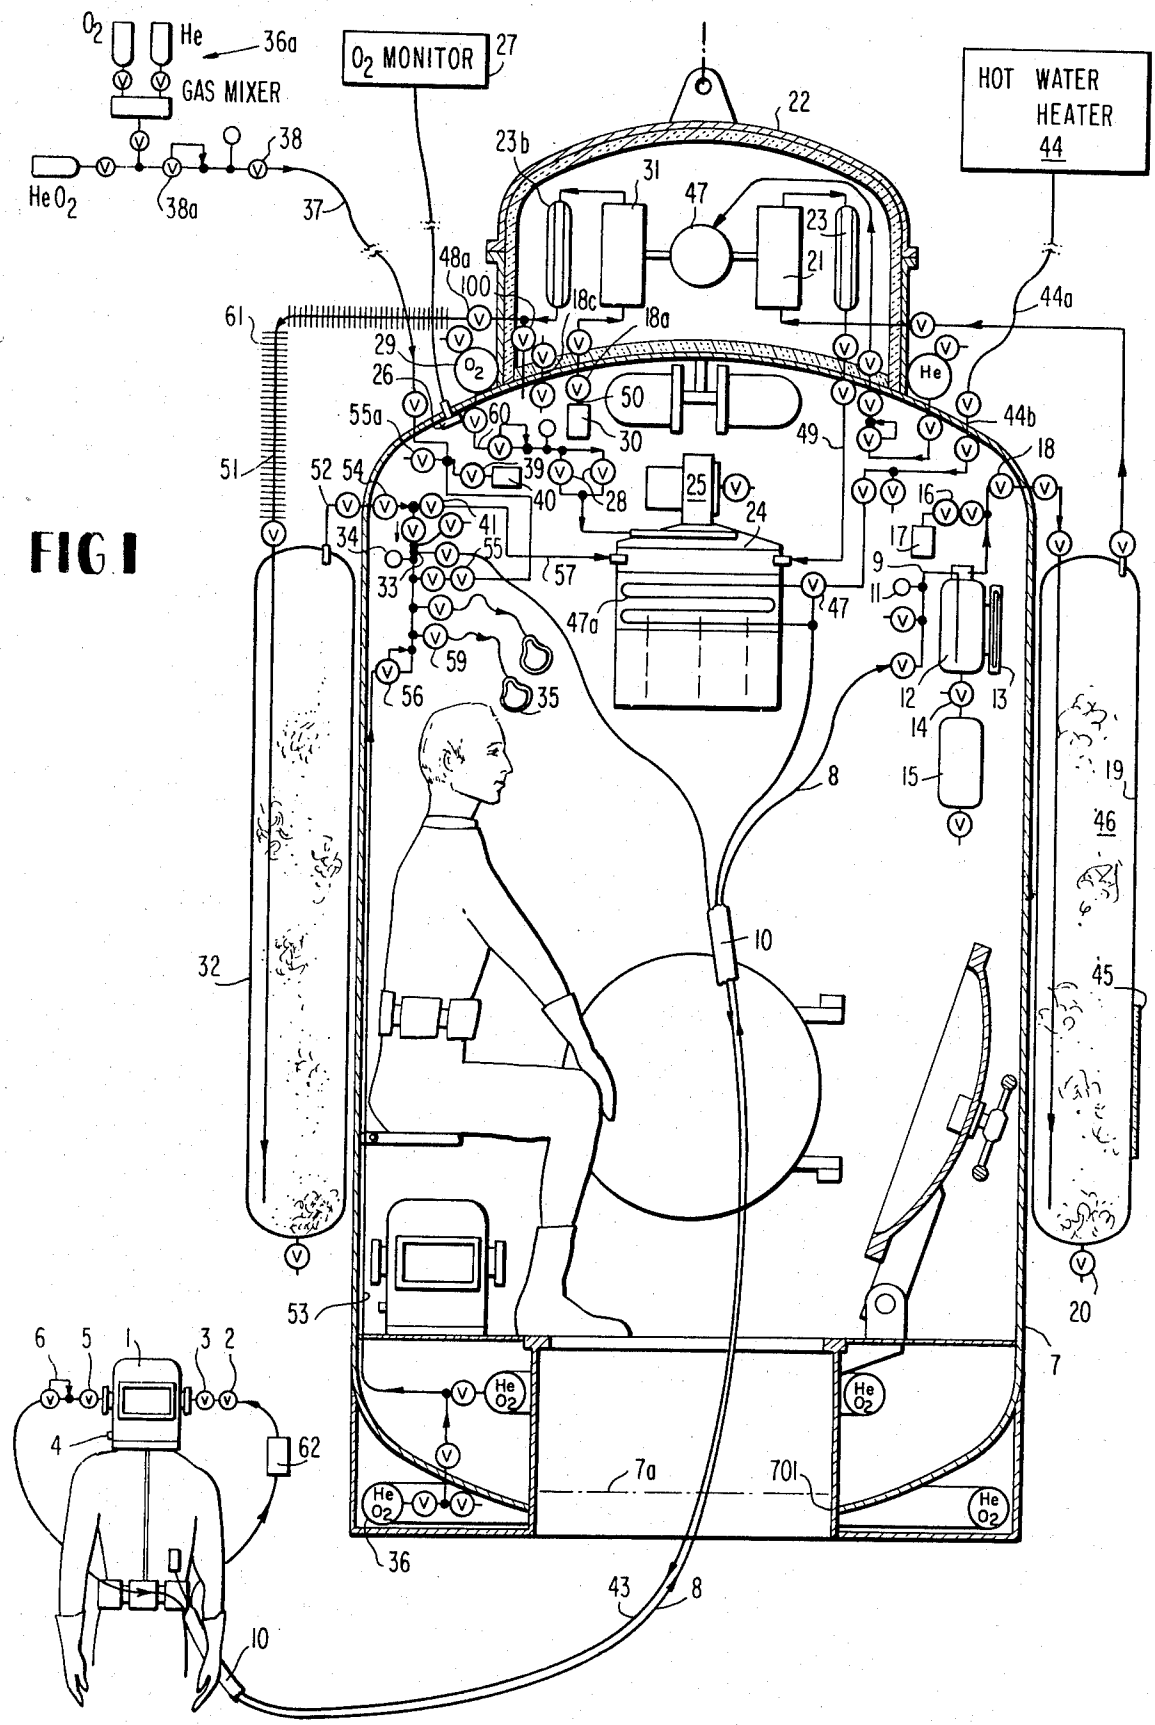

O2
He
36a
GAS MIXER
HeO2
38
38a
37
O2 MONITOR
27
HOT WATER HEATER
44
44a
22
23b
31
47
23
21
48a
100
18c
18a
61
29
26
O2
50
30
49
44b
18
55a
60
39
40
28
25
24
51
52
54
41
34
55
57
33
47a
47
59
56
35
16
17
9
11
12
13
14
15
8
10
19
46
45
32
53
20
7
6
5
1
3
2
4
62
He O2
7a
701
36
43

FIG. 2

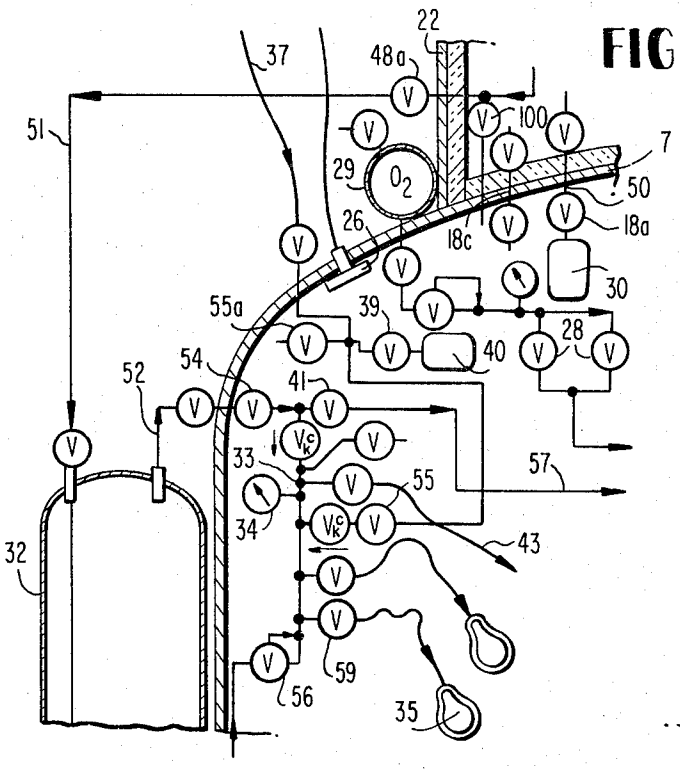


FIG. 3a

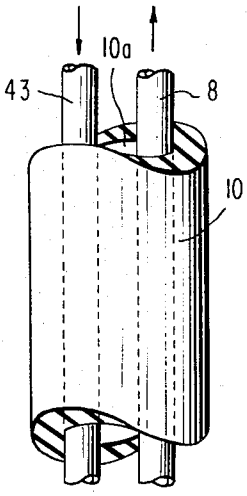
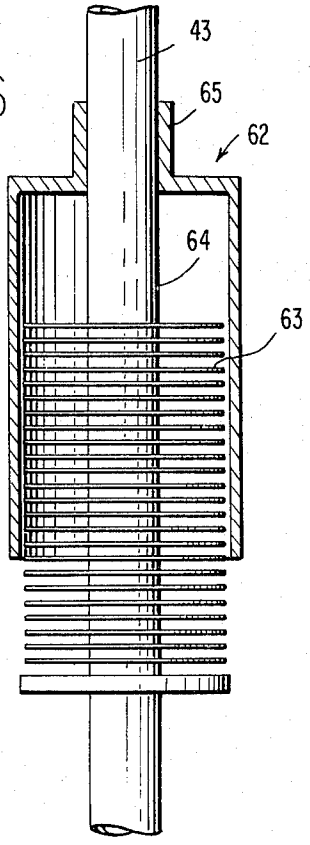


FIG. 6



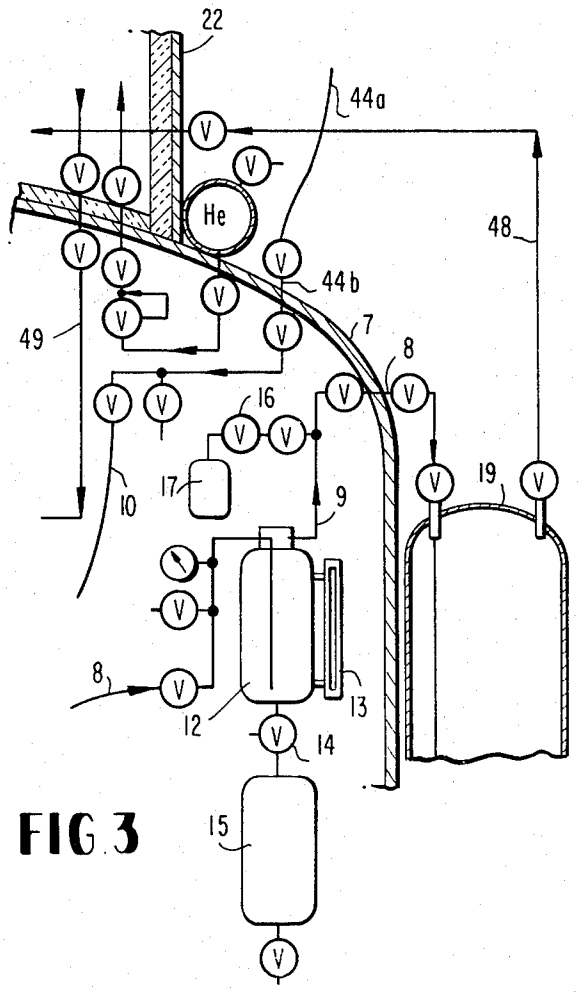


FIG. 3

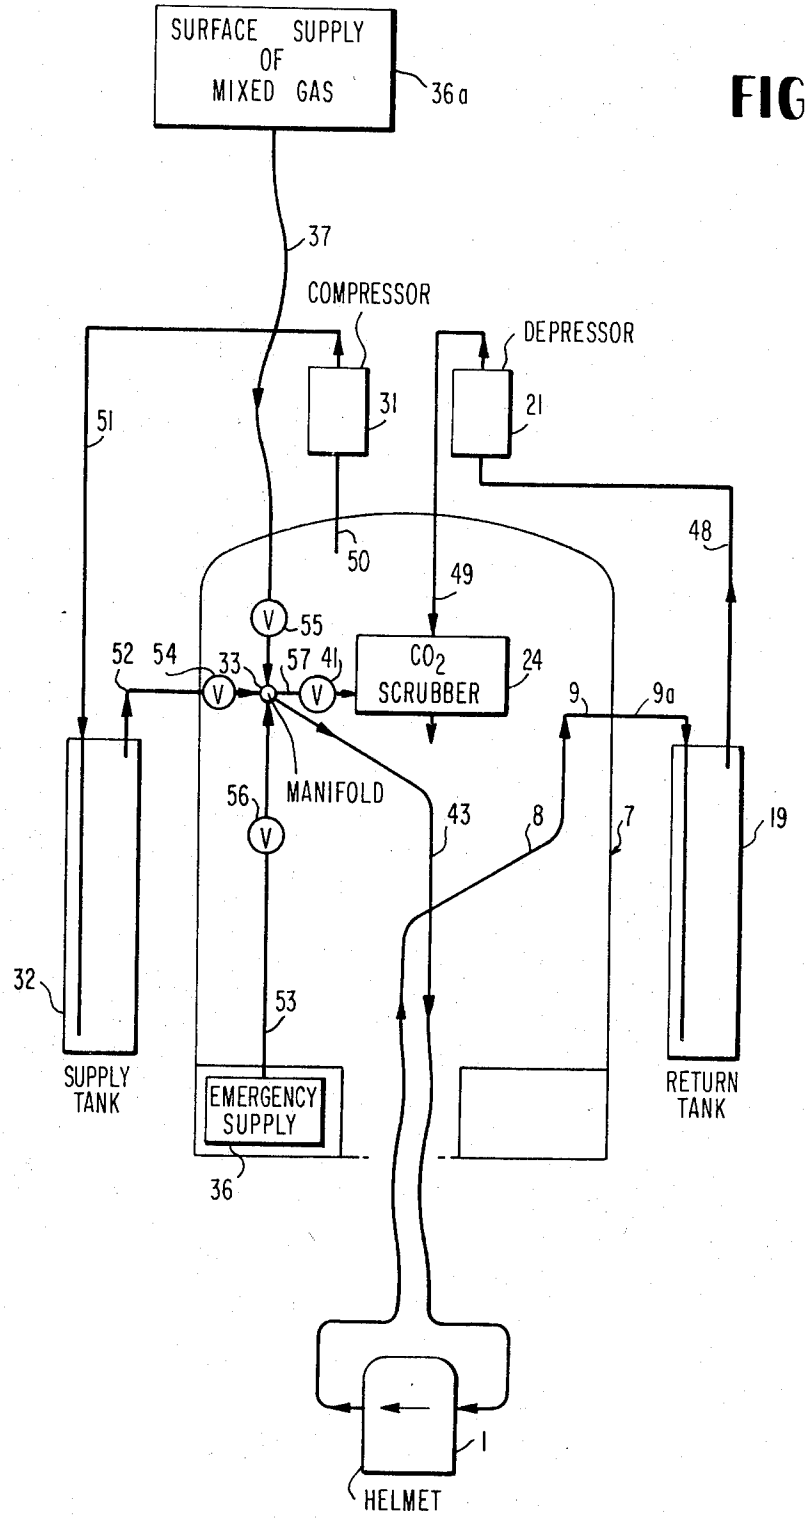

SURFACE SUPPLY OF MIXED GAS
36a
37
COMPRESSOR
DEPRESSOR
31
21
51
48
50
49
55
52
54
33
57
41
CO_2 SCRUBBER
24
9
9a
MANIFOLD
56
43
8
7
19
32
53
SUPPLY TANK
EMERGENCY SUPPLY
RETURN TANK
36
1
HELMET

FIG. 4

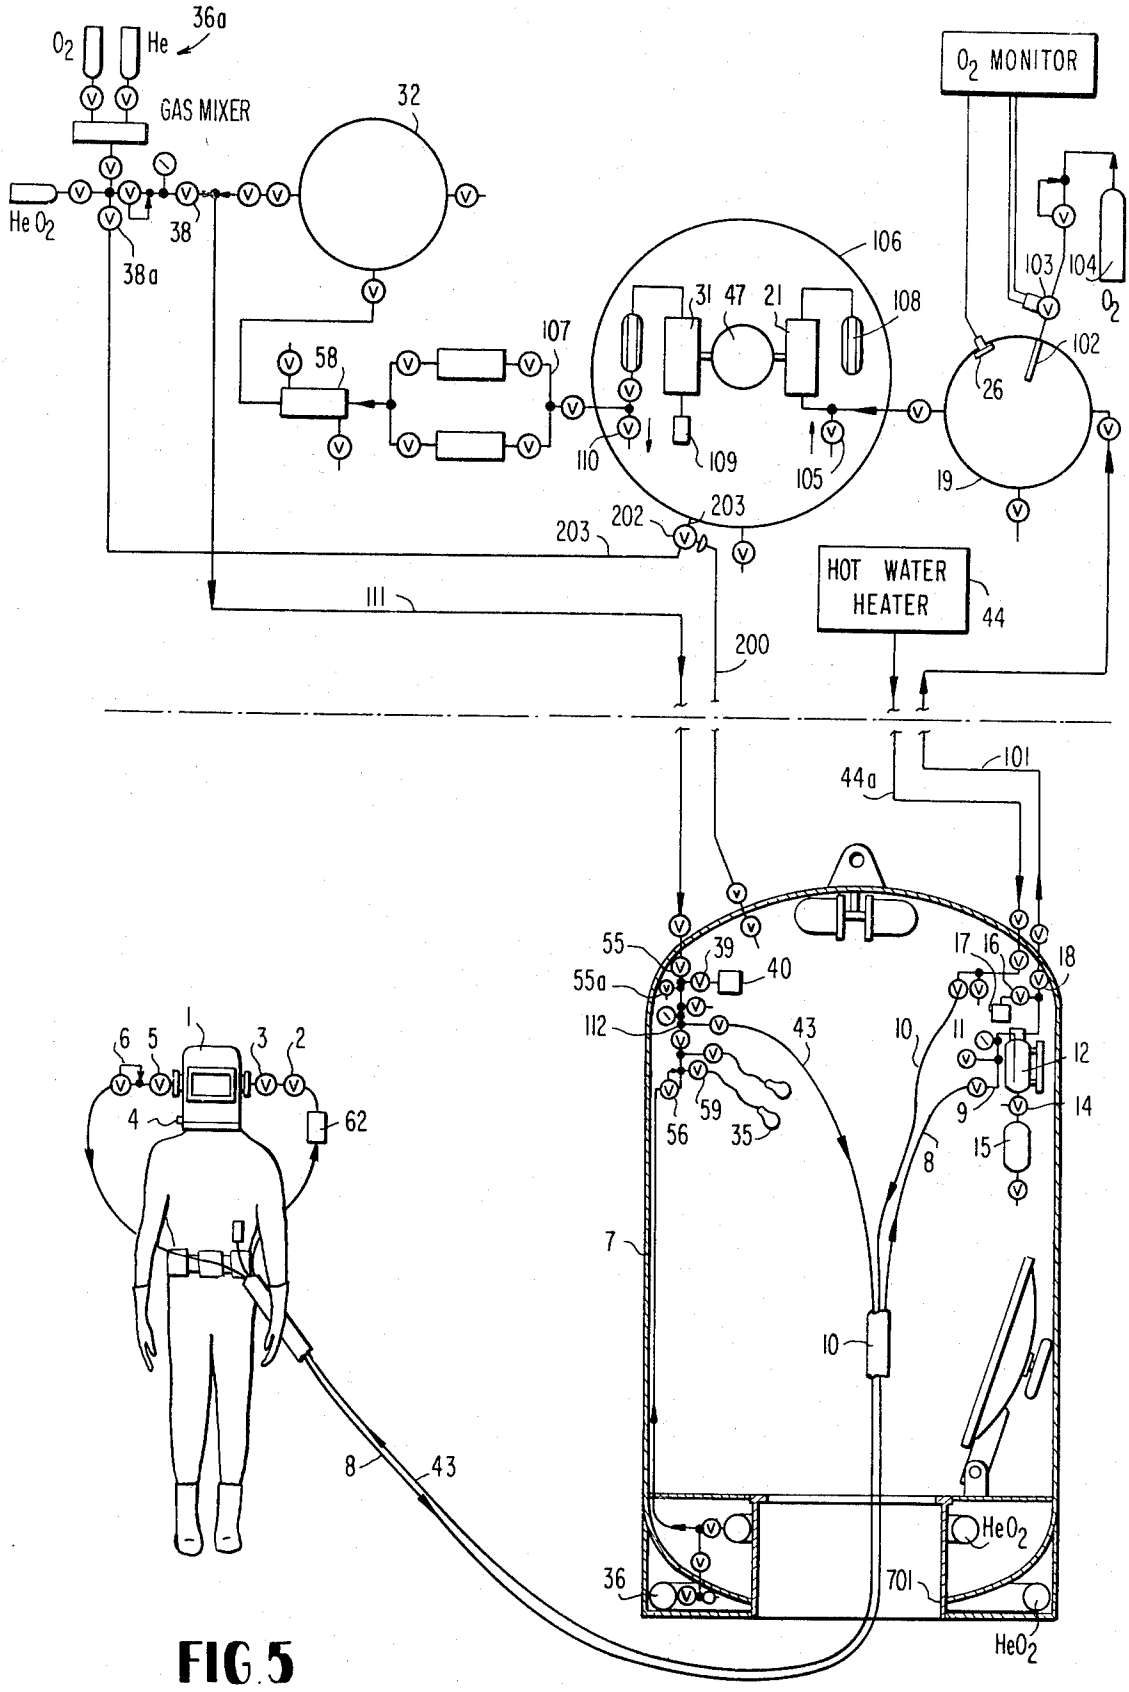

36a
O_2
He
GAS MIXER
32
O_2 MONITOR
He O_2
38
38a
106
108
107
58
31
47
21
103
104
O_2
102
26
110
109
105
19
203
202
203
HOT WATER HEATER
44
111
200
44a
101
55
55a
39
40
112
43
17
16
18
10
11
12
9
14
15
8
56
59
35
6
5
1
3
2
4
62
7
10
8
43
36
701
HeO_2
HeO_2

FIG. 5

CLOSED CIRCUIT, FREE-FLOW, UNDERWATER BREATHING SYSTEM

This is a division of application Ser. No. 198,105, filed Nov. 12, 1971, now issued as U.S. Letters Pat. No. 3,802,427.

GENERAL BACKGROUND, OBJECTS, AND SUMMARY OF INVENTION

A Closed Circuit, Free Flow, underwater breathing system is presented through this invention. The approach employs helmeted divers operating from an underwater enclosure. The enclosure is equipped with the usual breathing gas reconditioning devices, with emergency gas supplies, etc. and additionally is provided with or connected with a gas pumping module.

The aims of the invention are: To free the diver of encumbrances, to conserve and recirculate breathing gas normally lost by divers, to remove harmful carbon dioxide, to reduce loss of body temperature, to prevent lung congestion, and to provide a means of eliminating lung fatigue.

Substantial economies are possible and these become very significant as diving progresses to deeper depths. The consumption of helium gas, a limited resource, is reduced to a bare minimum. Heating the diver and his inspired gas increases his usefulness and prevents lung damage. Lung fatigue, inherent in demand systems and most apparent at deep depths, is virtually eliminated. Communications are optimized and removal of carbon dioxide is assured.

This invention, in general, relates to an underwater breathing system and, in particular, to an underwater breathing system characterized by a closed circuit, non-demand, or free-flow circulation pattern wherein a diver is supplied via an umbilical from a source not carried by the diver.

A common type of underwater breathing apparatus, called an open circuit rig, is one wherein a diver is supplied via an umbilical from a source located on the surface or from a diving chamber, habitat, or similar underwater device. The breathing mixture is supplied to the diver's helmet or face mask at a pressure in excess of the depth at which he intends to go, and the flow is throttled in accordance with his needs. His exhaled breath, which contains an amount of reusable oxygen, valuable helium, undesirable carbon dioxide, and other gases, is lost to the surrounding water.

Devices utilizing helmets or face masks have been developed which are carried by the diver to permit his exhaled breath to be purified by recirculating it through a carbon dioxide absorber, the impetus being provided by allowing the breathing gas supply from an umbilical to enter a venturi located within the absorber. This method is known as semi-closed circuit constant volume and is not as wasteful as open circuit; but while less gas is consumed, all gas supplied is eventually lost. In addition, the diver is encumbered by the device he wears and the performance of the venturi degrades rapidly with increases in depth, allowing a build-up of carbon dioxide.

Not being demand devices, there is no resistance to breathing using open circuit or semi-closed circuit methods.

If a diver were to use a closed circuit self-contained breathing apparatus wherein all of the diver's exhalation is recirculated through a carbon dioxide absorber, oxygen replenished, as required, and helium added to compensate for losses, a much more efficient utilization of the gases is effected. However, the diver is very encumbered and his bottom time limited by his gas supply and the life of his CO_2 absorber. These devices are electromechanically complex, have poor communications due to the necessary oral nasal mask, and the inherent breathing resistance of demand apparatuses.

A semi-closed circuit constant mass flow rate breathing device which is similar to the constant volume device, uses an umbilical, and since it is worn, it too encumbers the diver. While potentially having a longer capability, it is limited by the life of the CO_2 absorber. This device suffers from mechanical complexity. It has poor communications because of the oral nasal mask, unavoidable breathing resistance, and is position sensitive due to its breathing bags.

The advances in diving technology have ushered in saturation diving techniques and underwater habitats where men can work and live for extended times in a water environment. The atmosphere within these enclosures may be self-contained or replenishable from the surface but is always maintained at proper breathing conditions purified of carbon dioxide, etc., and reconstituted with oxygen as required.

Attempts have been made to supply this breathable environment to divers through the use of a pump and to prevent its loss by providing means for the exhaled gas to return to the enclosure for repurification. These devices generally employ conventional breathing bags, masks, etc. and are of the demand type, supplying breathing gas only upon inhalation of the diver.

The unavoidable breathing resistance of all demand types of breathing devices causes the diver to think he is not getting an adequate amount of gas and continuous deep overbreathing usually occurs. This results in fatigue of the diaphragm and chest muscles, leading to involuntary reduced breathing. In addition, the cold gas causes mucus to be secreted within the lungs which leads to congestion, and contributes to a significant reduction in the diver's body temperature. The above is especially critical at deep depths.

It is, therefore, a primary objective of the present invention to provide a closed circuit, free-flow breathing system that a diver may be supplied with a breathable gas mixture from a source not carried by a diver.

Another object is to provide a closed circuit, free-flow breathing system wherein the diver is supplied from an atmosphere within an underwater enclosure and in which the diver may descend to a depth below or ascend to heights above the enclosure.

Another object is to provide a closed circuit, free-flow breathing system of the type described wherein a diver is not subjected to dangerous eye, face, or thoracic squeeze.

Another object is to provide a closed circuit, free-flow breathing system wherein breathable mixture is supplied by a compressor pump and removed by a depressor pump, these pumps to be driven by a suitable variable or constant speed prime mover.

Another object is to provide a closed circuit, free-flow breathing system wherein the diver's breathing gas is heated to a suitable temperature to prevent harmful physiological effects that would reduce his capabilities.

Another object is to provide a closed circuit, non-demand breathing system that can be used below the surface, supplying submerged divers indirectly via a suitable underwater enclosure. The purification and reconstituting of the breathing gas may be done with suit-

able equipment attached to the underwater enclosure from which divers operate.

In accomplishing at least certain of the foregoing objectives, a method and apparatus are presented wherein underwater enclosure means operable, to permit diver ingress and egress, is provided. A helmet means is provided which is operable to provide a breathable atmosphere for a diver at a submerged location. An umbilical means extends between said underwater enclosure means and this helmet means. A flow of breathable gas is continuously circulated from the underwater enclosure means through supply conduit means of the umbilical means to the interior of said helmet means and from the interior of said helmet means back through return conduit means of the umbilical means to said enclosure means. The continuous flow of gas returning from the helmet means through said return conduit means is caused to be transmitted to return tank means located remote from a diver wearing the helmet means.

Gas is removed from the return tank means by operation of depressor means. The depressor means is operable to maintain a relatively low pressure in the return tank means, which lower pressure tends to promote a continuous flow of gas from the helmet means through the return conduit means to the return tank means.

Gas is transmitted from the depressor means to compressor means at a location remote from the diver.

Gas is transmitted from the compressor means to supply tank means, with the compressor means being operable to pressurize gas in said supply tank means to a relatively higher level.

Gas is transmitted from the supply tank means through the supply conduit means continuously to the interior of said helmet means, with the relatively higher pressure in said supply tank means being operable to induce and sustain a continuous flow of gas from the supply tank means through the supply conduit means to the interior of the helmet means. The rate of continuous flow of gas (from the supply conduit means through the interior of the helmet means and into the return conduit means for return to the enclosure means) is regulated.

A supply of breathable gas, operable to be transmitted to the helmet means through the supply conduit means independent of gas flowing from said supply tank means, is provided at a surface location. At a location remote from the diver, gas reconditioning means is provided which is operable to receive gas from at least one of said compressor or depressor means, remove carbon dioxide at least in part therefrom, and transmit gas with carbon dioxide removed at least in part therefrom to the supply tank means.

The continuous flow of gas from the supply conduit means into the interior of the helmet means and back into the return conduit means is operable to provide a continuous flow of breathable gas passing across the face of a diver positioned within said helmet means and generally displace from the vicinity of said diver face gas exhaled by said diver and induce this displaced, exhaled gas to flow out of said helmet means back into the return conduit means for return to said enclosure means.

DRAWINGS

In describing the invention, reference will be made to certain preferred embodiments described by way of example and without limitation in the appended drawings.

In the Drawings

FIG. **1** provides a schematic, elevational view of components of a system entailing method and apparatus aspects of the invention;

FIG. **2** provides an enlarged, fragmentary, schematic view of the control elements of the FIG. **1** system associated with supply tank means, an emergency supply of gas, and a surface supply of gas;

FIG. **3** provides an enlarged, fragmentary, schematic view of a portion of the FIG. **1** system pertaining to control elements associated with return tank means of the present invention;

FIG. **3***a* provides a still further enlarged, fragmentary view of an umbilical means of the FIG. **1** system;

FIG. **4** provides a schematic view of various flow paths of gas provided by the FIG. **1** system, illustrating the partially overlapping and integrated, diver servicing and habitat interior servicing, gas flow loops;

FIG. **5** provides a schematic view illustrating a modified form of the system approach illustrated in FIG. **1**; and

FIG. **6** illustrates a diver controlled heat exchanger which may be employed with either embodiment.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In describing the invention, at least two preferred embodiments and variations of these embodiments will be described.

The following discussion relating to these embodiments will be presented with the hydrostatic pressure at the underwater depth of the described enclosure being the "reference" pressure when pressure relationships are being described.

First Preferred Embodiment

A first preferred embodiment is illustrated in FIGS. **1** through **4**.

As shown in FIG. **1**, a helmet **1** on a diver's head protects and insulates his head, preserves his bubble of breathing gas, sweeps away his exhaled carbon dioxide to a safe level, and improves his communications due to lack of a mouth piece or oral nasal mask.

Breathing gas, at a pressure greater than reference, continuously flows through a check valve **2** and throttling valve **3** into the helmet. It may be exhausted through a combination chin button-exhaust valve **4** directly into the sea, but with this invention, it normally flows through a safety shutoff valve **5** and backpressure regulator valve **6**. Valve **6** monitors pressure in helmet **1** relative to ambient water pressure surrounding the helmet so as to tend to maintain a desired pressure in the helmet. The diver may adjust regulator **6** to compensate for limited changes in the diver's elevation in relation to that of the enclosure **7** so as to maintain a constant pressure in helmet **1**.

Diving vessel **7** may comprise an underwater diving chamber of the type disclosed in U.S. Pat. No. 3,323,312, to Banjavick issued June 6, 1967. This vessel is lowered from a service vessel to an appropriate location. As is described in the aforesaid Banjavich U.S. Pat. No. 3,323,312, divers move into and out of submerged diving vessel **7** by way of a base opening **701**, which opening communicates with the ambient water body in which the chamber **7** is submerged.

Ordinarily, water will rise partially within the opening **701** so as to provide a water and breathable gas inter-

face 7*a*, as shown generally in FIG. 1. The pressure of gas within the enclosure 7 may be selectively adjusted to determine the elevation of the interface 7*a*. In certain instances, divers may desire the interface to be somewhat higher than that shown in FIG. 1 so as to facilitate the returning of divers to the chamber interior.

Gas flows from helmet 1 through a return hose 8, which is normally stowed inside the enclosure 7, to a return gas manifold 9. This manifold, which may be considered part of return conduit means 8, is equipped with appropriate valving and a pressure indicator 11. The return gas then flows through a water separator 12 shown in FIG. 3 which is equipped with a sight glass 13, appropriate 3-way, vent and transfer valving 14, and a separated water receiver 15. This receiver permits draining of accumulated water, which is at less than reference pressure, into the enclosure which is at reference pressure via conventional valving arrangements.

A return relief valve 16 and return silencer 17 are "teed" into the return gas manifold 9, as shown in FIG. 3, to permit gas within the enclosure 7 to enter the return loop when the return line pressure falls below the setting of the return relief valve 16.

The return gas then flows through valves 18 and then into a return tank 19 which has a drain valve 20. The return tank 19 contains a mass of stainless steel, monel, or copper wool 46 which removes entrained water in the breathing gas. The tank 19 also absorbe pulsations from the depressor pump 21, and provides a reservoir of breathing gas at a pressure less than reference so that gas will flow from the diver's helmet 1. From tank 19, gas enters the compressor-depressor enclosure 22 and passes through depressor pump means 21.

Gas drawn from tank 19 by the positive displacement pump 21 is transmitted through silencer means 23 into a carbon dioxide scrubber 24 in the interior of closure 7. This gas, in passing through this scrubber, is treated so that at least a significant reduction in carbon dioxide content is effected and is then discharged from unit 24 into the enclosure 7 interior.

The returning breathing gas enters the environment of the enclosure 7, lean of the proper amount of oxygen. This condition is detected by the sensing element 26 of a commercial, oxygen monitoring instrument 27. When a low oxygen content is noted, means 26–27 energize two normally closed, parallel connected solenoid valves 28, connected in parallel from an appropriately valved and regulated oxygen supply 29 carried by enclosure 7, and oxygen is admitted until a desired content is noted, at which point the circuit is opened, valves 28 closed, and the oxygen flow ceases. These oxygen control components are shown in FIG. 2. The redundancy of valves 28 is to ensure failsafe operation.

The oxygen, when admitted into enclosure 7, flows into the inlet of a carbon dioxide scrubber 24 to ensure homogenization of gas (i.e. mixing with gas from depressor pump 21) and to reduce noise.

Gas within the enclosure 7, maintained at breathing condition, is drawn through a supply silencer 30 and valves 18*a* into a compressor pump 31 in enclosure 22, which is a positive displacement type pump. This pump 31 provides the means of increasing the pressure of the supply gas above reference. The supply gas is discharged through a silencer 23*b* and valve 48*a*, and exits the compressor-depressor enclosure 22 at a substantial increase in temperature.

This gas then flows into the supply tank 32. The function of this tank 32 is to absorb pulsations from the compressor pump 31 and provide a reservoir of breathing gas at a pressure above reference so that gas will flow to the diver.

The gas flows into the supply manifold 33, which is equipped with proper valving, pressure indicating devices 34, and emergency breathing masks 35.

The supply manifold 33, shown in FIG. 2, is connected via appropriate valving, to an emergency self-contained breathing gas supply 36, attached to the enclosure, and to a similar source 36*a* at the surface via an umbilical 37. Each of the sources 36 and 36*a* may comprise suitable admixtures of helium and oxygen.

A surface supply valve 38 controlling flow through umbilical 37 is normally open, and provides for remote pressurization of the enclosure interior from the surface. A surface supply relief valve 39 is set well above the level required for breathing, yet can be overcome by increasing the pressure at the surface by operation of regulator 38*a*. By thus forcing valve 39 open, the interior of enclosure 7 can be pressurized so as to control water level 7*a*. The surface supply silencer 40 is to mute noise.

The supply relief valve 41 is teed into the supply manifold 33 to permit gas from the supply tank to enter the enclosure when the supply gas pressure exceeds the setting of the supply relief valve 41. This excess gas is admitted into the inlet of the CO_2 scrubber 24 and serves as a "backup means" of gas circulation, augmenting the carbon dioxide scrubber blower 25.

The supply gas also flows from manifold 33 through a supply hose 43, which is normally stowed inside the enclosure, to the diver's helmet 1.

A self-contained or surface hot seawater source 44 is connected to the enclosure 7. Through this hose 10 may be threaded the breathing gas supply hose 43 and return hose 8, as shown in FIG. 3*a*. In this manner the inspired gas of the diver can be heated as might be required in extreme cold water conditions.

The breathing gas supply 36*a* on the surface is attached to the enclosure via an umbilical 37 and consists of regulated helium-oxygen mixtures and/or blended mixes as could be provided by a commercial gas mixer with pure helium and oxygen sources.

The prime mover 47 which drives pumps 21 and 31 is a constant speed electric motor of the totally enclosed type and may be equipped with an automatically regulated, inert helium gas purge. The pumping equipment thus operates at a constant level and maximum flow rate and works just as hard whether the diver(s) are using gas or not. This is because a self-compensating balance of flows exists.

Desirably, the pressure in enclosure 7 will be equalized with the pressure within enclosure 22 by normally open equalizing valve means 18*c* shown in FIGS. 1 and 2.

During normal operation, the excess of gas, supplied but not used by the diver(s), passes from the compressor 31 through the supply tank 32, supply relief valve 41, carbon dioxide scrubber 24, and into the enclosure 7. An equal amount passes from the enclosure 7 through the supply silencer 30 to inlet of the compressor 31. Hence, when the diver's need ceases as when one or two divers are taken off the line, the total flow of the pumping equipment will operate across the compressor relief valve means. Blower 25 will serve to recirculate gas in enclosure 7 through scrubber 24.

When there is an exceptional need, such as when a diver is descending, when helmet purging at an extreme

rate is taking place, or when the diver is temporarily on open circuit (i.e. with gas flowing from a supply source **36** or **36***a* via manifold **33** directly to conduit **43** and with no flow from a source into the enclosure occurring) insufficient gas will be returned by the diver or supplied to the enclosure and gas will be drawn from the enclosure **7** through the supply silencer **30.** The level of water within the enclosure will rise proportionately. This condition, while not immediately serious, must be corrected or else the enclosure will flood, the same as if a leak occurred. This is corrected by either the tender adding gas to the enclosure, as needed from surface supply **36***a*, by increasing the pressure setting of regulator **38***a*, or by the diver in enclosure **7** opening valve **55***a* shown in FIG. **2.** This is not an emergency condition and is not cause to abort the dive.

If the same condition occurred, and in addition the surface umbilical were severed or surface gas supplies exhausted, the tender would put the diver on the emergency self-contained breathing gas supply **36** which is integral with the enclosure.

Valve **55***a* is spring loaded to a closed position. When opened by a diver, this valve **55***a* enables gas to flow between conduit **37** and the enclosure interior. When it is desired to vent the enclosure, valve **55***a* is opened, and the pressure setting of regulator **38***a* is reduced. The reduced pressure setting will enable conduit **37** to vent to atmosphere through regulator **38***a*. Conversely, with valve **55***a* open, and the pressure setting of regulator **38***a* unchanged or increased, gas will flow into the interior of enclosure **7** through open valve **55***a*.

Integrated and, Partially Overlapping, Diver Breathing Loop and Enclosure Breathing Loop with Surface and On-Site Control

As will be apparent from the foregoing discussion, the system described in connection with FIGS. **1, 2** and **3** provides partially over-lapping and integrated breathing loops for a diver operating in association with the helmet **1** and a diver or divers stationed within the enclosure **7.**

In this system, the diver loop comprises, in series connected sequence, as shown in FIG. **4:**

1. helmet **1;**
2. return conduit means **8** (including manifold **9** and conduit means **9***b*);
3. return tank **19;**
4. conduit means **48** extending from return tank **19** to the inlet side depressor pump **21;**
5. conduit means **49** extending from the outlet side of depressor pump **21** through carbon dioxide scrubber **24** into the interior of enclosure **7;**
6. conduit means **50** extending from the interior of enclosure **7** to the inlet side of compressor pump **31;**
7. conduit means **51** extending from the outlet side of compressor means **31** to supply tank means **32;**
8.
   a. conduit means **52** extending from supply tank means **32** to manifold **33;**
   b. umbilical means **37** providing communication between surface supply **36***a* and manifold **33;** and
   c. conduit means **53** providing communication between emergency supply **36** and manifold **33;** and
9. supply conduit means **43** extending from manifold **33** to inlet side of helmet **1.**

By appropriate operation of valve means **54** in conduit means **52,** valve means **55** in conduit means **37** and valve means **56** in conduit means **53,** breathable gas from either of the sources **32, 36** or **36***a*, or any combination of gases from these sources, may be transmitted through manifold **33** to supply conduit means **43.**

These valve means may be operable in response to tender diver manipulation in enclosure **7** and may be concurrently and independently operable in response to the operation of remote control mechanisms contained on the surface located, service vessel. In this connection, it will be appreciated that surface supply **36***a* will ordinarily be contained at this service vessel.

The enclosure loop which partially overlaps the "diver" loop, comprises the following elements:

1. conduit means **50** transmitting gas from enclosure **7** to the inlet side of compressor pump means **31;**
2. conduit means **51** transmitting gas from the outlet side of compressor means **51** to supply tank **32;**
3.
   a. conduit means **52** extending from supply tank means **32** to manifold **33;**
   b. umbilical means **37** providing communication between surface supply **36***a* and manifold **33;** and
   c. conduit means **53** providing communication between emergency supply **36** and manifold **33;** and
4. conduit means **57** supplying gas from manifold **33** to carbon dioxide scrubber **24** for discharge to the interior of enclosure **7.**

Thus, two loops are provided, each of which ensures reconditioning of gas and provides two independently controllable breathing atmospheres, one associated with interior of enclosure **7** and the other with the interior of helmet **1.** Each loop is of the continuous circulation type such that stale gas is continuously swept away. The oxygen supply means **26–27–29** is operably independent of these loops and "revitalizes" both loops by discharging oxygen into the enclosure **7.**

In the interior of enclosure **7,** the manifold **33** may be provided with a plurality of independently valve controlled face masks **35** available for use by a diver or divers in the event of any failure in the system providing reconditioned gas in the interior of enclosure **7.** Such face masks **35** are schematically shown along with their schematically represented valves **59** in FIG. **1.**

As will be recalled, the flow pattern above described may be somewhat modified in the event that the diver loop is either inoperable, not being used, or supplying insufficient gas to return tank **19.** In this event, in order to ensure proper continuous operation of depressor pump means **21,** the return relief valve means **16** will open so as to permit a direct flow of gas from the interior of enclosure **7** into tank means **19** via a manifolded portion of conduit means **8** (i.e., the manifold portion **9** comprising water separator **12,** return relief valve **16,** etc.).

As will also be recalled from the foregoing discussion, the operation of the diver and enclosure loops previously described may be modified by inducing the opening of surface supply relief valve means **39** (as effected by the operation of regulator means **38***a* at the surface vessel). The opening of valve means **39** will serve to transmit gas from supply source **36***a* directly into the interior of the enclosure **7** so as to control interface level **7***a* and provide an emergency supply of breathable gas transmittable directly to the interior of enclosure **7.**

Similarly, as conditions may require, the valve mechanisms heretofore described in connection with manifold **33** may be manipulated so that breathable gas supplied to the diver in helmet **1** will be transmitted di-

rectly from either surface source **36***a* or emergency source **36** directly to the diver via supply conduit **43.** By closing the valve means **54,** in conduit means **57,** and opening either valve means **56** or **55,** breathable gas will be caused to be transmitted directly through manifold **33** to supply conduit **43** via either conduit means **53** or **37.** In this "open circuit" mode, returned gas from tank **19** will circulate through the interior of enclosure **7** via valve **16,** conduit means **8, 48** and **49,** and depressor pump **21.** The compressor circuit will be substantially isolated from the enclosure when this takes place. To prevent stalling of the compressor, a spring biased relief valve **100** may be incorporated between line **51** and the interior of enclosure **7** so as to permit compressor **31** to continuously circulate gas, albeit in bypassed relation with respect to supply tank **32.**

Gas Heating

As is apparent from FIG. **3,** hot water conduit means **44***a* is connected with appropriately valved manifold means **44***b* which in turn is connected with flexible umbilical hose **10.** Flexible umbilical hose **10,** as shown schematically in FIG. **3***a*, contains gas conduits **8** and **43** and provides a passage **10***a* through which warm water may be circulated in heat conducting relation with conduit means **8** and **43** to the suit of the diver wearing helmet **1.**

Other means may be employed to heat the gas going to the diver, including heaters carried by enclosure **7** and heating means discussed in the following section entitled "Enhanced Gas Conditioning."

It would be desirable for lines **9***b* and **48** to be insulated, and for tank **19** to be covered as well with thermal insulation material **45.** This insulating will retain heat in the returned gas (as provided by hot water in umbilical **10**) so as to improve the efficiency of operation of scrubber **24.**

Enhanced Gas Conditioning

Conduit means **51** may be provided with heat exchange means **61.** Such heat exchange means **61** may comprise metallic heat exchanging fins which would serve to provide heat transmitting relationships between ambient water surrounding the enclosure and gas passing from compressor means **31** to supply tank means **32.** Such a heat exchanger would serve to significantly and further reduce the moisture content of gas being supplied to supply tank means **32** and would ensure that this gas, when continuously transmitted through manifold **33** and conduit **43** to diver helmet **1,** would not cause "fogging" of the helmet face piece or produce significant or excessive condensation within the helmet interior.

Further control over moisture removal may be effected by positioning moisture entraining and condensing metallic wool within the interior of supply tank **32.**

In certain instances, and particularly if heat exchanger means **61** is not employed, and if the ambient water is relatively warm, reconditioned gas at an excessive or uncomfortably warm temperature may be transmitted through conduit means **43** to helmet **1.**

In order to offset the problems or discomfort which would be associated with such an excessively warm gas supply, a unique diver operated heat exchanger **61** may be associated with helmet means **1** and/or conduit means **43.**

Such a heat exchanger **62** is shown schematically in FIG. **6.**

As shown in FIG. **6,** heat exchanger **62** comprises a metallic, finned, heat exchanger **63** defining a portion of conduit means **43.** With this arrangement, gas would pass through conduit means **43** and through the interior **64** of finned tube heat exchanger section **63** en route to the interior of helmet **1.**

A sleeve or shroud means **65** having thermal insulating properties (fabricated of plastic, etc.) may be telescopingly mounted on conduit means **43** so as to telescope over fin section **63.** With sleeve **65** shown in the telescoped position of FIG. **6,** fin tube means **63** would be only partially isolated and would perform a heat exchange function. However, when a diver would move sleeve **65** down as shown in FIG. **6,** tube **63** would block direct, heat exchanging or heat conducting relation between the ambient water body and gas flowing to the diver helmet through the metallic fins and tubular body of exchanger **63.** The manipulation of sleeve **65** to expose fin means **63** would permit the ambient water to cool any gas passing through the interior of conduit means **43** which might be uncomfortably warm.

Other heating control may be effected by a three-way valve **47** incorporated in conduit means **10** and connected with a heating coil **47***a* shown in FIG. **1.** Operation of the three-way valve **47** may serve to permit the transmittal of hot water only through conduit **10** or the diversion of a selected portion of heated fluid from conduit **10** through coil **47***a* and then back into the interior of hose **10.**

Coil **47***a* may be positioned in the path of treated gas flowing into or out of carbon dioxide scrubber **24.** In this manner, the gas entering or exiting from scrubber **24** will be heated as it passes over the coil means **47***a* so as to warm the interior of enclosure **7.** Preferably, coil **47***a* will be positioned so as to warm gas within or entering the scrubber **24** so as to optimize scrubber efficiency.

Modification of First Preferred Embodiment

The embodiment described in connection with FIGS. **1–3** has contemplated an arrangement where pump means **21** and **31** as well as return tank means **19,** supply tank means **32** and oxygen supply **29,** and sensing means **26** would be mounted directly on the enclosure **7** so as to be submergible, in nature although remote from the diver in helmet **1.**

All this notwithstanding, it is believed that the invention may be effectively practiced with tank means **19** and **32,** as well as pump means **21** and **31** and oxygen supply means **29** located on the service vessel. When this sort of an arrangement would be employed, the conduit means **48, 49, 50, 51, 52** and **9***a* (shown in FIG. **4**) and oxygen supplying conduit means **60** would be at least partially flexible in nature and extend between the enclosure **7** and the location of these remote components on a service vessel. These conduit means may comprise another "umbilical" package, possibly integrated with umbilical means **37** and/or umbilical means **44***a* (extending from hot water source **44** to enclosure **7**).

As will also be apparent, other modifications of the FIGS. **1–3** system are feasible, including a disposition of either of, any one, or less than all of the components **19, 21, 31** and **32** and **29** at a service vessel. As will also be apparent, the basic concept heretofore described may be practiced with variations in valving, manifolding and associated components. It might also be feasi-

ble in certain instances to employ gas reconditioning means other than that described and to position such equipment on the service vessel rather than in the enclosure. In other words, moisture conditioning, carbon dioxide scrubbing, heating, oxygen replenishment, etc., may be effected at least in part at a floating service vessel as well as in the vicinity of enclosure 7.

Representative Components

In describing the first embodiment of the invention, certain components have been described in relation to the application drawings. The application drawings also show several conventional components in addition to those described, the function and location of which are apparent from the drawings.

Certain representative "off the shelf" valve, pump, and sensing components which may be employed in the novel system of the present invention are as follows:

Item Reference Number	Item, Manufacturer, Address and Model
1 2 3 4	Helmet Helium Beckman Instrument Company Oceanic Equipment Activity 2500 Harbor Boulevard Fullerton, California 92634 OR General Acquadyne 333 East Haley Street Santa Barbara, California 93101
5	Safety Shutoff Valve Tian Engineering, 630 Nectarine Street, Inglewood, California 90301
6	Back Pressure Regulator Valve Tian Engineering, 630 nectarine Street, Inglewood, California 90301
9	Return Gas Manifold Valves Hoke, Inc., Tenakill Park, Cresskill, New Jersey, No. 2112
14	Three-way Ball Valve (switching service) - 45XF8 Whitey Company 5679 Lendregan Street Oakland, California 94608
16	Return Relief Valve, 5159B-6PP-60PSIG Circle Seal Products Co., P.O. Box 3666 Anaheim, California 92803
17	Return Silencer, 152-M Johnson Service Co., 3866 Fratney St., Milwaukee, Wisconsin 53212
18	Valve — ¾" Hoke, Inc., Tenakill Park, Cresskill, New Jersey, No. 2112
21	Depressor Pump, Rotary Model, 1550-P139B Gast Manufacturing Corp., 515 Washington Ave., Carlstadt, New Jersey 07072
22	Compressor-Depressor Enclosure (Taylor design) - Allen Starr Co., 368 Iris Avenue New Orleans, Louisiana 70121
23	Silencer, UR-1 Universal Silencer Corp., Libertyville, Illinois
26	Sensing Element, 323 DF Teledyne Analytical Instrument Co., 333 W. Mission Drive San Gabriel, California 91776
27	Oxygen Monitor Teledyne Analytical Instrument Co. 333 W. Mission Drive, San Gabriel, California 91776
28	Solenoid Valve, X52HDB21502-VS9 Skinner Electric Valve Division New Britain, Connecticut
30	Supply Silencer Johnson Service Co., 3866 Fratney St., Milwaukee, Wisconsin 53212
31	Compressor Pump Gast Manufacturing Corp., 515 Washington Ave., Carlstadt, New Jersey 07072
38	Surface Valve Hoke, Inc., Tenakill Park, Cresskill, New Jersey
38a	Regulator 26-111-2B2-076 TESCOM Corporation 6118 Waytata Boulevard Minneapolis, Minnesota 55414
40	Silencer, 152-M Johnson Service Co., 3866 Fratney St., Milwaukee, Wisconsin 53212
41	Supply Relief Valve, 5159B-6PP-60PSIG Circle Seal Products Co., P.O. Box 3666 Anaheim, California 92803
47	Hot Water Coil Mixing Valve Honeywell, Inc., 1100 Virginia Drive Fort Washington, Pennsylvania 19034
48	Pressure Equalization Valve Hoke, Inc., Tanakill Park, Cresskill, New Jersey
55a	Valve-Type A-36 with SR5 handle Jamesbury Corporation 640 Lincoln Street Worcester, Massachusetts

The structural and functional nature of these listed components and other components more fully illustrated is believed to be evident from the overall disclosure and the foregoing discussion.

Second Preferred Embodiment

A second embodiment by means of which certain significant facets of the invention may be practiced is schematically illustrated in FIG. 5.

Where feasible, and where components of the second embodiment generally correspond to components of the first embodiment, common reference numerals have been employed.

The second embodiment arrangement lacks certain of the dual, partially overlapping loop aspects of the first preferred embodiment. In this second embodiment, the return tank, supply tank, compressor and depressor pump means, and oxygen-helium replenishment means are located at a service vessel.

Thus, as shown in FIG. 5, the second embodiment is characterized by the following arrangement.

In this embodiment, a helmet 1 on the diver protects and insulates his head, improves communication, and preserves his "bubble" of breathing gas. This helmet 1 is equipped with a check valve 2 and throttling valve 3 on the breathing gas being supplied to the helmet 1 and with a safety shutoff valve 5, a "chin button" exhaust valve 4 and backpressure regulating valve 6 on the exhaust side of the helmet 1.

The supply hose 43 and exhaust hose 8 are connected to the reconstituting equipment as follows:

The exhaust hose 8 is connected to an automatic water separator 12 and a return gas manifold 9 within the diving bell 7. The function of this automatic water separator is to catch water which might flow through the exhaust hose 8 from the diver. The return gas manifold 9 is connected via flexible return hose 101 to a return tank 19 on the surface located service vessel. Tank 19 is fitted with a metallic wool demister, oxygen sensing element 26, and oxygen inlet connection 102.

Using the depth of the dive, i.e. depth of bell 7 and diver, as reference, the function of the return tank 19 is to create a reservoir of breathing gas at a pressure less than reference so as to cause the diver's exhaust, which is substantially at reference, to flow through the return hose 101 and to absorb pulsations caused by the depressor pump 21.

The oxygen monitor 27 is a commercially purchased device which is equipped with high and low limits switches. These switches operate a solenoid valve means 103, preferably redundant in nature like valve means 28, and which is connected to a regulated oxy-

gen supply **104.** Oxygen is admitted when the "low" switch closed and not admitted when the "high" switch opens. The oxygen is added at this point to promote good mixing.

Downstream of the return tank **19** is a relief valve **105,** which allows the gas from the compressor-depressor pump means enclosure **106** to enter the system, relieving the load on the depressor pump **21.**

The return tank **19,** through enclosure **106,** is connected to dual CO_2 scrubbers **107** which are located downstream of the enclosure **106.**

The dual CO_2 scrubbers **107** permit the absorbent to be changed at any time without interrupting the flow since one scrubber may be used while the other is being serviced.

Two pumps **21** and **31** within the compressor-depressor enclosure **106** feed the dual CO_2 scrubbers **107.** These pumps are called compressor means **31** and depressor means **21.** If the diving depth is used as a reference, the compressor-depressor means **31–21** depressurizes the gas in the return hose **101** by creating a pressure less than reference and then delivers this gas to the compressor-depressor enclosure **106** through a silencer **108.** The compressor pump **31** draws gas from the compressor-depressor enclosure **21** through a silencer **109** and delivers it through treater **107** into a supply tank **32.** The purpose of tank **32** is to absorb pulsations from the compressor pump **31** and provide a reservoir of gas at a pressure above reference so as to cause the breathing gas to flow to the diver(s).

This reservoir **32** also acts as a "come home" supply in the event of equipment failure.

A relief valve **110** is placed ahead of the supply tank **32** in enclosure **106,** allowing excess pressure in the outlet side of the compressor to enter the compressor-depressor enclosure **106,** thereby promoting circulation in the process. The compressor-depressor **31-21** operates at a relatively constant load through the use of the relief valves **105** and **110.**

The gas returns to the diving bell **7** via breathing gas umbilical **111** to a supply manifold **112** and, thence, to the diver helmet **1.**

This supply manifold **112** is connected to an emergency self-contained breathing gas supply **36** located on the diving enclosure **7** and also to surface supply **36***a*. Gas sampling is taken downstream of the dual CO_2 scrubbers for both O_2 and CO_2.

A gas temperature controller **58** (cooler) may be incorporated in the surface system between scrubber **107** and supply tank **32** as shown in FIG. **5.**

Means **38***a*, **39, 40** and **55***a* heretofore described may be employed to regulate the level of water and/or pressure in the enclosure **7.**

With the second embodiment, divers in enclosure **7** must ordinarily use face masks connected with manifold **112** to receive breathable gas. However, a CO_2 scrubber **24** (not shown) will be employed in the enclosure **7** to continuously circulate and treat gas so as to avoid a carbon dioxide "build up."

Desirably, the pressure in enclosure **106** will equal the pressure in enclosure **7.** This is accomplished by a regulating valve **202** which controls flow between source **36***a* and enclosure **106** via a conduit means **203.** Regulator **202** monitors the pressure in enclosure **7** via conduit means **200** and in response to this monitoring insures proper flow through conduit means **203** to effect this equalization. Regulator **38***a* would automatically vent any excess pressure in enclosure **106** via conduit **203** which communicates with this regulator **38***a*.

In this connection, it will be realized that the settling of regulator **38***a* will be determinative of the presure in enclosure **7** in either the FIG. **1** or FIG. **5** embodiment, so long as valves **38** and **55** are open which they ordinarily would be. In the FIG. **1** embodiment, relief valve **41** will be set at the desired enclosure pressure level while in the FIG. **5** embodiment relief valve **39** will be set at the desired enclosure pressure level.

In this embodiment the "off the shelf" items, similar to those previously identified, may be employed.

SUMMARY OF OVERALL MODE OF OPERATION OF SYSTEMS

In either of the two embodiments described heretofore, the underwater enclosure **7** is operable to permit diver ingress and/or egress. The helmet **1** is operable to provide a continuously circulating breathable atmosphere for a diver at a submerged location. The umbilical means **10-43-8** extends between the underwater enclosure **7** and this helmet means **1.**

A flow of breathable gas is continuously circulated from the enclosure **7** through supply conduit means **43** to the interior of the helmet and from the interior of this helmet back through the return conduit means **8** to the enclosure **7.** The continuous flow of gas returning from helmet **1** through return conduit means **8** is caused to be transmitted to the return tank means **19** (due to the lower pressure in this tank), with the tank means **19** being located remote from the diver wearing the helmet means **1.**

In general, it is contemplated that the return gas will be treated so as to effect a removal of moisture in or en route to the return tank means.

Gas from the return tank means **19** is removed by operation of the depressor pump means **21.** The depressor pump means **21** is operable to maintain the relatively low pressure level in the return tank means **19** which serves to promote a continuous flow of gas from the helmet means **1** through conduit means **8.**

Gas is transmitted from the depressor pump means **21** to compressor pump means **31,** with each of these pump means being located remote from the diver.

Gas is transmitted from compressor pump means **31** to supply tank means **32,** with compressor means **31** serving to pressurize gas in the supply tank means **32** to a relatively higher level than that existing in tank means **19** or within the interior of enclosure **7.** Gas is transmitted from the supply tank means **32** through supply conduit means **43** to the interior of helmet means **1.** During this transmission the relatively higher pressure in supply tank means **32** is operable to induce and sustain a continuous flow of gas from the supply tank means **32** through supply conduit means **43** to the interior of helmet means **1.**

Generally at the location of the helmet means **1,** the rate of continuous flow of gas passing from the supply conduit means **43** through the interior of the helmet means **1** and into the return conduit means **8** is regulated. A supply of breathable gas, operable to be transmitted to the helmet means through the supply conduit means independent of gas flowing from the supply conduit means, is provided at a surface location.

At a location remote from the diver wearing the helmet, gas reconditioning means is provided. This gas reconditioning means is operable to receive gas from at least one of the compressor means **31** or depressor

means **21**, remove carbon dioxide at least in part from this gas, and transmit the gas with carbon dioxide removed at least in part therefrom to the supply tank means **32**.

The continuous flow of gas from the supply conduit means into the interior of the helmet means **1** and back into the return conduit means is operable to provide a continuous flow of breathable gas passing across the face of a diver positioned within the helmet means. This continuous flow of gas is operable to generally displace from the vicinity of the diver's face gas which is exhaled by the diver and induce this displaced exhaled gas to flow out of the helmet means back into return conduit means for return to the enclosure **7**.

In either embodiment, the manifolding means **33** is operable to concurrently or independently receive breathable gas from any of three independent sources, namely: the supply tank means **32**, the surface supply means **36***a*, and the emergency supply **36** carried by the enclosure **7**. In the first embodiment the manifold means is operable to concurrently circulate the selected supply of gas (or combinations thereof) through the interior of the enclosure **7** and into the supply conduit means **43** for transmittal to the diver's helmet.

Optimum advantages of the invention are realized where the gas is treated not only to remove carbon dioxide and supply additional amounts of breathable oxygen and helium (or other desired constituents or breathable gas means) but attain desired thermal and moisture conditions as well. The use of the diver controlled heat exchanger **62** provides unique thermal regulation at the location of the diver under his immediate control without encumbering the diver or his operations.

The utilization of separate enclosure means (either **22** or **106**) to isolate the compressor-depressor means from the enclosure provides a significant and advantageous reduction in sound in the enclosure itself. Further sound attenuation will be achieved through the use of sound insulation in the interior of enclosure **22** as shown in FIG. **1** and through the use of vibration isolating mounting means for the compressor and depressor means.

While the system has been described in connection with the operation of a single diver with his helmet, it is contemplated that the capacity of the system would permit at least two and possibly more divers to be operating concurrently in separate helmets outside of the enclosure.

The ability in either embodiment to transmit gas directly into the interior of the enclosure so as to control water level in the enclosure base concurrently provides control over this water level and an assured supply of emergency gas for the enclosure.

SUMMARY OF MAJOR ADVANTAGES AND OVERALL SCOPE OF INVENTION

A particularly significant advantage of the invention results from the unique integration of the submerged enclosure and remote helmet with a closed loop, non-demand, continuous, or free-flow circulation system as heretofore described. This arrangement affords optimum diver flexibility and minimizes or eliminates diver respiratory fatigue and operational problems commonly encountered in connection with demand-type or constant mass flow rate or semi-closed type systems.

These overall advantages enable a diver to remain operational for longer periods of time than would heretofore have normally been possible.

By blending oxygen in large capacity reservoirs, the problems encountered in prior art, small capacity reservoirs in relation to oxygen imbalance have been substantially eliminated. Minor deviations in the rate of oxygen flow will not have the critical adverse effect encountered in prior art small capacity systems. It is also believed that the oxygen feeding concept as disclosed in the context of the overall invention will tend to maintain a steadier oxygen level in the overall system.

The relatively large capacity of the normally rigid tank means **19** and **32** in relation to the helmet means **1** and the conduits **8** and **43**, tends to eliminate flow or pressure pulses in the system, or at least reduce such pulses so as to promote a steadier overall continuous gas flow to and from the diver.

The ability to use the surface supply of gas to regulate the liquid level **7***a* in the diving enclosure **7** (or other enclosure) provides a significant control over diving operations. In certain instances, it would be possible to employ a water level sensing mechanism in diving enclosure inlet **701** so as to automate the operation of valve means **38** and **39** and thereby automatically regulate the level **7***a*.

The continuous sweep of breathable gas through helmet **1** from conduit means **43** into conduit means **8** eliminates or minimizes adverse accumulations of carbon dioxide in the helmet and significantly eliminates or reduces diver respiratory fatigue in that the circulation of gas is not contingent upon a diver breathing effort.

In this connection, it is believed that a free or continuous volume flow rate of gas through helmet **1** of at least 4.5 cubic feet per minute (independent of depth) should be maintained and that rates up to about 6 cubic feet per minute might be desirable. Certain changes may need to be made in gas composition to maintain the requisite partial oxygen pressure conditions as diver depths vary.

The diver umbilical means **10** in combination with the "come home" supply of gas contained in relatively large reservoir **32** significantly improves diver safety in providing both a mechanical "life line" and breathable gas link between a diver and his associated enclosure.

Regulator **6**, intending to maintain a requisite pressure condition within the interior of helmet **1**, will perform an additional safety function in the event of a severance of line **8**. Should this line sever, the pressure differential regulating function of item **6** will inherently cause it to close so as to tend to preserve the pressure in helmet **1**, and thus close the helmet on the outlet side.

Safety valve **5** will provide "backup" protection, augmenting that provided by regulator **6**, in the event of a severance of hose **8**. In the event of such a severance, regulator **6** should automatically close. However, should it fail to close, safety valve **5**, being closable in response to an excessive flow rate therethrough would automatically close. Valve structures of this nature are now known and commercially available.

It is believed that where divers are operating at depths greater than about 600 feet the first embodiment would be most advantageous. For lesser depths, the unit described in connection with the second embodiment may well suffice as would those modifications of the first embodiment where return tanks, pump

means, etc. might be located in whole or in part at a surface location.

This system does not employ breathing bags, oral nasal and face masks, demand regulators, or check valves that are operated by a diver's inhalation or exhalation. Breathing bags are position sensitive and help or hinder breathing by the wearer, depending on his position. A diver must assume many different positions, therefore, such bags are unsuitable for a diver who must work long periods in less than the optimum position. Oral nasal masks tend to cause communication problems.

Face masks are the frequent cause of aborted dives because they leak, and when they are tight enough to seal, are uncomfortable. Custom fitted or fluid fill face masks leave much to be desired by a diver who must work long periods. Demand regulators, when operating properly, admit gas when a slight negative pressure is created by the inhalation of the diver. Exhalation can require a similar effort. This breathing resistance causes fatigue of the diver's diaphragm and chest muscles. Eventually, the body will not accept the effort and involuntary reduction of breathing occurs. Accumulated carbon dioxide eventually occurs and death results.

The system of the present invention incorporates the desired advantages of the various underwater breathing methods and eliminates problems of the type heretofore noted.

By recycling the breathing gas, almost all of a given initial supply is preserved. Helium is a major constituent of currently used breathing gas mixtures, and this element is both limited and expensive. Conserving this gas is highly desirable, of course, and substantial economies can be realized through this invention in the purchase and logistics of same.

Using an underwater enclosure assures a safe and relatively comfortable place from which the divers can operate. It also houses the necessary valving, machinery, and emergency supplies of the system. Retrofitting of existing enclosures is thus not only possible but economically desirable.

Not being a demand system, the present system is such that no breathing resistance must be overcome. Lung fatigue or, more accurately, fatigue of the diaphragm and chest muscles due to the system cannot occur. This is especially important in deep work where the gas density is high.

The diver's umbilical, consisting of a communications cable, supply, return, and hot water hoses, is nearly neutral in buoyancy and is as strong as a life line eliminating the need for that item. Bulk is therefore minimal. With this system, the working diver is warm, is not encumbered, and not limited by breathing cold, highly conductive gas(es). Heating the diver and his inspired gas prevents the loss of body warmth and precludes lung congestion and its associated breathing problems.

The volume of gas flowing through the diver's helmet insures that any carbon dioxide exhaled by the diver will be swept into the return hose. An adequate amount of breathing gas is always present and several redundant supplies are available. The supply tank functions as a "come home" supply, if the system should cease operating. If this occurred, the diver would use the open circuit method. His helmet is equipped to do this, drawing upon supplies on the surface. If the umbilical to the surface supply should become severed, emergency supplies integral with the enclosure could be used.

The large volume and induced circulation of breathing gas within the enclosure make the replenishment of oxygen noncritical which is highly desirable. Since only carbon dioxide is absorbed by the scrubber, the volumes of other gases which pass through do not effect its performance.

The circulation loop that is established by the compressor and depressor pumps could be directed through a separate carbon dioxide scrubber. Alternatively, a separate carbon dioxide scrubber with an electric driven blower could be used as a standby device.

Since gas, humid at reference pressure, is being drawn from the enclosure and discharged into the diver's helmet, it can be expected that dehumidification will occur on the diver's cold faceplate. This is eliminated by the fintube exchanger and the supply tank, both of which are exposed to sea water. This cools the gas from the compressor before it enters the supply tank. The dew point of the breathing gas is thus lowered and will not be further lowered when the breathing gas enters the diver's helmet at a reduced pressure.

The means of controlling the temperature of the inspired gas delivered to the diver's helmet is the uniquely simple and easy to operate fintube exchanger, over which a nonconductive sleeve has been attached. The sleeve is adjustable by the diver so that varying amounts of the fintube are exposed to the cold sea water. The sleeve may be held in position by a ball bearing detent located on one end of the assembly.

The invention has been described with reference to use in connection with a diving bell 7 which may be of the type disclosed in U.S. Pat. No. 3,323,312 to Banjavich. The invention, of course, may be practiced in connection with a variety of submersible enclosures including habitat structures of the type featured in U.S. Banjavich et al. application Ser. No. 841,777, filed Aug. 19, 1971, now pending and assigned to the assignee of the present application. The entire disclosures of Banjavich U.S. Pat. No. 3,323,312 and the aforesaid pending Banjavich et al application Ser. No. 841,777, insofar as they are exemplary of the context of the present invention, are incorporated herein by reference.

In describing the invention, reference has been made to a preferred embodiment and various modifications in these embodiments have been postulated. Those skilled in the diving art and familiar with the disclosure of this invention may well envision other additions, deletions, substitutions, modifications or changes which would also fall within the scope of the invention as defined in the appended claims.

What is claimed is:

1. A method of conducting underwater diving operations, said method comprising:

providing underwater enclosure means operable to permit diver ingress and egress;

providing helmet means operable to provide a breathable atmosphere for a diver at a submerged location;

providing flexible conduit means extending at least between said underwater enclosure means and said helmet means and including supply conduit means and return conduit means;

continuously circulating a flow of breathable gas from said underwater enclosure means through said supply conduit means to the interior of said helmet means and from the interior of said helmet

means back through said return conduit means to said enclosure means;

causing the continuous flow of gas passing from said helmet means through said return conduit means to be transmitted to return tank means located remote from a diver wearing said helmet means;

removing gas from said return tank means by operation of depressor means, with said depressor means being operable to maintain a relatively low pressure in said return tank means to promote a continuous flow of gas from said helmet means through said return conduit means and to said return tank means;

transmitting gas from said depressor means to compressor means at a location remote from said diver;

transmitting gas from said compressor means to supply tank means, with said compressor means being operable to pressurize gas in said supply tank means to a relatively higher pressure level;

transmitting gas from said supply tank means through said supply conduit means continuously to the interior of said helmet means, with said relatively higher pressure in said supply tank means being operable to induce and sustain a continuous flow of gas from

said supply tank means through said supply conduit means to the interior of said helmet means;

independent of diver breathing effort, regulating the rate of continuous flow of gas from said supply conduit means through the interior of said helmet means and into said return conduit means, including

passing said continuous flow of gas continuously through check valve means in said supply conduit means generally adjacent said helmet means,

passing said continuous flow of gas continuously through flow throttling means, located generally adjacent said helment means,

passing said continuous flow of gas continuously through said helmet means, with said continuous flow of gas circulating continuously through said helmet means and continuously removing carbon dioxide therefrom, and

passing said continuous flow of gas from said helmet means continuously into said return conduit means while

maintaining a back pressure on said continuous flow of gas downstream of said helmet means and maintaining a positive pressure in said helmet means relative to the ambient water pressure surrounding said helmet means, and

providing means in said return conduit means continuously operable to close said return conduit means generally adjacent said helmet means in the event of a rupture in said return conduit means remote from said helmet means;

at a location remote from said diver, providing gas recoditioning means operable to receive gas from at least one of said compressor or depressor means,

utilizing said gas reconditioning means, removing at least in part carbon dioxide therefrom, and transmitting said gas with said carbon dioxide removed at least in part therefrom to said supply tank means;

said continuous flow of gas from said supply conduit means through the interior of said helmet means and into said return conduit means being operable to provide a free and continuous flow of breathable gas operable to generally displace, from the vicinity of said diver's face, gas exhaled by said diver and induce said displaced exhaled gas to flow out of said helmet means and into said return conduit means.

2. A method as described in claim **1** comprising:

reducing the transmission of pulses, generated by said compressor means and said depressor means to said helmet means, by interposing said supply tank means between said compressor means and said helmet means and interposing said return tank means between said depressor means and said helmet means.

3. Apparatus for conducting underwater diving operations, said apparatus comprising:

underwater enclosure means operable to permit diver ingress and egress;

helment means operable to provide a breathable atmosphere for a diver at a submerged location;

flexible conduit means extending at least between said underwater enclosure means and said helmet means and including supply conduit means and return conduit means;

means for continuously circulating a flow of breathable gas from said underwater enclosure means through said supply conduit means to the interior of said helmet means and from the interior of said helmet means back through said return conduit means to said enclosure means;

return tank means remote from said diver;

means for causing the continuous flow of gas passing from said helmet means through said return conduit means to be transmitted to said return tank means;

depressor means for removing gas from said return tank means, said depressor means being operable to maintain a relatively low pressure in said return tank means tending to promote a continuous flow of gas from said helmet means through said return conduit means and to said return tank means;

compressor means remote from said diver;

means for transmitting gas from said depressor means to said compressor means;

supply tank means remote from said diver;

means for transmitting gas from said compressor means to said supply tank means, with said compressor means being operable to pressurize gas in said supply tank means to a relatively higher pressure level;

means for transmitting gas from said supply tank means through said supply conduit means continuously to the interior of said helmet means, with said relatively higher pressure in said supply tank means being operable to induce and sustain a continuous flow of gas from said supply tank means through said supply conduit means to the interior of said helmet means;

means operable independent of diver breathing effort to regulate the rate of continuous flow of gas from said supply conduit means through the interior of said helmet means and into said return conduit means, including

check valve means in said supply conduit means generally adjacent said helmet means and operable to continuously pass said continuous flow there-through,

flow throttling means, located generally adjacent said helmet means, and operable to continuously

pass said continuous flow therethrough,

said continuous flow of gas being operable to pass continuously through said helmet means, with said continuous flow of gas circulating continuously through said helmet means and continuously removing carbon dioxide therefrom, and

means operable to pass said continuous flow of gas from said helmet means continuously into said return conduit means including

back pressure regulator valve means located generally adjacent said helment means and operable to maintain a back pressure on said continuous flow of gas downstream of said helmet means and a positive pressure in said helmet means relative to the ambient water pressure surrounding said helmet means, and

flow shut-off means located generally adjacent said helmet means and continuously operable to close said return conduit means generally adjacent said helmet means in the event of a rupture in said return conduit means remote from said helmet means;

gas reconditioning means located remote from said diver and operable to receive gas from at least one of said compressor or depressor means, remove carbon dioxide at least in part therefrom, and transmit said gas with said carbon dioxide removed at least in part therefrom to said supply tank means;

said continuous flow of gas from said supply conduit means through the interior of said helmet means and into said return conduit means being operable to provide a free and continuous flow of breathable gas operable to generally displace, from the vicinity of said diver's face, gas exhaled by said diver and induce said displaced exhaled gas to flow out of said helmet means and into said return conduit means.

4. An apparatus as described in claim **3** comprising:

pressure pulse reducing means including said supply tank means and said return tank means with said supply tank means and return tank means being interposed, respectively, between said helmet means and said compressor means and between said helmet means and said depressor means and operable to reduce the transmission to said helmet means of pulses generated by said compressor means and said depressor means.

5. A method of conducting underwater diving operations, said method comprising:

providing underwater enclosure means operable to permit diver ingress and egress;

providing helmet means operable to provide a breathable atmosphere for a diver at a submerged location;

providing flexible conduit means extending at least between said underwater enclosure means and said helmet means and including supply conduit means and return conduit means;

continuously circulating a flow of breathable gas from said underwater enclosure means through said supply conduit means to the interior of said helmet means and from the interior of said helmet means back through said return conduit means to said enclosure means;

causing the continuous flow of gas passing from said helmet means through said return conduit means to be transmitted to water separator means mounted within the interior of said underwater enclosure means for removing moisture from the continuous flow of gas returning from said helmet means;

causing the continuous flow of gas from said water separator means to be transmitted to return tank means connected to the exterior surface of said underwater enclosure means wherein ambient water surrounds said return tank means to lower the temperature of the gas within said return tank means and thus induce condensation of moisture out of the gas within the return tank means;

removing gas from said return tank means by operation of depressor means, with said depressor means being operable to maintain a relatively low pressure in said return tank means tending to promote a continuous flow of gas from

said helmet means through said return conduit means and to said return tank means;

transmitting gas from said depressor means to compressor means at a location remote from said diver;

transmitting gas from said compressor means to heat exchange means mounted exteriorly of said underwater enclosure means for cooling the gas exiting from said compressor means with the ambient water;

transmitting gas from said heat exchange means to supply tank means connected to the exterior surface of said underwater enclosure means with said compressor means being operable to pressurize gas in said supply tank means to a relatively higher pressure level and said pressurized gas within said supply tank being cooled approximately to the ambient water temperature and thus induce condensation of moisture out of the gas within the supply tank means;

transmitting gas from said supply tank means through said supply conduit means continuously to the interior of said helmet means, with said relatively higher pressure in said supply tank means being operable to induce and sustain a continuous flow of gas from said supply tank means through said supply conduit means to the interior of said helmet means and with the moisture content of said gas being

reduced sufficiently so as not to condense upon a faceplate of said helmet means at ambient water temperature;

independent of diver breathing effort, regulating the rate of continuous flow of gas from said supply conduit means through the interior of said helmet means and into said return conduit means;

at a location remote from said diver, providing gas reconditioning means operable to receive gas from at least one of said compressor or depressor means;

utilizing said gas reconditioning means, removing at least in part carbon dioxide from at least one of said compressor or depressor means, and transmitting said gas with said carbon dioxide removed at least in part therefrom to said supply tank means;

said continuous flow of gas from said supply conduit means through the interior of said helmet means and into said return conduit means being operable to provide a free and continuous flow of breathable gas operable to generally displace, from the vicinity of said diver's face, gas exhaled by said diver and induce said displaced exhaled gas to flow out of said helmet means and into said return conduit means and

heating the gas within said supply conduit means above the ambient water temperature prior to transmitting the gas into said helmet means to provide a breathable atmosphere for the diver.

6. Apparatus for conducting underwater diving operations, said apparatus comprising:

underwater enclosure means operable to permit diver ingress and egress;

helmet means operable to provide a breathable atmosphere for a diver at a submerged location;

flexible conduit means extending at least between said underwater enclosure means and said helmet means and including supply conduit means and return conduit means;

means for continuously circulating a flow of breathable gas from said underwater enclosure means through said supply conduit means to the interior of said helmet means and from the interior of said helmet means back through said return conduit means to said enclosure means;

water separator means mounted within the interior of said underwater enclosure means;

return tank means connected to the exterior of said underwater enclosure means;

means for causing the continuous flow of gas passing from said helmet means through said return conduit means to be transmitted to said water separator means for removing moisture within the gas and then to said return tank means where ambient water will cool the gas and thus induce condensation within said return tank means;

depressor means for removing gas from said return tank means, said depressor means being operable to maintain a relatively low pressure in said return tank means tending to promote a continuous flow of gas from said helmet means through said return conduit means and to said return tank means;

compressor means remote from said diver;

means for transmitting gas from said depressor means to said compressor means;

supply tank means connected to the exterior of said underwater enclosure means;

means for transmitting gas from said compressor means to said supply tank means including heat exchange means for cooling the gas, with said compressor means being operable to pressurize gas in said supply tank means to a relatively higher pressure level and said heat exchange means being operable to lower the temperature of the pressurized gas with ambient water;

means for transmitting gas from said supply tank means through said supply conduit means continuously to the interior of said helmet means, with said relatively higher pressure in said supply tank means being operable to induce and sustain a continuous flow of gas from said supply tank means through said supply conduit means to the interior of said helmet means and with the moisture within the pressurized gas being reduced sufficiently so as not to condense upon a faceplate of said underwater helmet means at ambient water temperature;

means operable independent of diver breathing effort to regulate the rate of continuous flow of gas from said supply conduit means through the interior of said helmet means and into said return conduit means;

gas reconditioning means located remote from said diver and operable to receive gas from at least one of said compressor or depressor means, remove carbon dioxide at least in part therefrom, and transmit said gas with said carbon dioxide removed at least in part therefrom to said supply tank means;

said continuous flow of gas from said supply conduit means through the interior of said helmet means and into said return conduit means being operable to provide a free and continuous flow of breathable gas operable to generally displace, from the vicinity of said diver's face, gas exhaled by said diver and induce said displaced exhaled gas to flow out of said helmet means and into said return conduit means and

heating means for heating the supply of breathable gas within said supply conduit means above the ambient water temperature prior to transmitting the gas into said helmet means.

7. A method of conducting underwater diving operations, said method comprising:

providing underwater enclosure means operable to permit diver ingress and engress;

providing helmet means operable to provide a breathable atmosphere for a diver at a submerged location;

continuously circulating gas in a first essentially continuous loop comprising;

providing flexible conduit means extending between said underwater enclosure means and said helmet means and including supply conduit means and return conduit means,

continuously circulating a flow of breathable gas from said underwater enclosure means through said supply conduit means to the interior of said helmet means and from the interior of said helmet means back through said return conduit means to said enclosure means,

causing the continuous flow of gas passing from said helmet means through said return conduit means to be transmitted to return tank means located remote from a diver wearing said helmet means,

removing gas from said return tank means by operation of depressor means, with said depressor means being operable to maintain a relatively low pressure in said return tank means tending to promote a continuous flow of gas from said helmet means through said return conduit means and to said return tank means;

transmitting gas from said depressor means into the interior of said underwater enclosure means and from the interior of said underwater enclosure means to compressor means at a location remote from said diver,

transmitting gas from said compressor means to supply tank means, with said compressor means being operable to pressurize gas in said supply tank means to a relatively higher pressure level,

transmitting gas from said supply tank means through said supply conduit means continuously to the interior of said helmet means, with said relatively higher pressure in said supply tank means being operable to induce and sustain a continuous flow of gas from said supply tank means through said supply conduit means to the interior of said helmet means,

continuously circulating gas in a second essentially continuous loop comprising,

continuously circulating gas from within the interior of said underwater enclosure means to said compressor means,

transmitting gas from said compressor means to said supply tank means, and

transmitting gas from said supply tank means into the interior of said underwater enclosure means,

within the interior of said underwater enclosure means, providing gas reconditioning means;

removing at least in part carbon dioxide from gas circulating through said underwater enclosure means with said gas reconditioning means;

providing oxygen supply means operable to supply oxygen to the interior of said underwater enclosure means;

sensing the oxygen content of oxygen in the open interior of said underwater enclosure means and causing said oxygen supply means to supply oxygen to said open interior of said underwater enclosure means in response to said sensing;

said first and second essentially continuous gas circulating loops overlapping and serving to promote complete oxygen mixing and carbon dioxide removal control within the system while supplying a breathable atmosphere to one or more divers within the interior of said underwater enclosure means and to a diver utilizing said helmet means exteriorly of said underwater enclosure means;

heating gas within the interior of said underwater enclosure means to a level at least above the ambient water temperature at said underwater enclosure means; and

heating gas within said supply conduit means to a level at least above the ambient water temperature at said helmet means prior to delivery of the gas into said helmet means.

8. Apparatus for conducting underwater diving operations, said apparatus comprising:

underwater enclosure means operable to permit diver ingress and egress;

helmet means operable to provide a breathable atmosphere for a diver at a submerged location;

a first essentially continuous gas flowpath comprising,

flexible conduit means extending between said underwater enclosure means and said helmet means and including supply conduit means and return conduit means,

means for continuously circulating a flow of breathable gas from said underwater enclosure means through said supply conduit means to the interior of said helmet means and from the interior of said helmet means back through said return conduit means to said enclosure means,

return tank means remote from said diver,

means for causing the continuous flow of gas passing from said helmet means through said return conduit means to be transmitted to said return tank means,

depressor means for removing gas from said return tank means, said depressor means being operable to maintain a relatively low pressure in said return tank means tending to promote a continuous flow of gas from said helmet means through said return conduit means and to said return tank means;

compressor means remote from said diver;

means for transmitting gas from said depressor means to said compressor means;

supply tank means remote from said diver;

means for transmitting gas from said compressor means to said supply tank means, with said compressor means being operable to pressurize gas in said supply tank means to a relatively higher pressure level;

means for transmitting gas from said supply tank means through said supply conduit means continuously to the interior of said helmet means, with said relatively higher pressure in said supply tank means being operable to induce and sustain a continuous flow of gas from said supply tank means through said supply conduit means to the interior of said helmet means;

a second essentially continuous gas flow path comprising,

means for transmitting gas from said underwater enclosure means to said compressor means;

means for transmitting gas from said compressor means to said supply tank means; and

means for transmitting gas from said supply tank means into the interior of said underwater enclosure means;

gas reconditioning means located within the interior of said underwater enclosure means and being operable for receiving gas from said depressor means to remove carbon dioxide at least in part therefrom, and transmit said gas with said carbon dioxide removed at least in part therefrom into the open interior of said underwater enclosure means;

oxygen supplying means connected to said underwater enclosure means and operable to supply oxygen into the open interior of said underwater enclosure means;

sensing means operable to sense the oxygen content of oxygen in the open interior of said underwater enclosure means and cause said oxygen supply means to supply oxygen to the open interior of said underwater enclosure means in response to operation of said sensing means; and

said first and second essentially continuous gas circulation loops overlapping and serving to promote complete oxygen mixing and carbon dioxide removal control within the system while supplying a breathable atmosphere to one or more divers within the open interior of said underwater enclosure means and to a diver utilizing said helmet means exteriorly of said underwater enclosure means;

heating means connected within the interior of said underwater enclosure means for heating gas within said underwater enclosure means to a level at least above the ambient water temperature at said underwater enclosure means; and

heating means connected to said supply conduit for heating gas within said supply conduit to a level at least above the ambient water temperature at said helmet means prior to delivery of the gas into said helmet means.

* * * * *