

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
31 December 2014 (31.12.2014)



(10) International Publication Number
WO 2014/207689 A8

(51) International Patent Classification:
B62B 7/06 (2006.01) *B62B 9/10* (2006.01)

(21) International Application Number:
PCT/IB2014/062618

(22) International Filing Date:
26 June 2014 (26.06.2014)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
MI2013A 001079 27 June 2013 (27.06.2013) IT

(71) Applicant: PEG PEREGO S.P.A. [IT/IT]; Via Alcide De Gasperi, 50, I-20862 Arcore (MB) (IT).

(72) Inventor: PEREGO, Lucio Clemente; Via Vicinale alle Spazzate, 1, I-20862 Arcore (MB) (IT).

(74) Agent: COSENZA, Simona; c/o BARZANO' & ZANARDO MILANO S.P.A., Via Borgonuovo, 10, I-20121 Milano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) Title: "BOOK-LIKE" FOLDABLE CHILD SEAT AND "BOOK-LIKE" FOLDABLE BABY STROLLER COMPRISING SUCH A CHILD SEAT

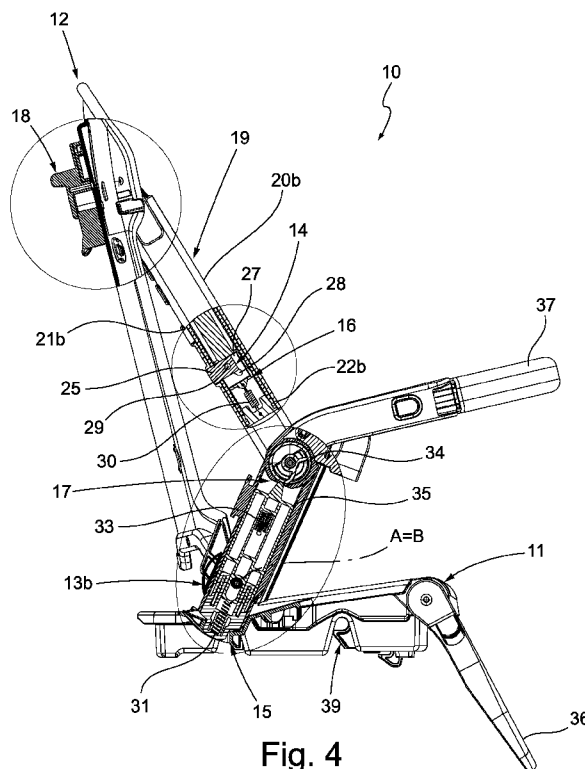


Fig. 4

(57) Abstract: A child seat (10) applicable to frames (100), in particular of the "book-like" foldable type, of baby strollers and comprising a support plane or seat plate (11), a backrest (12) and a pair of armrests (13a, 13b), wherein the backrest (12) is hinged to the seat plate (11) or to the armrests (13a, 13b) rotatably about a first axis (A) and the armrests (13a, 13b) are hinged to the seat plate (11) rotatably about a common second axis (B) parallel or coinciding with the first axis (A), the child seat (10) further comprising first locking means (14) for locking the rotation of the backrest (12) about the first axis (A) relatively to the member of the child seat (10) to which the backrest (12) is hinged, the first locking means (14) being movable between a locking position and an unlocking position of the rotation of the backrest (12) about the first axis (A), second locking means (15) for locking the rotation of the armrests (13a, 13b) about the second axis (B) relatively to the seat plate (11), the second locking means (15) being movable between a locking position and an unlocking position of the rotation of the armrests (13a, 13b) about the second axis (B), a pair of rods (20a, 20b) which articulate to each other the backrest (12) and the armrests (13a, 13b) and each of which has an end hinged to the backrest (12) rotatably about a common third axis (C) parallel to the first and to the second axis (A) and (B), the opposite end hinged to a respective armrest (13a, 13b) rotatably about a common fourth axis (D) parallel to the first and to the second axis (A) and (B) and comprises at least one pair of rod-like elements (21a, 22a; 21b, 22b) which are coupled to each other in an axially slidable manner, wherein the first locking means (14) are defined at the rods (20a, 20b) in order to lock and unlock

[Continued on next page]



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(88) **Date of publication of the international search report:**
19 March 2015

(48) **Date of publication of this corrected version:**
14 May 2015

Published:

— with international search report (Art. 21(3))

(15) **Information about Correction:**
see Notice of 14 May 2015

the relative sliding of the respective rod-like elements (21a, 22a; 21b, 22b) and, thus, in order to respectively prevent and allow the relative rotation between the backrest (12) and the armrests (13a, 13b), and the second locking means (15) are defined between the armrests (13a, 13b) and the seat plate (11), wherein the seat plate (11), the backrest (12) and the armrests (13a, 13b) are articulated to each other in a "book-like" manner moveably between at least one open position of the seat (10), wherein the backrest (12) and the armrests (13a, 13b) are in raised position with respect to the seat plate (11), and, when the first locking means (14) and the second locking means (15) are in the respective unlocking position, a closed position of the seat (10), wherein the backrest (12) and the armrests (13a, 13b) are rotated forward one on the others in lowered position and abutted on the seat plate (11).