


L. G. Heylin Compartment Cane

No 82949.

Patented Oct 13, 1868

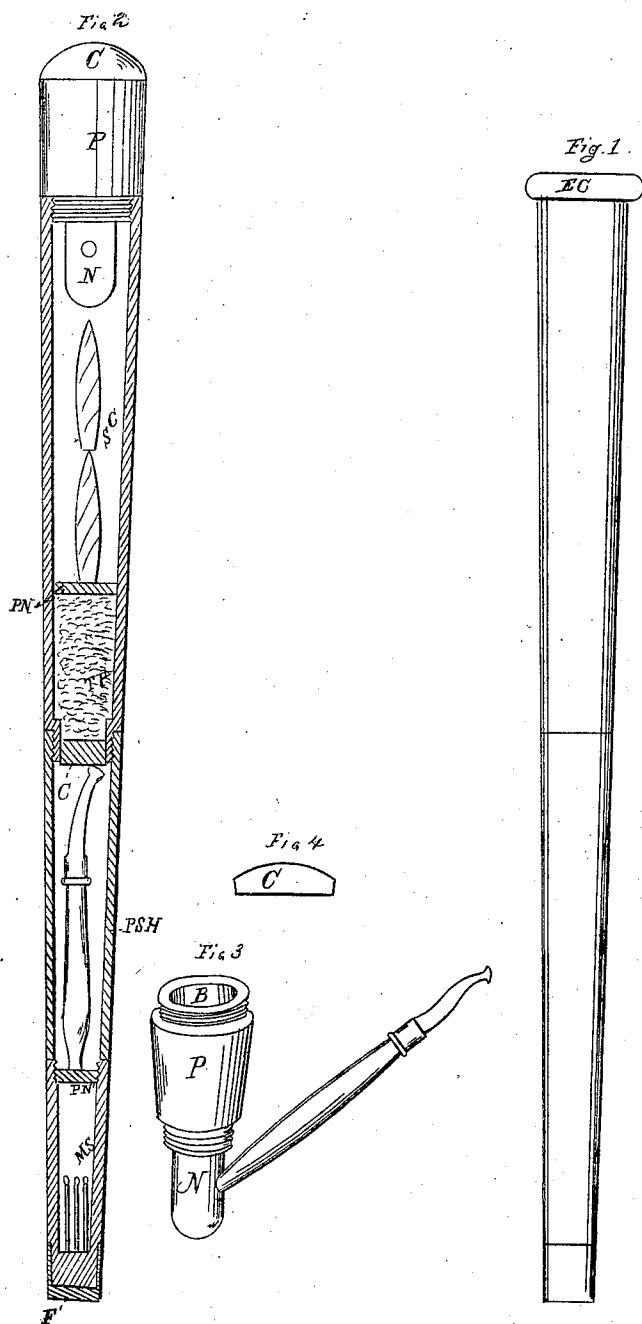

Witnesses { *Charles H. Evans*
Henry Kelling

L. G. Heylin } Inventor

United States Patent Office.

LUCIUS C. HEYLIN, OF PHILADELPHIA, PENNSYLVANIA.

Letters Patent No. 82,949, dated October 13, 1868.

IMPROVEMENT IN COMPARTMENT-CANES.

The Schedule referred to in these Letters Patent and making part of the same.

To all whom it may concern:

Be it known that I, LUCIUS C. HEYLIN, of the city of Philadelphia, county of Philadelphia, and State of Pennsylvania, have invented a new and improved "Combination-Cane;" and I do hereby declare that the following is a full, clear, and exact description of the construction and operation of the same, reference being had to the accompanying drawings, making a part of this specification, in which—

Figure 1 is a perspective view of my cane.

Figure 2 is a vertical section of same, showing the different compartments.

Figures 3 and 4 are views showing the pipe and cap detached from the cane.

The object of my invention is to provide a cane with different compartments, to act as a receptacle for matches, smoking-tobacco, cigars, pipe, and stem.

To enable others skilled in the art to make and use my invention I will now proceed to describe its construction and operation.

I make my cane hollow, and in seven different parts, which I will style as follows: First, cap C; second, pipe P; third and fourth, (although inseparable,) cigar-case S C, and tobacco-pouch T P; fifth, pipe-stem holder P S H; sixth, match-safe M S; seventh, extra cap E C for head of cane when pipe P is in use.

Pipe P is a pipe of ordinary construction, the bowl B of said pipe being coated on the inside with a plaster to prevent its burning out. On the lower part of the bowl is a chamber, N, for inserting the pipe-stem, and also acting as a plug. On the upper and lower parts of

the bowl B is cut a thread corresponding with cap C and cigar-case S C. Parts S C and T P are secured together by a tight-fitting joint, with a partition, P N, between, the lower end of T P being provided with a thread corresponding with part P S H, in which it screws. The opening on the end of T P, which connects with P S H, is closed by a cork, C, so as to prevent the smoking-tobacco from entering chamber P S H. On the lower end of part P S H is cut a thread corresponding with thread in M S, in which it screws, the opening in part P S H, which connects with M S, being closed by means of a plug or partition, P N. Lower part of M S is provided with a ferrule, F.

In removing the pipe P from the cane, extra cap E C is screwed on to act as a head.

Having thus described my invention, its construction and operation,

What I claim, and desire to secure by Letters Patent of the United States, is—

A cane arranged as herein described, whereby one portion thereof is adapted to be used as a pipe, the handle of which is contained in a compartment formed in the same, and other portions of the body of the cane being provided with receptacles for cigars, tobacco, and matches, the whole constructed as herein described.

L. C. HEYLIN.

Witnesses:

CHARLES H. EVANS,
HENRY ROELLIG.