



## (51) International Patent Classification:

*G01V 8/10* (2006.01)      *G06T 7/60* (2006.01)  
*B60R 21/0134* (2006.01)    *H04N 7/18* (2006.01)  
*G06T 7/20* (2006.01)

## (21) International Application Number:

PCT/CA2012/000057

## (22) International Filing Date:

20 January 2012 (20.01.2012)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

61/478,717      25 April 2011 (25.04.2011)      US

(71) Applicant (for all designated States except US): **MAGNA INTERNATIONAL INC.** [CA/CA]; 337 Magna Drive, Aurora, Ontario L4G 7K1 (CA).

## (72) Inventor; and

(75) Inventor/Applicant (for US only): **GUPTA, Nikhil** [IN/CA]; 62 Bison Run Road, Brampton, Ontario L6R 1R9 (CA).

(74) Agents: **PORAT, Alex** et al.; 337 Magna Drive, Aurora, Ontario L4G 7K1 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

— with international search report (Art. 21(3))

(54) Title: IMAGE PROCESSING METHOD FOR DETECTING OBJECTS USING RELATIVE MOTION

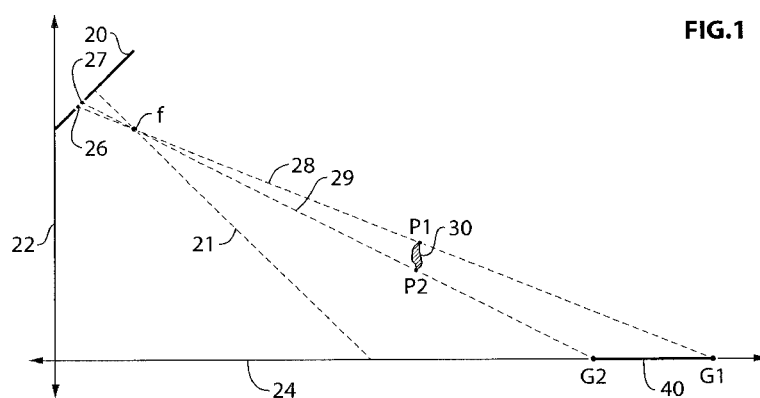


FIG. 1

(57) Abstract: An image based obstacle detection method. A camera mounted on a vehicle provides a set of image frames whilst the vehicle is in motion. The image frames define an image plane having a vertical aspect and a horizontal aspect. The relevancy of an object is determined by (i) selecting first and second feature points from the object that are spaced apart vertically in a first image frame; (ii) tracking the positions of the first and second feature points over at least a second image frame; and (iii) deciding the object to be relevant if the first and second feature points move dissimilar distances in physical space, within a tolerance, and deciding the object to be irrelevant otherwise. The motion of relevant objects is then estimated to determine if any relevant object is likely to become an obstacle to the vehicle.

# IMAGE PROCESSING METHOD FOR DETECTING OBJECTS USING RELATIVE MOTION

## **CROSS-REFERENCE TO RELATED APPLICATIONS**

**[0001]** This application claims priority to United States Provisional Patent Application No. 61/478,717 filed April 25, 2011.

## **Field of Invention**

**[0002]** The invention relates to the field of image processing, and more particularly to a method and system for discerning three-dimensional objects using relative motion between the camera and the objects, and an object detection system based on same.

## **BACKGROUND OF INVENTION**

**[0003]** Many vehicles now incorporate one or more obstacle detection system which use cameras to provide a field of view of the roadway and surrounding environment. The obstacle detection systems process the video stream or sequence of image frames provided by the camera in an attempt to ascertain the existence of an obstacle in the path of vehicle. Obstacle detection algorithms do this by attempting identify a variety of objects localized in one or more predefined regions of interest in the captured field of view, determine whether or not such objects are real, and estimate their path relative to the vehicle to determine whether or not such objects will indeed become obstacles.

**[0004]** The conventional approach to solving such a problem is to develop a series of classifiers and detectors to detect a group of predefined objects. The classifiers work in a cascade or in a parallel fashion to detect image content such as pedestrians, vehicles and geometrically shaped objects such as balls and poles. Such systems may require significant computational resources provided by expensive signal processors. In addition, in such a system, all the objects that need to be detected have to be defined in the development stage and require extensive training for the classifiers. Such a process is expensive and time consuming and might not be generic enough with respect to all possible different objects that might be encountered in the real world.

**SUMMARY OF INVENTION**

**[0005]** In order to overcome some of the above mentioned shortcomings, the invention proposes a more generic approach which does not depend upon the design of specific classifiers. Instead, the invention uses the relative motion between the vehicle and the surrounding environment to identify whether or not detected objects are relevant. This approach uses a single image sensor and can be employed for detecting generic objects.

**[0006]** Generally speaking, the invention utilizes the principle that spaced apart physical points that in reality have a vertical dimension will move at different rates when projected to the image plane provided by the vehicular camera, whereas spaced apart physical points that in reality lie only horizontally along the ground plane will move at the same rate when projected to the image plane. Using this principle the invention is able to rapidly distinguish between three dimensional objects that could be relevant to the obstacle detection analysis and irrelevant two dimensional objects that, for example, may be pavement markings or artifacts such as shadows.

**[0007]** The foregoing principle will be better understood with reference to Figs. 1 and 2. Referring to Fig. 1, the vehicular camera establishes an image plane 20. The camera has a focal point  $f$  through which all light rays pass. Axis 21 is a normal projection to the image plane 20. Axis 22 represents the real vertical plane, and axis 24 represents the ground plane (a horizontal plane corresponding to the roadway). An object lies in the camera field of view. The object has a first point seen by image pixel 26, corresponding to ray 28, and a second point, seen by image pixel 27, corresponding to ray 29. This object may be either a vertical object 30 or a horizontal object 40 (lying along the ground plane 22) because the vertical object 30 has a first point  $P1$  lying along the ray 28 and the horizontal object 40 also has a first point  $G1$  lying along the ray 28, and likewise the vertical object 30 has a second point  $P2$  lying along the ray 29 and the horizontal object 40 also has a second point  $G2$  lying along the ray 29. The camera sees only two vertically spaced points at pixels 26 and 27, so without further information it is not possible for the camera to discern if the rays 28, 29 impinging on pixel 26, 27 come from points lying on the ground or from a vertical object.

**[0008]** However, referring additionally to Fig. 2, if there is relative motion between the object and the image plane additional information can be garnered to be able to differentiate between a vertically oriented object and a horizontally oriented object. Consider again the horizontally oriented object 40 which lies on the ground plane. It has two opposing edge points

that lie at initial positions G1, G2. (To the camera, these two points could also correspond to points P1 and H of vertical object 30.) If the horizontal object 40 moves relative to the camera by a real distance  $d$ , then the edge points will move to positions G1', G2'. With the height and angular orientation of the camera known, it is possible to calculate the distance moved in the ground plane by the end points, i.e., the distance between G1 to G1' and between G2 to G2'. As the object is presumed to be of constant length for at least a short period of time, the distance between G1 and G1' will be  $d$  and the distance between G2 to G2' will also be  $d$ .

**[0009]** Now consider the vertical object 30. It has two opposing edge points that lie at initial positions P1, P2. The point P1, lying along ray 28, projects onto the ground plane at point G1 as previously discussed. Point P2 in this example lies along the ground plane (but it need not). Let the vertical object 30 move relative to the camera by a real distance  $d$ . The top edge point moves from position P1 to position P1', and the bottom edge point moves from position P2 to P2'. Now calculate the distance moved in the ground plane by these end points. P1 projects onto the ground plane at point G1. Point P1' projects onto the ground plane at point X. So, a distance calculation in the ground plane between points P1 and P1' effectively yields a result computing the distance between G1 and X, resulting in a much larger distance  $d++$ . On the other hand, P2 and P2' are located on the ground plane so the distance between them will be computed as  $d$ . The change  $d++$  in the ground plane between P1 and P1' differs considerably from the change  $d$  between P2 and P2', thus enabling a vertical object to be distinguished from an object lying substantially along the ground plane.

**[0010]** The principle holds for distinguishing between an object lying substantially along any selected real horizontal plane and an object lying generally transverse to the selected horizontal plane. Likewise, the principle applies even when the vertical object does not touch the selected real horizontal plane because vertically spaced apart points will move at different rates when projected onto the selected horizontal plane.

**[0011]** In the preferred obstacle detection system described in greater detail below, a vehicular camera is utilized to capture a video stream or sequence of image frames. The image frames are processed by an image processor which executes an obstacle detection algorithm. The preferred system then processes the images to extract edges therein. (An example of a road image 10 and its edge image 12 can be seen in Figs. 3 and 4 respectively.)

**[0012]** The preferred system processes the edge images to identify potential objects preferably within a region of interest (ROI) in the image frame. Objects (obstacles or not) are identified by their boundaries or contours. If an object moves across successive image frames, the edges of such an object will also move and so edge based features are used to identify the location of the objects and are also used to track the objects across frames. However, owing to environmental effects and low contrast, it is possible that the edges of an object are not always isolated from other objects or the general background. In order to make the object localization more reliable, the preferred system examines different features such as color and texture cues, in conjunction with the edges, in order to detect and isolate objects from one another.

**[0013]** The isolated objects could be actual three dimensional objects or they could be two dimensional objects on the ground such as shadows or pavement markings. Using a single monocular image sensor, it can be quite difficult to differentiate one type of object from another. However, if there is relative motion between these objects and the camera, then using the principles outlined above the preferred system can estimate which of the detected objects are above a certain specified height threshold and which detected objects are not (such as markings on the ground). Accordingly, the preferred system examines the motion of at least two different feature points in the edge image of each object across image frames. If there is relative motion between the camera and the object, for the same physical distances traveled, points lying at different physical heights will have different rates of change in the image plane (termed "differential-gradient effect"). Thus, if the selected feature points in the edge image of an isolated object do not have different rates of change, within a tolerance, the preferred system deems that object to be an irrelevant two dimensional object. Similarly, if the selected feature points in the edge image of an isolated object do have different rates of change, within a tolerance, the preferred system deems that object to be relevant and estimates the relative path of that object to determine whether or not it will become an obstacle to the vehicle.

**[0014]** Thus, one aspect of the invention provides a method of obstacle detection. In this method, a vehicle is provisioned with a camera having an external field of view and a set of image frames provided by the camera are acquired whilst the vehicle is in motion. The image frames define an image plane having a vertical aspect and a horizontal aspect. The relevancy of an object is determined by (i) selecting first and second feature points from the object that are spaced apart vertically in a first image frame; (ii) tracking the positions of the first and second feature points over at least a second image frame; and (iii) deciding the object to be relevant if the first and second

feature points move dissimilar distances in physical space, within a tolerance, and deciding the object to be irrelevant otherwise. The motion of relevant objects is then estimated to determine if any relevant object is likely to become an obstacle to the vehicle.

**[0015]** In practice, an edge detection is preferably carried out on the set of images frames and one or more objects are isolated based on their edge contours. The most desirable feature points for tracking across frames are the topmost and bottommost pixel points of any given isolated object as these can be used to estimate the relative physical displacement of the object. For this estimated displacement of the object, by comparing the estimated pixel movement of the topmost detected point of the object with the actual pixel movement of the same point, the object can be determined to be a relevant object.

**[0016]** In addition, in practice, a given pixel is preferably position is de-warped to account for lens distortion prior to determining a physical location corresponding to the given pixel position.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

**[0017]** The foregoing and other aspects of the invention will be better understood with respect to the attached drawings, wherein:

**[0018]** Fig. 1 is a schematic diagram illustrating how vertical and horizontal objects in the real world are viewed by a vehicular camera;

**[0019]** Fig. 2 is a schematic diagram illustrating how the movement of vertical and horizontal objects in the real world are viewed differently by a vehicular camera;

**[0020]** Fig. 3 is a system block diagram of an object detection algorithm according to a preferred embodiment;

**[0021]** Fig. 4 is a flowchart of a software module employed by the object detection algorithm;

**[0022]** Fig. 5 is a graph illustrating derivatives of a exemplary single dimension function;

**[0023]** Fig. 6 is an image frame provided vehicular camera which sees a vertical object and a horizontal object;

- [0024]** Fig. 7 is a edge image of Fig. 6;
- [0025]** Fig. 8 is composite image showing the image of Fig. 6 with associated edge detection contours;
- [0026]** Figs. 9A and 9B are schematic diagrams illustrating the function of a block detection algorithm;
- [0027]** Figs. 10A and 10B are successive image frames provided by a vehicular camera which has moved relative to a object seen by the camera;
- [0028]** Fig. 11A - 11C are schematic diagrams illustrating the operation of an object height detection filter employed by the object detection algorithm; and
- [0029]** Fig. 12 is a flowchart of a software module employed by the object detection algorithm.

### **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

**[0030]** For reference purposes, the following mathematical nomenclature is used in this description. A vector or a matrix is represented in bold face, while a scalar entity is represented in a regular face. The lower case is used to denote the dimensions and pixel locations in two dimensional image space. Thus, the collection of all the pixels in an image can be denoted as  $\mathbf{f}$  and a pixel at column  $x$  and row  $y$  in the image  $\mathbf{f}$  can be represented as  $f(x, y)$ . The coordinates of a point in the three-dimensional world are represented using the upper case. A point on the ground can be represented in its vector form as  $\mathbf{X}$ , or also as  $[X_w, Y_w, Z_w]$ .

**[0031]** Fig. 3 shows a system block diagram of a preferred obstacle detection system 100. The inputs to system 100 include the image frames 102 from the vehicular camera (not explicitly shown) and vehicle CAN (controller area network) data 104 such as the instantaneous speed of the vehicle and its steering angle. In an overall system, knowledge of the vehicle speed allows for the optimization of the tracking of feature points and assessing the priority of the detected obstacles and the steering angle can be used for estimating and predicting the relative trajectory of the detected obstacles. In addition, the system 100 also has or receives information 105 about the camera. This includes intrinsic camera parameters such as its principal or central point, focal length, and lens map and extrinsic parameters such as the position of the camera. The lens map

refers to the characteristic description of the particular lens being used in the system which describes the behavior of the lens and allows for the generation of the output angle of the light given any input incidence angle. In the preferred embodiment the system 100 is operated in conjunction with a dynamic calibration system that is capable of dynamically ascertaining the translation position and rotational angles of the camera in the field so that any deviations in the position of the camera from a nominal position/angle over time are accounted for. The preferred calibration system is described in Applicant's co-pending Patent Application No. \_\_\_\_\_, titled "Method and System for Dynamically Calibrating Vehicular Cameras" and filed contemporaneously herewith, the contents of which are incorporated by reference herein in their entirety.

**[0032]** The system 100 outputs one or more detected objects 106 (if any). The detected objects 106 are output as an array of data structures indicating: object centroid; object bounding box (position and breadth); and an estimated distance from the vehicle.

**[0033]** A differential, gradient-based, segmentation module 110 receives the input information 102 - 105. At an initial stage 112 the module 110 uses the input image frames to hypothesize or postulate the existence of an object by detecting and isolating objects from the background, within a predefined region of interest (ROI). At a subsequent stage 114 the module 110 filters the postulated objects to discern those which have dimensions above a defined height threshold. This is an important practical consideration because most real life objects that pose any threat to the vehicle (or to a pedestrian) have a significant vertical component. This module thus generates initial object hypotheses at output 116 which can be further refined and processed for final output.

**[0034]** The segmentation module 110 is based on a differential gradient based pseudo-stereo effect, which has the following features:

- Points lying on the same vertical axis at different planar heights (in reality) move at different pixel rates in the captured video. This allows for separation of hypothesized objects which lie on the ground plane (or other selected horizontal plane) versus those which are three dimensional in nature and pose a threat to the vehicle.
- Owing to the above principle, this approach allows the detection of even those objects which are stationary around the vehicle if the vehicle itself is moving. This allows for detection of stationary pedestrians or poles or other objects which the vehicle might be driving towards.



- Only relative motion is required between the objects and vehicle.

**[0035]** Referring additionally to Fig. 4, the segmentation module 110 includes the following functional blocks, discussed in turn below: edge feature extraction 110A; feature selection and tracking 110B; physical distance estimation of detected points 110C; and obstacle detection 110D.

**[0036]** The edge detection block 110A uses the contours of objects as a means to segment them from the background image. An object can be assumed to be bound by its contour or its edge, which can be extracted using the gradient operator.

**[0037]** The edge points of an image can be detected by finding the zero crossings of the second derivative of the image intensity. The idea is illustrated for a one dimensional signal  $f(l)$  in Fig. 5. However, calculating the 2<sup>nd</sup> derivative is very sensitive to noise. This noise should be filtered out before edge detection. To achieve this, edge detection block 110A uses the “Laplacian of Gaussian (LoG)” method as known in the art *per se*. This method combines Gaussian filtering with the Laplacian for edge detection.

**[0038]** There are three main steps in Laplacian of Gaussian edge detection: filtering, enhancement, and detection.

**[0039]** Gaussian filtering is used for smoothing and the second derivative of which is used for the enhancement step. The detection criterion is the presence of a zero crossing in the second derivative with a corresponding large peak in the first derivative.

**[0040]** In this approach, noise is first reduced by convoluting the image with a Gaussian filter which removes isolated noise points and small structures. Those pixels, that have locally maximum gradient in the zero crossing of the second derivative, are considered as edges by the edge detector. To avoid detection of insignificant edges, only the zero crossings whose corresponding first derivative is above some threshold, are selected as edge point. The edge direction is obtained using the direction in which zero crossing occurs.

**[0041]** The output of the LoG operator;  $h(x,y)$ ; is obtained by the convolution operation:

$$\begin{aligned} h(x,y) &= \Delta^2 [g(x,y) * f(x,y)] \\ &= [\Delta^2 g(x,y)] * f(x,y) \end{aligned}$$

**[0042]**

**[0043]** where

[0044] 
$$\Delta^2 g(x, y) = \left( \frac{x^2 + y^2 - 2\sigma^2}{\sigma^4} \right)^{-(x^2 + y^2)/2\sigma^2}$$

[0045] where,  $\Delta$  and  $*$  are the gradient and convolution operators, respectively.  $\sigma$  is the standard deviation of the smoothing function  $g()$ ,  $x$  and  $y$  are the location column and the row index, respectively, and  $f(x, y)$  represents the pixel at column  $x$  and row  $y$  in the input image

[0046] Fig. 7 shows an example of an edge image 140 obtained by using the LoG operator on an input image 138 shown in Fig. 6.

[0047] Once the objects have been isolated using their contours, each object or group of objects can be identified by its edge. The feature selection and tracking block 110B assumes that the bottom of the each objects lies on the ground while the top of the object is either on the ground or not, depending if the object is flat or has a three-dimensional shape. Most preferably the top and bottom of each contour are selected as the points of interest in the image frame which need to be investigated to determine if the object is above a certain threshold of height or not. These topmost and bottommost points of each edge contour are then tracked from the current frame to the next frame to find their corresponding location in the next frame. For example, Fig. 8 shows the top and bottom feature points of interest  $O_{1t}$  and  $O_{1b}$  which are tracked across frames. (Note that the feature points  $O_{1t}$  or  $O_{1b}$  may each comprise multiple pixels.)

[0048] In addition, for more robustness, instead of just selecting the topmost and bottommost points, the feature selection and tracking block 110B preferably also selects and processes a set of additional feature points along the contour.

[0049] Once the feature points that define the top and bottom of each object are isolated, they, as well as any other selected feature points, can be tracked across frames using a block matching algorithm. (Note that there is no need to track the entire image or object contour, only the selected feature points need to be tracked across frames.)

[0050] Any given feature point will likely subsist for least a few following image frames and with the typical frame rate of 30 fps the given feature point will move relatively slowly across image frames. The block matching algorithm establishes a macro block around the feature point and looks for a best match. For example, Fig. 9A shows as an example a feature point 152 selected by the feature selection and tracking block 110B that consists of a 3x3 pixel array in image frame 150. The pixel array 152 has a middle position at pixel position  $j, k$ . In the following or otherwise subsequent

image frame 160 shown in Fig. 9B, the feature selection and tracking block 110B establishes a macro-block 162 centered on the position of the selected feature point 152. The size of the macro-block 162 is based on the estimated degree of movement of the feature point/area to be tracked, and in this example encompasses a 10x10 array centered at pixel position j,k. A search window 164 is defined. The feature selection and tracking block 110B slides the search window 164 in a raster fashion one pixel at a time to find a contiguous array of pixels in the macro-block 162 whose values are the closest match to the values of the selected feature point 152. The closest match is preferably defined based on a minimum absolute error criterion. To make the search process optimal, a hierarchical search may be performed if the search window 164 is larger than a default size. In this manner, the position of the selected feature point 152 may be tracked to a new location, for example to pixel position p,q as indicated in Fig. 9.

**[0051]** The distance estimation block 110C calculates the physical distances to the selected feature points in the ground plane.

**[0052]** A point in the image,  $x_i$ , can be defined as

**[0053]** 
$$\mathbf{x}_i = [x_p \ y_p \ 1]^T$$

**[0054]** It is desired to compute the real world coordinates of this point on the ground plane, given the camera position and geometry. Before estimating the distance, a selected pixel location is de-warped using the distortion function of the lens, which is one of the intrinsic parameters provided in input 105. In a de-warped image, every image point can be expressed as a 3D Plucker line matrix, which correlates to one of the rays running through the camera focal point and impinging upon the image plane (see Fig. 1). As the projected real world is assumed to be flat or planar, the intersection point of the Plucker line matrix and the ground plane is needed. The Homography matrix,  $H$  (a 3 x 4 matrix), describes the projection from the image point to the world coordinate inside the plane and so the intersection point with the plane, which is defined as

**[0055]** 
$$\mathbf{X}_i = \mathbf{H} \cdot \mathbf{x}_i$$

**[0056]** where  $\mathbf{X}_i = [X_1 \ Y_1 \ Z_1 \ N_1]^T$

**[0057]** The real world coordinates of the image point on the ground plane can be estimated with respect to the origin using  $\mathbf{X}_i$  as:  $[X_w = X_1 / N_1; Y_w = Y_1 / N_1; Z_w = Z_1 / N_1]$ . To compute the real world distance of the various points using the above equation, the intrinsic and the extrinsic

parameters of the camera being used are necessary. Given these parameters, the Homography matrix, **H**, can be estimated as the inverse of the projection matrix, **P**, which is defined as:

[0058]  $\mathbf{P} = \mathbf{KRT}$

[0059] where

[0060] 
$$\mathbf{K} = \begin{bmatrix} -\frac{f}{p} & 0 & \text{axis}X \\ 0 & \frac{f}{p} & \text{axis}Y \\ 0 & 0 & 1 \end{bmatrix}$$

[0061] 
$$\mathbf{R} = \begin{bmatrix} \cos\gamma & \sin\gamma & 0 \\ -\sin\gamma & \cos\gamma & 0 \\ 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} \cos\beta & 0 & -\sin\beta \\ 0 & 1 & 0 \\ \sin\beta & 0 & \cos\beta \end{bmatrix} \times \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos\alpha & \sin\alpha \\ 0 & -\sin\alpha & \cos\alpha \end{bmatrix} \text{ and}$$

[0062] 
$$\mathbf{T} = \begin{bmatrix} 1 & 0 & 0 & -t_1 \\ 0 & 1 & 0 & -t_2 \\ 0 & 0 & 1 & -t_3 \end{bmatrix}$$

[0063] In the above equations,  $f$  and  $p$  are the focal length of the lens and the pixel size of the sensor, respectively.  $\text{axis}X$  and  $\text{axis}Y$  are the column and row coordinates of the optical center on the image plane.  $\alpha$ ,  $\beta$ , and  $\gamma$  represent the angles of rotation around X, Y, and Z axes, respectively, and  $t_1$ ,  $t_2$ , and  $t_3$  are the translations along X, Y, and Z axes, respectively.

[0064] The object detection block 110D filters the segmented objects based on the estimated real height of the objects. Those objects that are estimated to have a real height greater than a selected threshold are considered to be relevant objects worth tracking, whereas those objects that are estimated to have a real height less than a selected threshold are considered to be irrelevant objects not worth tracking.

[0065] For height threshold verification, the object detection block 110D assumes that there is some relative motion between the object and the camera, i.e., either the camera moves or the object itself moves with respect to the camera. For example, Figs. 10A and 10B illustrate two images frames 170, 172 in which the camera has moved and thus shows the relative displacement of the object in the image. Since the objects are solid connected entities, it is fair to assume that the

real-world distance traversed by the bottommost point on the object,  $O_{1b}$  (Fig. 10A) would be the same as that of the topmost point of the object,  $O_{1t}$ . The object detection block 110D use this as the basis for detecting if the topmost point of the object is above a certain height threshold,  $T$ , or not.

**[0066]** The steps involved in this detection are as follows:

**[0067]** (1) Estimate the initial distance of the object from the reference camera using the pixel location of the bottommost point,  $O_{1b}$ , and use it with the Homography matrix to estimate the real-world coordinate,  $D_1$ , in the ground plane. See, for example, Fig. 11A.

**[0068]** (2) Track the motion of the bottommost point the object from pixel location  $O_{1b}$  to pixel location  $O_{2b}$  and using the Homography equation estimate the real-world coordinate  $D_2$  of the bottommost point on the ground plane, and the distance  $\Delta D$  the bottommost point has moved. See, for example, Fig. 11B.

**[0069]** (3) Use the Homography equation to estimate a real world coordinate of the topmost point of the object corresponding to its location  $O_{1t}$  in the first frame. Assume that the top of the object is at a height  $T$ , which will correspond to a point  $D_T$  at this height. See Fig. 11A.

**[0070]** (4) Since the top and the bottom points of the physical object move by the same distance in the real world, then presuming that the topmost point of the object it is at height  $T$ , the new real world location of the top-most point,  $D^*_{T}$ , is  $D_T + \Delta D$ . See Fig. 11B.

**[0071]** (5) Using the inverse of the Homography equation, compute the pixel coordinate  $O^*_{2T}$  of the top-most point after accounting for its real world displacement if it was at a height  $T$ . See Fig. 11B.

**[0072]** (6) Compare the pixel displacement of the estimated pixel location of the top most point with respect to the initial location,  $\|O^*_{2t} - O_{1t}\|$ , with that of actual pixel location of the tracked topmost point of the object with respect to the initial location  $\|O_{2t} - O_{1t}\|$ . If  $\|O^*_{2t} - O_{1t}\| < \|O_{2t} - O_{1t}\|$ , then the topmost point of the object is above the height threshold and if  $\|O^*_{2t} - O_{1t}\| > \|O_{2t} - O_{1t}\|$ , then the topmost point of the object is below the height threshold. See, for example, Fig. 10B where the object is higher than the threshold height  $T$  and so  $O^*_{2t}$  is closer to  $O_{1t}$  than  $O_{2t}$ .

**[0073]** The foregoing steps utilized the image plane. It should also be appreciated that the analysis can just as well be carried out in real physical space. In this methodology, as exemplified in

Fig. 11C, the rays in the first and second image frames corresponding to the topmost point of the object are projected onto the selected horizontal physical plane corresponding to height T to generate real points G1 and G2. The object is deemed to be a valid object, i.e., having a height greater than T, if  $\|G2 - G1\| > \Delta D$ .

**[0074]** It will also be understood that in the case of T=0 the selected horizontal physical plane corresponds to the ground plane.

**[0075]** Referring back to Fig. 3, the output of the segmentation module 110 - postulated objects - is fed in to a hypothesis evaluation stage 118. This stage evaluates the postulated objects and multiple hypotheses which could belong to the same object are combined to form a single hypothesis or postulated object.

**[0076]** Stage 122 - temporal hypotheses assignment - tracks postulated objects over time. The postulated objects from stage 118 are further evaluated using the predicted hypotheses from the previous image frame. The corresponding hypotheses are assigned to the current frame where a match is found. However, if no match is found between the predicted hypothesis and the current estimated hypothesis, then a new hypothesis is instantiated.

**[0077]** In addition, if a hypothesis existed in the previous frame but is not currently detected, then this hypothesis is not immediately rejected, but is held in memory for a specified number of frames to verify that the postulated object is no longer present. In case where the postulated object is actually present, the detection may be missed intermittently, and therefore this temporal processing leads to a significant reduction in the false negatives.

**[0078]** Stage 126 is a distance and trajectory estimation block. Before the physical distance of the pixel locations can be estimated at step 128, the fish-eye distortion of the lens needs to be corrected. See Fig. 12. For this correction, the lens distortion is modeled as a fifth order polynomial and using this polynomial, each point in the captured image which needs further processing is de-warped.

**[0079]** The de-warped points used for estimating the distance of postulated objects are preferably the bottommost points of the objects which are assumed to lie on the ground plane. These points can be used to estimate the distance of the objects from the camera and this distance can then be translated to the vehicle coordinates. This allows the further processing of relevant postulated objects based on their relative distance to the vehicle.

**[0080]** The distance estimation of the same postulated object across multiple frames is subject to small variations owing to real world, non-ideal conditions. Thus, these estimated distances are filtered using a Kalman filter which can smooth out instantaneous variations. The same filter can also be used to predict the location of the object in the next frame and thus help predict the trajectory of the object, which is computed at step 132 (Fig. 3).

**[0081]** Owing to the nature of the problem, a modified Kalman filter is preferably used, which has the following order of steps:

- Update Step: Update the filter parameters and estimate the filtered distance of the object detected in the current frame,  $(\hat{X}, \hat{Y})$ , using the input real world distance  $(X, Y)$ . (See Fig. 12.)
- Prediction Step: Predict the distance of the object in the next frame.

**[0082]** Stage 136 provides a hypothesis prediction. Based on the predicted physical location of the object, the location of each hypothesis in the next frame is estimated by projecting the distances back to the image plane. These projected pixel locations can then be used for the temporal assignation of the hypotheses in the next frame.

**[0083]** The system output is provided at stage 106. Based on the trajectory estimation of each object, if the detected object is in the path of the vehicle, or poses a threat to the vehicle, then the object is output using its centroid as well as its bounding region or contour. This output may be displayed visually on a display screen or the like mounted in the vehicle and may be accompanied by audible warnings such as an alarm or voice, or by tactile feedback such as a buzz in the steering wheel. In addition, in the event the system detects an imminent crash by virtue of an obstacle being immediately in the path of the vehicle various pre-emptive actions may be taken such as automated braking or tensioning of seat belts.

**[0084]** Those skilled in the art will appreciate that a variety of modifications may be made to the embodiments described herein without departing from the spirit of the invention.

**CLAIMS**

1. An obstacle detection method, comprising:
  - (a) provisioning a vehicle with a camera having an external field of view;
  - (b) acquiring a set of image frames provided by the camera whilst the vehicle is in motion, the image frames defining an image plane having a vertical aspect and a horizontal aspect;
  - (c) detecting edges in the set of images frames and isolating one or more objects based on their edge contours;
  - (d) determining the relevancy of an object by
    - (i) selecting first and second feature points from the object contour that are spaced apart vertically in a first image frame,
    - (ii) tracking the positions of the first and second feature points over at least a second image frame, and
    - (iii) deciding the object to be relevant if the first and second feature points move dissimilar distances in physical space, within a tolerance, and deciding the object to be irrelevant otherwise;
  - (e) estimating the motion of relevant objects to determine if any relevant object is likely to become an obstacle to the vehicle.
2. A method according to claim 1, wherein step d(iii) is determined by reference to physical space and includes:
  - determining first and second physical locations along a selected physical horizontal plane corresponding to pixel positions of the first and second feature points in the first image frame;
  - determining third and fourth physical locations along the selected real horizontal plane corresponding to pixel positions of the first and second feature points in the second image frame;
  - determining a first distance  $\Delta d1$  between the third and first physical locations and
  - determining a second distance  $\Delta d2$  between the fourth and second physical locations; and
  - deciding the object to be relevant if the difference between the first distance  $\Delta d1$  and the second distance  $\Delta d2$  exceeds a threshold, and otherwise deciding the object to be irrelevant.
3. A method according to claim 2, including unwarping a given pixel position to account for lens distortion prior to determining a physical location corresponding to the given pixel position.



4. A method according to claim 3, wherein the first and second feature points are portions of top and bottom edge contours of the object.

5. A method according to claim 1, wherein step d(iii) is determined by reference to the image plane and, where the first feature point is vertically lower than the second feature point in the method, includes:

estimating, from the first image frame, a physical distance  $D_1$  of the first feature point  $O_{1b}$  to the camera in a selected physical horizontal plane;

estimating, from the first image frame, a physical location  $D_T$  of the second feature point  $O_{1T}$  assuming that the second feature point physically lies at a height  $T$  above the selected physical horizontal plane;

estimating, from the second image frame, a physical distance  $D_2$  of the first feature point  $O_{2b}$  to the camera in the selected physical horizontal plane, and determining the distance  $\Delta D$  between  $D_2$  and  $D_1$ ;

estimating a physical location  $D^*_T$  which is equivalent to  $D_T + \Delta D$ , with  $D^*_T$  being located at a height  $T$  above the selected physical horizontal plane;

computing a nominal feature point coordinate  $O^*_{2t}$  in the image plane corresponding to  $D^*_T$ ;

determining the object to be relevant if the absolute distance between the nominal feature point coordinate  $O^*_{2t}$  and the second feature point coordinate in the first image frame  $O_{1T}$  is less than the absolute distance between the second feature point coordinate in second image frame  $O_{2T}$  and the second feature point coordinate in the first image frame  $O_{1T}$ .

6. A method according to claim 5, wherein the selected physical horizontal plane is the ground plane.

7. A method according to claim 6, including unwarping a given pixel position to account for lens distortion prior to determining a physical location corresponding to the given pixel position.

8. A method according to claim 7, wherein the first and second feature points are portions of top and bottom edge contours of the object.

9. An obstacle detection method, comprising:

(a) provisioning a vehicle with a camera having an external field of view;

(b) acquiring a set of image frames in a video stream provided by the camera whilst the vehicle is in motion, the image frames defining an image plane having a vertical aspect and a horizontal aspect;

(c) detecting edges in the set of images frames and isolating one or more objects based on their edge contours;

(d) determining the relevancy of an object by

(i) selecting, in a first image frame, first and second feature points  $j$  and  $k$  from the object contour that are spaced apart vertically,

(ii) determining first and second physical locations along a selected real horizontal plane corresponding to the pixel positions of the first and second feature points in the first image frame,

(iii) tracking the pixel positions of the first and second feature points over at least a second image frame,

(iv) determining third and fourth physical locations along the selected real horizontal plane corresponding to the pixel positions of the first and second feature points in the second image frame,

(v) determining a first distance  $\Delta d_1$  between the third and first physical locations and determining a second distance  $\Delta d_2$  between the fourth and second physical locations, and

(vi) deciding the object to be relevant if the difference between the first distance  $\Delta d_1$  and the second distance  $\Delta d_2$  exceeds a threshold, and otherwise deciding the object to be irrelevant; and

(e) estimating the motion of relevant objects to determine if any relevant object is likely to become an obstacle to the vehicle.

10. An obstacle detection system for a vehicle, comprising:

a camera mounted to the vehicle, the camera providing a set of image frames from a video stream obtained whilst the vehicle is in motion, the image frames defining an image plane having a vertical aspect and a horizontal aspect;

a controller coupled to the camera, the controller configured to detect one or more objects in the video stream and determine the relevancy of an object by

(i) selecting first and second feature points on the object that are spaced apart vertically in a first image frame,

- (ii) tracking the positions of the first and second feature points over at least a second image frame, and
- (iii) deciding the object to be relevant if the first and second feature points move dissimilar distances in physical space, within a tolerance, and deciding the object to be irrelevant otherwise; and

the controller estimating the relative motion of relevant objects to determine if any relevant object is likely to become an obstacle to the vehicle; and

the controller providing an indication to the driver of detected obstacles.

11. An obstacle detection system according to claim 10, wherein the process of deciding objects to be relevant is determined by reference to physical space and the controller is configured to:

determine first and second physical locations along a selected physical horizontal plane corresponding to pixel positions of the first and second feature points in the first image frame;

determine third and fourth physical locations along the selected real horizontal plane corresponding to pixel positions of the first and second feature points in the second image frame;

determine a first distance  $\Delta d_1$  between the third and first physical locations and determining a second distance  $\Delta d_2$  between the fourth and second physical locations; and

decide the object to be relevant if the difference between the first distance  $\Delta d_1$  and the second distance  $\Delta d_2$  exceeds a threshold, and otherwise deciding the object to be irrelevant.

12. An obstacle detection system according to claim 11, wherein the controller de-warps a given pixel position to account for lens distortion prior to determining a physical location corresponding to the given pixel position.

13. An obstacle detection system according to claim 12, wherein the first and second feature points are portions of top and bottom edge contours of the object .

14. An obstacle detection system according to claim 11, wherein the process of deciding objects to be relevant is determined by reference to the image plane and, where the first feature point is vertically lower than the second feature point, the controller:

estimates, from the first image frame, a physical distance  $D_1$  of the first feature point  $O_{1b}$  to the camera in a selected physical horizontal plane;

estimates, from the first image frame, a physical location  $D_T$  of the second feature point  $O_{1T}$

assuming that the second feature point physically lies at a height  $T$  above the selected physical horizontal plane;

estimates, from the second image frame, a physical distance  $D_2$  of the first feature point  $O_{2b}$  to the camera in the selected physical horizontal plane, and determines the distance  $\Delta D$  between  $D_2$  and  $D_1$ ;

estimates a physical location  $D^*_T$  which is equivalent to  $D_T + \Delta D$ , with  $D^*_T$  being located at a height  $T$  above the selected physical horizontal plane;

computes a nominal feature point coordinate  $O^*_{2t}$  in the image plane corresponding to  $D^*_T$ ;

determines the object to be relevant if the absolute distance between the nominal feature point coordinate  $O^*_{2t}$  and the second feature point coordinate in the first image frame  $O_{1T}$  is less than the absolute distance between the second feature point coordinate in second image frame  $O_{2T}$  and the second feature point coordinate in the first image frame  $O_{1T}$ .

15. An obstacle detection system according to claim 14, wherein the selected physical horizontal plane is the ground plane.

16. An obstacle detection system according to claim 15, wherein the controller de-warps a given pixel position to account for lens distortion prior to determining a physical location corresponding to the given pixel position.

17. An obstacle detection system according to claim 16, wherein the first and second feature points are portions of top and bottom edge contours of the object.

18. An obstacle detection system for a vehicle, comprising:

a camera mounted to the vehicle, the camera providing a set of image frames from a video stream obtained whilst the vehicle is in motion, the image frames defining an image plane having a vertical aspect and a horizontal aspect;

a controller connected to the camera, the controller configured to detect edges in the set of images frames and isolate one or more objects seen in the image frames based on edge contours of the objects;

the controller determining the relevancy of an object by

(i) selecting, in a first image frame, first and second feature points  $j$  and  $k$  from the object contour that are spaced apart vertically,

- (ii) determining first and second physical locations along a selected real horizontal plane corresponding to the pixel positions of the first and second feature points in the first image frame,
- (iii) tracking the pixel positions of the first and second feature points over at least a second image frame,
- (iv) determining third and fourth physical locations along the selected real horizontal plane corresponding to the pixel positions of the first and second feature points in the second image frame,
- (v) determining a first distance  $\Delta d1$  between the third and first physical locations and determining a second distance  $\Delta d2$  between the fourth and second physical locations, and
- (vi) deciding the object to be relevant if the difference between the first distance  $\Delta d1$  and the second distance  $\Delta d2$  exceeds a threshold, and otherwise deciding the object to be irrelevant;

the controller estimating the motion of relevant objects to determine if any relevant object is likely to become an obstacle to the vehicle; and

the controller providing an indication to the driver of detected obstacles.

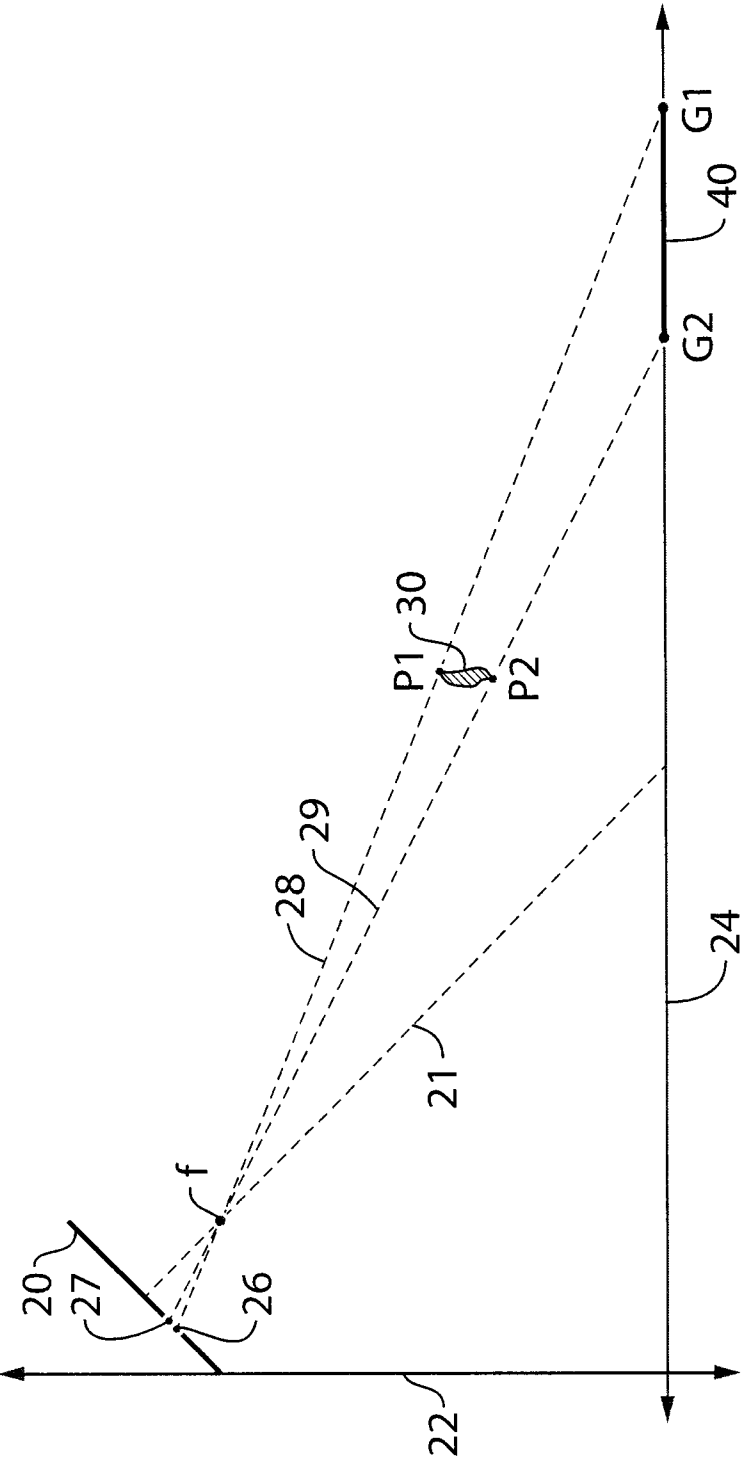


FIG.1

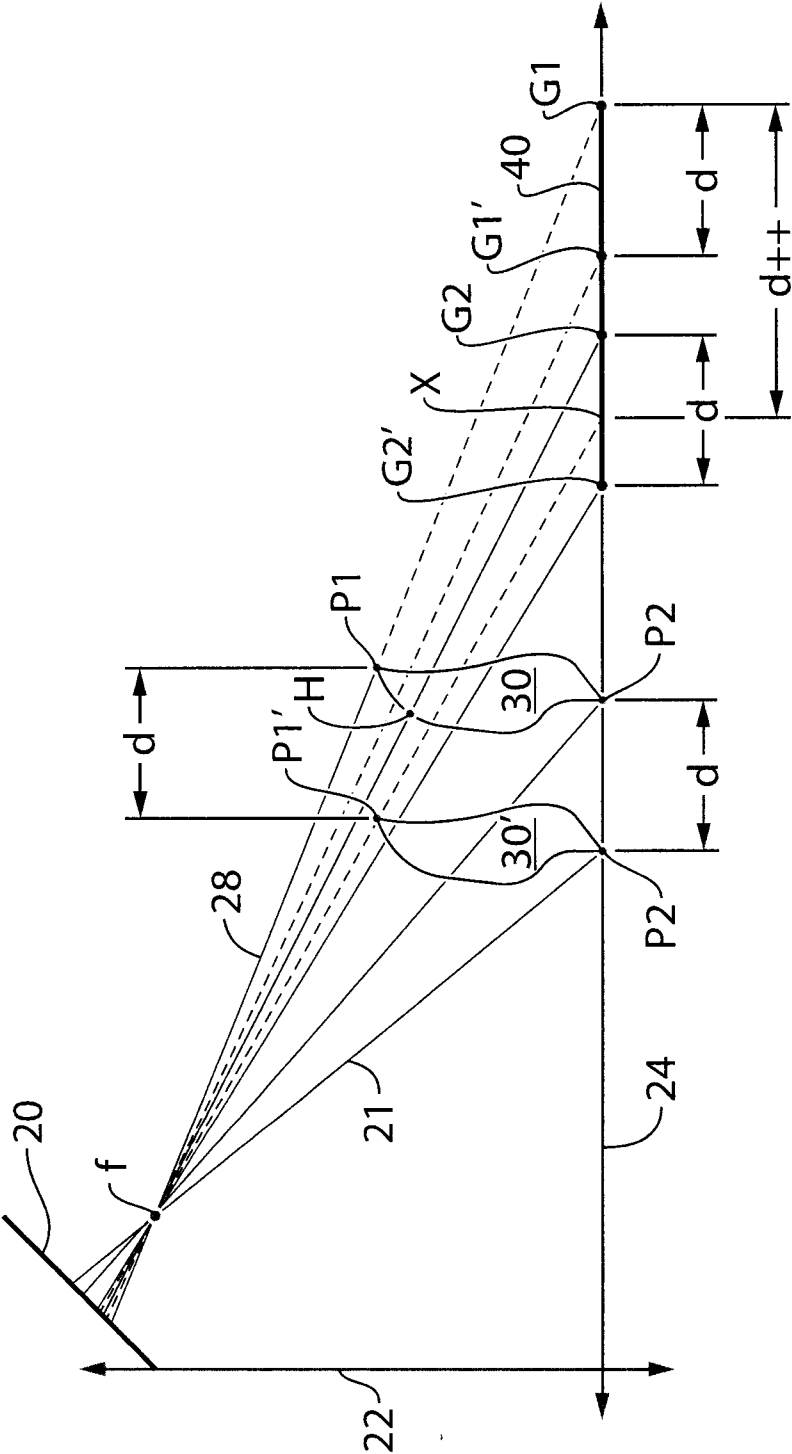


FIG. 2

3/15

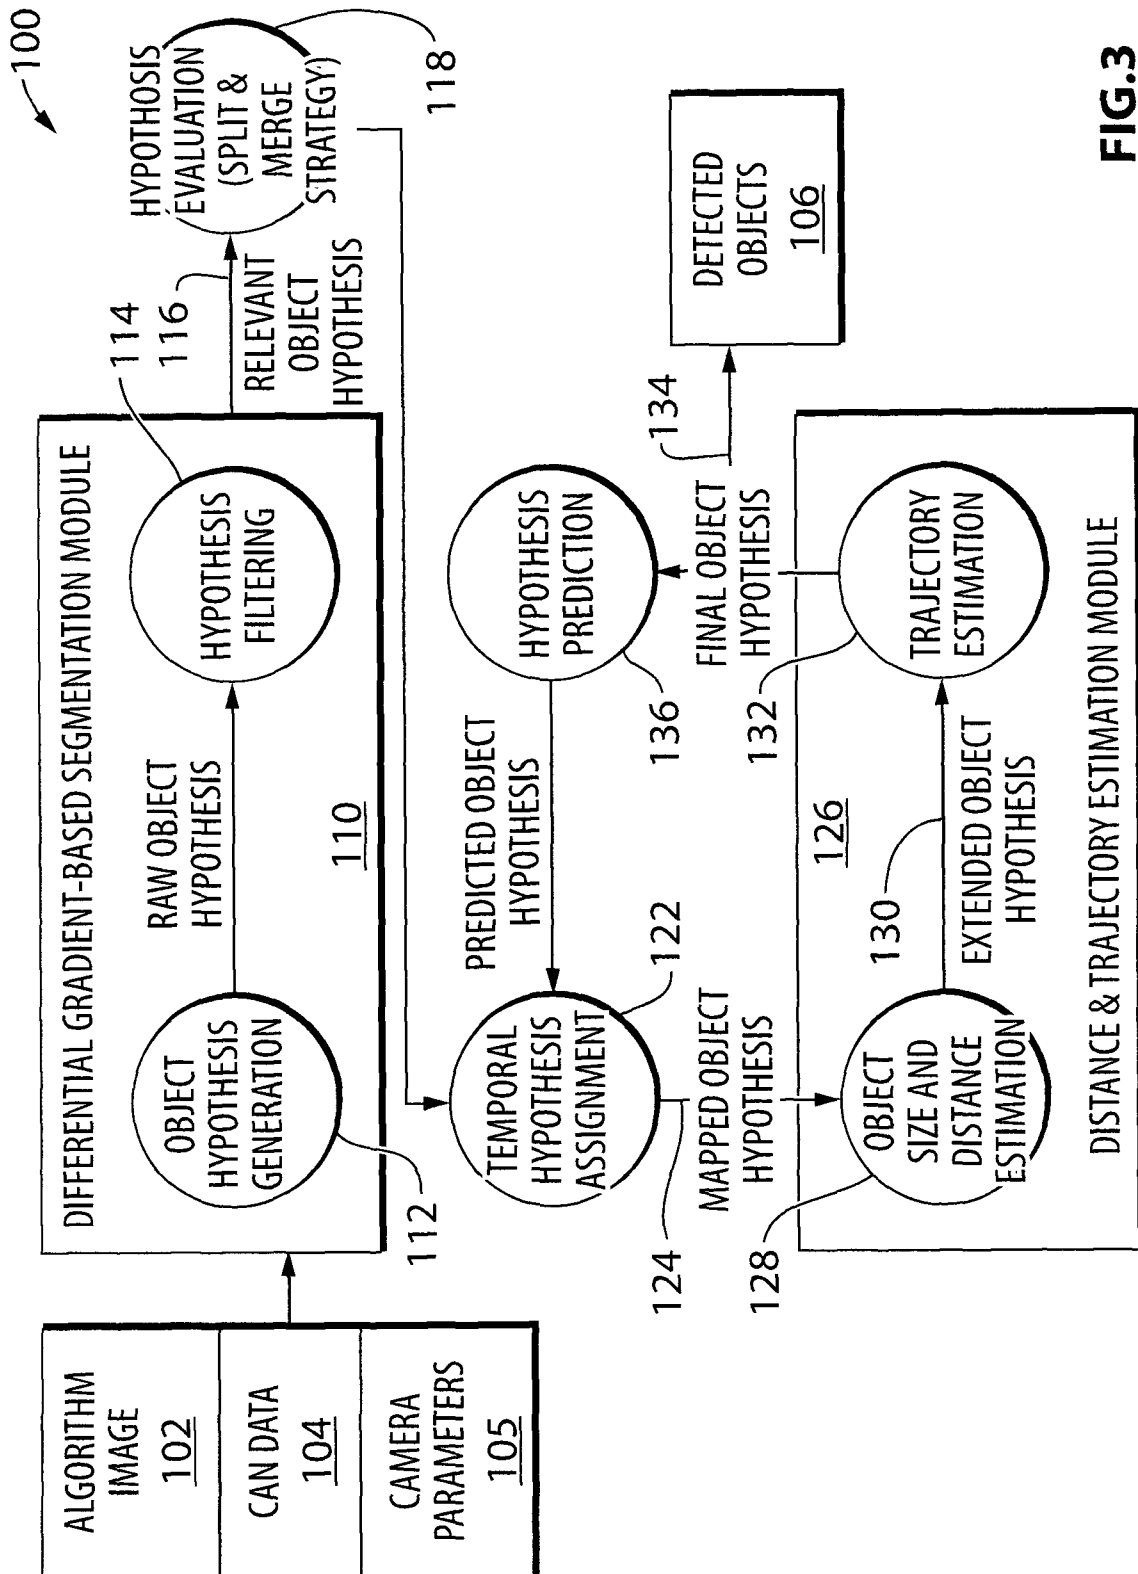


FIG.3



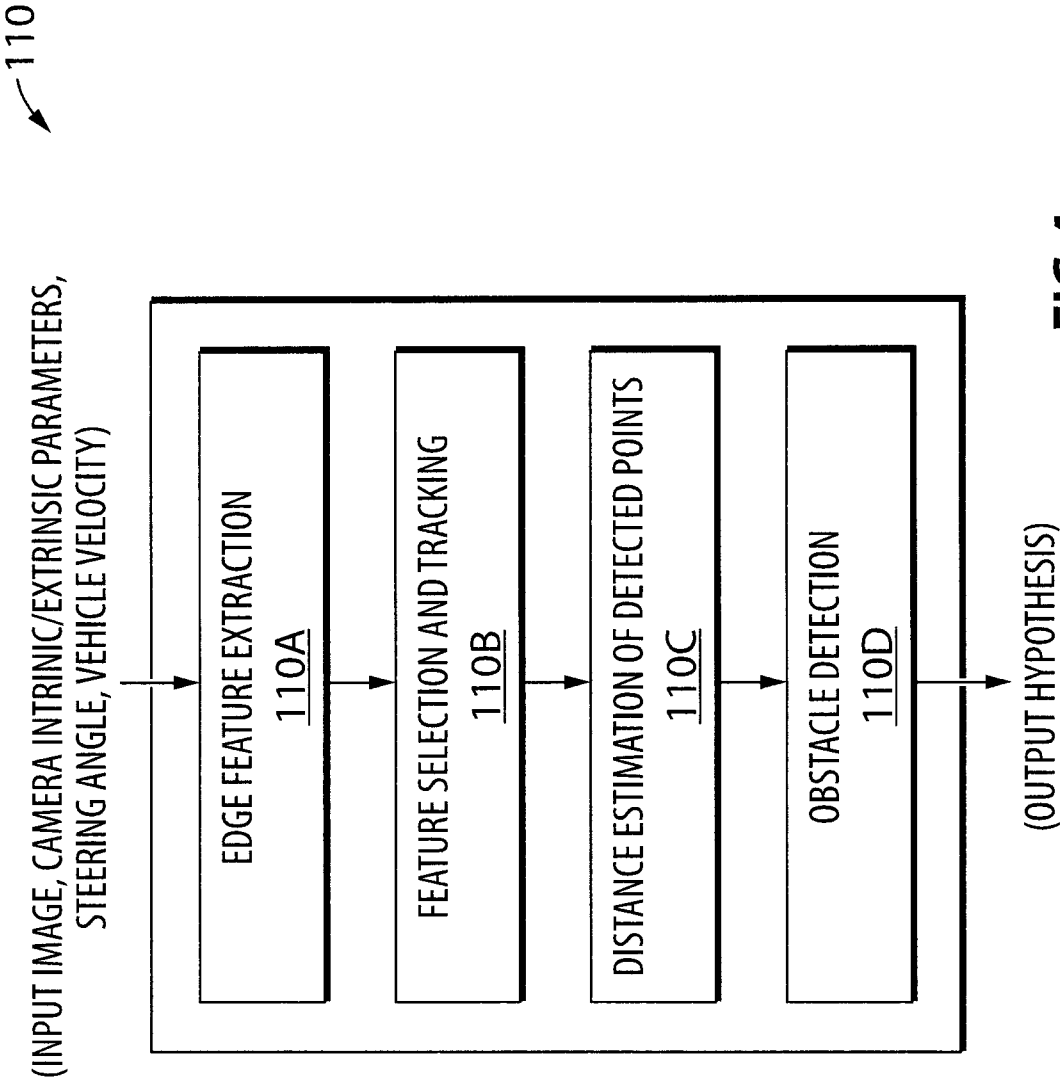


FIG.4

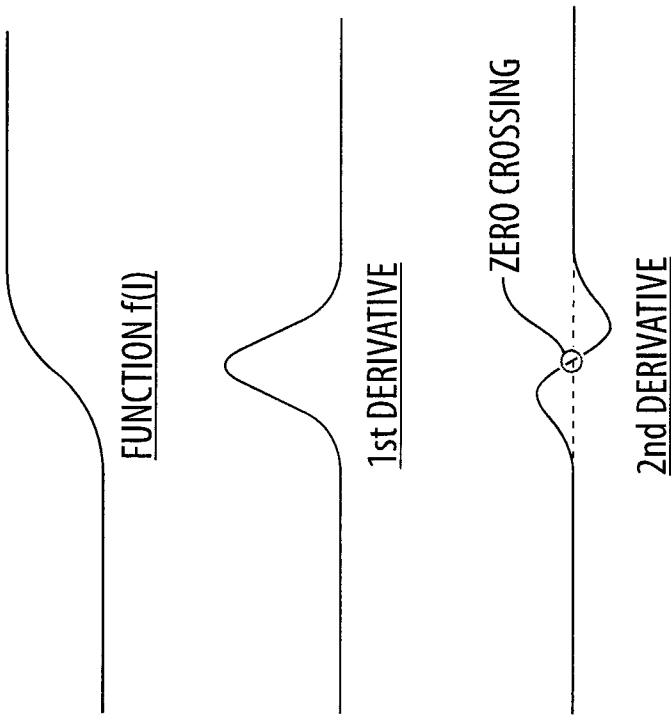


FIG.5

6/15

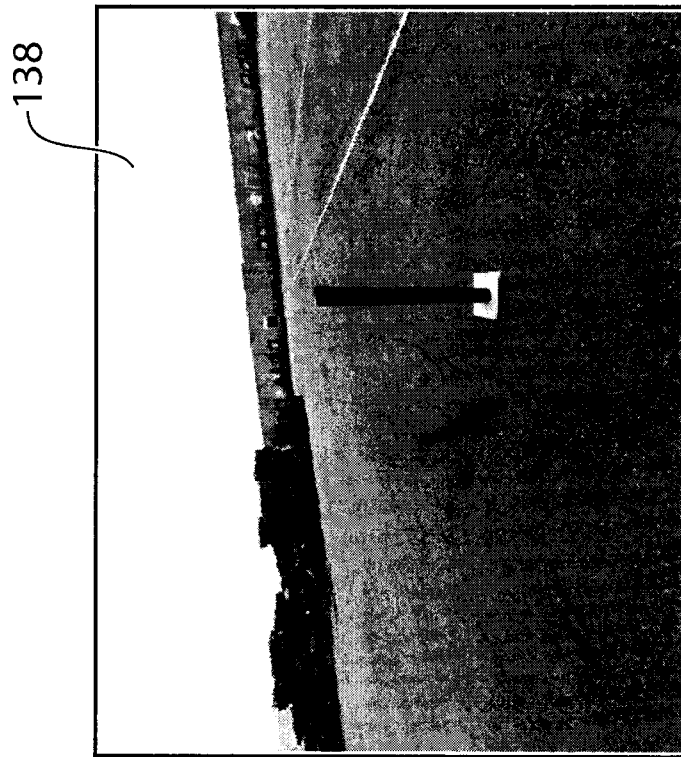


FIG. 6

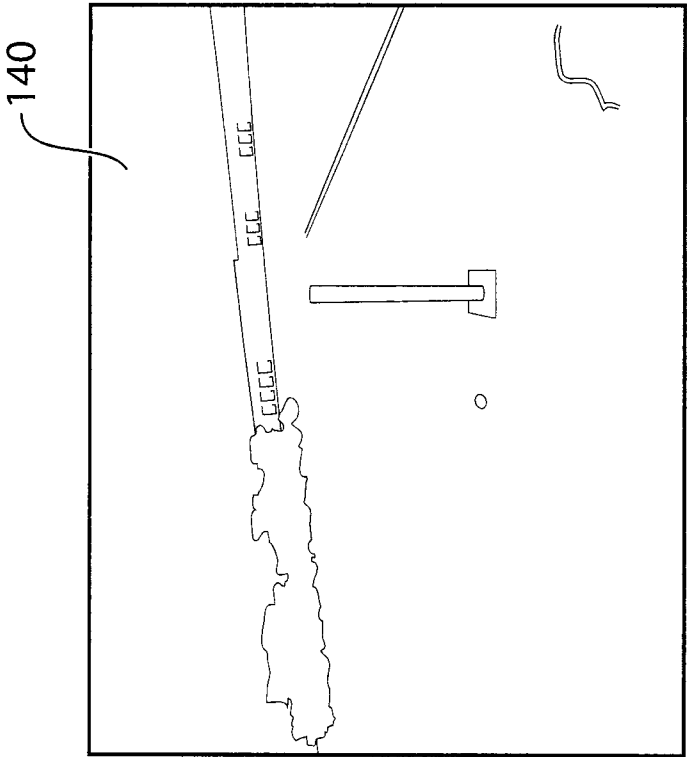


FIG. 7

8/15

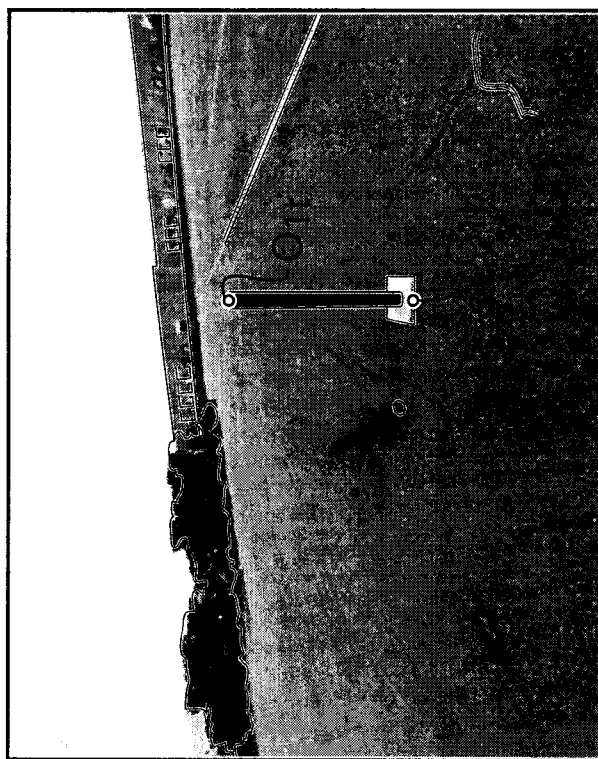


FIG.8

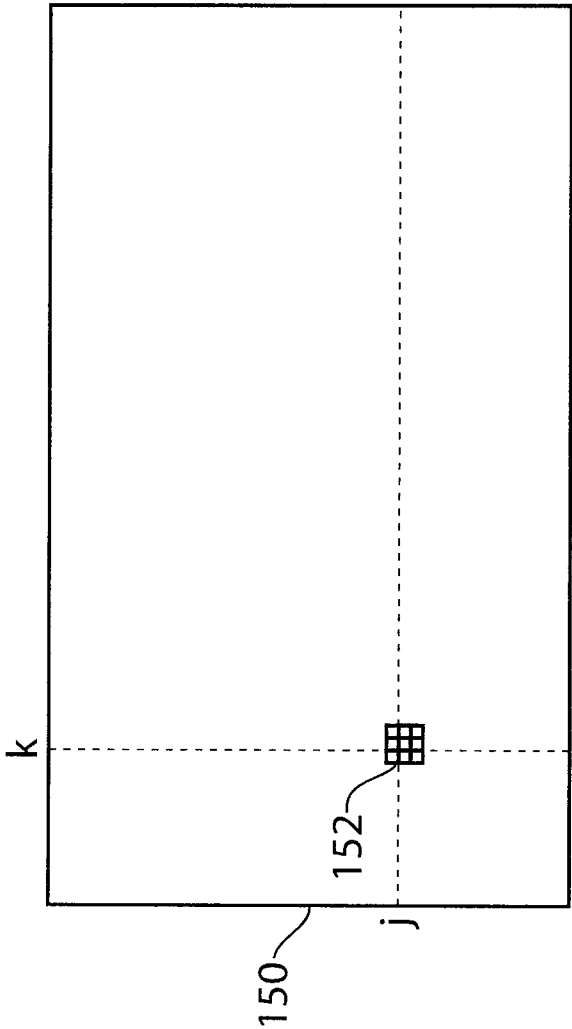


FIG. 9A

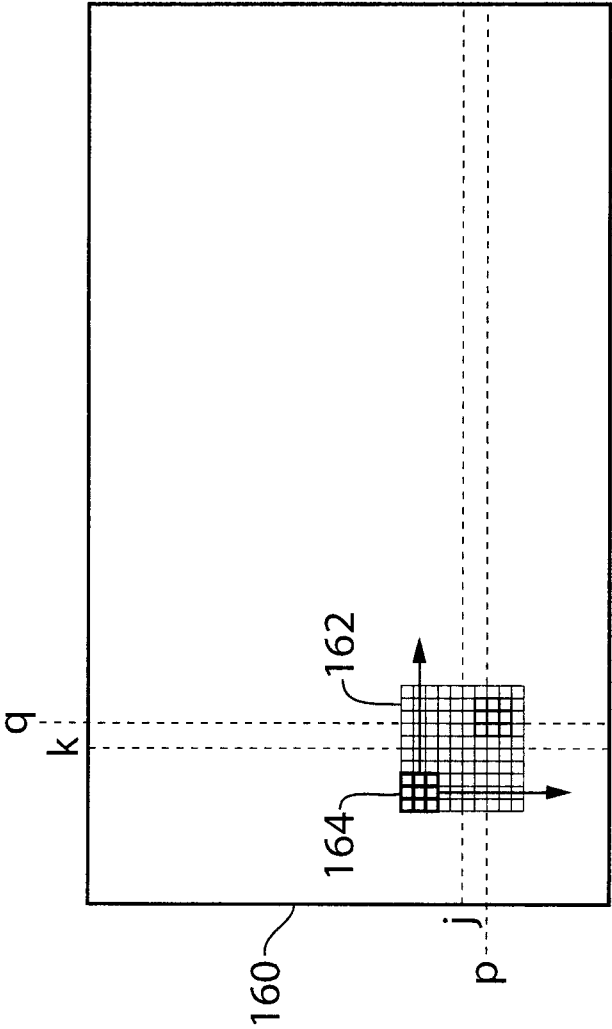


FIG. 9B

11/15

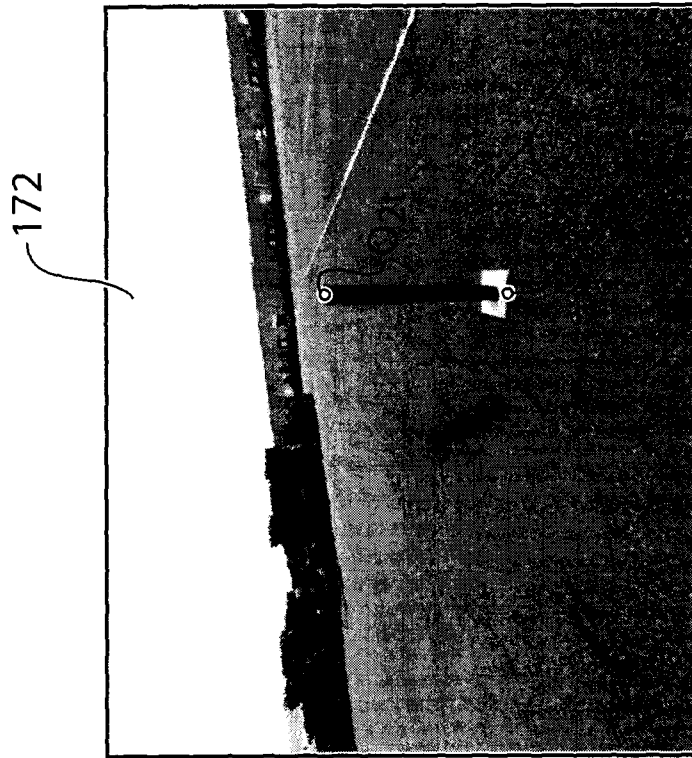


FIG. 10B

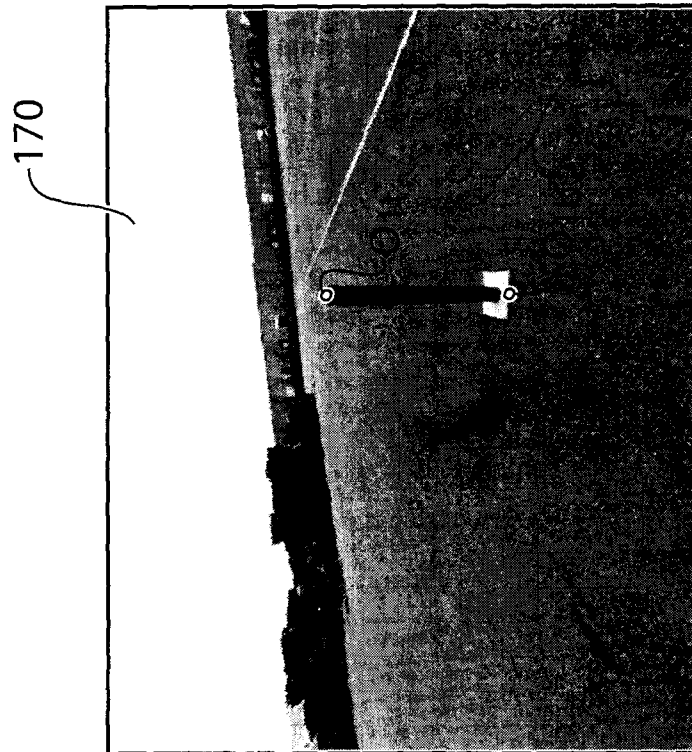


FIG. 10A



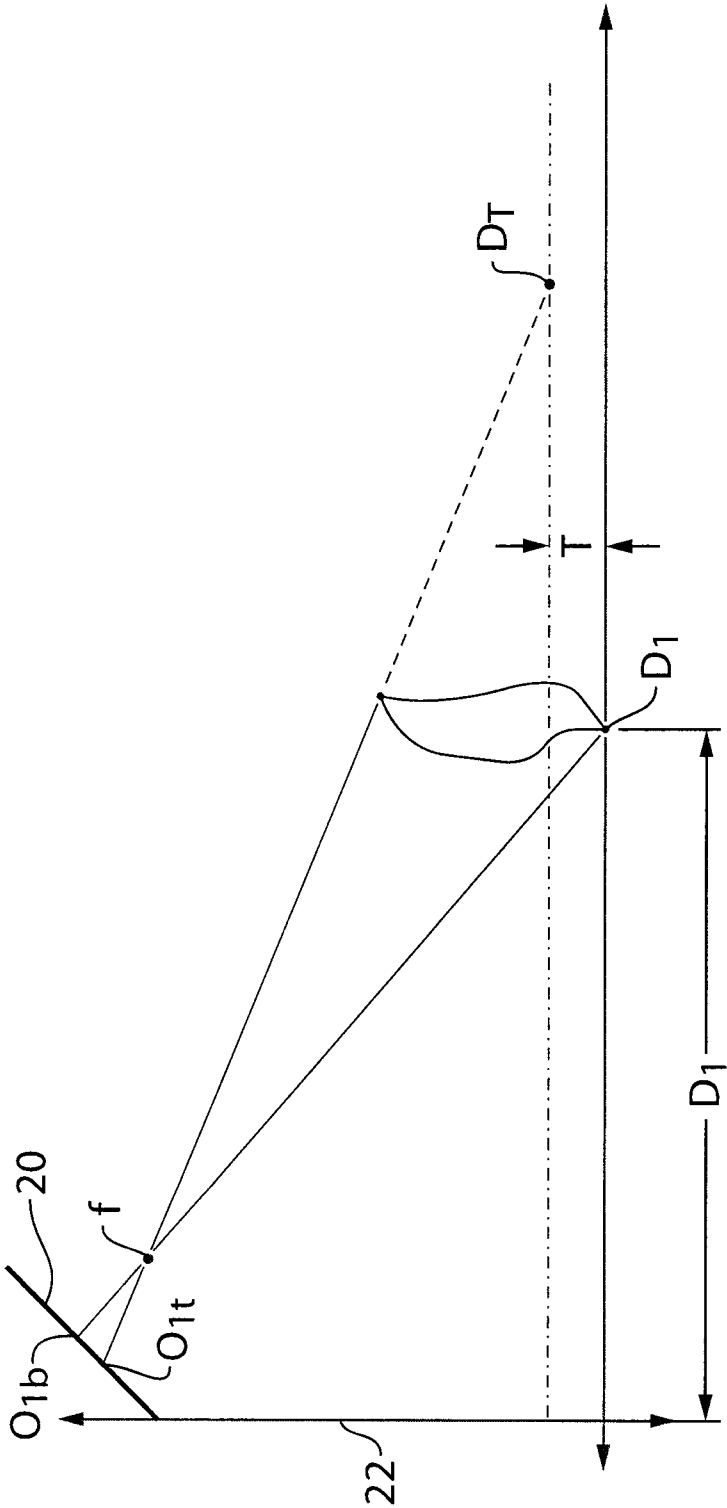


FIG.11A

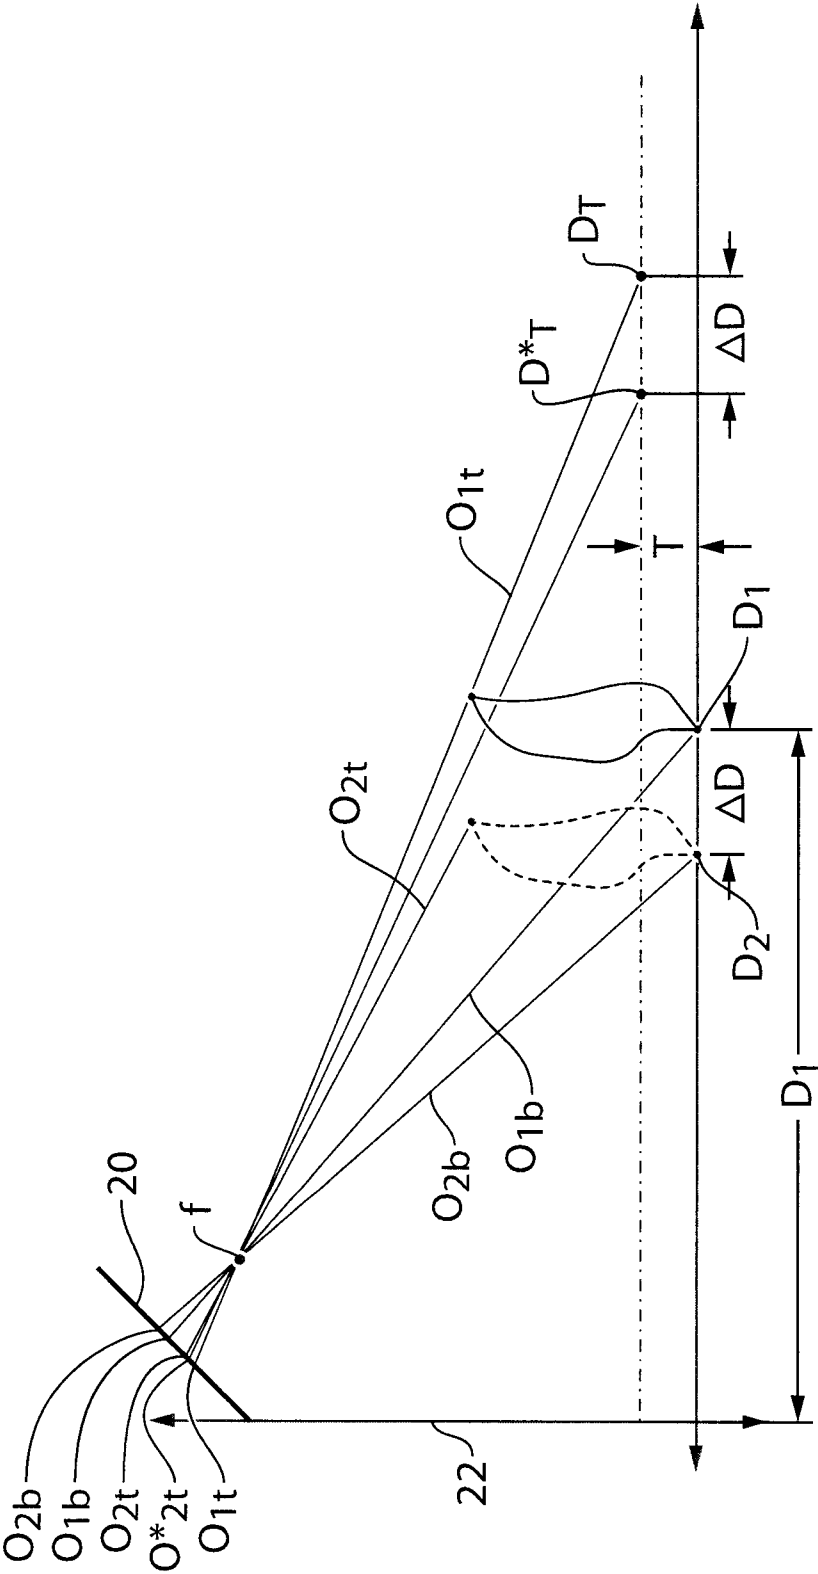
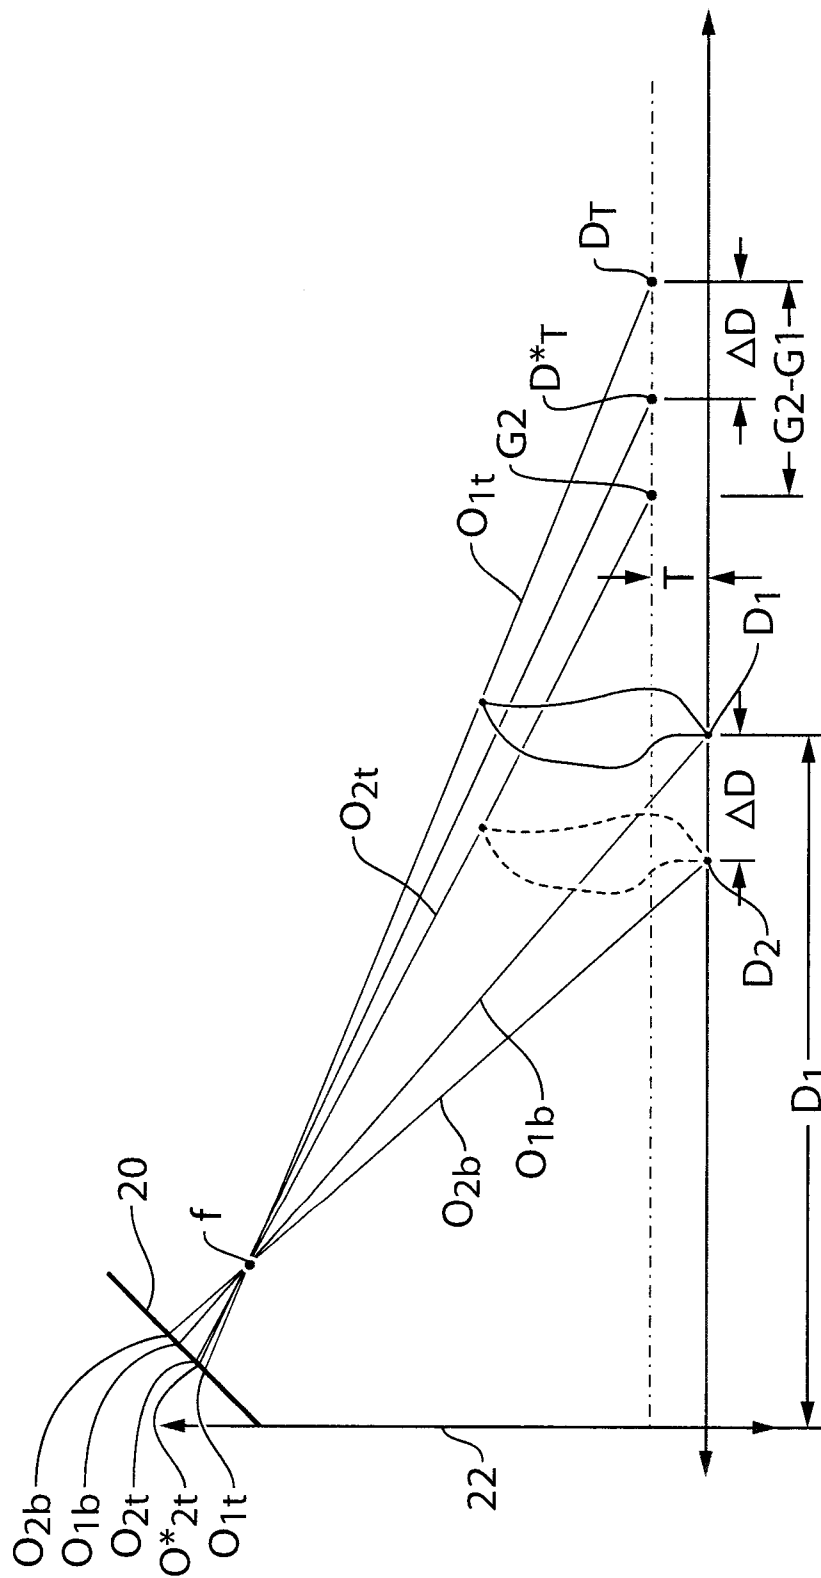



FIG. 11B

**14/15**



**FIG. 11C**

15/15

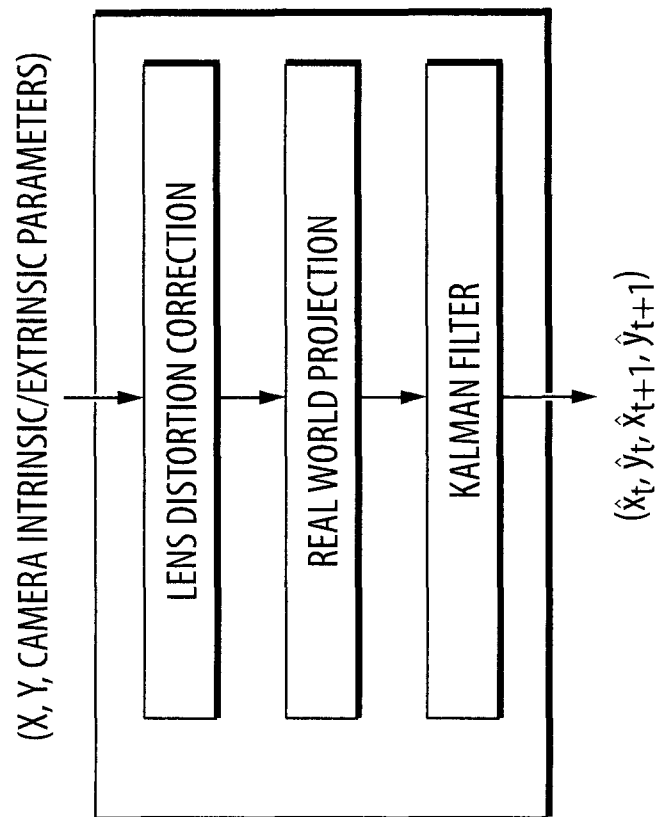**FIG.12**

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/CA2012/000057

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| <b>A. CLASSIFICATION OF SUBJECT MATTER</b><br>IPC: <i>G01V 8/10</i> (2006.01) , <i>B60R 21/0134</i> (2006.01) , <i>G06T 7/20</i> (2006.01) , <i>G06T 7/60</i> (2006.01) , <i>H04N 7/18</i> (2006.01)<br>According to International Patent Classification (IPC) or to both national classification and IPC                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |
| <b>B. FIELDS SEARCHED</b><br>Minimum documentation searched (classification system followed by classification symbols)<br>IPC: <i>G01V 8/10</i> (2006.01) , <i>B60R 21/0134</i> (2006.01) , <i>G06T 7/20</i> (2006.01) , <i>G06T 7/60</i> (2006.01) , <i>H04N 7/18</i> (2006.01) (in combination with keywords)<br>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched<br>Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)<br>Total Patent (Keywords vehicle, camera, obstacle, contour, edge detecting, edge detection) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |
| <b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |
| Category*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Relevant to claim No. |
| A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | US7437244B2, OKADA 14 October 2008 (14-10-2008)(see whole document)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1-18                  |
| A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | US2009143986A1, STEIN et al. 04 June 2009 (04-06-2009) (see whole document)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 1-18                  |
| A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | JP2007129560A, SUZUKI 24 May 2007 (24-05-2007) (see whole document)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1-18                  |
| A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | JP2010020476A, MATSUNO 28 January 2010 (28-01-2010) (see whole document)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1-18                  |
| A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | JP2010038907A, FUJIMOTO 18 February 2010 (18-02-2010) (see whole document)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1-18                  |
| A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | WO2010119329A2, FUKAMACHI et al. 21 October 2010 (21-10-2010) (see whole document)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1-18                  |
| <input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |
| * Special categories of cited documents :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention<br>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone<br>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art<br>"&" document member of the same patent family |                       |
| "A" document defining the general state of the art which is not considered to be of particular relevance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |
| "E" earlier application or patent but published on or after the international filing date                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |
| "O" document referring to an oral disclosure, use, exhibition or other means                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |
| "P" document published prior to the international filing date but later than the priority date claimed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |
| Date of the actual completion of the international search<br>7 March 2012 (07-03-2012)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Date of mailing of the international search report<br>23 March 2012 (23-03-2012)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                       |
| Name and mailing address of the ISA/CA<br>Canadian Intellectual Property Office<br>Place du Portage I, C114 - 1st Floor, Box PCT<br>50 Victoria Street<br>Gatineau, Quebec K1A 0C9<br>Facsimile No.: 001-819-953-2476                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Authorized officer<br><br>David E. Green (819) 994-8213                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
**PCT/CA2012/000057**

| Patent Document<br>Cited in Search Report | Publication<br>Date           | Patent Family<br>Member(s)                                                                                                 | Publication<br>Date                                                                                                                                                                                                                              |
|-------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| US7437244B2                               | 14 October 2008 (14-10-2008)  | JP2005209019A<br>JP4052650B2<br>US2005165550A1                                                                             | 04 August 2005 (04-08-2005)<br>27 February 2008 (27-02-2008)<br>28 July 2005 (28-07-2005)                                                                                                                                                        |
| US2009143986A1                            | 04 June 2009 (04-06-2009)     | AT396470T<br>DE602005007006D1<br>EP1741079A1<br>EP1741079B1<br>EP2068269A2<br>EP2068269A3<br>US8082101B2<br>WO2005098782A1 | 15 June 2008 (15-06-2008)<br>03 July 2008 (03-07-2008)<br>10 January 2007 (10-01-2007)<br>21 May 2008 (21-05-2008)<br>10 June 2009 (10-06-2009)<br>07 October 2009 (07-10-2009)<br>20 December 2011 (20-12-2011)<br>20 October 2005 (20-10-2005) |
| JP2007129560A                             | 24 May 2007 (24-05-2007)      | None                                                                                                                       |                                                                                                                                                                                                                                                  |
| JP2010020476A                             | 28 January 2010 (28-01-2010)  | None                                                                                                                       |                                                                                                                                                                                                                                                  |
| JP2010038907A                             | 18 February 2010 (18-02-2010) | None                                                                                                                       |                                                                                                                                                                                                                                                  |
| WO2010119329A2                            | 21 October 2010 (21-10-2010)  | EP2419881A2<br>JP2010250541A<br>JP4840472B2<br>JP2010249641A<br>US2012019655A1<br>WO2010119329A3<br>WO2010119329A9         | 22 February 2012 (22-02-2012)<br>04 November 2010 (04-11-2010)<br>21 December 2011 (21-12-2011)<br>04 November 2010 (04-11-2010)<br>26 January 2012 (26-01-2012)<br>20 January 2011 (20-01-2011)<br>01 December 2011 (01-12-2011)                |