



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2019/12/30
(87) Date publication PCT/PCT Publication Date: 2020/08/27
(85) Entrée phase nationale/National Entry: 2021/12/17
(86) N° demande PCT/PCT Application No.: RU 2019/001043
(87) N° publication PCT/PCT Publication No.: 2020/171737
(30) Priorité/Priority: 2019/02/18 (RU2019104508)

(51) Cl.Int./Int.Cl. *G21C 7/12* (2006.01),
G21C 17/10 (2006.01), *G21C 9/02* (2006.01)
(71) Demandeur/Applicant:
STATE ATOMIC ENERGY CORPORATION
"ROSATOM" ON BEHALF OF THE RUSSIAN
FEDERATION, RU
(72) Inventeurs/Inventors:
KUDRYAVTSEV, MIKHAIL YURYEVICH, RU;
LUPA, POLINA YURYEVNA, RU
(74) Agent: CPST INTELLECTUAL PROPERTY INC.

(54) Titre : RACCORD RAPIDE
(54) Title: DETACHABLE CONNECTION

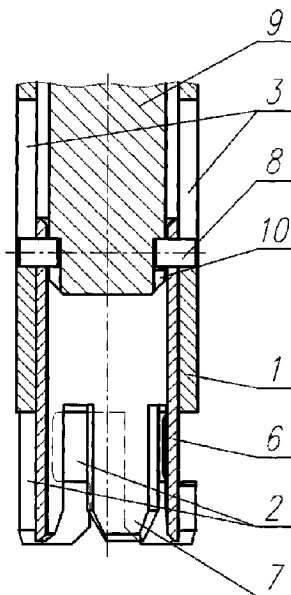


Fig. 1

(57) **Abrégé/Abstract:**

The invention relates to the field of nuclear technology. A detachable connection between a tubular armature of a linear motor and a vertical cylindrical rod of a nuclear-reactor actuating mechanism is designed such that the rod is arranged in a guide tube. L-shaped slots are formed at the end of the armature and vertical slots are formed thereabove. The rod is mounted in the armature with an annular gap into which a tubular fork with prongs is placed. Furthermore, radial protrusions are formed on the rod. In the guide tube, below the vertical armature slots, a bushing with grooves is fastened in coaxial alignment with the armature such that the rod protrusions can be inserted into (removed from) said grooves, and the lower part of the armature is covered by a longitudinally immovable plug, on the lateral surface of which grooves are formed for the insertion (removal) of the fork prongs. The invention makes it possible to increase the reliability of the connection between armature and rod under conditions of high temperature and radiation.



ABSTRACT

The invention relates to the field of nuclear technology. A detachable connection between a tubular armature of a linear motor and a vertical cylindrical rod of a nuclear-reactor actuating mechanism is designed such that the rod is arranged in a guide tube. L-shaped slots are formed at the end of the armature and vertical slots are formed thereabove. The rod is mounted in the armature with an annular gap into which a tubular fork with prongs is placed. Furthermore, radial protrusions are formed on the rod. In the guide tube, below the vertical armature slots, a bushing with grooves is fastened in coaxial alignment with the armature such that the rod protrusions can be inserted into (removed from) said grooves, and the lower part of the armature is covered by a longitudinally immovable plug, on the lateral surface of which grooves are formed for the insertion (removal) of the fork prongs. The invention makes it possible to increase the reliability of the connection between armature and rod under conditions of high temperature and radiation.

DETACHABLE CONNECTION

Field of the invention

The invention relates to the field of nuclear industry and can be used in the detachable connection of a linear motor tubular armature and a vertical cylindrical rod of the actuator of the nuclear reactor control and protection system.

Prior art

The closest to the claimed invention in terms of the combination of essential features is a detachable connection of a linear motor tubular armature and a vertical cylindrical rod of the actuator of a nuclear reactor (Principles of the design of the nuclear reactor control actuators). I. Ya. Emelyanov, V. V. Voskoboynikov, B. A. Maslenok; M.: Energoatomizdat, 1987; Fig. 3.15c, p. 41).

The above-mentioned detachable connection of the tubular armature of a linear stepper motor with a vertical cylindrical rod,

installed with the possibility of vertical movement and angular rotation, in fact, is a bayonet connection of the anchor with the rod, fixed with a spring stop at the lower end of the rod.

The disadvantage of this detachable connection is the possibility of its spontaneous uncoupling as a result of the failure of the spring stop due to hard radiation and high temperature in the area of the lower end of the rod.

Disclosure of the invention

The object of invention hereof is to create a detachable connection of a linear motor tubular armature and a vertical cylindrical rod of the actuator of the control and protection system of a nuclear reactor, which reduces the dose loads on personnel, as well as provides increase in the reliability of the coupling of the armature and rod in conditions of high temperature and radiation.

The technical result of the present invention is prevention of spontaneous uncoupling of the detachable connection of the linear motor tubular armature and the vertical rod of the actuator of the control and protection system of the nuclear reactor, while reducing the running actions for coupling-uncoupling of the detachable connection.

The said technical result is achieved by the fact that in the detachable connection of the linear motor tubular armature and the vertical cylindrical rod of the nuclear reactor control actuator, the rod is located in the guide pipe, L-shaped slots are made at the end of the armature, and vertical slots are made above them, and the rod is installed in the armature with an annular

gap, in which a tubular fork with pins is placed, and at the same time radial protrusions are made on the rod, and in the guide pipe - below the vertical slots in the armature - the bushing with L-shaped grooves which allow inserting (removing) the rod protrusions into them is fixed coaxially with the armature, and the lower part of the armature is closed by a longitudinally fixed plug, on the side surface of which there are Γ -shaped grooves for inserting (removing) the fork pins.

The use of the above-described connection of the armature with the rod prevents the spontaneous rotation of the rod, since its structural elements are located above the rod in the area of low temperatures and the absence of radiation, which allows maintaining its initial operational characteristics (strength, ductility, etc.) and, thereby, increasing the reliability of the rod coupling with the control member. In addition, the said connection simplifies the procedure of coupling-uncoupling the rod of the control member with the linear motor armature.

Brief description of drawings

The essence of the claimed invention is explained by the drawings, where Fig. 1 shows a detachable connection when connecting (coupling) the armature with a rod, Fig. 2 shows a detachable connection when disconnecting (uncoupling) the armature from a rod.

The figures show the tubular armature 1 of a linear stepper motor, L-shaped slots 2 of the armature 1, vertical slots 3 of the armature 1, vertical cylindrical rod 4, radial protrusions 5 on the rod 4, tubular fork 6, teeth 7 of the fork 6, pins 8 of the fork 6, plug 9, Γ -shaped grooves 10 of the plug 9, bushing 11 with L-shaped grooves 12, guide pipe 13.

The best embodiment of the invention

The detachable connection of the linear motor tubular armature and the vertical cylindrical rod of the actuator of the control and protection system of the nuclear reactor functions as follows.

Linear stepper motor (not shown in the figure) vertically moves the tubular armature 1 and the cylindrical rod 4 connected to the control member (not shown in the figure). The movement of the control member enhances or weakens the nuclear reaction in the core of a nuclear reactor.

To attach the armature 1 to the rod 4, the radial protrusions 5 of the rod 4 are first brought into the upper lateral vertical sections of the L-shaped grooves 12 of the bushing 11, which

is fixed coaxially to the armature 1 in the guide pipe 13. Then, the protrusions 5 are moved along the horizontal sections of the $L|$ -shaped grooves 12 of the bushing 11 into the central blind vertical sections of the $L|$ -shaped grooves 12 of the bushing 11. This prevents the rotation of the rod 4 when coupling and uncoupling with the armature 1. After that, the armature 1 is lowered until the protrusions 5 of the rod 4 bump into the end of the armature 1 and the armature 1 is rotated until the protrusions 5 enter the vertical sections of the L-shaped slots 2 of the armature 1. Then the armature 1 is lowered until the protrusions 5 bump into the point of transition of the vertical part of the L-shaped slot 2 into the horizontal one. In this position, the protrusions 5 pass through the annular gap between the armature 1 and the rod 4. Located in this gap, the tubular fork 6 rests with teeth 7 on the protrusions 5 of the rod 4 and does not lower. Next, the armature 1 is rotated until the protrusions 5 stop at the dead ends of the horizontal sections of the L-shaped slots 2, while the teeth 7 cease to rest on the protrusions 5, and the fork 6 lowers until the pins 8 stop at the lower end of the vertical slots 3 of the armature 1, locking with the teeth 7 the protrusions 5 of the rod 4 in the horizontal sections of the L-shaped slots 2 of the armature 1. At the same time, the transverse pins 8 of the fork 6 located in the upper part enter with the outer ends into the slots 3 of the armature 1, which allow only vertical movement of the fork 6 relative to the armature 1 from the lower to the upper stops of the pins 8 in the slots 3 of the armature 1.

Coupling is controlled by attempting to turn the armature 1. If the fork 6 has moved to the position of locking with the teeth 7 of the fork 6 of the protrusions 5 of the rod 4 in the horizontal blind sections of the L-shaped slots 2, the armature 1 does not rotate because the protrusions 5

of the rod 4 are located in the central vertical sections of the $L|$ -shaped grooves 12 of the fixed bushing 11.

To uncouple the armature 1 from the rod 4, the protrusions 5 of the rod 4 are brought into the central vertical sections of the $L|$ -shaped grooves 12 of the bushing 11. After that, the armature 1 with the rod 4 is lifted up to the stop of the pins 8 from below to the place of transition of the lower vertical section to the horizontal section of Γ -shaped grooves 10 of the vertically fixed plug 9, which covers the lower part of the armature 1 to protect personnel from the reactor radiation. Then the plug 9 is rotated relative to the armature 1 until the pins 8 stop at the place of

transition of the horizontal section to the upper vertical section of the L -shaped grooves 10. After that, the armature 1 with the rod 4 is lowered until the pins 8 stop at the upper ends of the vertical slots 3, while the fork 6 is not lowered, and the protrusions 5 together with the armature 1 fall below the teeth 7 of the fork 6 and get the opportunity to exit the L-shaped slots 2 of the armature 1. Then the plug 9 is turned together with the armature 1 until the protrusions 5 of the rod 4 stop at the place of transition of the vertical section into the horizontal section of L-shaped slots 2. In this position, the rod 4 cannot be turned, because the protrusions 5 of the rod 4 are located in the vertical sections of the L -shaped grooves 12 of the bushing 11. After that, the armature 1 is raised to the exit of the protrusions 5 of the rod 4 from the L-shaped slots 2 of the armature 1. In the position of uncoupling the armature 1 with the rod 4, the inner ends of the pins 8 are located in the Γ -shaped grooves 10 of the plug 9.

Thus, this detachable connection prevents the possibility of spontaneous uncoupling of the tubular armature of a linear stepper motor by a vertical cylindrical rod of the nuclear reactor actuator while reducing the dose loads on personnel due to a reduction in the number of running actions for coupling-uncoupling the detachable connection.

Industrial applicability

The invention can be applied in a detachable connection of a linear motor tubular armature and a vertical cylindrical rod of the actuator of the control and protection system of a nuclear reactor.

CLAIM

A detachable connection of a linear motor tubular armature and a vertical cylindrical rod of the nuclear reactor actuator, characterized in that the rod is located in a guide pipe, L-shaped slots are made at the end of the armature, and vertical slots are made above them, and the rod is installed in an armature with an annular gap, in which a tubular fork with pins is placed, and at the same time the radial protrusions are made on the rod, and in the guide pipe - below the vertical slots of the armature - the bushing with  - shaped grooves with the possibility of inserting (removing) the rod protrusions into them is fixed coaxially with the armature, and the lower part of the armature is closed by a longitudinally fixed plug, on the side surface of which there are  -shaped grooves for inserting (removing) the fork pins.

1/2

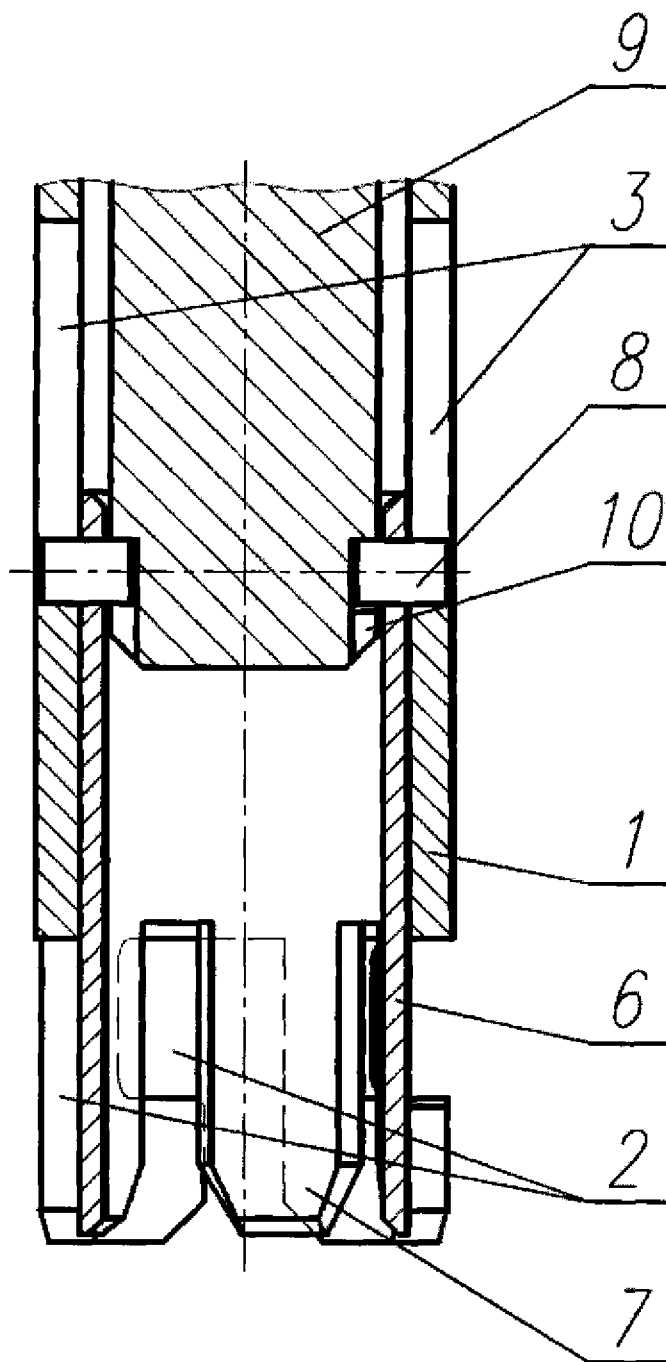


Fig. 1

2/2


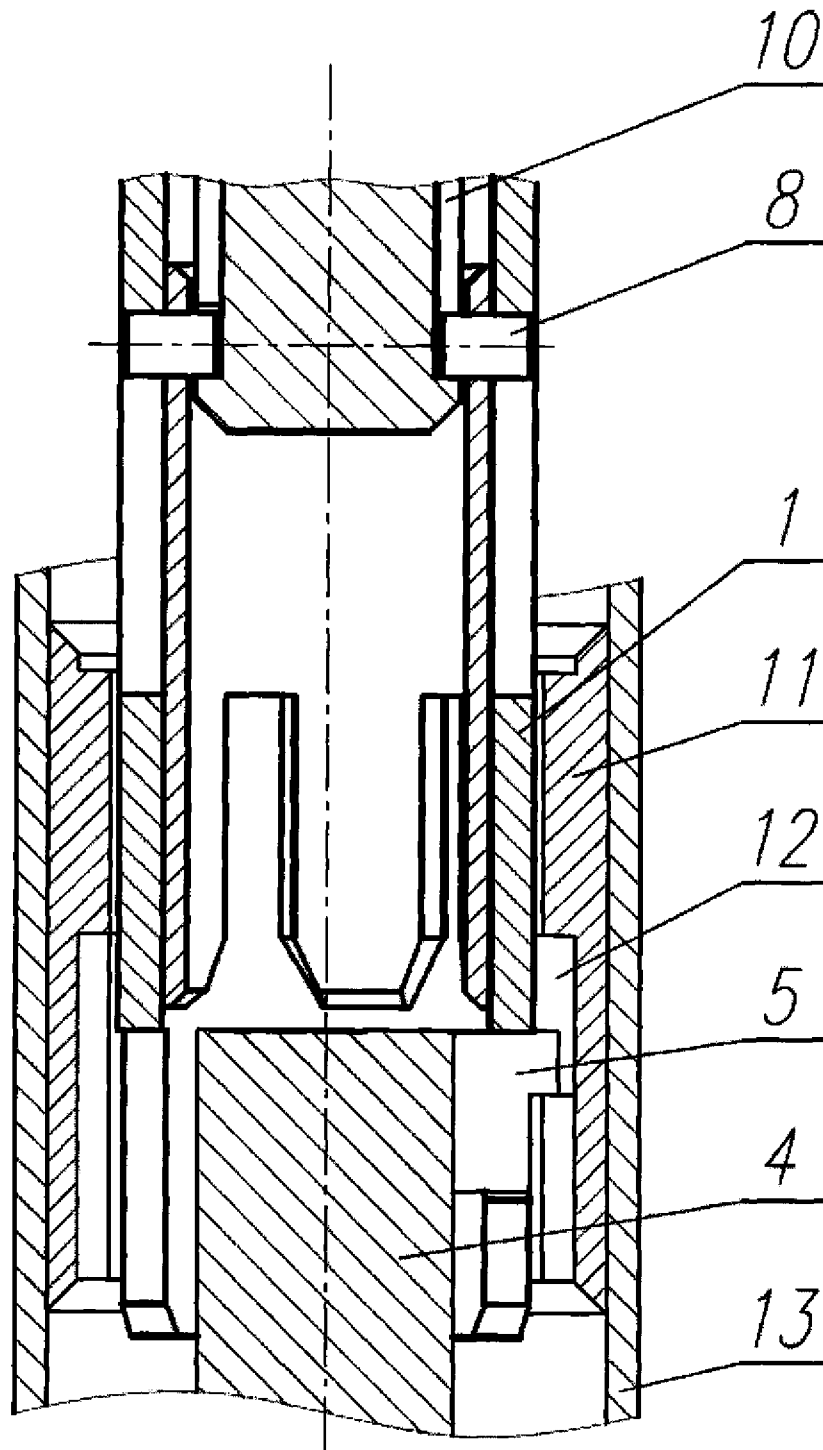


Fig. 2

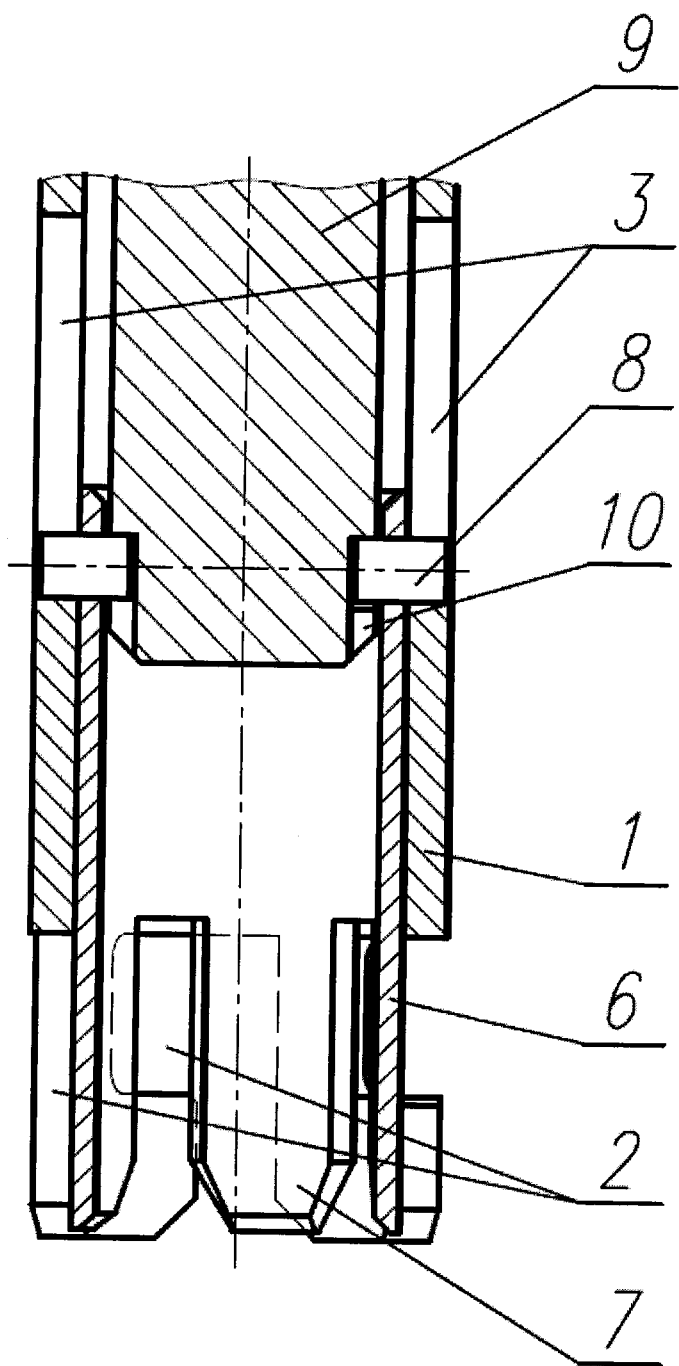

Фиг.1