



(No Model.)

S. D. NORTH.

MACHINE FOR RECUTTING AXLE SHOULDERS.

No. 547,025.

Patented Oct. 1, 1895.

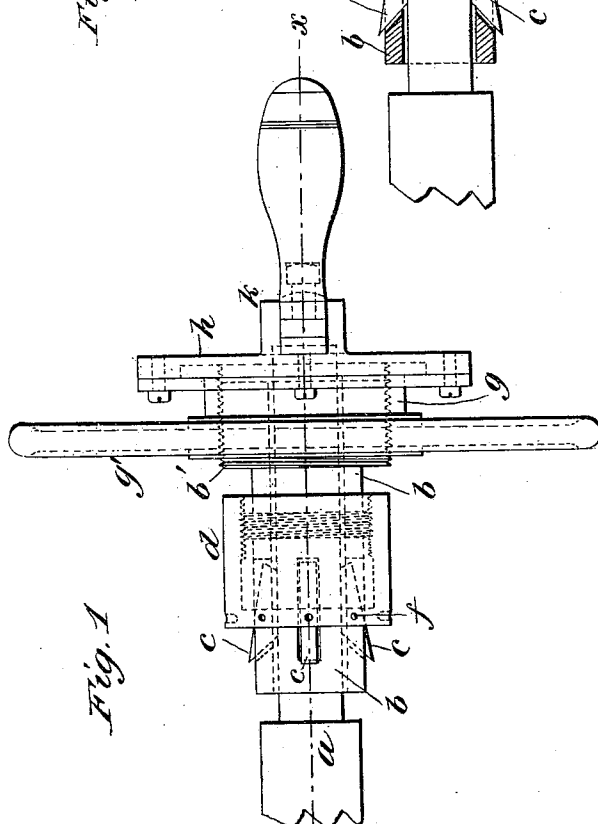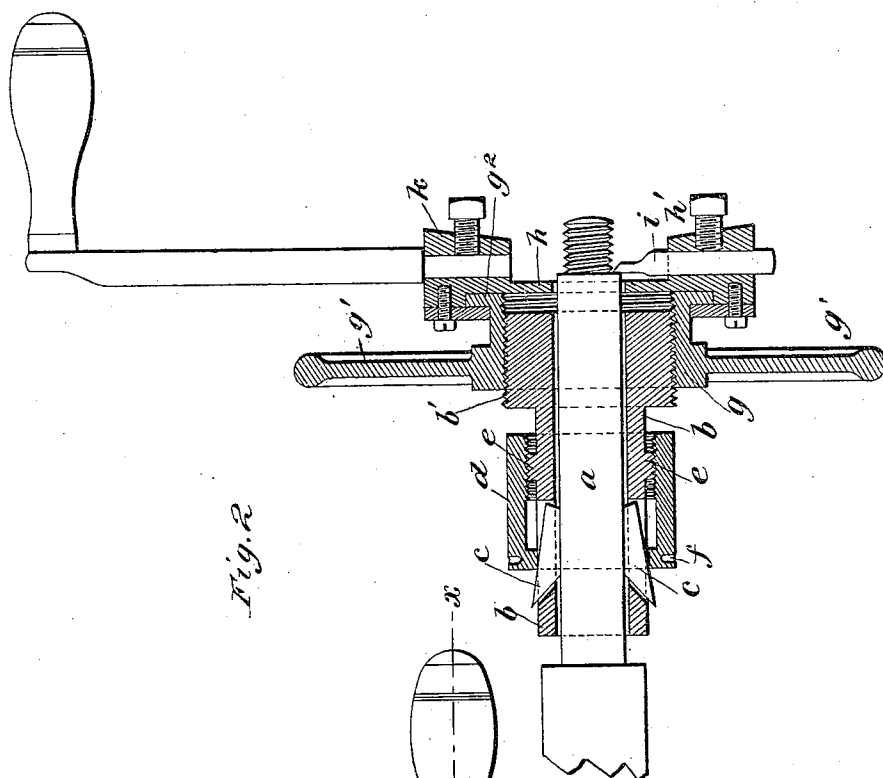

Witnesses
J. Thompson
Andrew Ferguson

Inventor
Solomon D. North
By W. E. Simons
Attorney

UNITED STATES PATENT OFFICE.

SOLOMON D. NORTH, OF PLAINVILLE, CONNECTICUT.

MACHINE FOR RECUTTING AXLE-SHOULDERS.

SPECIFICATION forming part of Letters Patent No. 547,025, dated October 1, 1895.

Application filed December 29, 1894. Serial No. 533,273. (No model.)

To all whom it may concern:

Be it known that I, SOLOMON D. NORTH, a citizen of the United States, residing at Plainville, in the county of Hartford and State of Connecticut, have invented a certain new and useful Improvement in Machines for Recutting Shoulders Upon the Ends of Axle-Arms, of which the following is a description, reference being had to the accompanying drawings, wherein—

Figure 1 is an exterior view of the entire tool. Fig. 2 is a view of the same in central longitudinal section on the plane denoted by the broken line *x x*.

The primary object served by this tool is the recutting of the shoulders at the outer extremity of the axle-arms of vehicles, for the purpose of permitting the nut which is commonly borne upon such extremity to be "turned up" a little farther than was originally intended, so as to compensate for endwise wear of the axle-box and co-operating parts. The tool can also be used for other purposes than that above indicated.

In the accompanying drawings, the letter *a* denotes an axle-arm to which the tool is attached.

b denotes a sleeve loosely inclosing the axle-arm.

c denotes a key, of which there are three or more, each lying in a longitudinal slot made for that purpose in the sleeve *b*, and they are used for centering the sleeve *b* in place upon the axle-arm and there holding it after it is so centered. These keys are simultaneously and synchronously moved radially toward a common center by means of the compressor-ring *d*, which is interiorly screw-threaded and has that thread co-operating with a corresponding thread upon the collar *e*.

The letter *f* denotes socket-holes, more or less in number, sunk in the compressor-ring for the end of a small wrench-bar, whereby the compressor-ring may be rotated.

The tool, as a whole, is centered and fastened and placed upon an axle-arm by means of the devices and parts so far described. The forward portion of the sleeve *b* carries a screw-thread *b'*, co-operating with a corresponding screw-thread upon the interior of the feed-sleeve *g*, and it is by the rotation of this feed-sleeve *g* upon the axle-arm-inclosing sleeve *b* that the cutting-tool, soon to be described, is fed back and forth. The feed-sleeve is rotated by any suitable means—for instance, feed-wheel *g'*.

On the feed-sleeve is hung the rotary tool-carrier *h*, through the medium of a flange *g*² on the feed-sleeve and corresponding inclosing parts, which are constituents of the tool-carrier. The tool-carrier has a socket (or it may have more than one) *h'*, carrying a cutting-tool *i*. The letter *k* denotes a wrench-socket on the tool-carrier for the insertion of a wrench-bar to rotate the tool-carrier, and with it the cutting-tool, and do the cutting for reshouldering axles.

I claim as my improvement—

In combination, sleeve *b* carrying screw-thread *b'*, keys *c*, compressor-ring *d*, interiorly threaded feed sleeve *g* carrying flange *g*², tool-carrier *h* rotarily hung on flange *g*², tool-socket *h'*, and tool *i*, all substantially as described and for the purposes set forth.

SOLOMON D. NORTH.

Witnesses:

WILLIAM E. SIMONDS,
ANDREW FERGUSON.