



- (51) International Patent Classification:
B01F 13/00 (2006.01) *B01F 5/06* (2006.01)
- (21) International Application Number:
PCT/IN2016/050108
- (22) International Filing Date:
13 April 2016 (13.04.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1022/DEL/2015 13 April 2015 (13.04.2015) IN
- (71) Applicant: COUNCIL OF SCIENTIFIC & INDUSTRIAL RESEARCH [IN/IN]; Anusandhan Bhawan, Rafi Marg, New Delhi 110001 (IN).
- (72) Inventors: KULKARNI, Amol Arvind; National Chemical Laboratory, Dr. Homi Bhabha Road, Pune 411008 (IN). RANADE, Vivek Vinayak; National Chemical Laboratory, Dr. Homi Bhabha Road, Pune 411008 (IN).
- (74) Agents: KOUL, Sunaina et al.; RCY House, C-235, Defence Colony, New Delhi 110024 (IN).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(54) Title: CONTINUOUS MICRO MIXER

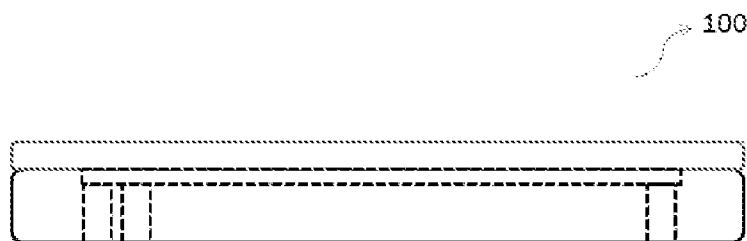


Figure 1

(57) Abstract: A multimodal micromixer obstacle for intensification of mixing and performing the reaction in a continuous manner is disclosed herein. The micromixer 100 comprises of plurality of inlets, an outlet and a plurality of channels. The end channels- of the channels, have plurality- of converging sections having width, to depth ratio ranging 1:1 to 20:1. The intermediate channels have at least, one obstacle having non-circular shape. Each converging section is incomplete ellipse, prolate or oblate shaped having, angle of curvature in the range of 90 to 270°. Axes of the inlets are coplanar and perpendicular to the channels. All the components of the micromixer are coplanar.

CONTINUOUS MICRO MIXER

FIELD OF INVENTION

The present invention relates to a flow micromixer composed of plurality of fluidic components which helps retain consistency and re-configurability of the continuous chemical processes with improved processing ability. More specifically, the invention relates to a multimodal micromixer composed of varied permutations and combinations of a plurality of modular elements for intensification of mixing and performing the reaction in a continuous manner.

BACKGROUND OF INVENTION

A continuous flow passive micromixer usually helps to achieve rapid mixing based on the geometry of the flow domain. It offers much faster mixing than the batch reactors for processing the same volume. This gives an advantage of better mixing, reduced mixing time, and consistency in the quality of mixed fluid thereby helping to achieve identical inlet conditions for reactions in a continuous reactor.

However, Continuous reactors usually are inflexible, less agile and not very prone to process modifications. Therefore, many multi-product manufacturing modules or plants prefer batch processing.

Converging diverging type mixers are one type of continuous mixer, which have not been widely explored to overcome this issue as it is typically perceived to be a ventury only. Prior exploration have been limited to only the converging section as mixer and residence time distribution for a tracer pulse has been used as a parameter to study the mixing performance.

But this option does not overcome the issues of moving from batch to continuous processing.

There have been attempts to improve micromixer designs. US7753580 discloses mixer apparatus which comprises at least one injection zone in a continuous flow path where plurality of fluids make initial contact. The injection zone has co-axial injection passage. The mixer elements comprise of a channel segment in the flow path. The channels lie on a first layer and a second layer. The channels in the first layer and the second layer are in perpendicular with each other. The mixer elements is further characterized by a chamber disposed at an end of said channel segment wherein each chamber further contains at least one obstacle. Further, the obstacle may preferably have a cylindrical shape. However, the

obstacle may also take any geometrical shape and may be in series or parallel along the flow path to provide the desired flow-rate, mixing and pressure-drop.

US5904424 discloses a device for mixing liquids, The said device has at least two microchannels issuing from at least one inlet channel. Both of the microchannels are lying in the same branching plane. The device includes a confluence element connected by a connection to said microchannels. The said connection effects a 90° rotation of the inflow of the liquid relative to the branching plane as the liquid flows from the microchannels to the confluence element. However, the channel segments in US'424 are the sections that connect the subsequent segments in a perpendicular manner and not in the same plane.

Further, an article titled "Mixing performance of a planar micromixer with circular obstructions in a curved microchannel" by Afroz Alam et. al. numerically investigates the mixing and fluid flow in a new design of passive micromixer employing several cylindrical obstructions within a curved microchannel. Mixing in the channels is analyzed using Navier–Stokes equations and the diffusion equation between two working fluids (water and ethanol) for Reynolds numbers from 0.1 to 60. The proposed micromixer of the said paper is claimed to be shown far better mixing performance than a T-micromixer with circular obstructions and a simple curved micromixer. The effects of cross-sectional shape, height, and placement of the obstructions on mixing performance and the pressure drop of the proposed micromixer have also been evaluated. However, these obstacles are placed in straight channels.

Another article titled "Design and Analysis of Y Shaped Micro-Mixer with Different Configuration of Obstacles" by Anil Shinde published in Sverian Scientific Vol. 1 April 2015 studies the mixing of two liquids in "Y" channel using Cosmol multyphysics, a commercial CFD tool. Obstacles located on the channel wall are used to enhance mixing in the channel, so as to reduce the mixing length. Micro channels with different geometric layout and with different shapes and sizes of obstacles such as rectangular, triangular and semicircular, are analyzed for their mixing length. The triangular obstacles within the "Y" channel gave minimum mixing length for the same distance between the obstacles.

The inventors of the present invention have attempted to improve the mixing efficiency further without affecting its agility.

OBJECT OF INVENTION

It is an object of the invention to provide a multimodal micro mixer that provides consistent mixing without affecting its agility.

SUMMARY OF THE INVENTION

In accordance with the object, the present invention provides novel modular reactor/micro mixer design that helps retain consistency and re-configurability of the continuous processes with better processing ability via intensification of mixing and reaction.

In an aspect, the present invention discloses a multimodal micromixer comprising plurality of inlets, an outlet and a plurality of channels wherein end channel comprises plurality of converging sections having width to depth ratio ranging 1:1 to 20:1, and intermediate channels having plurality of obstacles for intensification of mixing and performing the reaction in a continuous manner.

In a preferred embodiment, the obstacles may be non-circular, such as triangular, rectangular or any other non-circular shape. In another embodiment, the obstacles may have a non-cylindrical shape. The obstacles are placed in the intermediate channels only in order to enhance the mixing efficiency.

The micromixer may be metallic or non-metallic. It has a machined lamellar structure. The obstacles may have same or lower height than the depth of machined converging section.

In a preferred embodiment, the micromixer may have multi feed inlets. The inlet / injection ports are placed such that the axes of injection port are co-planar and perpendicular to the channel. The obstacles may be arranged in periodic or aperiodic sequence. The channels have serpentine nature.

In another embodiment, the periodic or aperiodic sequence may be of different shaped obstacles. For example, the sequence may include combination of triangular, rectangular and any other non-circular shaped obstacles.

In another aspect, the individual fluidic structures can have identical or different axis of symmetry.

BRIEF DESCRIPTION OF DRAWINGS

Figure 1: Illustrates the assembled micromixer device.

Figure 2: illustrates side views of micromixer in Figure 1.

Figure 3: Illustrates side view of the details of the machined bottom plate of micromixer in Figure 1.

Figure 4: Illustrates front view of the details of the machined bottom plate of micromixer in Figure 1.

Figure 5: Illustrates front view of the details of the mixing zone of the micromixer in Figure 3.

Figure 6: Illustrates the lamellar structure [701] and its variants.

Figure 7: Illustrates the split lamellar structure [701].

Figure 8: Illustrates the various options of sharp edged converging section in the mixing zone of the micromixer in Figure 3.

Figure 9: Illustrates the front view of the bottom plate [102] and the top plate [103]

Figure 10: RTD for the instant device and the sequence of middle converging section of the micro mixer alone

Figure 11: Effect of Re on the mixing time for single phase and two phase flow in lamellar channels in a geometry with fixed turn-around angle.

Figure 12: The extent of mixing was analyzed by mixing blue and red colours. The images of the micro mixer at different flow rates (0.5 ml/min, 1 ml/min, 2 ml/min, 5 ml/min, 10 ml/min, 20 ml/min)

DETAILED DESCRIPTION OF INVENTION

The present invention provides a continuous flow metallic or non-metallic micromixer assembly which comprises of mixing units having different planar features.

The continuous flow micromixer of the present invention retains agility and re-configurability of the continuous processes and also facilitates in achieving desired mixing time and enhancing mixing and reaction.

Accordingly, the present invention discloses a multimodal micromixer comprising plurality of inlets, an outlet and a plurality of channels wherein end channels comprise plurality of converging sections having width to depth ratio ranging 1:1 to 20:1, and intermediate channels having plurality of obstacles for intensification of mixing and performing the reaction in a continuous manner.

In a preferred embodiment, the obstruction may be non-circular, such as triangular, rectangular or any other non-circular shape. In another embodiment, the obstructions may have a non-cylindrical shape.

The micromixer may be metallic or non-metallic. It has a machined lamellar structure. The obstruction may have same or lower height than the depth of machined converging section.

In a preferred embodiment, the micromixer may have multi feed inlets. The inlet / injection ports are placed such that the axes of injection port are co-planar and perpendicular to the channel. The obstacles may be arranged in periodic or aperiodic sequence.

In another embodiment, the periodic or aperiodic sequence may be of different shaped obstacles. For example, the sequence may include combination of triangular, rectangular and any other non-circular shaped obstacles.

Each of the fluidic structures can be machined in metallic and non-metallic flat plates having respective inlet and outlet ports;

The selection of right combination of lamellar structures (radii of curvature, shape of cross-section, flow area, plane of machining and number of elements) and the converging unit (number of units, dimensions, type of obstruction, etc.) is decided upon the physicochemical properties of fluids to be mixed and the available pressure drop;

The micromixer having said plurality of machined fluidic structures achieves the desired residence time, extent of mixing, pressure drop and chemical reaction in a single phase or multiphase (gas-liquid, liquid-liquid, gas-liquid-liquid and such like) system is disclosed herein.

The individual fluidic structures can have identical or different axis of symmetry.

The invention will now be described in detail in connection with certain preferred and optional embodiments by way of figures, so that various aspects thereof may be more fully

understood and appreciated. However, the figures are for the purpose of understanding the embodiments of the invention and should not be construed as limiting the scope of the invention. Any modifications in the embodiments may be considered as obvious to person skilled in the art.

With reference to Figures 1-9, the micromixer of the present invention comprises a plurality of channels, intermediate channels, plurality of inlets [202-204] being co-planar and perpendicular to the channels; and an outlet [205]. The end channels of said plurality of channels comprise of plurality of converging sections [702] having width to depth ratio ranging 1:1 to 20:1. The converging sections [702] are incomplete ellipse [701A-C], prolate [701D] or oblate [701E] shaped having angle of curvature in the range of 90 to 270°. The ratio of radii of curvature of incomplete ellipse, prolate or oblate shaped is in the range of 0.1:10. The intermediate channels have at least one obstacle [703] for intensification of mixing and performing the reaction in a continuous manner. The obstacle/s [703] in the intermediate channel have non-circular shape selected from triangular, rectangular or any such shape. The converging sections [702], the obstacles [703], the inlets [202-204] and the outlet [205] are co-planar.

The micro mixer [100] is a combination of two flat plates [102] and [103] joined face to face using screws or threaded nut-bolts through several end to end grooves [101].

The flat large surface of the bottom plate [102] facing the top plate is machined partly [201] and the system is made leak proof using an o-ring or gasket that can be held in the groove [206] machined on the same flat surface [102] and the machined section has four through holes [202-205] that open on the other side of the bottom plate [102A]. The holes [202 – 204] act as inlets while [205] acts as outlet.

The machined surface [201] of the bottom plate [102] includes a mixing zone [207] that occupies a substantial section of the machined area.

The bottom plate [102] and the holes [202-205] are either threaded or are smooth for connecting to metallic or non-metallic straight or flexible tubes with or without the help of external connectors.

The mixing zone [207] may be selected from one or a plurality of units selected from lamellar flow structures [701], or a sequence of sharp converging units [702] or such like arranged in varied permutations and combinations.

In another embodiment, the lamellar flow structures [701] comprises a cross section of geometries selected from circular, elliptical, square or rectangular or a combination of segments of an incomplete circle [701A – 701C], specifically any geometry from quarter of a circle to $3/4^{\text{th}}$ of complete circle in the same plane. The individual lamella can have the shape of an incomplete ellipse, prolate [701D] or oblate [701E]. The ratio of radii of curvature of the two sides of any lamella (R1 – major axis, R2 – minor axis) can vary in the range of 0.1 to 10. The angle of curvature can vary in the range of 90^0 to 270^0 . The lamella having varied properties (radii, angle of curvature and diameter or cross-section shapes) can be arranged in varied permutations and combinations to achieve the desired length. The mixing zone may comprise of one or more rows of such combination of segments connected to each other.

In another embodiment of the lamellar flow structures [701], can have circular or elliptical or square or rectangular cross-section and can have a combination of segments of an incomplete circle [701A – 701C], specifically any geometry from quarter of a circle to $3/4^{\text{th}}$ of complete circle in the same plane such that every alternate lamella is machined in two different plates [701F] i.e. top plate [103] and the bottom plate [102] with slight overlap to facilitate fluid transfer from one segment to other. The individual lamella can have the shape of an incomplete ellipse, prolate [701D] or oblate [701E]. The ratio of radii of curvature of the two sides of any lamella (R1 – major axis, R2 – minor axis) can vary in the range of 0.1 to 10. The angle of curvature can vary in the range of 90^0 to 270^0 . The lamella having varied properties (radii, angle of curvature and diameter or cross-section shapes) can be arranged in varied permutations and combinations to achieve the desired length. The mixing zone can comprise of one or more rows of such combination of segments connected to each other.

In a preferred embodiment, each of the elements of the sharp converging sections [702] may have non-cylindrical or non-circular obstacles [703] arranged in varied permutations and combinations. In one embodiment, the flow obstacles [703] comprise a triangular or rectangular shape. In another embodiment, the major axis of the rectangular shaped flow obstacles [703] is parallel or perpendicular to the flow direction.

In a preferred embodiment, the lamellar structure [701] is a sequence of 270^0 turns.

The micro mixer of the invention is useful used for carrying out the reactions selected from, but not limited to aromatic nitration (o-xylene, acetophenone, propiophenone, substituted aromatic ketones and such like), reactions involving diazonium salts and for Meerwein

arylation reaction, reactions involving Bu-Li, flow synthesis of amino crotonates, sulfoxidation, and such others.

Residence time distribution for a tracer pulse was used as a method for exploring the nature of mixing in converging section of mixer. In addition to the converging sections, a sequence of diverging sections was also used as different mixer geometry. For the converging section the ratio of the length scale facing the fluid inlet is between 2 to 20, more specifically it was between 5 to 7.

The RTD curves for the different sections of the micromixer are shown in Figure 9. The extent of dispersion only from the middle section comprising of converging two dimensional units (Figure 9A) is quite wide as compared to the lamellar section (Figure 9B) indicates that it is necessary to have the lamellar sections sandwiching the middle section to reduce the dispersion and also enhance mixing. The overall tracer outlet was close to Gaussian indicating that the extent of dispersion was close to a plug flow reactor, which is desired.

Fig. 10A, 10B and 10C illustrate the effect of power consumption per unit volume on the mixing time for single phase and two phase flow in lamellar channels in a geometry with fixed turn-around angle. Mixing time was seen to decrease with increasing flow rate or the power consumption in the micromixer. The trends were identical for single phase as well as two-phase systems. This is standard for a good micromixer and indicates that constant extent of mixing can be achieved with higher power or flow rates in shorter time.

Following examples are given by way of illustration and therefore should not be construed to limit the scope of the invention.

Examples:

Example 1: Mixing uniformity

The extent of mixing was analyzed by mixing blue and red colours. The images of the micromixer at different flow rates (0.5 ml/min, 1 ml/min, 2 ml/min, 5 ml/min, 10 ml/min, 20 ml/min) are given in Figure 12 which shows the pictorial view of the mixing quantification. It can be seen that in the first lamellar section mixing takes place only to some extent and it enhances rapidly when the type of mixing changes from lamellar mixing to split and recombine type of mixing. Later the second lamellar section ensures that complete mixing is achieved. From top to bottom the pictures correspond to different flow rates.

Example 2: Extent of dispersion

Residence time distribution for a tracer pulse was used as a method for exploring the nature of mixing in converging section of mixer. In addition to the converging sections, a sequence of diverging sections was also used as different mixer geometry. For the converging section the ratio of the length scale facing the fluid inlet is between 2 to 20, more specifically it was between 5 to 7. When fluids flow through curvilinear channels, they experience inertial forces acting to direct axial motion and centrifugal forces acting along the radius of curvature. When the fluid flows through the lamellar channels, a mismatch of velocity between the fluid in the centre and the fluid near the wall region causes secondary flows. Fluid elements at the channel centreline tend to flow outward around the curve and since the channel is enclosed, the fluid near the walls re circulates inward creating two symmetric vortices. The residence time distribution (RTD) which actually indicates the extent of dispersion in the system were measured for the complete device and also the sequence of middle converging section of the micro mixer alone. The RTD curves are illustrated in Figure 11 and 12.

Example 3: Flow synthesis

Reaction of bromobenzene in acetic acid (bromobenzene to acetic acid volume ratio was kept at 1:15.) with nitrating mixture (60:40 v/v, 68% HNO_3 & H_2SO_4 respectively) was carried out with the micromixer followed by residence time tube. Complete conversion was achieved at 30 °C and residence time of 60 minutes. Para to ortho isomer ratio was 2.82.

Example 4: Flow synthesis

Reaction of bromobenzene in acetic acid (bromobenzene to acetic acid volume ratio was kept at 1:15.) with nitrating mixture (60:40 v/v, 68% HNO_3 & H_2SO_4 respectively) was carried out with the micromixer followed by residence time tube. Complete conversion was achieved at 80 °C and residence time of 15 minutes. Para to ortho isomer ratio was 2.82.

We Claim,

1. A multimodal micromixer comprising plurality of inlets [202-204], an outlet [205] and a plurality of channels wherein end channels of said plurality of channels comprise plurality of converging sections [702] having width to depth ratio ranging 1:1 to 20:1, and intermediate channels having at least one obstacle [703] for intensification of mixing and performing the reaction in a continuous manner.
2. The multimodal micromixer according to claim 1, wherein each converging section [702] is incomplete ellipse [701A-C] , prolate [701D] or oblate [701E] shaped having angle of curvature in the range of 90 to 270°.
3. The multimodal micromixer according to claim 2, wherein ratio of radii of curvature of incomplete ellipse, prolate or oblate shaped is in the range of 0.1:10.
4. The multimodal micromixer according to claim 1, wherein said obstacle [703] in said intermediate channel have non-circular shape selected from triangular, rectangular or any such shape.
5. The multimodal micromixer according to claim 1, wherein said obstacles as well as said converging sections are arranged in periodic or aperiodic sequence.
6. The multimodal micromixer according to claim 1, wherein intermediate channels having said obstacles have sharp corners.
7. The multimodal micromixer according to claim 1, wherein axis of said inlets are co-planar and perpendicular to said channels.
8. The multimodal micromixer according to any of the claims, wherein said converging sections [702], said obstacles [703], said inlets [202-204] and said outlet [205] are co-planar.

9. The multimodal micromixer according to claim 1, wherein said plurality of channels have serpentine nature.
10. A multimodal micromixer comprising a plurality of channels and intermediate channels, wherein end channels of said plurality of channels comprise plurality of converging sections [702] having width to depth ratio ranging 1:1 to 20:1, said converging sections [702] are incomplete ellipse [701A-C] , prolate [701D] or oblate [701E] shaped having angle of curvature in the range of 90 to 270°; ratio of radii of curvature of incomplete ellipse, prolate or oblate shaped is in the range of 0.1:10; said intermediate channels having at least one obstacle [703] for intensification of mixing and performing the reaction in a continuous manner; said obstacle [703] in said intermediate channel have non-circular shape selected from triangular, rectangular or any such shape, plurality of inlets [202-204] being co-planar and perpendicular to said channels; and an outlet [205], wherein said converging sections [702], said obstacles [703], said inlets [202-204] and said outlet [205] are co-planar.



Figure 1

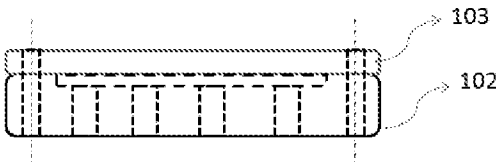
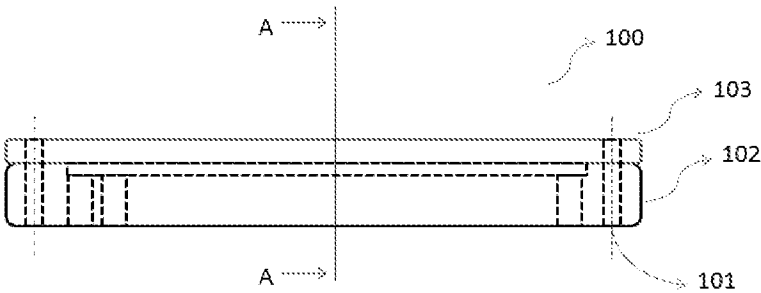


Figure 2

2/8

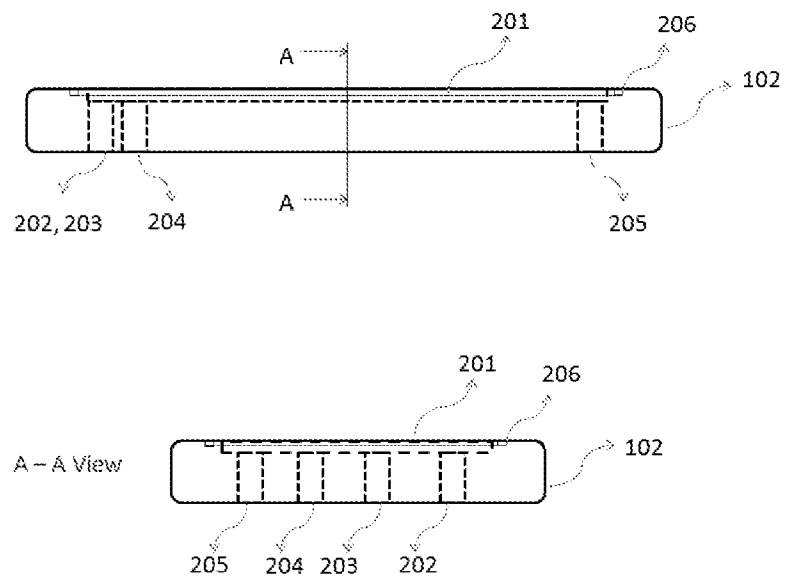


Figure 3

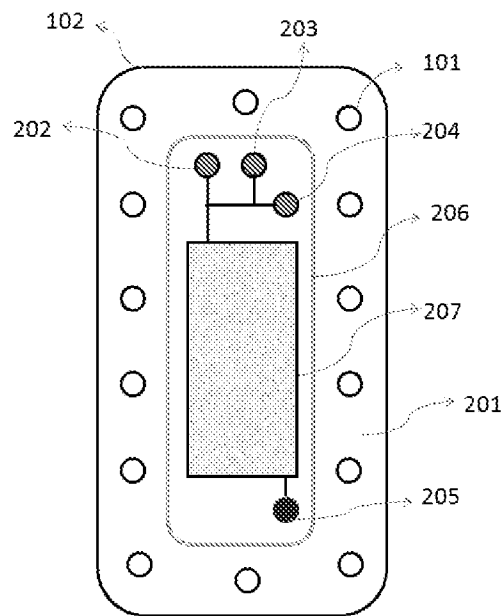


Figure 4

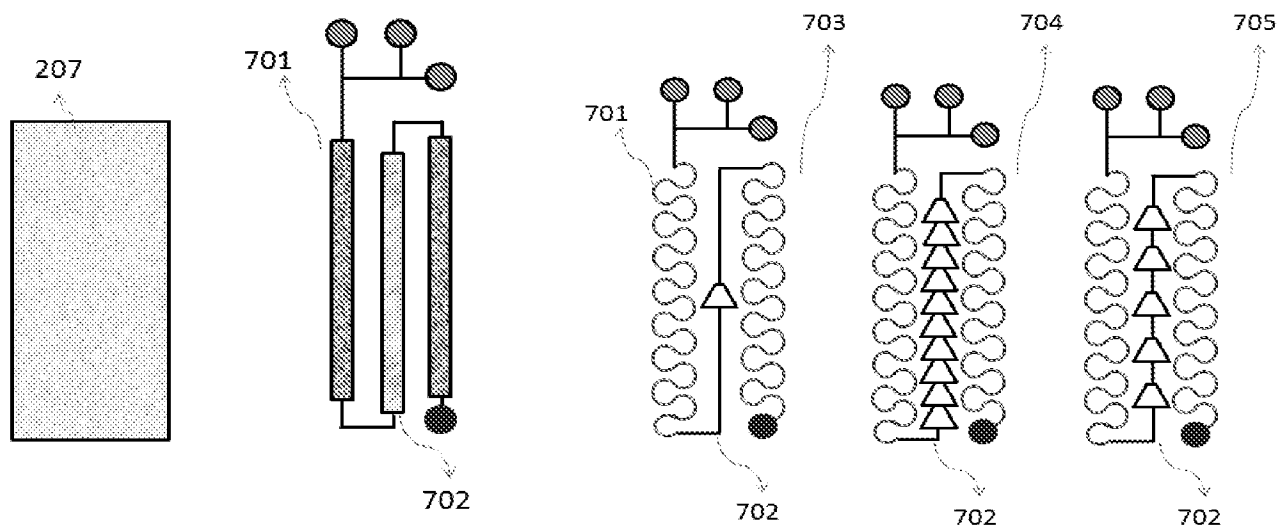


Figure 5

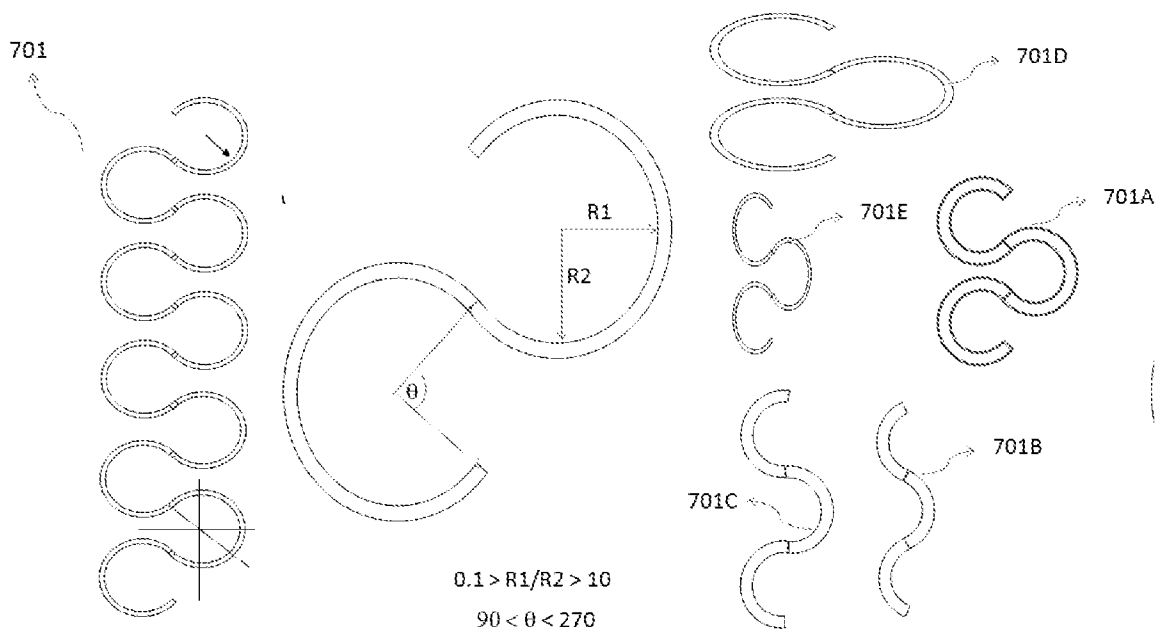


Figure 6

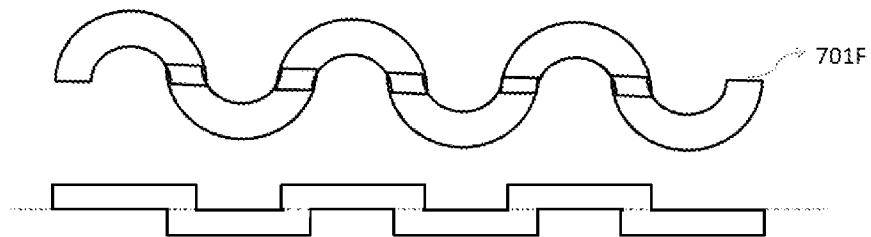


Figure 7

5/8

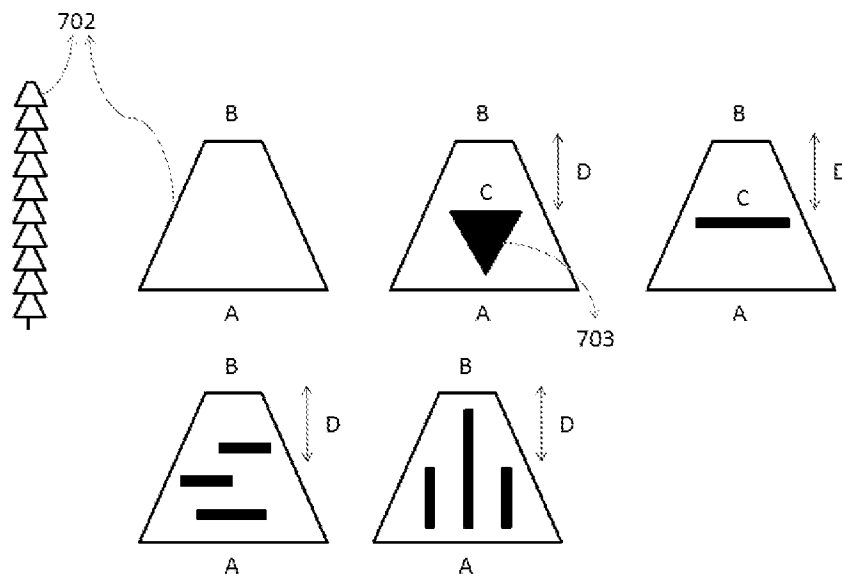


Figure 8

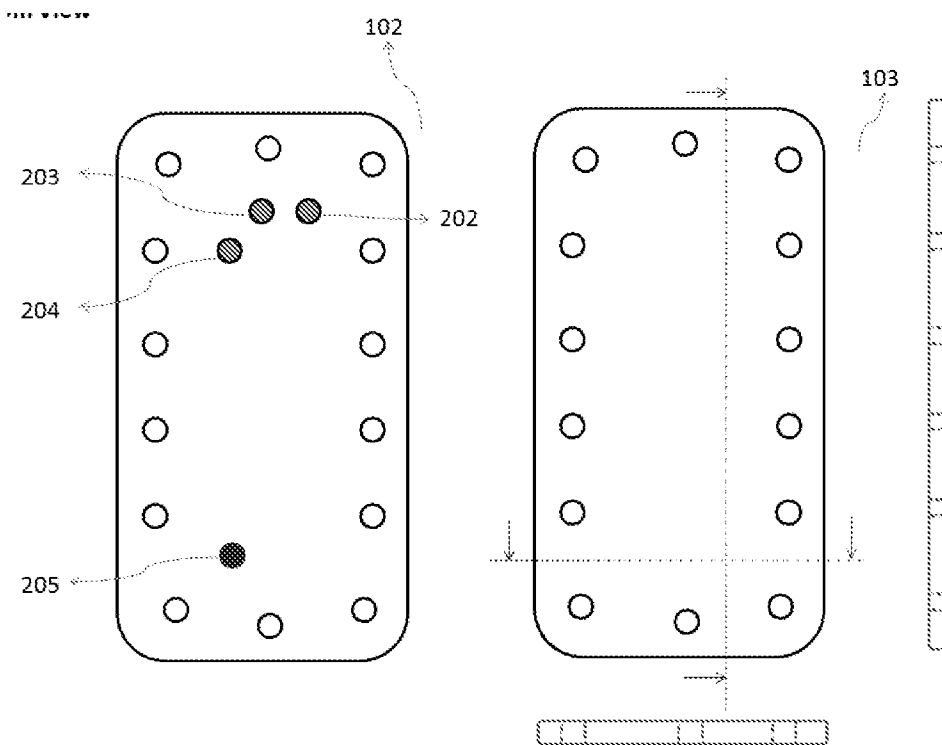


Figure 9

6/8

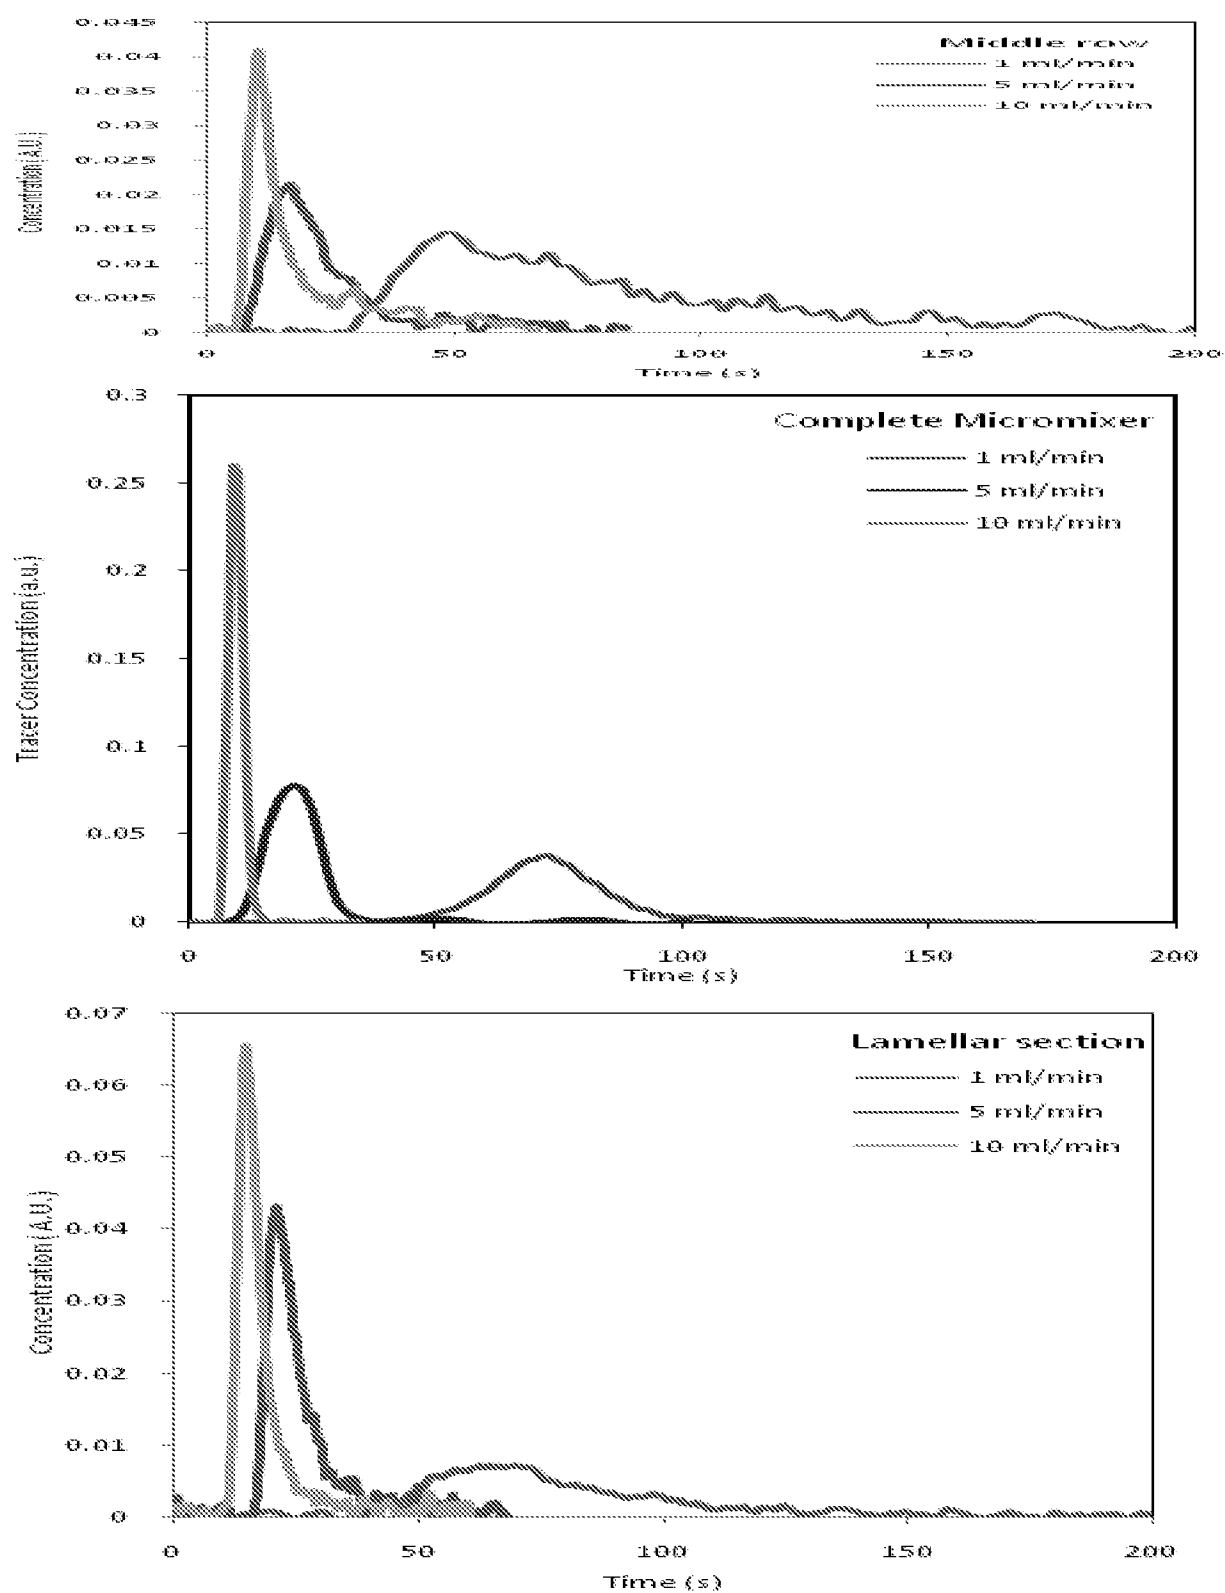


Figure 10 A, B and C

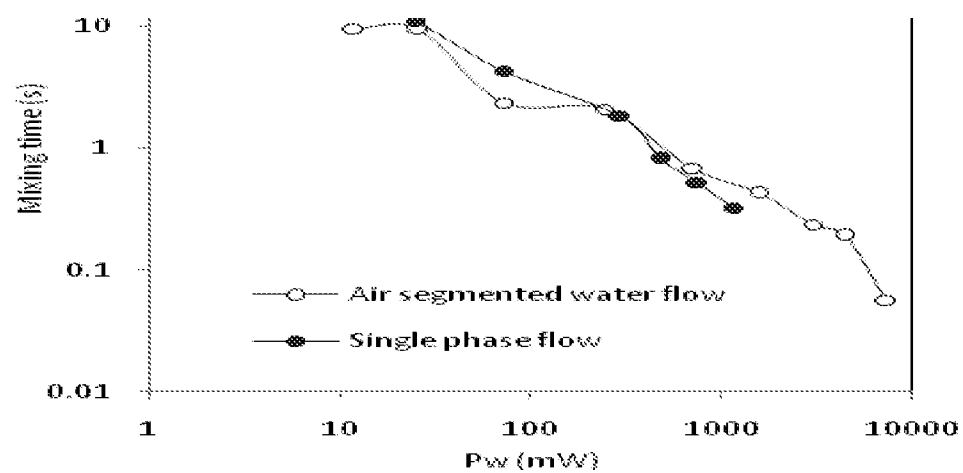


Figure 11

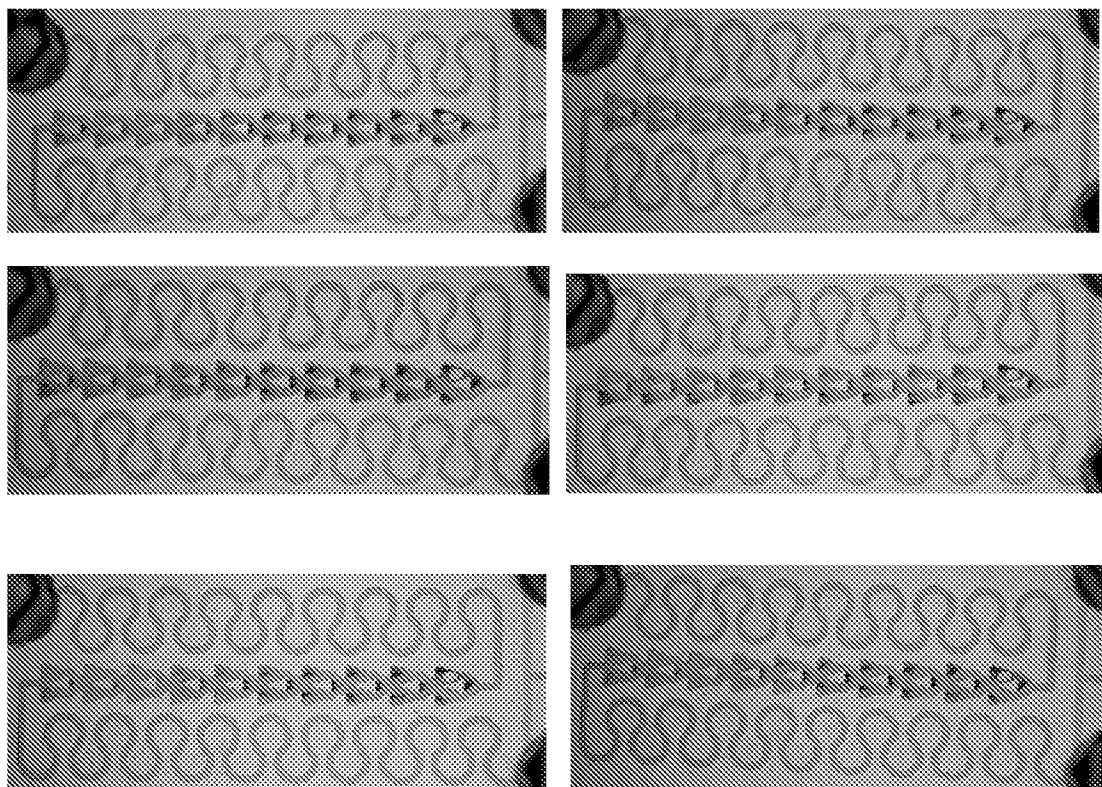


Figure 12

INTERNATIONAL SEARCH REPORT

International application No
PCT/IN2016/050108

A. CLASSIFICATION OF SUBJECT MATTER
INV. B01F13/00 B01F5/06
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2013/059922 A1 (UNIV BRITISH COLUMBIA [CA]) 2 May 2013 (2013-05-02) figure 1 pages 5,21,22	1-10
X	US 2009/028763 A1 (LAVRIC ELENA DANIELA [FR] ET AL) 29 January 2009 (2009-01-29) figures 1-3,7-13 paragraphs [0027] - [0035], [0043] - [0048]	1-10
X	WO 2010/009239 A2 (3M INNOVATIVE PROPERTIES CO [US]; CASTRO GUSTAVO H [US]; COBIAN PAUL J) 21 January 2010 (2010-01-21) abstract figures 1-10 page 6, line 8 - page 18, line 18	1-10
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 September 2016

Date of mailing of the international search report

21/09/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Krasenbrink, B

INTERNATIONAL SEARCH REPORT

International application No
PCT/IN2016/050108

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014/146636 A1 (DILLION BRIAN W [US]) 29 May 2014 (2014-05-29) figures 6,7 abstract paragraphs [0061] - [0065] -----	1-10
X	WO 01/68257 A1 (BIOPROCESSORS CORP [US]) 20 September 2001 (2001-09-20) abstract figures 1,3-6 page 6 - page 11 -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IN2016/050108

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2013059922 A1	02-05-2013	CA 2853316 A1 EP 2770980 A1 EP 3069785 A1 JP 2015502337 A US 2014328759 A1 US 2016214103 A1 WO 2013059922 A1	02-05-2013 03-09-2014 21-09-2016 22-01-2015 06-11-2014 28-07-2016 02-05-2013
US 2009028763 A1	29-01-2009	AU 2008275602 A1 BR PI0813700 A2 CA 2693463 A1 CN 101873890 A EP 2017000 A1 JP 2011508657 A JP 2014147930 A KR 20100049060 A RU 2010104674 A TW 201107029 A US 2009028763 A1 WO 2009009129 A1 ZA 201000944 B	15-01-2009 30-12-2014 15-01-2009 27-10-2010 21-01-2009 17-03-2011 21-08-2014 11-05-2010 20-08-2011 01-03-2011 29-01-2009 15-01-2009 27-10-2010
WO 2010009239 A2	21-01-2010	US 2011150703 A1 WO 2010009239 A2	23-06-2011 21-01-2010
US 2014146636 A1	29-05-2014	NONE	
WO 0168257 A1	20-09-2001	AU 4355301 A CA 2400978 A1 CN 1441703 A EP 1265708 A1 JP 2003526359 A US 7485454 B1 US 2004121454 A1 US 2009275115 A1 WO 0168257 A1	24-09-2001 20-09-2001 10-09-2003 18-12-2002 09-09-2003 03-02-2009 24-06-2004 05-11-2009 20-09-2001