




(86) **Date de dépôt PCT/PCT Filing Date:** 2007/11/09
 (87) **Date publication PCT/PCT Publication Date:** 2008/05/15
 (45) **Date de délivrance/Issue Date:** 2017/06/13
 (85) **Entrée phase nationale/National Entry:** 2010/05/07
 (86) **N° demande PCT/PCT Application No.:** SE 2007/000994
 (87) **N° publication PCT/PCT Publication No.:** 2008/057027
 (30) **Priorité/Priority:** 2006/11/09 (SE0602393-1)

(51) **Cl.Int./Int.Cl. B27B 5/29** (2006.01)
 (72) **Inventeur/Inventor:**
ERICSSON, HANS, SE
 (73) **Propriétaire/Owner:**
TWINBLADE TECHNOLOGIES HOLDING SWEDEN
AB, SE
 (74) **Agent:** SMART & BIGGAR

(54) **Titre : PAIRE DE LAMES DE SCIE**
 (54) **Title: PAIR OF SAW BLADES**

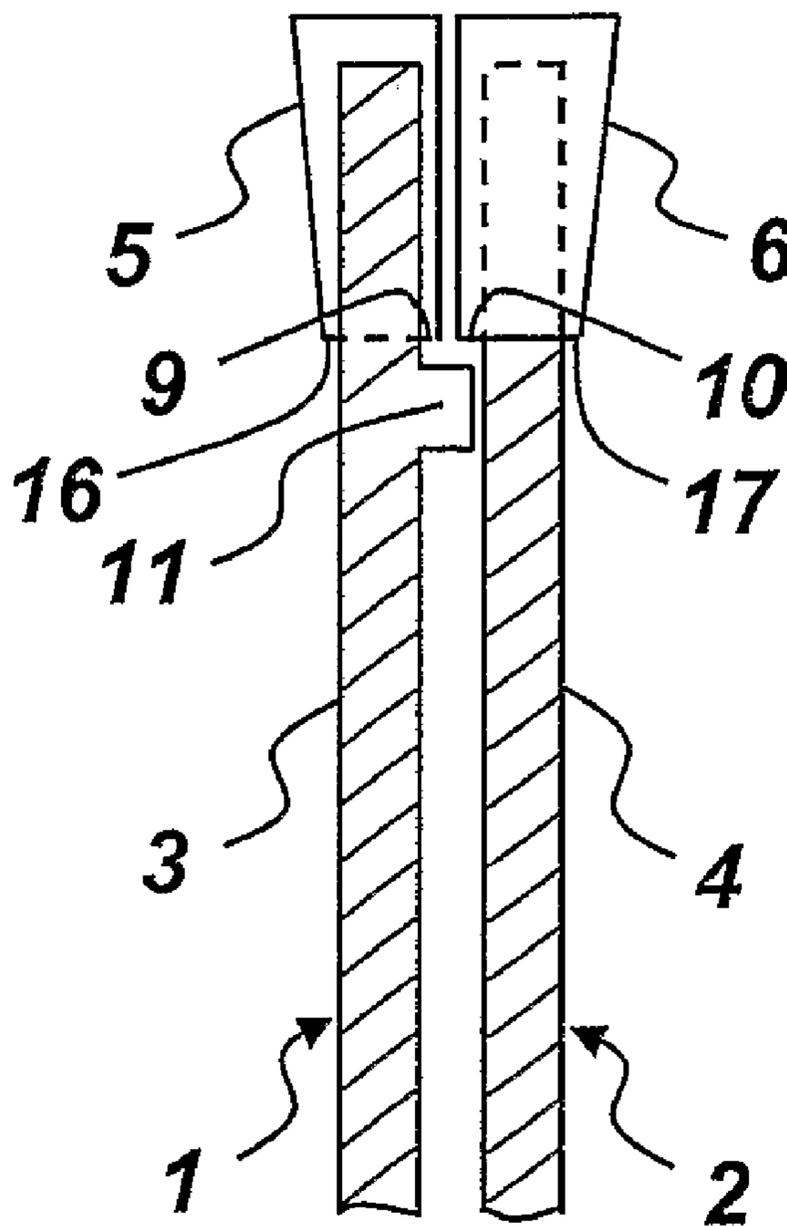

(57) **Abrégé/Abstract:**

The invention concerns a pair of saw blades, including a first blade (1) and a second blade (2), which are arranged to rotate around the same rotational axis in opposite directions. Each of the blades (1, 2) has its own blade body (3, 4) and peripheral cutting

(57) Abrégé(suite)/Abstract(continued):

elements (5, 6), wherein the blade body (3) of the first blade (1) has a front side, which is turned towards a back side of the blade body (4) of the second saw blade (2), and wherein the cutting elements (5, 6) form overhangs (9, 10) protruding from said front or back side. Said front and/or back side have/has a circumferential ridge (11), which is arranged peripherally inside of the cutting elements (5, 6) and to slide over a corresponding part or a corresponding ridge (11) on the opposite back side and/or front side, wherein the ridge/ridges (11) is/are made in one piece with the blade body (3, 4) in question and serves/serve as a spacer means to prevent the cutting elements (5, 6) with their overhangs (9, 10) to hit each other during rotation of the blades (1, 2).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 May 2008 (15.05.2008)

PCT

(10) International Publication Number
WO 2008/057027 A1

(51) International Patent Classification:
B27B 5/29 (2006.01)

(74) Agent: AWAPATENT AB; Box 5117, S-200 71 Malmö (SE).

(21) International Application Number:
PCT/SE2007/000994

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
9 November 2007 (09.11.2007)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0602393-1 9 November 2006 (09.11.2006) SE

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (*for all designated States except US*): TTP TECHNOLOGIES HOLDING AB [SE/SE]; Box 6070, S-390 06 Kalmar (SE).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): ERICSSON, Hans [SE/SE]; Vickleby bygata 41, S-386 93 Färjestaden (SE).

Published:
— with international search report

(54) Title: PAIR OF SAW BLADES

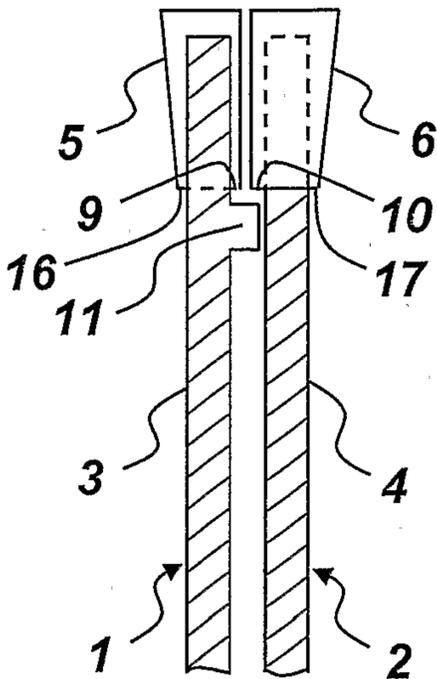

(57) Abstract: The invention concerns a pair of saw blades, including a first blade (1) and a second blade (2), which are arranged to rotate around the same rotational axis in opposite directions. Each of the blades (1, 2) has its own blade body (3, 4) and peripheral cutting elements (5, 6), wherein the blade body (3) of the first blade (1) has a front side, which is turned towards a back side of the blade body (4) of the second saw blade (2), and wherein the cutting elements (5, 6) form overhangs (9, 10) protruding from said front or back side. Said front and/or back side have/has a circumferential ridge (11), which is arranged peripherally inside of the cutting elements (5, 6) and to slide over a corresponding part or a corresponding ridge (11) on the opposite back side and/or front side, wherein the ridge/ridges (11) is/are made in one piece with the blade body (3, 4) in question and serves/serve as a spacer means to prevent the cutting elements (5, 6) with their overhangs (9, 10) to hit each other during rotation of the blades (1, 2).

WO 2008/057027 A1

PAIR OF SAW BLADES

Technical Field

The present invention concerns a pair of saw blades, including a first blade, which is arranged to rotate in a first direction around a rotational axis, and a second blade, which is arranged to rotate around the same rotational axis in a second direction opposite to the first direction, wherein each of the blades has its own blade body and cutting elements along the periphery of each blade body, the cutting elements being arranged to run close to and in parallel with each other during rotation, and wherein the blade body of the first saw blade has a front side, which is intended to be turned towards a back side of the blade body of the second saw blade.

State of the Art

From the international patent application WO02/092298 it is known to arrange a spacer means between two cooperating saw blades in order to prevent the cutting elements from hitting each other. In this known solution, the spacer means consists of either radially extended cutting elements on one of the blades, which slide on the blade body of the second, opposing blade, or of a spacer ring or a surface coating on either blade, which is also arranged to slide on the blade body of the opposing saw blade.

A disadvantage with the extended cutting elements according to the international patent application is that there are small intervals between the individual cutting elements, which during operation entails both noise and a risk of saw dust and the like entering in between the saw blades, thus jeopardizing operation. A disadvantage with the other spacer means is above all a tendency to fall off or to quickly be worn down during operation, a tendency further promoted by high temperatures occurring during sawing.

In addition, in the known solution with the extended cutting elements grinding of the cutting elements causes problems. This is due to the fact that the opposing blade in such a solution is forced to have cutting elements that do not protrude from the blade body in question, and for that reason during grinding these of these cutting elements one has to count on problems with

54823-2

2

grinding wheels being clogged by the sheet metal of the blade body, said sheet metal being inevitably affected by the grinding.

Summary of the Invention

According to an aspect of the invention, there is provided a pair of saw
5 blades according to the preamble in that the cutting elements on the blade body of
the first blade protrude with a first overhang from said front side in a direction towards
the second blade, in that the cutting elements on the blade body of the second blade
protrude with a second overhang from said back side in a direction towards the first
blade, and in that said front side and/or back side have/has a circumferential ridge,
10 which is arranged peripherally inside of the cutting elements and to slide over a
corresponding part or a corresponding ridge on the opposite back side and/or front
side, wherein the ridge/ridges is/are made in one piece with the blade body in
question and serves/serve as a spacer means to prevent the cutting elements with
their overhangs to hit each other during rotation of the blades.

15 According to an aspect of the invention by providing the cutting
elements with a first and a second overhang, grinding of the cutting elements is made
a lot easier and this producing too, because all contact between the sheet material of
a blade body and a grinding disc used for grinding is easy to avoid. In addition, the
overhangs contribute to breaking of chips, that penetrate between two cutting
20 elements meeting each other, in a free space, which is formed by the overhang in
question immediately behind the cutting element as to the sense of rotation, thus
preventing the formation of long chips, which tend to get stuck between the saw
blades. The ridge/ridges, which is/are easily made by turning or milling of the blade
body/bodies before the cutting the cutting elements are attached, have no
25 interruptions, which reduces operational noise and prevents operating interruptions
because of chips that during operation enter into the space between the blades.
Further, such a ridge/ridges is/are very durable and can withstand high working
temperatures that occur during sawing.

70181-14

3

Preferably a ridge is formed only on one of the blade bodies, said ridge having a height that exceeds the total height of said first and second overhang. This is advantageous mainly from an industrial engineering point of view, since it means that only one of the saw blades needs to be turned or milled.

5 According to a preferred embodiment, the cutting elements besides said first and second overhang on the sides facing each other have overhangs on their opposite sides too. Of course the latter overhangs also facilitate the milling of the cutting elements and further they contribute to a reduction of the friction of the blade bodies against the cut material.

10 Some embodiments disclosed herein relate to a pair of saw blades, including a first blade, which is arranged to rotate in a first direction around a rotational axis, and a second blade, which is arranged to rotate around the same rotational axis in a second direction opposite to the first direction, wherein each of the blades has its own blade body and cutting elements along the periphery of each
15 blade body, the cutting elements being arranged to run close to and in parallel with each other during rotation of the blades, and wherein the blade body of the first saw blade has a front side, which is intended to be turned towards a back side of the blade body of the second saw blade, wherein the cutting elements on the blade body of the first blade protrude with a first overhang from said front side in a direction
20 towards the second blade, wherein the cutting elements on the blade body of the second blade protrude with a second overhang from said back side in a direction towards the first blade, and wherein said front side and/or back side have/has a circumferential ridge, which is arranged peripherally inside of the cutting elements and to slide over a corresponding part or a corresponding ridge on the opposite back
25 side and/or front side, wherein the ridge/ridges is/are made in one piece with the blade body in question and serves/serve as a spacer means to prevent the cutting elements with their overhangs to hit each other during rotation of the blades, wherein the cutting elements besides said first and second overhang on the sides facing each other have overhangs on their opposite sides too.

70181-14

3a

Brief Description of the Drawings

A preferred embodiment of the invention is described in more detail in below with reference to the attached schematic drawings, in which:

5 Fig. 1 is a partial section view of a pair of saw blades according to the invention;

Fig. 2 is a partial section view along line II-II in Fig. 4 of the first blade of said pair;

Fig. 3 is a partial section view along line III-III in Fig. 5 of the second blade of said pair;

10 Fig. 4 is an overhead view of the front side of the first blade; and

Fig. 5 is an overhead view of the front side of the second blade.

Description of a Preferred Embodiment

In Fig. 1 a pair of saw blades is shown, that consists of a first blade 1, which is arranged to rotate around a rotational axis r according to Fig. 4 in a first
15 direction r1, and a second blade 2, which according to Fig. 5 rotates in a second direction r2, opposite to said first direction r1. Such an opposite

rotation of the blades 1, 2 does effectively counteract all tendencies of throw and in addition it enables very high work rates.

Each blade 1, 2 has its own blade body 3, 4, which appropriately is made of sheet steel. Each blade body 3,4 has cutting elements along the periphery thereof, which in the embodiment shown are saw teeth 5, 6 with cutting edges of hard metal brazed thereon.

The saw teeth 5, 6 have, which is best shown in Figs. 2 and 3, a slightly larger width than the associated blade body 3, 4. This means that the saw teeth 5 of the first blade 1 protrudes with a certain overhang 9 from the front side 7 of the blade 1, that is the side that is intended to be turned towards the second blade 2, and that saw teeth 6 of the second blade 2 protrudes with a certain overhang 10 from the back side 8 of the blade 2, that is the side that is intended to be turned towards the first blade 1.

In order to enable said rotation in opposite directions r_1 and r_2 despite the overhang without the saw teeth 5, 6 hitting each other, when the blades 1, 2 for sawing are mounted on and driven by a cutting tool, a spacer means is provided on the blade body 3 of the first blade 1. According to the invention this spacer means is an integral part of the blade body 3 and comprises of a annular ridge 11 (Fig. 4), which is concentric with the rotational axis r .

The ridge 11 is made by turning the blade body 3 down both inside and outside of the ridge 11 and has a height h (Fig. 2) that slightly exceeds the combined heights of both of said overhangs 9, 10. The ridge 11 is all flat and unbroken and intended to slide over a corresponding flat part of the blade body 4 of the second blade 2. The flat and unbroken contact between the blades 1, 2 causes little friction and low noise, and in addition it effectively prevents particles, such as sawdust, from entering into the space between the blades 1, 2 during sawing.

According to the preferred embodiment of the invention, the pair of saw blades besides the ridge 11 also has a specially shaped central parts.

The first blade 1 has in its center a circular centering hole 12, which on both sides has drive peg notches 13, which are intended for corresponding drive pegs on a machine hub (not shown).

The second blade 2 too has in its center a centering hole 14. This is bordered by four drive peg notches 15 symmetrically arranged around the rotational axis r in the form of spoke wise slots, which extend from the centering hole 14. The angle between the slots 15 is 90°. The slots 15 are intended to cooperate in a stable way with a machine hub (not shown), which for said stable cooperation with the slots 15 has a central driver.

Currently the pair of saw blades shown in the drawings constitutes the preferred embodiment of the intention, but it should not be considered to be the only possible one. In particular, the central parts of the blades 1, 2 can be shaped in another way if another type of blade mounting is desired. In addition it is obvious that the ridge 11 instead could be provided on the second blade 2 or that a ridge 11 could be provided on each of the blades 1, 2.

Finally it is also obvious that the saw teeth 5, 6 described above made of hard metal could be cutting elements of another type, such as diamond bits, and that they, as shown, besides said first and second overhang 9, 10 on the sides 7, 8 of the blades 1, 2 facing each other, may have overhangs 16, 17 on their opposite sides 18, 19, said overhangs 16, 17 facilitating milling of the saw teeth 5, 6 and reducing friction of the blade bodies 3, 4 against a material cut with the saw blades 1, 2.

70181-14

6

CLAIMS:

1. Pair of saw blades, including a first blade, which is arranged to rotate in a first direction around a rotational axis, and a second blade, which is arranged to rotate around the same rotational axis in a second direction opposite to the first
5 direction, wherein each of the blades has its own blade body and cutting elements along the periphery of each blade body, the cutting elements being arranged to run close to and in parallel with each other during rotation of the blades, and wherein the blade body of the first saw blade has a front side, which is intended to be turned towards a back side of the blade body of the second saw blade, wherein the cutting
10 elements on the blade body of the first blade protrude with a first overhang from said front side in a direction towards the second blade, wherein the cutting elements on the blade body of the second blade protrude with a second overhang from said back side in a direction towards the first blade, and wherein said front side and/or back side have/has a circumferential ridge, which is arranged peripherally inside of the
15 cutting elements and to slide over a corresponding part or a corresponding ridge on the opposite back side and/or front side, wherein the ridge/ridges is/are made in one piece with the blade body in question and serves/serve as a spacer means to prevent the cutting elements with their overhangs to hit each other during rotation of the blades, wherein the cutting elements besides said first and second overhang on the
20 sides facing each other have overhangs on their opposite sides too.
2. Pair of saw blades according to claim 1, wherein said ridge is provided on only one of the blade bodies and has a height that exceeds the total height of said first and second overhang.
3. Pair of saw blades according to claim 1 or claim 2, wherein the ridge on
25 at least one of said front side of the first saw blade and said back side of the second saw blade is made by turning or milling the respective blade bodies.

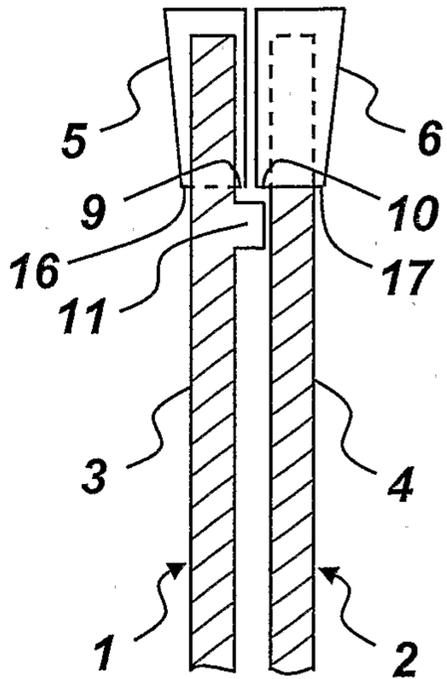


Fig 1

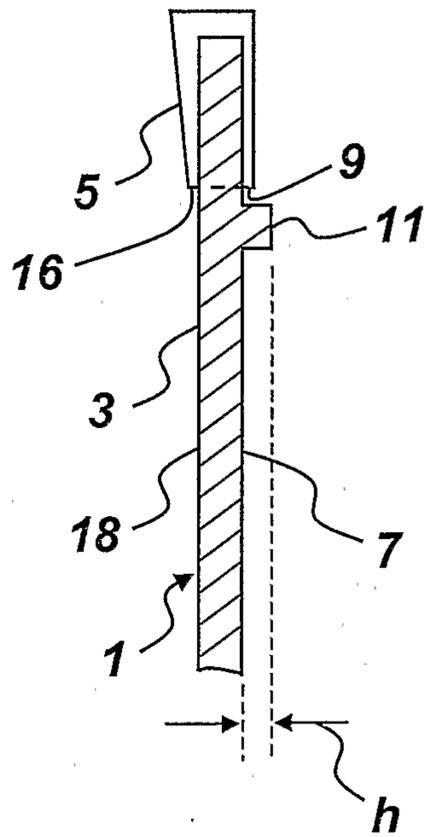


Fig 2

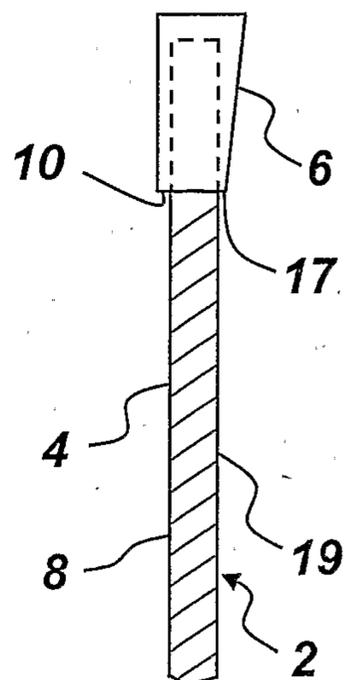


Fig 3

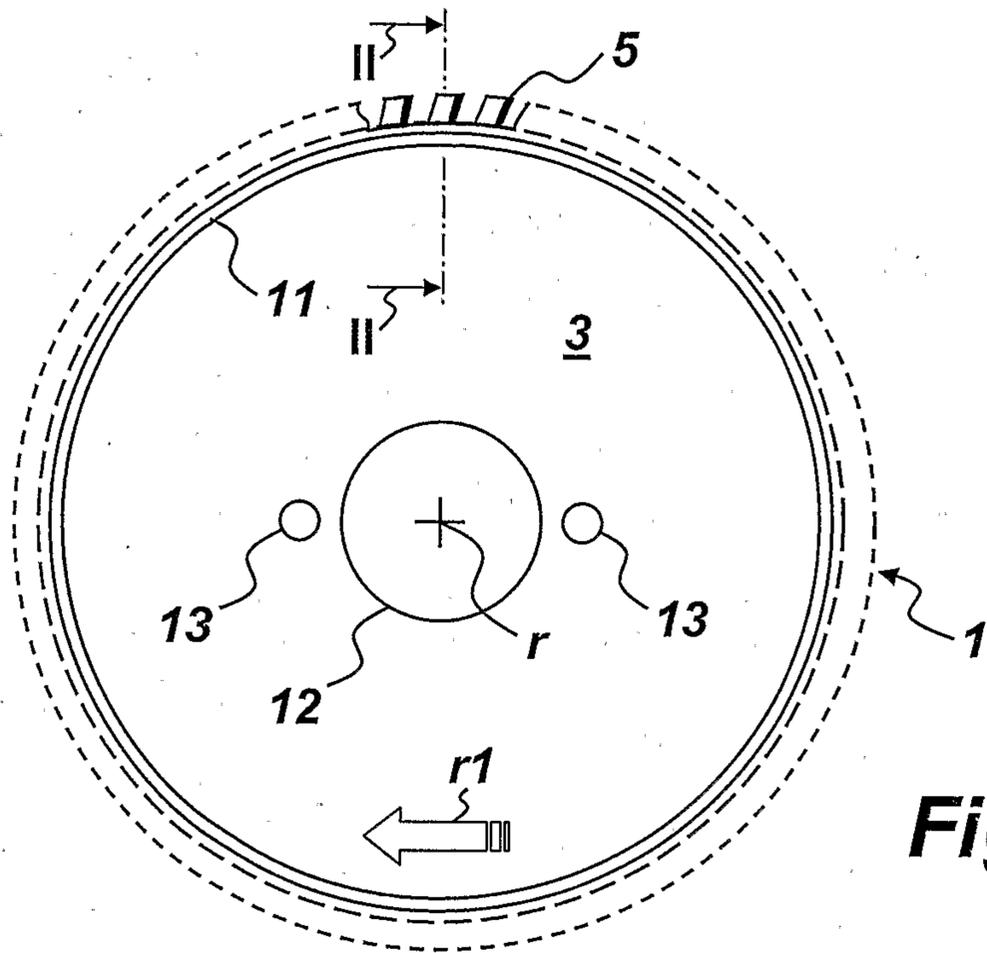


Fig 4

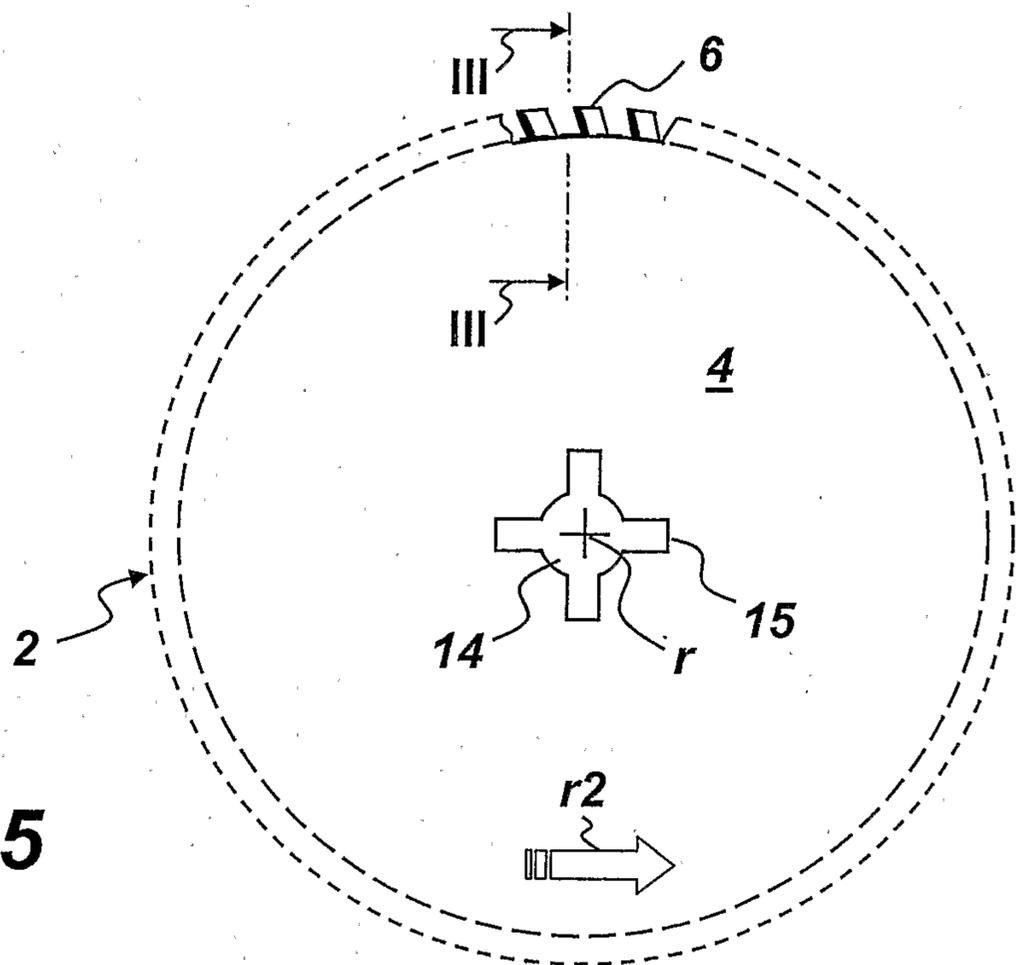


Fig 5

