

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 May 2009 (28.05.2009)

PCT

(10) International Publication Number
WO 2009/067643 A1

(51) International Patent Classification:

A43B 17/00 (2006.01) A43B 1/00 (2006.01)
A43B 17/14 (2006.01)

(21) International Application Number:

PCT/US2008/084280

(22) International Filing Date:

21 November 2008 (21.11.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/989,767 21 November 2007 (21.11.2007) US

(71) Applicant (for all designated States except US): **SPENCO MEDICAL CORPORATION** [US/US]; P.O. Box 2501, Waco, TX 76702 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SULAK, Duane, M.** [US/US]; 501 Howe Hill Road, Waco, TX 76706 (US).
GRANGER, David, B. [US/US]; 1794 W. Warren Road,

Lorena, TX 76655 (US). **MARTINEZ, Jacob** [US/US]; 2902 Creasey Drive, Temple, TX 76501 (US).

(74) Agent: **HANSEN, Eugenia, S.**; Hemingway & Hansen, LLP, 1717 Main Street, Suite 2500, Dallas, TX 75201 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: ARTHRITIS & DIABETES INSOLE

FIG. 1

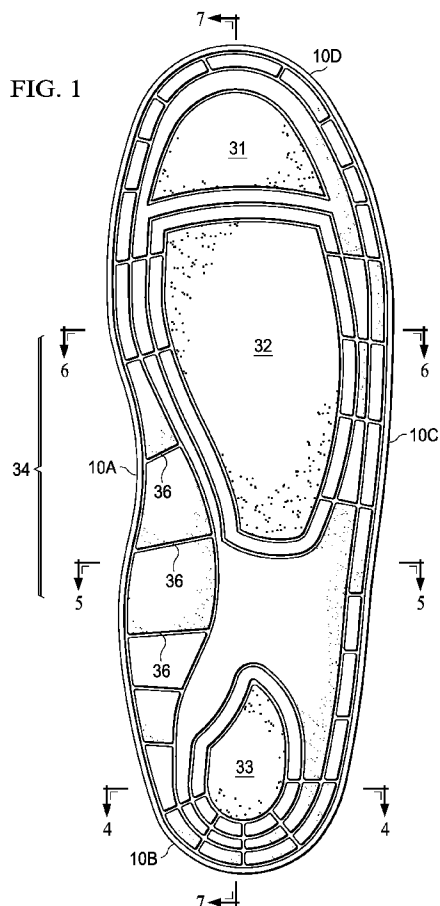

(57) Abstract: An insole especially advantageous for arthritic or diabetic patients comprises three layers and is shaped in a form which provides an arch support and an integral heel receiving area. It is made from a generally foot-shaped bottom layer having a length extending from a heel area to a toe area, a top surface and a bottom surface. The bottom surface of the bottom layer preferably further comprises one to three indentations formed integrally therein. Insert layers are secured to each of said indentations. Preferably, the bottom layer is made from an EVA foam. A middle layer having a first and second side is secured to the top surface of the bottom layer adjacent the middle layer's second side. The middle layer is preferably made of a synthetic rubber layer. The middle layer takes the shape of the bottom layer. A top layer is coextensive with and secured to the first side of the synthetic rubber layer. The top layer composition is selected according to the intended use. In use, the foot of the wearer, with or without a sock or stocking thereon, rests upon the top layer in the foot-receiving compartment of the shoe.



FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report*
— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

ARTHRITIS & DIABETES INSOLE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of United States Provisional Patent Application 60/989,767, filed 21 November 2007.

STATEMENT REGARDING FEDERALLY SPONSORED
RESEARCH OR DEVELOPMENT

[0002] Not applicable.

TECHNICAL FIELD

[0003] This invention relates to the field of replacement insoles for shoes.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] FIG. 1 is a bottom view of an insole for the left shoe of the preferred embodiment of the present invention;

[0005] FIG. 2 is a perspective inner side view of the insole depicted in FIG.1;

[0006] FIG. 3 is a perspective outer side view of one embodiment of the present invention;

[0007] FIG. 4 is a cross-sectional view near the heel area along line 4-4 of FIG.1;

[0008] FIG. 5 is a cross-sectional view near the arch area along line 5-5 of FIG.1;

[0009] FIG. 6 is a cross-sectional view near the metatarsal area line 6-6 of FIG. 1.

[0010] FIG. 7 is a cross-sectional view along line 7-7 of FIG.1

[0011] FIGS. 2A-7A represent the same views as FIGS. 2-7, except that they illustrate embodiments described herein which have a thicker top layer.

[0012] FIG. 8 is a top view of the insole of FIG. 1

DETAILED DESCRIPTION

[0013] An insole advantageous for users afflicted with arthritic, diabetic, and other conditions is disclosed that advantageously absorbs shock and provides support to areas of the feet most subject to increased force or pressure during standing, walking or other activities. For convenience, the insole of the invention disclosed herein will be referred to as "the insole".

[0014] The insole is formed in a shape which receives and supports the foot of the wearer. It has an inner side and an outer side. The outer side will lie adjacent the outer outline of a user's foot in use and the inner side will lie adjacent the inner side of a user's foot in use, including the arch of the foot. Accordingly, the formed shape includes an integrally formed arch support which extends generally upwardly on the inner side of the insole. This upward extension allows the arch support to lie adjacent to a user's foot arch during wearing.

[0015] The insole comprises at least three coextensive layers adjacent one another and extending the length of the insole, a middle layer, a bottom layer, and a top layer to be discussed later. Each of said layers is included in the formed shape.

[0016] In the preferred embodiment, the top layer mentioned in paragraph 14 is constructed of polyethylene foam having a thickness of about 2mm. In this embodiment, the insole is most advantageous for use by persons with arthritis.

[0017] In a second alternate embodiment, the top layer mentioned in paragraph 14 is constructed of closed-cell cross-linked polyethylene foam material having a thickness of from about 2.5 mm to from about 3.8 mm, preferably about 3.2 mm. In this embodiment, the insole is most advantageous for use by persons with diabetes. An insole appropriate for use by diabetic patients utilizes the same basic design as the arthritic

insole, except that the top layer comprises a closed cell cross-linked polyethylene foam material. Preferably, this material has an ASKER value of about 30 ASKER C $\pm$ 3 and meets governmental regulation for diabetic insoles A5510 (direct formed, compression molded to patient's foot without external heat source, multiple density insert prefabricated, per shoe)

[0018] One suitable material for the diabetic insole top layer is Plastazote[®] closed cell cross-linked foam material available from Zotefoams PLC. (United Kingdom). This type of foam provides for total contact with the foot. The top layer is preferably about 2.5 to 3.8 mm thick. Most preferred, the top layer is about 3.2 mm thick. Upon contact with the foot of a user, the top layer will permanently conform thereto. Other materials can be used as long as they provide for total contact with the patient's foot.

[0019] In a third alternate embodiment, the top layer mentioned in paragraph 14 is constructed of a thin fabric layer. In this embodiment, the insole is most advantageous for use by persons with arthritis.

[0020] The bottom layer has a shoe side surface which further comprises one or more indentations adapted to receive an insert layer, and an insert layer attached to each of said indentations.

[0021] The bottom layer preferably comprises a durable material which will provide a semi-rigid structure to the insole. A preferred material used for the bottom layer is an Ethylene Vinyl Acetate (EVA) foam material. Other materials can be used as long as they have the durability needed and which can be compression molded. The preferred EVA material of the bottom layer and inserts has a relative ASKER C hardness of 51 $\pm$ 3.

[0022] EVA or other appropriate materials can be shaped into a dimensional article by compression and heat. In this way, the preferred embodiment having an arch support integral with the insole, but rising upwardly from a relatively planar surface on which most of the weight of a

user's foot is intended to rest, and an integral heel-receiving area can be formed in the insole.

[0023] The bottom layer has a shoe-side surface which is intended to rest adjacent in the foot-receiving compartment of a shoe. The shoe side surface preferably further comprises one or more indentations each adapted to receive an insert layer. The indentations may be formed by providing a positive area in a mold which will create the indentation. Preferably, a heel indentation is in the heel area. A toe indentation may be provided in the toe area. A third indentation may be provided in the metatarsal area and this may extend to the arch area. Any combination of these indentations may be provided in an insole, for example toe and heel, heel and metatarsal, toe, heel and metatarsal. Preferably, the insole comprises a toe indentation, a heel indentation, and a metatarsal indentation.

[0024] Inserts are secured to each of the indentations. Each insert preferably comprises an EVA foam material. Preferably, the inserts have a texture which provides a gripping feature to aid in positioning and gripping to the inside of a shoe in which it is intended to be inserted by the wearer so that little or no slipping of the insole will occur during use. The texture is provided by features on the mold.

[0025] The inserts are placed in areas of high stress. The heel insert is positioned in the heel area to provide cushioning to the heel area of the foot of a user at heel strike. Another may be placed within the metatarsal area extended to the arch area to receive metatarsal impact and to provide support. The toe insert is placed in the toe area to assist in cushioning during toe impact.

[0026] Preferably, there is an insert-free area between the toe area and the metatarsal area. This permits the insole to flex in that area during a natural walking motion if the shoe also flexes and provides rigidity to the arch of the insole.

[0027] The bottom surface further is preferably provided with a number of linear indentations which form ridges. These indentations provide flexibility.

[0028] The middle layer is comprised of a material that provides extra cushioning and support of the arthritic foot. In a preferred embodiment, the middle layer comprises a synthetic rubber. Most preferred are synthetic rubbers based on styrene butadiene or polychloroprene, which may be used to make sheets that can be die-cut in the shape of the insole. Neoprene brand polychloroprene synthetic rubber (DuPont Performance Elastomers, Wilmington, DE) is an exemplary raw material for these types of sheets. SBR (styrene butadiene (synthetic) rubber) and CPR (chloroprene (synthetic) rubber) are synthetic rubbers used in the industry to make sheets known as synthetic rubber or neoprene sheets. Other materials can be used, but it is preferred that the material used has a value of approximately 21 ASKER C $\pm$ 5 to 30 ASKER C $\pm$ 5.

[0029] The top layer should be preferably secured by adhesive to the middle layer prior to die cutting the insole shapes.

[0030] Insole production can be accomplished by laminating together all materials into a die before shaping with heat and pressure. After the insole has been shaped in this fashion it is cut to its final shape. Alternatively, only middle and bottom layers may be produced in this way with later securement of the top layer.

[0031] As an example, approximate dimensions are given for a men's size 9 insole. Length and width of the insole are 11.063 inches and 3.813 inches. The total thickness of the insole can range from .256 inches near the toe area to .545 in the arch area. Arch height is about 1.476 inches. The thickness of each layer may vary, with the preferred thicknesses of about 2 millimeters for the middle layer and the thickness of the bottom layer varying, depending on its position of the insole. The inserts have a thickness of about 2 millimeters.

[0032] A view of the bottom (shoe side) of the insole is best seen in FIG. 1. FIG. 1 illustrates a left insole and it can be easily envisioned that a right insole would be a mirror image of the left insole illustrated. Insoles are generally sold and used in pairs, each pair comprising a right and a left insole. Outline (10) of the insole has been divided into outer region (10C), heel region (10B), inner region (10A) and toe region (10C).

[0033] Three inserts are shown secured to indentations in the bottom side of the bottom layer. The toe area insert (31) is secured near the front (toe) side of the insole. The metatarsal area insert (32) extends from just behind the toe area insert (31) towards the back (heel) end of the insole up to the arch region of the insole. The heel area insert (33) is secured near the back end of the insole. Each insert is shown exhibiting a different texture than the bulk of the insole bottom which will aid with traction in the shoe.

[0034] Cross sections along lines 4-4, 5-5, 6-6 and 7-7 will be discussed with respect to FIGS. 4-7. Ridges (36) are illustrated on the bottom of the arch area (34). Numerous other ridges and lines are also visible.

[0035] Referring to side view FIG. 2, from the inner outline region (10A) side of the insole of FIG. 1, arch area (34) extends upwardly and one is able to see ridges (36) on the bottom side of the insole as well as fabric layer (1) and middle layer (2) from this view. Layer (1) is secured to a middle layer (2). Secured to the bottom (shoe) side of the middle layer (2) is a bottom layer (3). Referring to side view FIG. 2A, layer (1) is a foam layer.

[0036] The bottom layer (3) dictates the shape of the insole. The middle layer (2) and top cloth layer or foam layer(1) are sheets of material of uniform thickness that take on the shape determined by said bottom layer (3) when secured to one another and to said bottom layer (3).

[0037] Some key features found in the shape and design of the bottom layer (3) are the arch support (34) and heel area (35). The arch support

(34) extends upwardly from the rest of the insole and serves to provide added comfort and support for the arch of the foot. Heel area (35) appears as a cup or indented area and is adapted generally to receive the heel area of a user's foot. In this view the contour of heel area 35 is visible. The cup shape allows for extra comfort and security to the heel of the foot. Ridges (36) are also preferably employed to allow for better flexibility during use. The top layer thickness can vary from a thin cloth sheet to a foam layer of up to about 3.8 mm in thickness. Preferably, the top layer comprises foam and is of a thickness of from about 2.5 mm to from about 3.8 mm, preferably about 3.2 mm. The layer (1) as illustrated will appear thicker in relation to middle layer depending on the top layer selected. Most preferably, top layer (1) is a foam layer. In a less preferred embodiment top layer (1) is a thin cloth layer or a combination of a thin cloth layer and foam layer.

[0038] FIG. 3 and FIG. 3A shows a side view from outer outline region (10C). Because inner outline region (10A) extends upwardly, one can see it also from this view point, as well as top layer (1) covering the top of arch area (34). Side views of middle layer (2) and bottom layer (3) are also visible. In FIG. 3 a thin layer which can be cloth or foam is illustrated. In FIG. 3A, a thicker foam layer is illustrated.

[0039] FIGS. 4, 5, and 6 and FIGS. 4A, 5A and 6A show cross-sections of the insole at lines 4-4, 5-5 and 6-6 of FIG.1 respectively. When compared one to another, the change in shape (both curve and thickness) at different sections of the insole can be seen. The thickness is typically much greater in the arch area of the foot as shown in FIG. 5 and 5A. The height of the arch support (34) mentioned above is best shown in FIG. 5 and 5A. The cup or dented shape of the heel area (35) is best shown in FIG. 4 and 4A. The figures designated with "A" show a thicker foam layer as the top layer as compared with the figures without the "A" which illustrate a thin cloth or foam layer as top layer (1).

[0040] FIG. 7 and FIG. 7A show a cross section of the insole of FIG. 1 along line 7-7. FIG. 7 illustrates a thinner top layer(1) and FIG. 7A a

thicker top layer(1) as discussed above. The positioning of inserts 31, 32 and 33 and the indentations in which they lie is best seen in this figure as is the contour of the various components of the insole.

[0041] FIG. 8 illustrates a top view of the insole of FIG. 1. Top layer (1) is visible as well as well as outline (10) inner outline region (10A) , outer outline region (10C), heel outline region (10B) and toe outline region (10D)

I CLAIM:

1. An insole for arthritic or diabetic patients, comprising:
 - a generally foot-shaped bottom layer having a length extending from a heel area to a toe area, a top surface and a bottom surface wherein said bottom layer is integrally formed in a shape comprising an arch support and a heel-receiving cup area;
 - a synthetic rubber layer having first and second sides, said second side coextensive with and secured to said top surface of said bottom layer, and
 - a top layer coextensive with and secured to said first side of said synthetic rubber layer.
2. The insole of claim 1, wherein said bottom surface further comprises one or more indentations formed integrally therein, said indentations adapted to receive an insert layer.
3. The insole of claim 2, further comprising one or more insert layers secured to said indentations.
4. The insole of claim 1, wherein said synthetic rubber layer is a polymer of polychloroprene.
5. The insole of claim 2, wherein said synthetic rubber layer is a polymer of polychloroprene.
6. The insole of claim 3, wherein said synthetic rubber layer is a polymer of polychloroprene.

7. The insole of claim 2, wherein said insole comprises three indentations, one of said indentations positioned in the heel area, one in the toe area, and one in the metatarsal area.

8. The insole of claim 3, wherein said inserts comprise a textured material which is softer than the material of the bottom layer.

9. The insole of claim 7, wherein said inserts comprise a textured material which is softer than the material of the bottom layer.

10. The insole of claim 8, wherein said bottom layer comprises EVA.

11. The insole of claim 9, wherein said bottom layer comprises EVA.

12. The insole of claim 1, wherein said top layer is a sheet of fabric.

13. The insole of claim 1, wherein said top layer is polyethylene foam.

14. The insole of claim 13, wherein said top layer is about 2mm thick.

15. The insole of claim 1, wherein said top layer is closed cell cross-linked foam material.

16. The insole of claim 15, wherein said foam material is from about 2.5 mm to from about 3.8 mm, preferably about 3.2 mm thick.

17. The insole of claim 16, wherein said foam material is about 3.2 mm thick.

18. An insole for arthritic patients, comprising,

(a) a generally foot-shaped bottom layer having a length extending from a heel area to a toe area, a top surface and a bottom surface wherein said bottom layer is integrally formed in a shape comprising an arch support and a heel-receiving cup area wherein said bottom surface further comprises one or more indentations formed integrally therein, said indentations adapted to receive an insert layer and an insert layer secured to each of said indentations.

(b) a synthetic rubber layer having first and second sides, said second side coextensive with and secured to said top surface of said bottom layer;

(c) a top layer coextensive with and secured to said first side of said synthetic rubber layer.

19. The insole of claim 18, wherein said bottom layer has at least two indentations.

20. The insole of claim 19, wherein said indentations are located at the heel area of the insole and the toe area.

21. The insole of claim 19, wherein said indentations are located at the heel area and the metatarsal area.

22. The insole of claim 18, wherein said indentations are located at the toe, the heel and the metatarsal areas.

23. The insole of claim 18, wherein said bottom layer comprises EVA.

24. The insole of claim 18, wherein said synthetic rubber comprises polychloroprene.

25. The insole of claim 18, wherein said top layer is selected from cloth, polyethylene foam, and closed cell cross-linked foam material.

26. An insole for arthritic patients, comprising,

(a) a generally foot-shaped bottom layer having a length extending from a heel area to a toe area, a top surface and a bottom surface wherein said bottom layer is integrally formed in a shape comprising an arch support and a heel-receiving cup area wherein said bottom surface further comprises three indentations formed integrally therein, said indentations adapted to receive an insert layer, and an insert layer secured to each of said indentations.

(b) a synthetic rubber layer having first and second sides, said second side coextensive with and secured to said top surface of said bottom layer;

(c) a top layer coextensive with and secured to said first side of said synthetic rubber layer.

27. The insole of claim 25, wherein said bottom layer comprises EVA.
28. The insole of claim 18, wherein said top layer is a polyethylene foam.
29. The insole of claim 18, wherein said top layer is cloth.
30. The insole of claim 18, wherein said top layer is closed cell cross-linked foam material.

FIG. 1

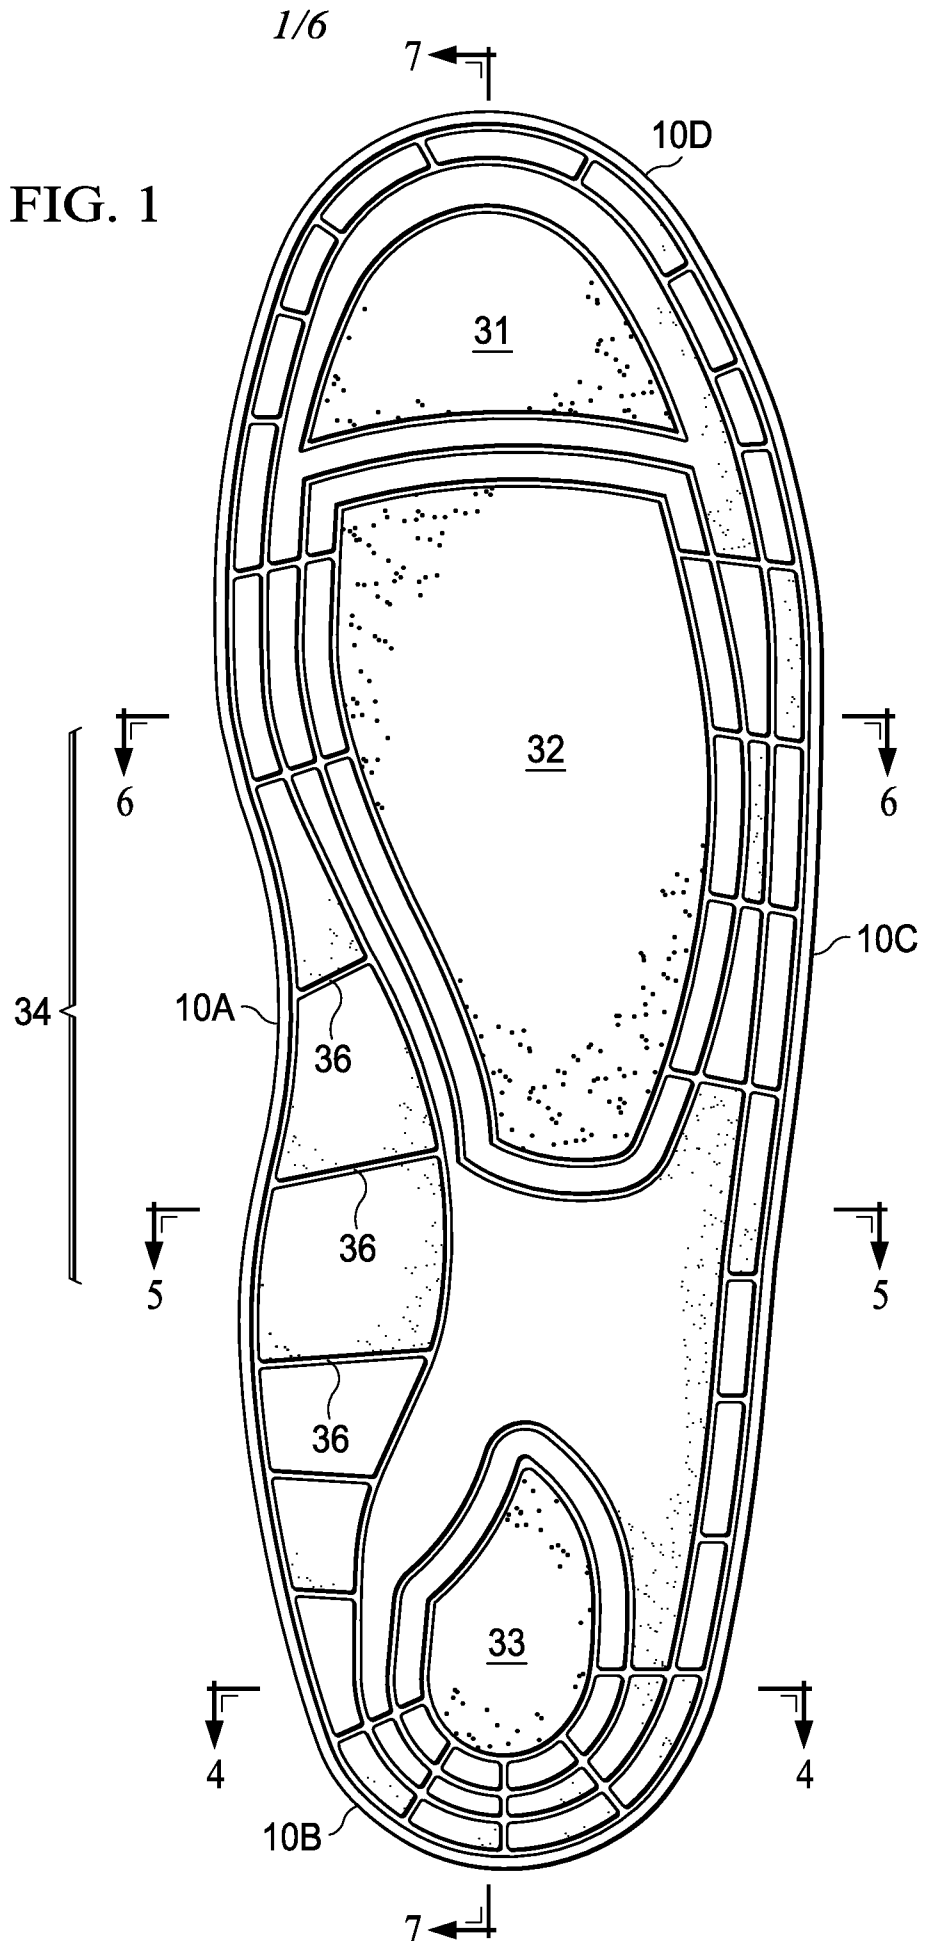


FIG. 2


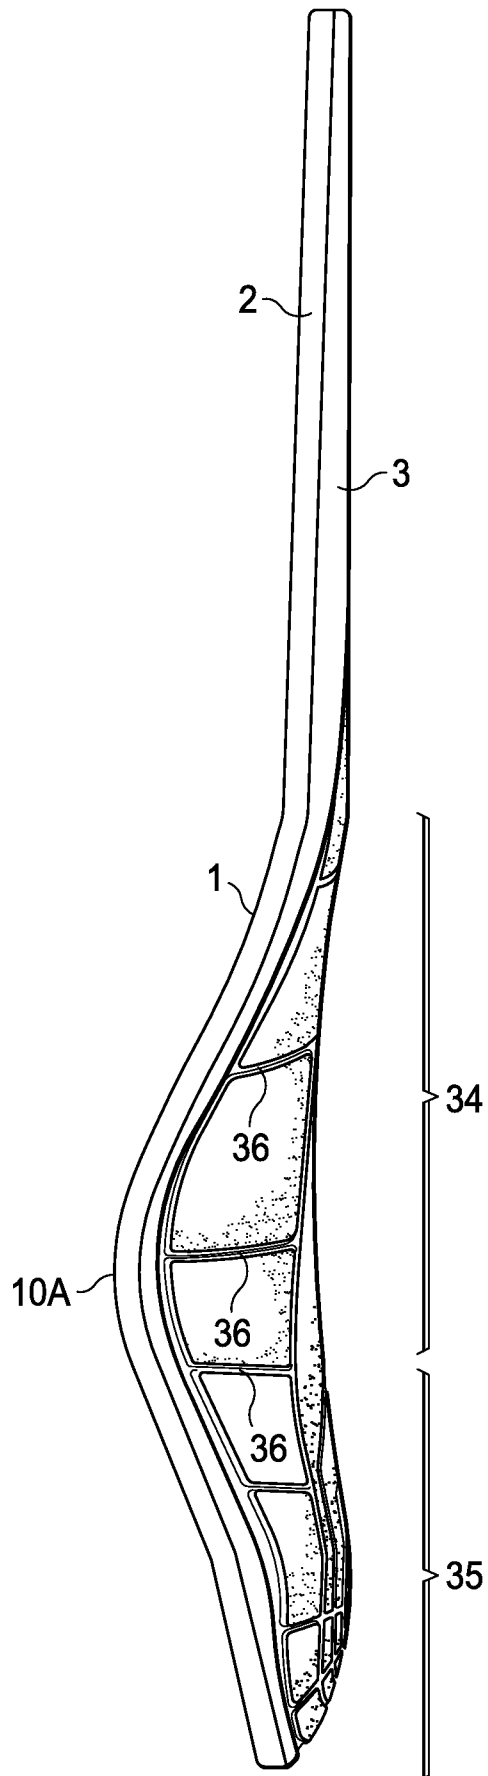


FIG. 3

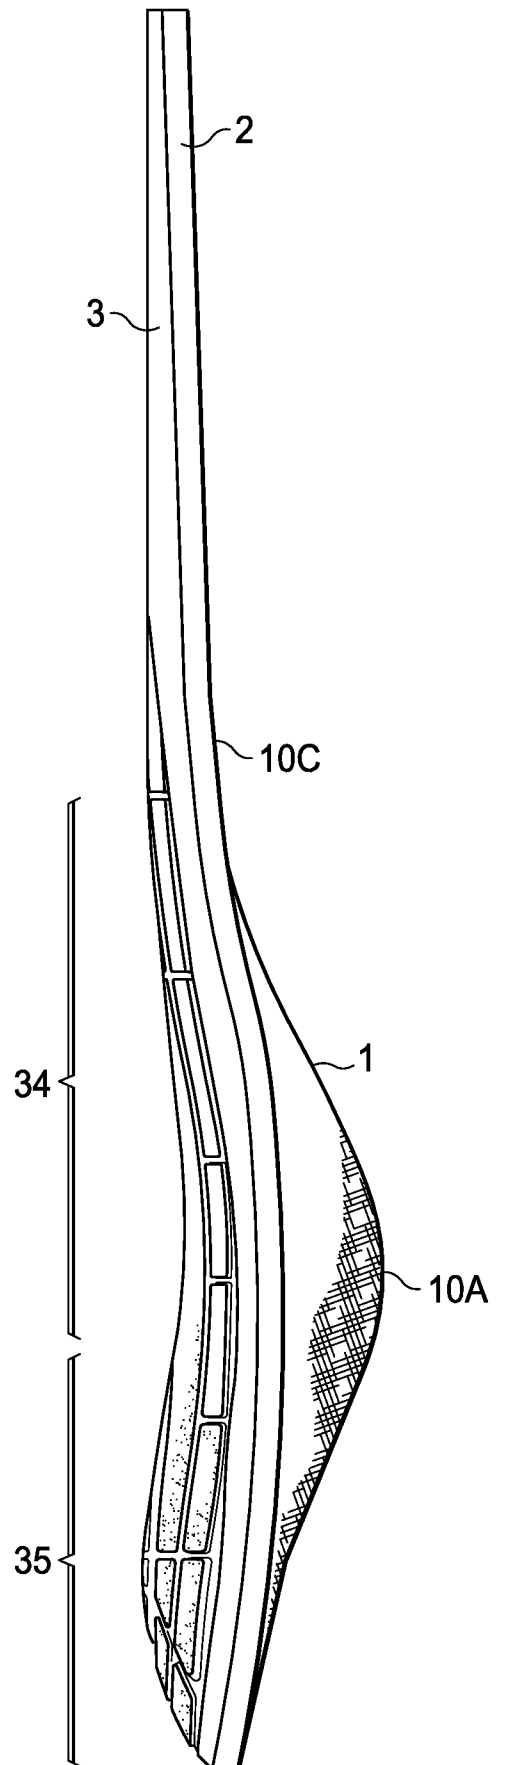

3/6

FIG. 4

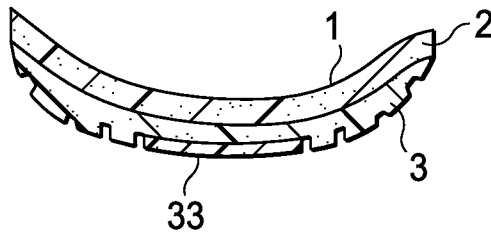


FIG. 5

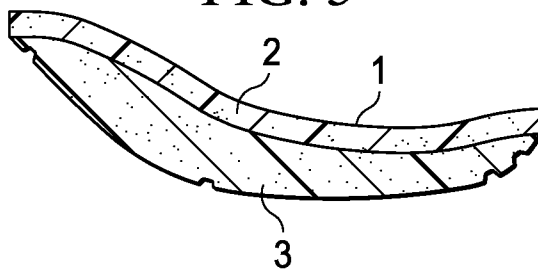


FIG. 6


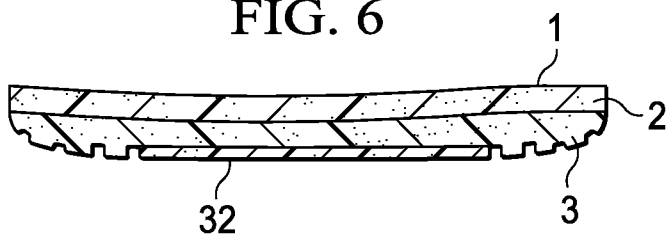


FIG. 7

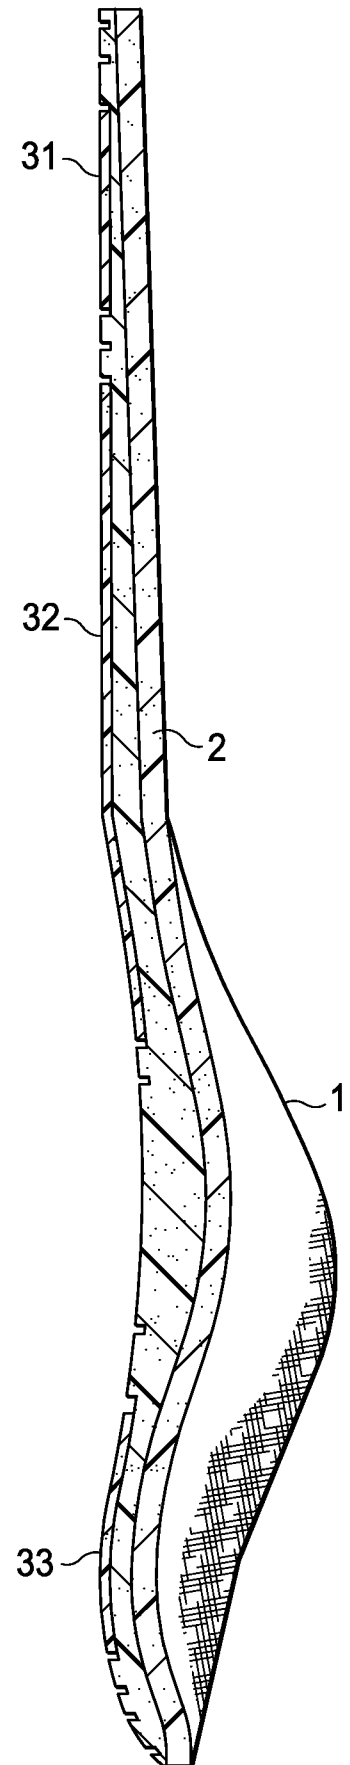

4/6

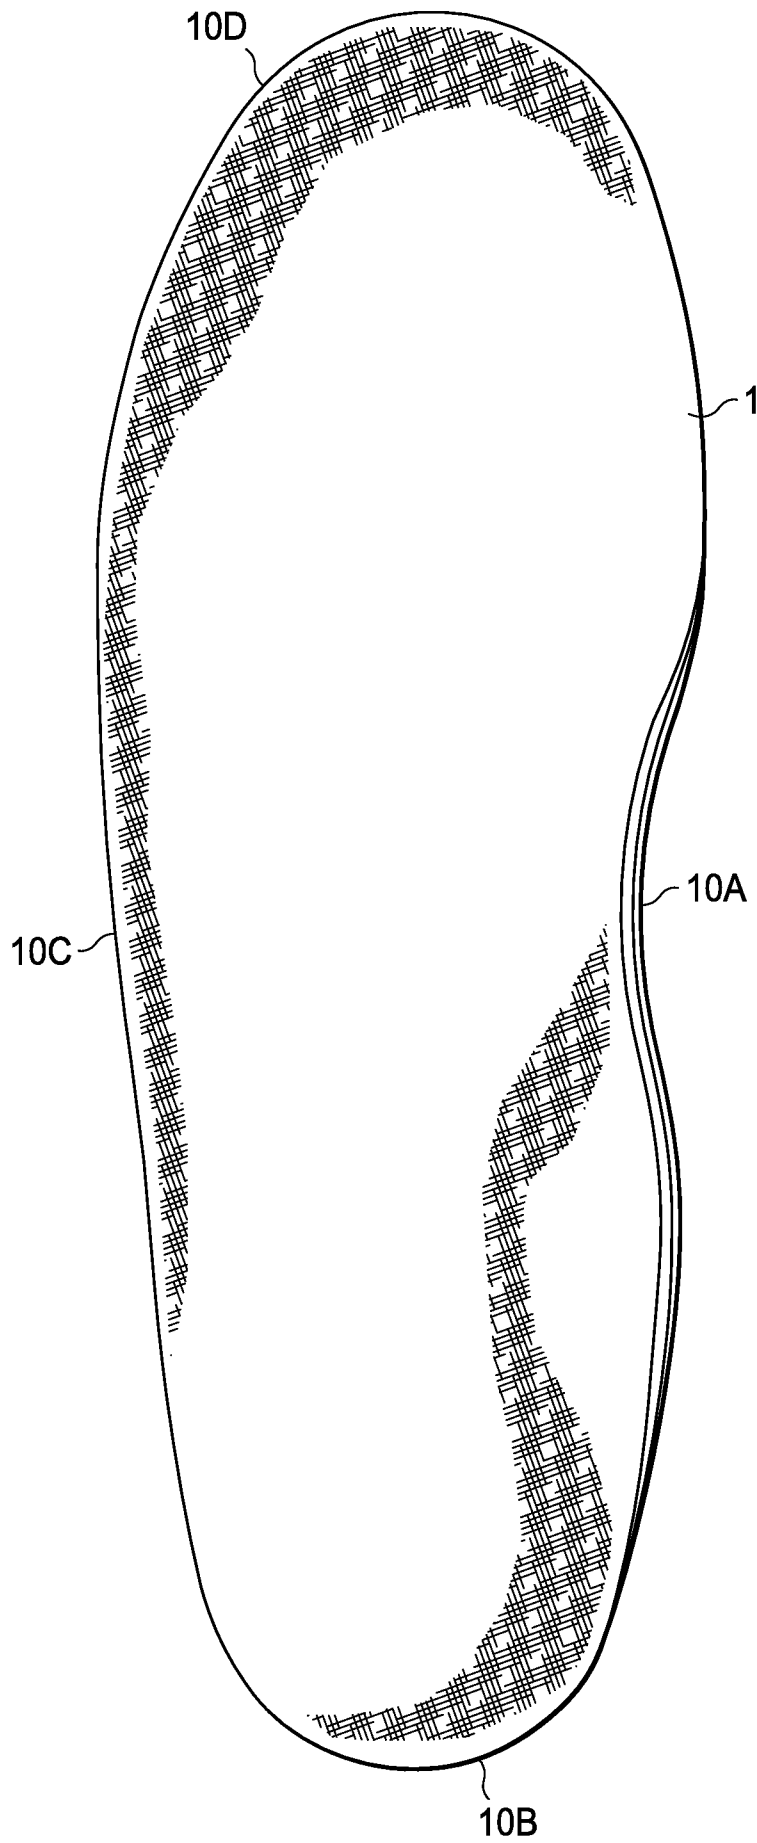


FIG. 8

5/6

FIG. 2A


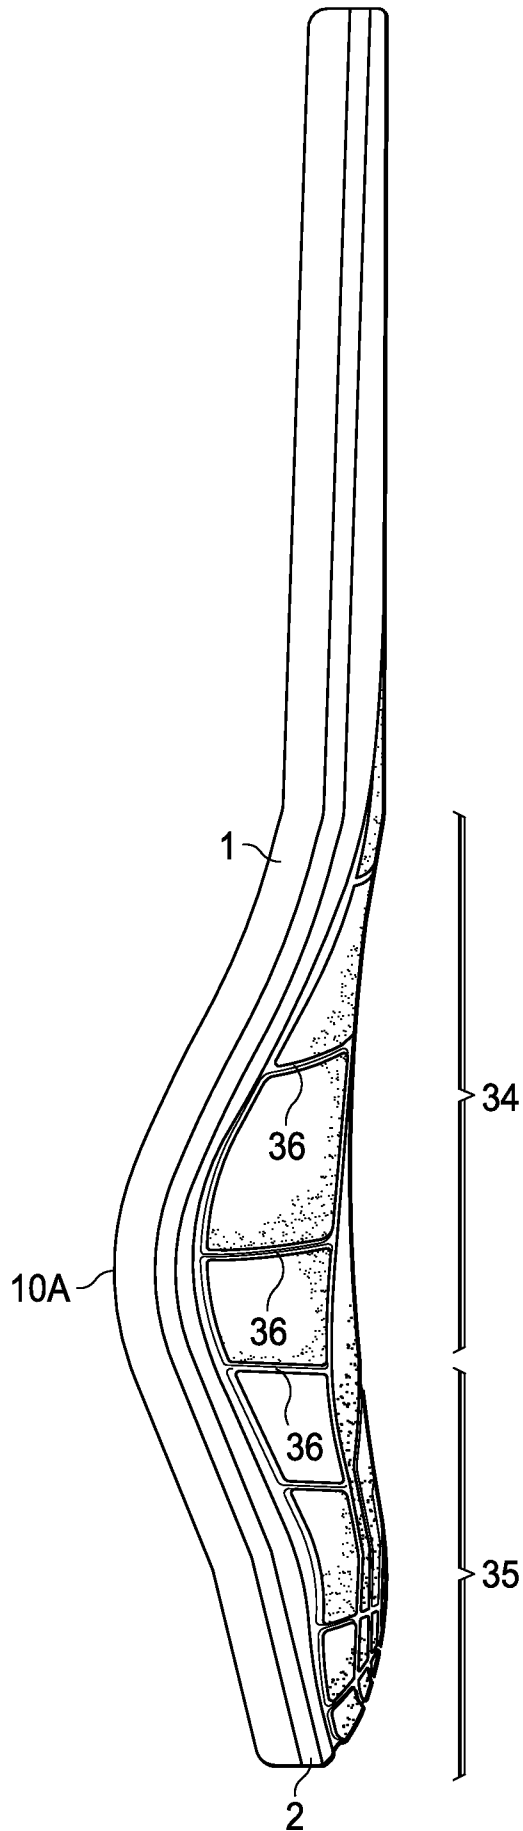


FIG. 3A

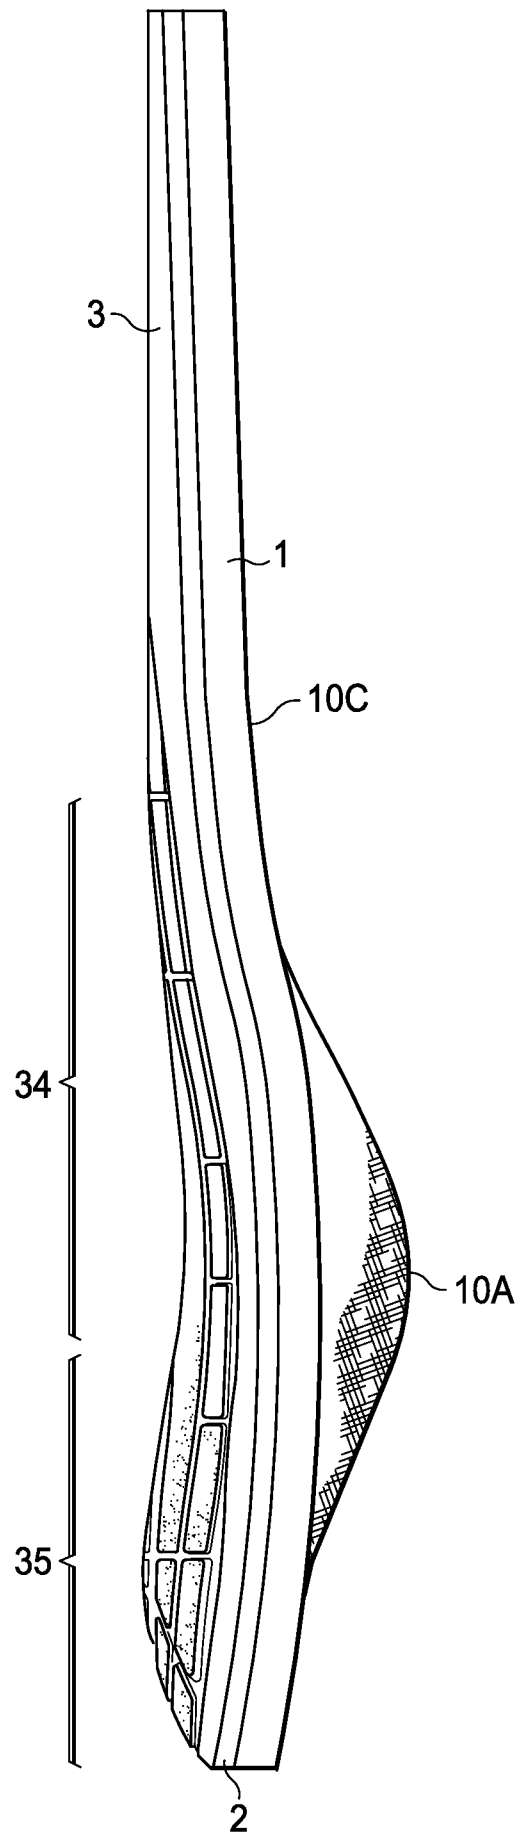

6/6




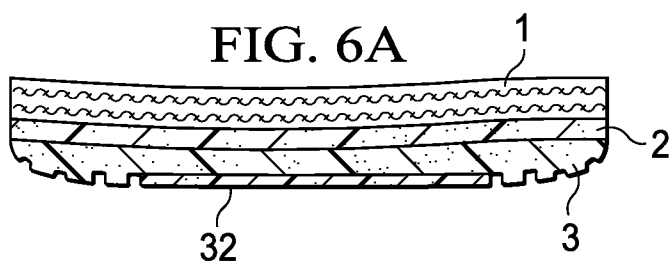


FIG. 7A

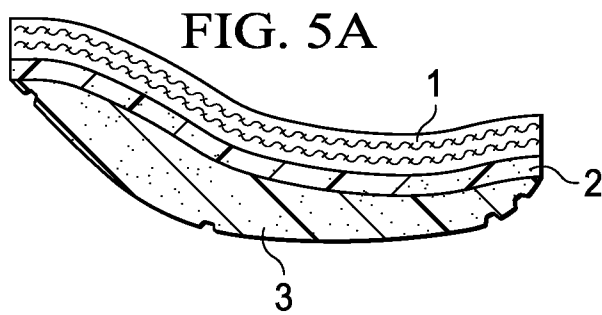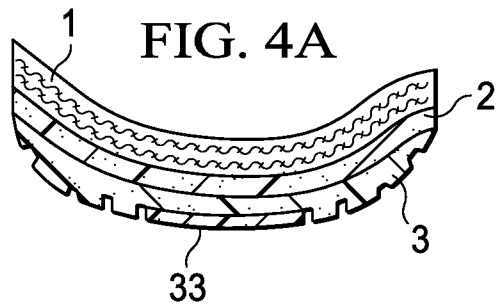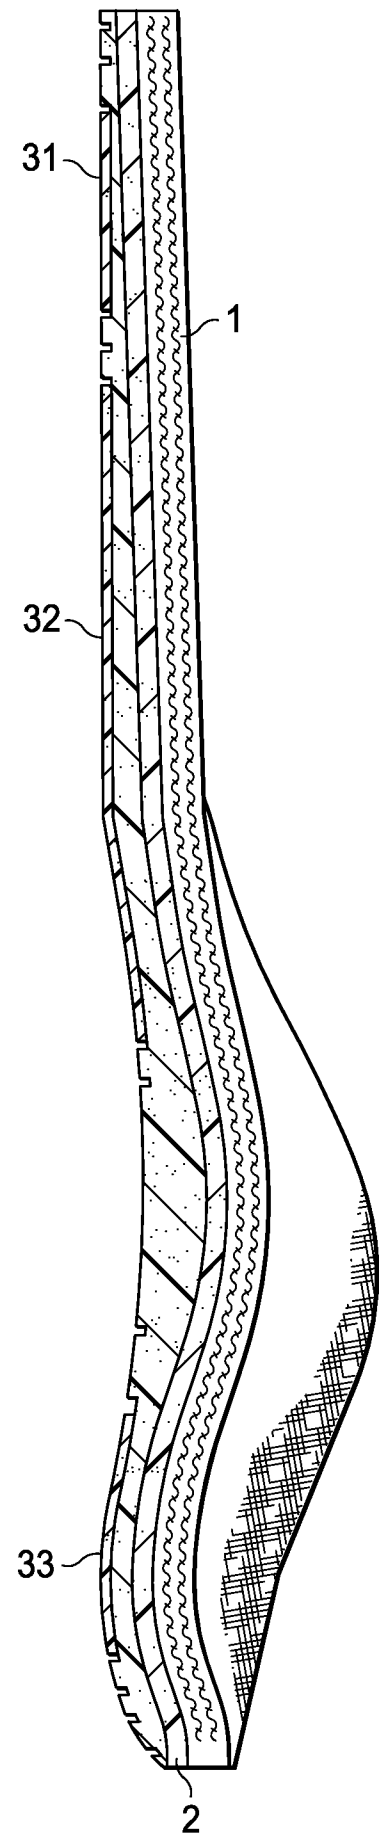

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2008/084280**A. CLASSIFICATION OF SUBJECT MATTER****A43B 17/00(2006.01)i, A43B 17/14(2006.01)i, A43B 1/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC A43B A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility models and applications for Utility models since 1975

Japanese Utility models and application for Utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKIPASS(KIPO internal) "insole, heel, arch "

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6453578 B1 (WU BIN YUNG et al.) 24 SEPTEMBER 2002 See the whole document	1-30
A	US 6915598 B2 (BERNARD F. GRISONI et al.) 12 JULY 2005 See the whole document	1-30
A	US 6481120 B1 (BIN XIA et al.) 19 NOVEMBER 2002 See the whole document	1-30
A	US 7284342 B2 (RICHARD T. AVENT et al.) 23 OCTOBER 2007 See the whole document	1-30
A	KR 10-0641278 B1 (WILDCAT CO., LTD.) 02 NOVEMBER 2006 See the whole document	1-30
A	KR 10-0736813 B1 (WILDCAT CO., LTD.) 09 JULY 2007 See the whole document	1-30



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 APRIL 2009 (24.04.2009)

Date of mailing of the international search report

24 APRIL 2009 (24.04.2009)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 139 Seonsa-ro, Seo-
gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Kang Young

Telephone No. 82-42-481-5583



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2008/084280

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6453578 B1	24.09.2002	NONE	
US 6915598 B2	12.07.2005	AU 2003-244336 B2 AU 2003-244336 A1 CA 2436383 A1 CA 2436383 C EP 1545255 A1 JP 2005-519723 T JP 2007-229498 A US 2004-025376 A1 US 6915598 B2 WO 2004-012548 A1	23.02.2004 23.02.2004 06.02.2004 30.10.2007 29.06.2005 07.07.2005 13.09.2007 12.02.2004 12.07.2005 12.02.2004
US 6481120 B1	19.11.2002	CA 2349272 A1 CA 2349272 C CA 2349272 C US 6481120 B1	31.01.2002 04.01.2005 31.01.2002 19.11.2002
US 7284342 B2	23.10.2007	CA 2514278 A1 CN 101031212 A EP 1623642 A1 EP 1623642 B1 PA 05008398 A US 2006-026866 A1 WO 2006-017651 A1	06.02.2006 05.09.2007 08.02.2006 04.06.2008 09.02.2006 09.02.2006 16.02.2006
KR 10-0641278 B1	02.11.2006	NONE	
KR 10-0736813 B1	09.07.2007	NONE	