




(86) Date de dépôt PCT/PCT Filing Date: 2014/01/02
(87) Date publication PCT/PCT Publication Date: 2014/07/10
(45) Date de délivrance/Issue Date: 2020/08/25
(85) Entrée phase nationale/National Entry: 2015/06/16
(86) N° demande PCT/PCT Application No.: US 2014/010010
(87) N° publication PCT/PCT Publication No.: 2014/107478
(30) Priorité/Priority: 2013/01/02 (US13/732,640)

(51) Cl.Int./Int.Cl. *A41D 13/06* (2006.01),
A41D 13/05 (2006.01)
(72) Inventeur/Inventor:
RICHARDS, LEE, US
(73) Propriétaire/Owner:
RICHARDS, LEE, US
(74) Agent: FINLAYSON & SINGLEHURST

(54) Titre : ARMATURE DE SUPPORT POUR GENOUILLERE
(54) Title: KNEE PAD SUPPORT FRAME

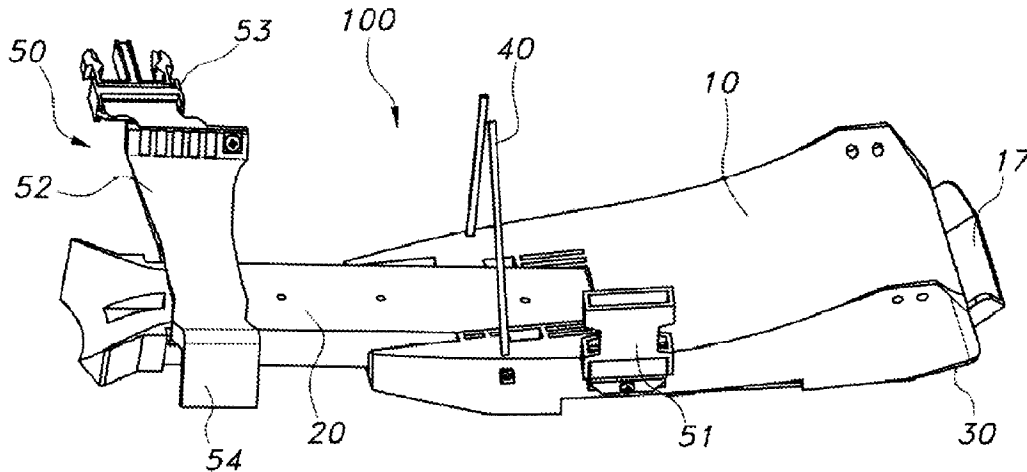

(57) Abrégé/Abstract:

A support frame for a knee pad has three major components that interlock with each other to form a rigid and strong frame capable of supporting the weight of a person who is working on knees. The three components are molded of a rigid plastic material. The upper component has a knee seat and a strap for wrapping around the leg of the wearer; the lower component has a cuff for wrapping around the wearer's ankle. Fastener devices for attaching the knee pad and the straps to the support frame are either incorporated into or provided on the support frame.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2014/107478 A1

(43) International Publication Date
10 July 2014 (10.07.2014)

- (51) International Patent Classification:
A41D 13/06 (2006.01) *A41D 13/05* (2006.01)
- (21) International Application Number:
PCT/US2014/010010
- (22) International Filing Date:
2 January 2014 (02.01.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/732,640 2 January 2013 (02.01.2013) US
- (72) Inventor; and
- (71) Applicant : **RICHARDS, Lee** [US/US]; c/o ProKnee Corp., 137 Devine Road, Whitefield, Maine 04353 (US).
- (74) Agent: **MATHERS, Patricia**; Bohan Mathers LLC, 32 Pleasant Street, P.O. Box 449, Portland, Maine 04112-0449 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,

KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the identity of the inventor (Rule 4.17(i))

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: KNEE PAD SUPPORT FRAME

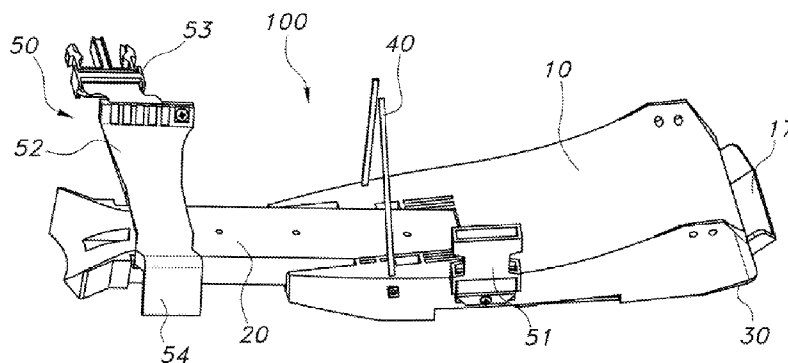


FIG. 1

(57) Abstract: A support frame for a knee pad has three major components that interlock with each other to form a rigid and strong frame capable of supporting the weight of a person who is working on knees. The three components are molded of a rigid plastic material. The upper component has a knee seat and a strap for wrapping around the leg of the wearer; the lower component has a cuff for wrapping around the wearer's ankle. Fastener devices for attaching the knee pad and the straps to the support frame are either incorporated into or provided on the support frame.

KNEE PAD SUPPORT FRAME

BACKGROUND INFORMATION

[0001] FIELD OF THE INVENTION

[0002] The invention relates to a knee pad that is worn by persons who work on their knees, such as, when laying floors. More particularly, the invention relates to a frame for holding the knee pad.

[0003] DISCUSSION OF THE PRIOR ART

[0004] People who professionally lay floors or carpeting, stair treads, and other jobs that require spending a lot of time on one's knees often wear knee pads that include a support frame and a pad that protects not just the knee, but the shin and ankle portions of the leg. An example of such a knee pad with support frame is disclosed in US Patents 4,772,071, 4,876,745, and a knee pad in US Patent 7,937,769.

[0005] These professional knee pads with support frame are adapted to fit the length dimension of the user's leg. One desire to modify the prior art is to obtain a support frame that is less expensive to manufacture, yet readily adaptable to the desired leg length and knee width of the individual user, and that also provides strength, rigidity, and durability.

BRIEF SUMMARY OF THE INVENTION

[0006] The invention, a support frame for a pad to protect a knee, is a molded plastic unit that includes an upper support, a lower support, and a coupling member.

The initial intended use of the support frame is as a frame for a knee pad, but this term is not intended to be limiting, because the support frame and pad can be modified to support a limb and corresponding joint of a user, such as a lower arm and an elbow. Thus, reference is made throughout this disclosure to a support frame for a knee pad, but it is understood that the terms that have specific relevance to a knee pad are for readability and may be exchanged for other terms.

[0007] The upper support is shaped to accommodate the knee and upper shin portion of the leg and the lower support to accommodate the lower shin portion and the ankle. The coupling member extends through an opening in the upper support and slidingly meshes with the lower support, which are then fastened together with fastening elements, to form the support frame. Various attachment means are incorporated into the frame to secure the knee pad to the frame and to strap the frame plus knee pad to the user's leg.

[0008] The three major components of the frame are molded components that have a plurality of grooves and reinforcing ribs to provide a unit that has the desired structural integrity, i.e., the strength, rigidity, and load-bearing capacity needed to provide support and comfort for a person who spends extended periods of time on his or her knees.

[0008A] In accordance with one broad aspect of the invention, a support frame for a pad is disclosed. The support frame and pad to be strapped to a user to protect a limb and a flexing joint. The support frame comprises a base frame comprising frame components that include an upper support, a lower support with a first coupling end, and a coupling member with a second coupling end. The upper support has a first end shaped to accommodate the flexing joint and a second end for supporting the coupling member, with a through-way provided between the first end and the second end. The second coupling end of the coupling member is slidable through the through-way from a first direction. The first coupling end of the lower support is

slidable through the through-way from a direction opposite the first direction and onto the second coupling end of the coupling member, so as to slidingly engage with the second coupling end of the coupling member, thereby coupling the upper support with the lower support to form a fixed configuration of the base frame.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The present invention is described with reference to the accompanying drawings. In the drawings, like reference numbers indicate identical or functionally similar elements. The drawings are not drawn to scale.

WO 2014/107478

PCT/US2014/010010

- [0010] FIG. 1 is a perspective view of a support frame according to the invention for a knee pad.
- [0011] FIG. 2 is a top plan view of the knee support.
- [0012] FIG. 3 is a bottom plan view of the upper support.
- [0013] FIG. 4 is a first side plan view of the upper support, showing a buckle attachment.
- [0014] FIG. 5 is a second side plan view of the upper support, showing holes for the pad and boot attachment means.
- [0015] FIG. 6 is a perspective view of the upper support, seen from the coupling end, showing the coupling opening.
- [0016] FIG. 6A shows a deflector that extends from the first end of the knee support.
- [0017] FIG. 7 is a top plan view of the lower support.
- [0018] FIG. 8 is a bottom plan view of the lower support.
- [0019] FIG. 9 is a side view of the lower support
- [0020] FIG. 10 is a top plan view of the coupling member.
- [0021] FIG. 11 is a bottom plan view of the coupling member.
- [0022] FIG. 12 is a side plan view of the coupling member.
- [0023] FIG. 13A is a perspective view of the support frame, partially assembled.

WO 2014/107478

PCT/US2014/010010

[0024] **FIG. 13B** is a second perspective view of the support frame, partially assembled.

[0025] **FIG. 13C** is a perspective view of the support frame, showing the upper support and the lower support coupled by the coupling member.

[0026] **FIG. 14** is a view of the completely assembled product as it is provided to the user.

[0027] **FIG. 15** shows the stirrup cuff.

[0028] **FIG. 16** shows the completely assembled product with stirrup cuff strapped to leg of a user.

DETAILED DESCRIPTION OF THE INVENTION

[0029] The present invention will now be described more fully in detail with reference to the accompanying drawings, in which the preferred embodiments of the invention are shown. This invention should not, however, be construed as limited to the embodiments set forth herein; rather, they are provided so that this disclosure will be complete and will fully convey the scope of the invention to those skilled in the art.

[0030] **FIG. 1** is a perspective view of a support frame **100** according to the invention. The embodiment shown is a support frame for a knee pad that is worn by people who work on their knees, for instance, installing flooring, carpeting, stair treads, etc.

[0031] The support frame **100** comprises a unit assembled from three basic components, an upper support **10**, a lower support **20**, and a coupling member **30**.

These components will hereinafter be referred to as a knee support **10**, a top shin plate **20**, and a bottom shin plate **30**, to facilitate reading. Pad attachment means **40** are provided on the frame **100** for securing a knee pad **P** to the frame and frame attachment means **50** are provided for securing the support frame **100** with the pad **P** to a user's leg. The figures illustrating the support frame **100** show only a few examples of the pad attachment means **40** and the frame attachment means **50**. **FIG. 14** shows a complete knee pad or final product **1000**, as it is provided to the customer.

[0032] **FIGS. 2 - 6A** illustrate the knee support **10**, which is a single molded component that has a first end that includes a knee seat **12**, a coupling-member support end **13**, and a through-way **14** therebetween for receiving the bottom shin plate **30**. Reinforcing ribs and recesses **16** are provided on the top and bottom sides of the knee support **10**. **FIG. 6** shows a perspective view of the knee support **10**, taken from the coupling-member support end **13** and illustrating the throughway **14**. A deflector **17** extends from the knee seat **12**. **FIG. 6A** shows one part of a fabric hook and loop fastener **171** that has been adhesively applied to the underside of the deflector. Typically, a liner is wrapped over the pad **P**, to protect it from dirt and wear. The liner is a relatively thin, flexible fabric and its upper portion is wrapped over the deflector **17** and touch-fastened to the fastener **171**. The forward portion **10A** of the bottom surface of the knee support **10** is formed at a slight angle to allow the wearer to tip forward slightly and walk on his knees. The angle is sufficient to allow the wearer to lift his feet slightly above the floor, to make it easier to maneuver on the floor. In the embodiment shown, the angle of this forward portion **10A** is approximately 10.5 degrees. The same angle is reflected in a forward portion **30A** of the bottom shin plate **30**. **FIGS. 4** and **5** also show holes **41** for the pad and boot attachment means.

[0033] **FIGS. 7 - 9** illustrate the top shin plate **20**, a molded component shaped to provide support for the knee pad **P** in the shin area and to protect the ankle area.

The top shin plate **20** includes a shin bar **21**, an ankle protector **22**, and a first coupling end **23**. Reinforcing ribs and recesses **26** are provided on the bottom side of the top shin plate. The first coupling end **23** has ribs **231** that extend downward from the top plane of the plate **20**.

[0034] FIGS. 10 – 12 illustrate details of the bottom shin plate **30**. This component, too, is a molded component that includes a knee plate **32** and a second coupling end **33**. The knee plate **32** is shaped to correspond to the shape of the underside of the first end of the knee support **10**. The second coupling end **33** has ribs **331** that extend upward from the bottom plane of the bottom shin plate and mesh with the ribs **231** of the top shin plate **20**. Fastening bores **101** are provided, which are used to fasten the bottom shin plate **30** with the knee support **10** and the top shin plate **20**, by means of threaded fasteners, for example.

[0035] FIGS. 13A – 13C illustrate assembly of the support frame **100**. First, the bottom shin plate **30** is inserted through the through-way **14** so that the coupling end **33** extends toward the coupling-member support end **13** of the knee support **10**, with the coupling fins **331** extending upward. The coupling end **23** of the top shin plate **20** is coupled with the bottom shin plate by meshing the coupling fins **231** with the fins **331** of the bottom shin plate **30** and sliding the top shin plate in toward the through-way **14**. **FIG. 13C** shows the three components **10**, **20**, **30** of the support frame **100** coupled together. The coupling end **33** of the bottom shin plate **30** is now covered by the shin bar portion **21**. The knee plate **32** of the bottom shin plate **30** has yet to be pushed into place against the underside of the knee support **10**. Fastening bosses **101** have been provided on the components **10**, **20**, **30** for receiving fasteners (not shown), which are used to fasten all three components together.

[0036] The top and bottom shin plates **20**, **30** may be pre-fabricated to different lengths, in order to assemble the support frame **100** that is adapted to the length of the leg of the individual user. It is also possible to make the plates **20**, **30** a standard length, and to cut one or both of them to the desired length when assembling the support frame **100** for a particular customer. The knee support **10** may be manufactured in two or more sizes to accommodate the width of the knee of the individual user. For example, three sizes S / M / L may be kept in stock, so as to provide the appropriate width when assembling a final product **1000** for a customer.

[0037] FIG. 14 illustrates a complete knee pad **1000** that includes the support frame **100**, the knee pad **P**, and the boot **B**. A liner that is typically used to protect the pad **P** is not shown. The user has placed an order for a knee pad and given dimensions for the leg length and knee width. The support frame **100** has been assembled according to the dimensions, a knee pad **P** fastened to the upper side of the frame, and a boot **B** fastened to the underside of the frame. US Patent 7,937,769 discloses details of the knee pad **P** and boot **B**.

[0038] In the embodiments shown, the frame attachment means **50** includes a strap and a male buckle element **53** and a female buckle element **51** for receiving the male buckle element. The female buckle anchor **51** is shown on the upper support **10** and the strap and male buckle element **53** shown on the lower support **20**, but it is understood that the attachment means **50** on both supports **10**, **20** includes both the strap and male buckle element **53** and the female buckle element **51**. The frame attachment means **50** on the lower support **20** includes an ankle cuff **52** that has a live hinge **54** at one end for anchoring the strap and male buckle element **53**. See FIG. 13C. The cuff **52** is preferably made of a thermoplastic material, such as urethane, with a suitable durometer to provide some flexibility, so that the cuff is adaptable to the contour of the wearer's leg when it is strapped on, yet stiff enough, so that it pre-forms the pad **P** that is attached to the frame **100**, to facilitate strapping the frame with pad to the leg. Other suitable materials may also

be used, such as leather, woven materials, such as a rugged canvas, rubber, or rubber-like materials. A buckle is slipped over the end of the live hinge, which is then folded to the cuff and fastened to form the buckle anchor. The cuff **52** is an improvement over the prior art, which was simply a strap attached directly to the frame. The cuff acts to protect the ankle extensions or strap ears on the pad **P**, which can get caught on things and be torn or damaged and to prevent rotation of the pad on the leg.

[0039] FIG. 15 illustrates an alternative cuff **52'** which is constructed to accommodate a stirrup strap **55**. The final product **1000** shown in FIG. 16 is assembled with this alternative cuff. The live hinges **54** for the buckle anchors have not yet been fastened in this illustration. The cuff **52'** has sleeve extensions **56** and the straps are slipped over these extensions.

[0040] The concept of the support frame **100** according to the invention provides the user with a knee pad **1000** that is the correct length and width. The components are inexpensive, the assembly process is simple, yet the knee pad **1000** functions as a solid unit, with greater stability and load-bearing capacity than conventional knee pads.

[0041] It is understood that the embodiments described herein are merely illustrative of the present invention. Variations in the construction of the support frame may be contemplated by one skilled in the art without limiting the intended scope of the invention herein disclosed and as defined by the following claims.

What is claimed is:

Claim 1: A support frame for a pad, the support frame and pad to be strapped to a user to protect a limb and a flexing joint, the support frame comprising:

a base frame comprising frame components that include an upper support, a lower support with a first coupling end, and a coupling member with a second coupling end; and

wherein the upper support has a first end shaped to accommodate the flexing joint and a second end for supporting the coupling member, with a through-way provided between the first end and the second end;

wherein the second coupling end of the coupling member is slidable through the through-way from a first direction; and

wherein the first coupling end of the lower support is slidable through the through-way from a direction opposite the first direction and onto the second coupling end of the coupling member, so as to slidingly engage with the second coupling end of the coupling member, thereby coupling the upper support with the lower support to form a fixed configuration of the base frame.

Claim 2: The support frame of claim 1, wherein the frame components are molded plastic components having reinforcing ribs for strength and stability.

Claim 3: The support frame of claim 1, wherein the limb and the flexing joint are a leg and a knee, wherein the first end of the upper support is shaped to provide a protective seat for the knee and the frame portion for the limb provides a protective frame for a shin and an ankle portion of a leg.

Claim 4: The support frame of claim 3, wherein the coupling member has an upper end opposite the second coupling end that is shaped as a knee plate that is attachable to an underside of the upper support.

Claim 5: The support frame of claim 3, wherein the lower support has a lower end opposite the first coupling end that is shaped as a truncated fork to accommodate the ankle portion.

Claim 6: The support frame of claim 1, wherein the first coupling end and the second coupling end are constructed as fins that mesh with each other when the lower support is slidingly engaged with the coupling member.

Claim 7: The support frame of claim 6, wherein, when the first and second coupling ends are fully meshed, the upper surfaces of the lower support and the upper support provide a solid support surface.

Claim 8: The support frame of claim 1 further comprising frame attachment means for securing the base frame to the limb of the user.

Claim 9: The support frame of claim 8, the frame attachment means including one or more anchors that are attached to the base frame and a strap with a buckle that is attachable to the anchors.

Claim 10: The support frame of claim 9, wherein the frame attachment means includes a cuff that is assembled on the lower support at the ankle portion, the cuff having a first end that extends away from the lower support, and wherein a cuff strap is attachable to the first end.

Claim 11 : The support frame of claim 10, the cuff having a second end that is a living hinge that anchors a cuff buckle.

Claim 12: The support frame of claim 9, wherein the cuff is a molded thermoplastic component.

Claim 13: The support frame of claim 1, further comprising pad attachment means for securing the pad to the base frame.

Claim 14: The support frame of claim 13, the pad attachment means including a plurality of bores in the base frame and tie straps that are insertable through one of the plurality of bores and through a corresponding hole in the pad.

Claim 15: The support frame of claim 1, further comprising frame fasteners for fastening the frame components to each other.

1/8

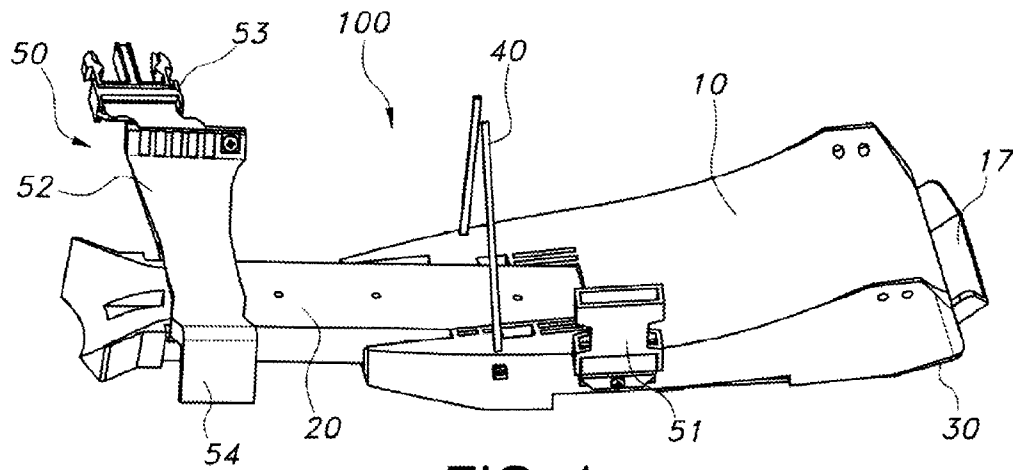


FIG. 1

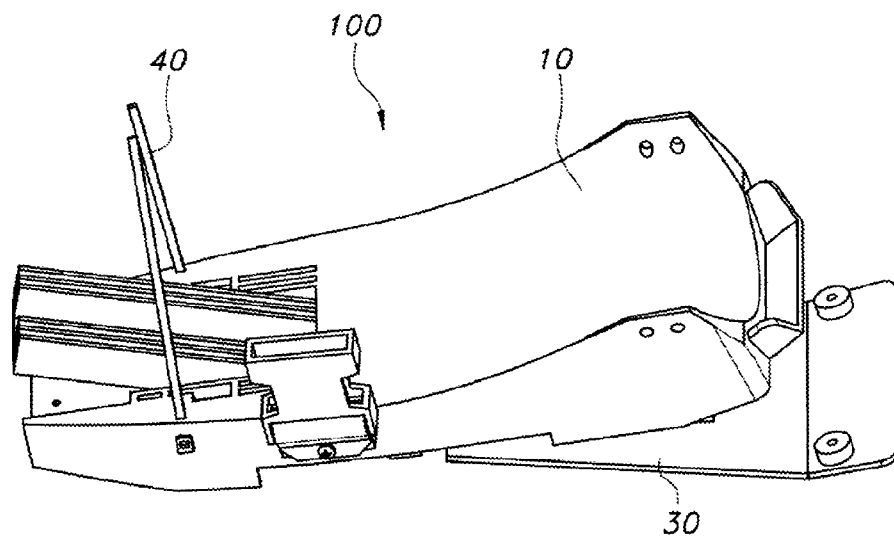


FIG. 13A

2/8

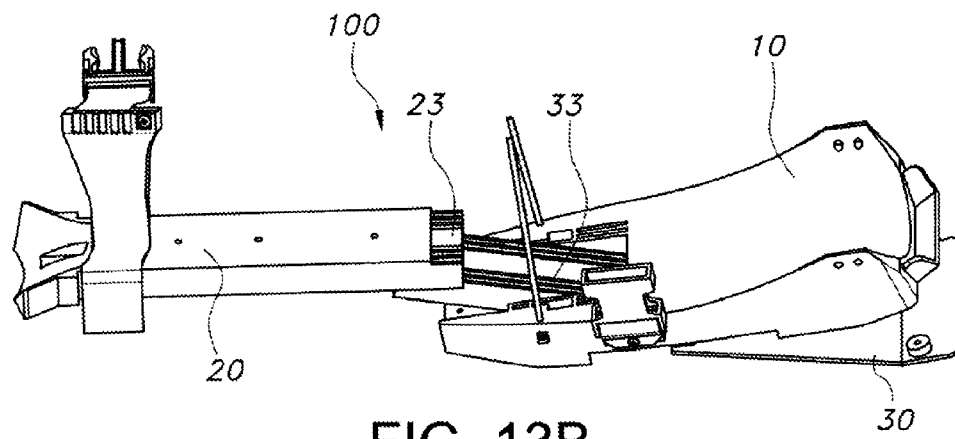


FIG. 13B

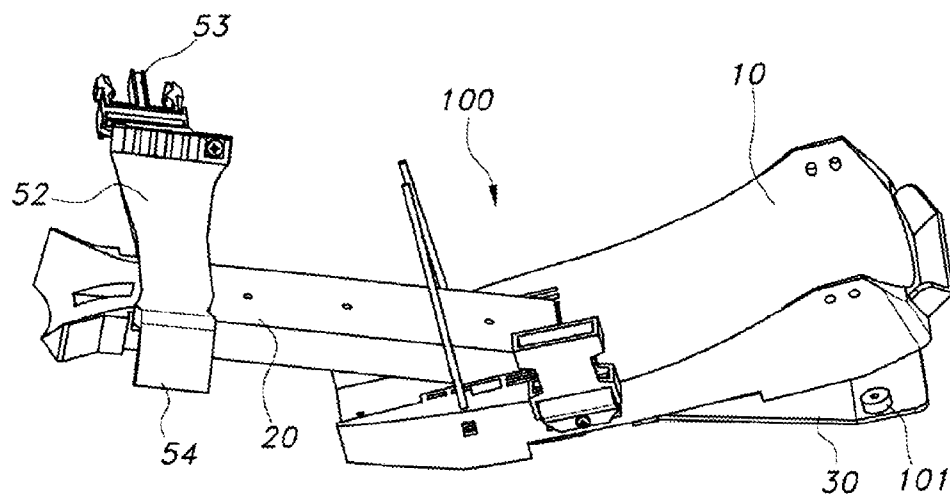
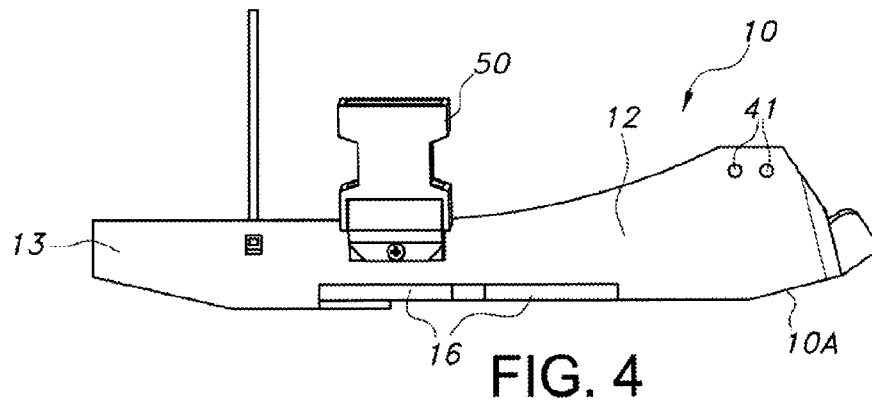
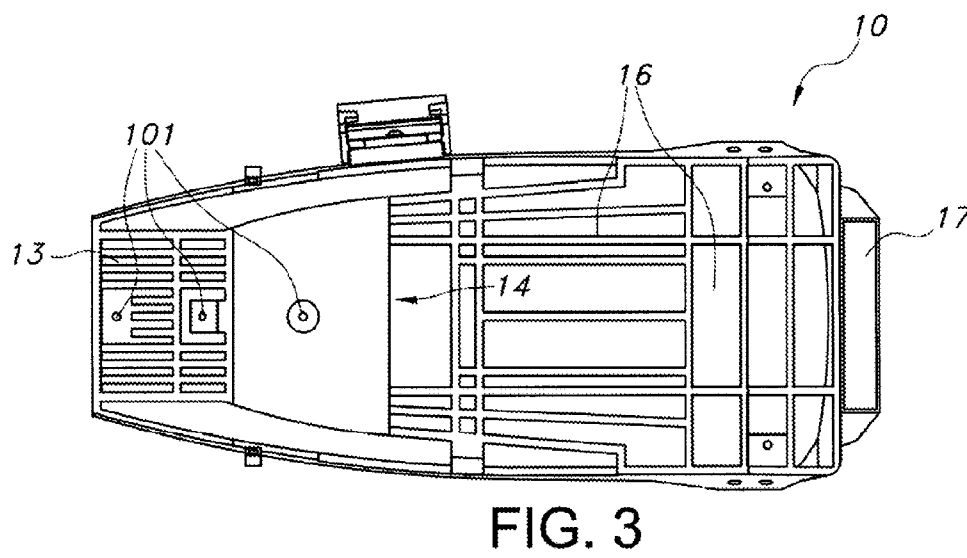
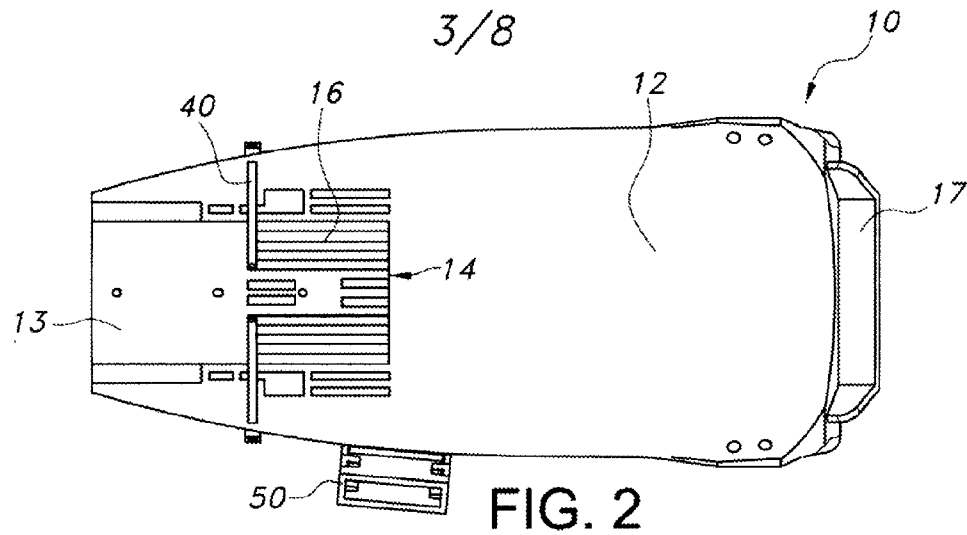
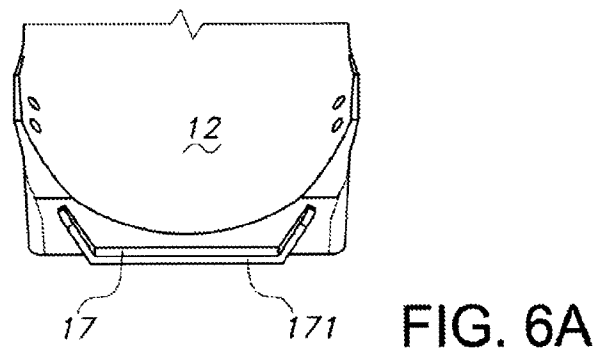
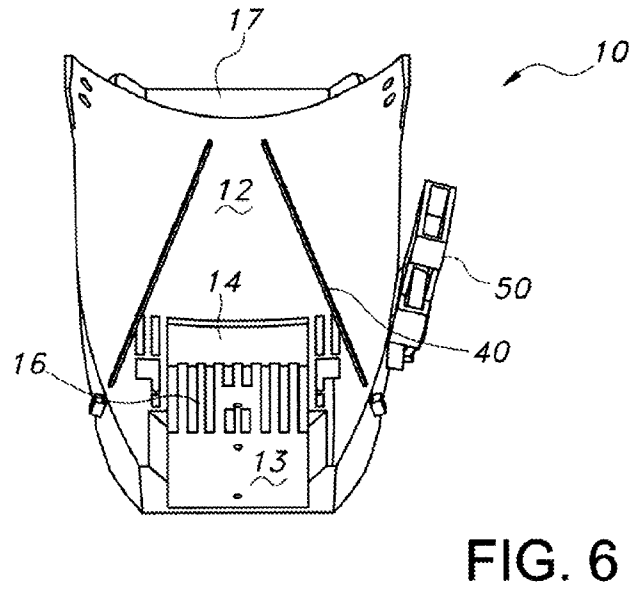
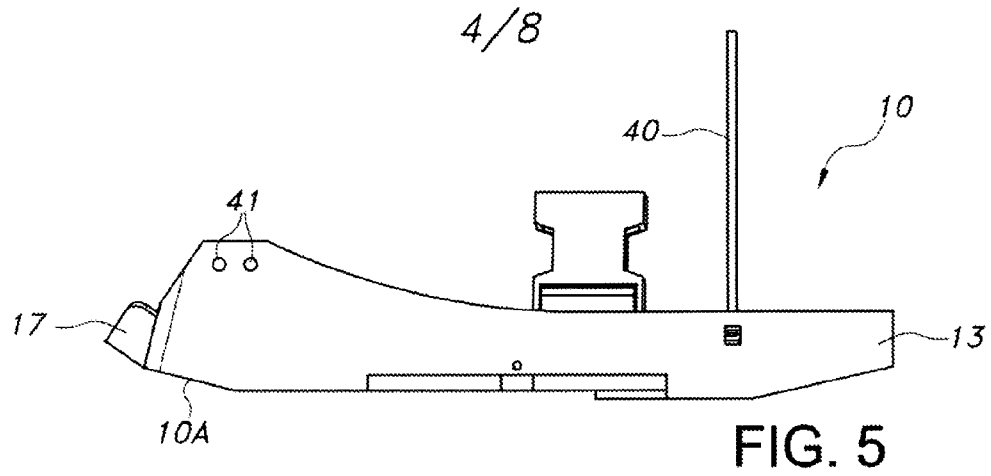


FIG. 13C





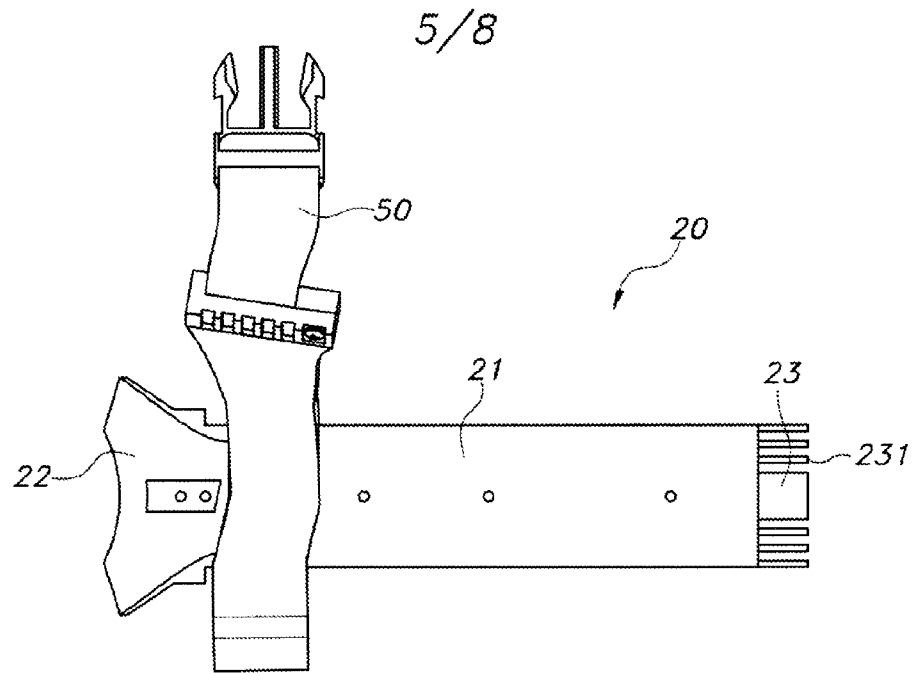


FIG. 7

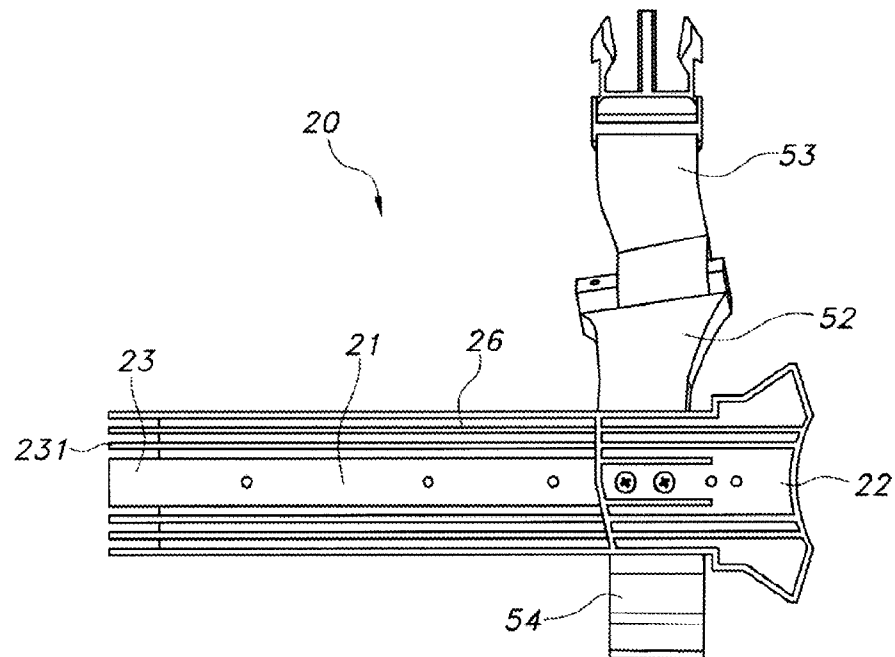


FIG. 8

6/8

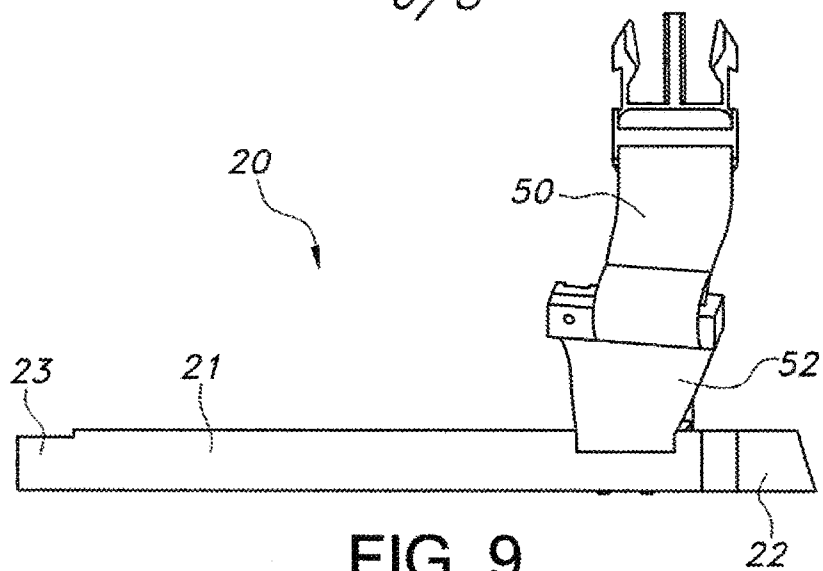


FIG. 9

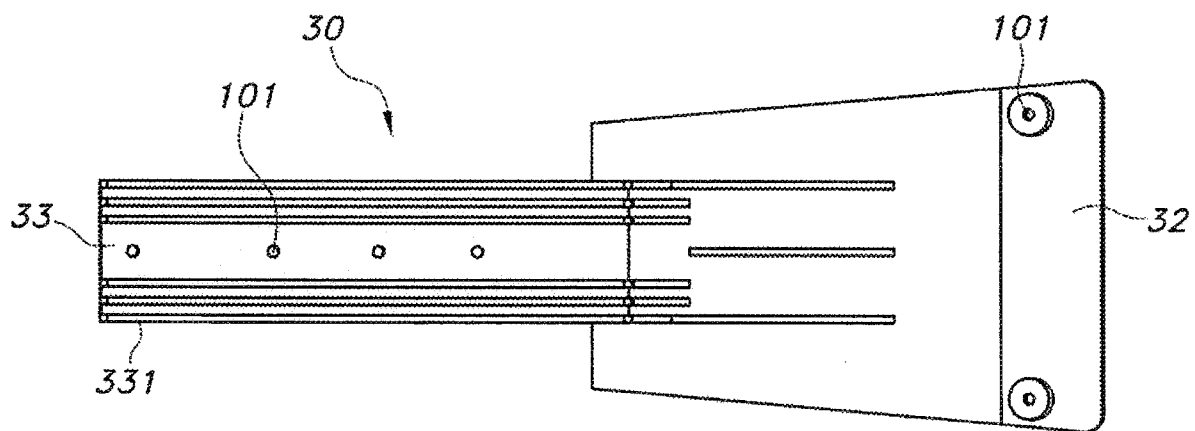


FIG. 10

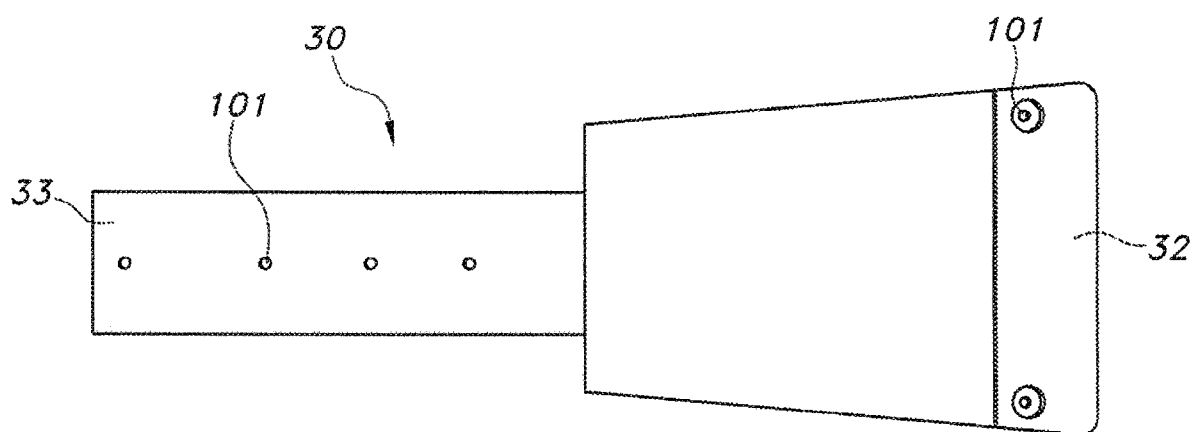


FIG. 11

7/8

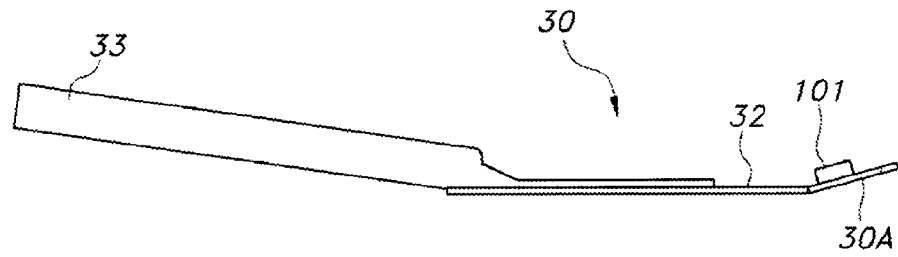


FIG. 12

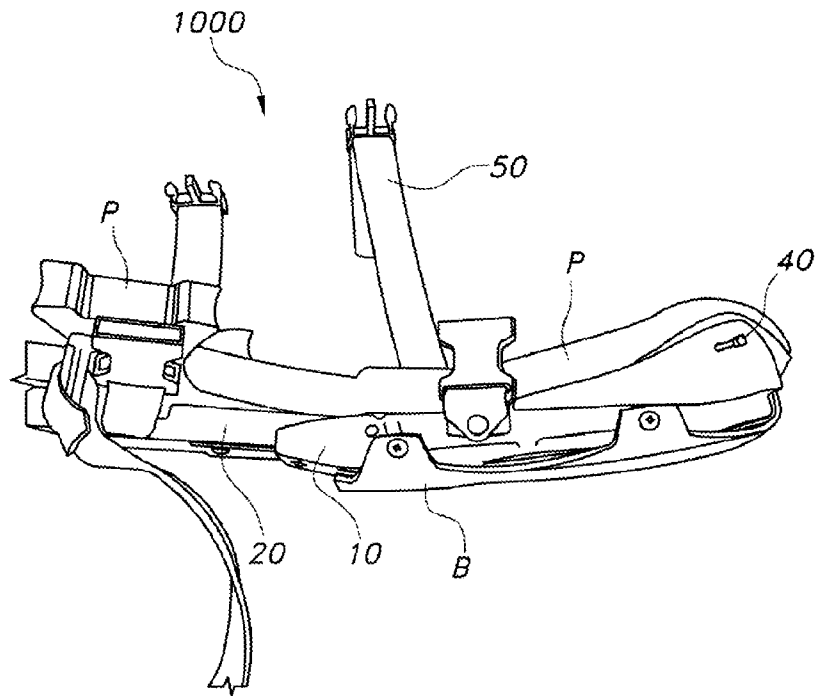


FIG. 14

8/8

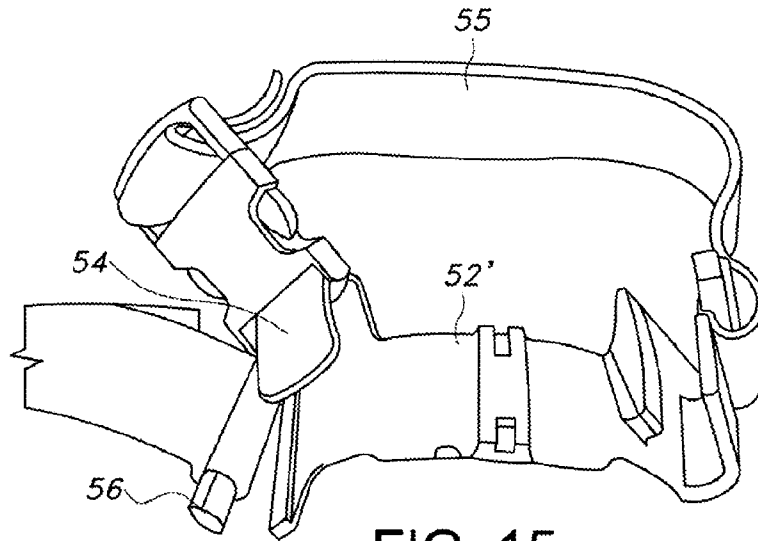


FIG. 15

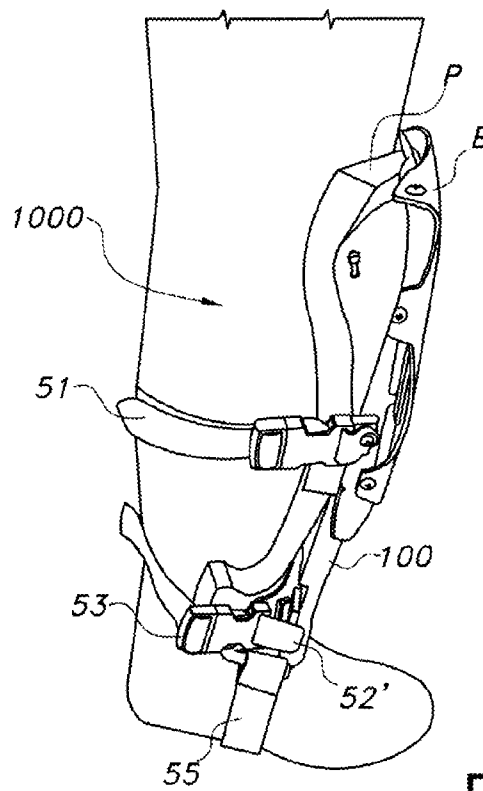


FIG. 16

