

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 March 2006 (02.03.2006)

PCT

(10) International Publication Number
WO 2006/022980 A2

(51) International Patent Classification:
G06K 9/00 (2006.01)

(21) International Application Number:

PCT/US2005/020154

(22) International Filing Date: 9 June 2005 (09.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/910,098 3 August 2004 (03.08.2004) US

(71) Applicant (for all designated States except US): **SONY ELECTRONICS INC.** [US/US]; 1 Sony Drive, Park Ridge, New Jersey 07656 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BERESTOV, Alexander** [US/US]; 5313 Manderston Drive San Jose, CA 95138 (US). **WONG, Earl** [US/US]; 1544 Huddersfield Court, San Jose, CA 95126 (US).


(74) Agent: **KOERNER, Gregory, J.**; Redwood Patent Law, 1291 East Hillsdale Boulevard, Suite 205, Foster City, CA 94404 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR EFFICIENTLY PERFORMING A DEPTH MAP RECOVERY PROCEDURE

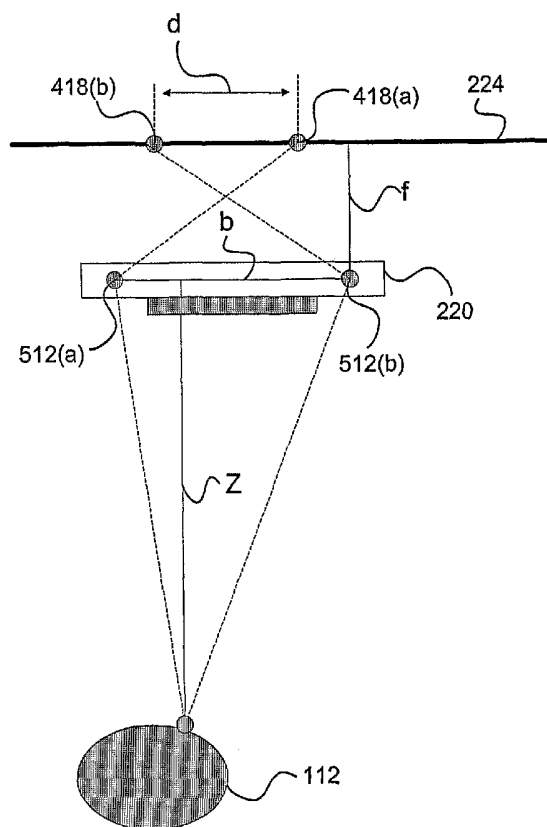

(57) Abstract: A system and method for efficiently performing a depth map recovery procedure includes an imaging device that is implemented in a single-lens stereo-shutter configuration for simultaneously capturing overlaid images corresponding to a photographic target. A depth map generator is configured to analyze the overlaid images to determine disparity values corresponding to separation distances between matching points in the overlaid images. The depth map generator then utilizes the disparity values to calculate depth values that correspond to locations in the photographic target. The depth map generator may then utilize the foregoing depth values for creating a depth map corresponding to the photographic target.



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SYSTEM AND METHOD FOR EFFICIENTLY PERFORMING
A DEPTH MAP RECOVERY PROCEDURE

BACKGROUND SECTION

5

1. Field of the Invention

This invention relates generally to techniques for analyzing image data, and relates more particularly to a system and method for efficiently
10 performing a depth map recovery procedure.

2. Description of the Background Art

Implementing efficient methods for analyzing image data is a significant
15 consideration for designers and manufacturers of contemporary electronic devices. However, efficiently analyzing image data with electronic devices may create substantial challenges for system designers. For example, enhanced demands for increased device functionality and performance may require more system processing power and require additional hardware
20 resources. An increase in processing or hardware requirements may also result in a corresponding detrimental economic impact due to increased production costs and operational inefficiencies.

Furthermore, enhanced device capability to perform various advanced operations may provide additional benefits to a system user, but may also
25 place increased demands on the control and management of various device components. For example, an enhanced electronic device that effectively analyzes digital image data may benefit from an effective implementation because of the large amount and complexity of the digital data involved.

Due to growing demands on system resources and substantially
30 increasing data magnitudes, it is apparent that developing new techniques for analyzing image data is a matter of concern for related electronic technologies. Therefore, for all the foregoing reasons, developing effective

systems for analyzing image data remains a significant consideration for designers, manufacturers, and users of contemporary electronic devices.

SUMMARY

In accordance with the present invention, a system and method are disclosed for efficiently performing a depth map recovery procedure. In one
5 embodiment, a depth map generator or any other appropriate entity may initially enable a depth map mode in a camera device. A capture subsystem of the camera device may responsively engage a single-lens stereo-shutter configuration by utilizing any effective techniques. The camera device may then simultaneously capture overlaid images corresponding to a selected
10 photographic target. Next, the depth map generator may perform a matching procedure to determine corresponding matching points in the overlaid images.

The depth map generator may calculate disparity values corresponding to various pairs of the matching points from the overlaid images. Finally, the
15 depth map generator may calculate individual depth values by utilizing the disparity values to thereby define a depth map corresponding to the selected photographic target. In certain embodiments, an auto-focus module may then utilize the depth map to perform an auto-focus procedure before the camera device captures and stores one or more final images.

20 In various alternate embodiments, the depth map may be utilized in any other appropriate and effective manner. For example, in certain embodiments of the present invention, the depth map may be utilized for various types of machine vision or object tracking applications. The present invention therefore provides an improved system and method for effectively
25 and efficiently performing a depth map recovery procedure.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram for one embodiment of a camera device, in accordance with the present invention;

5

FIG. 2 is a block diagram for one embodiment of the capture subsystem of FIG. 1, in accordance with the present invention;

FIG. 3 is a block diagram for one embodiment of the control module of FIG. 1, in accordance with the present invention;

10

FIG. 4 is a block diagram for one embodiment of the memory of FIG. 3, in accordance with the present invention;

15

FIG. 5 is a frontal view for one embodiment of a single-lens stereo-shutter configuration, in accordance with the present invention;

FIGS. 6A and 6B are plan views illustrating a disparity value, in accordance with one embodiment of the present invention;

20

FIG. 7 is a diagram of the overlaid images of FIG. 4, in accordance with one embodiment of the present invention;

FIG. 8 is a plan view illustrating a calculation procedure for determining a depth value, in accordance with one embodiment of the present invention; and

25

FIG. 9 is a flowchart of method steps for performing a depth map recovery procedure, in accordance with one embodiment of the present invention.

30

DETAILED DESCRIPTION

The present invention relates to an improvement in data analysis techniques. The following description is presented to enable one of ordinary skill in the art to make and use the invention and is provided in the context of a patent application and its requirements. Various modifications to the disclosed embodiments will be readily apparent to those skilled in the art, and the generic principles herein may be applied to other embodiments. Thus, the present invention is not intended to be limited to the embodiments shown, but is to be accorded the widest scope consistent with the principles and features described herein.

The present invention comprises a system and method for efficiently performing a depth map recovery procedure, and includes an imaging device that is implemented in a single-lens stereo-shutter configuration for simultaneously capturing overlaid images corresponding to a photographic target. A depth map generator is configured to analyze the overlaid images to determine disparity values corresponding to separation distances between matching points in the overlaid images. The depth map generator then utilizes the disparity values to calculate depth values that correspond to locations in the photographic target. The depth map generator may then utilize the foregoing depth values for creating a depth map corresponding to the photographic target.

Referring now to FIG. 1, a block diagram for one embodiment of a camera device 110 is shown, in accordance with the present invention. In the FIG. 1 embodiment, camera device 110 may include, but is not limited to, a capture subsystem 114, a system bus 116, and a control module 118. In the FIG. 1 embodiment, capture subsystem 114 may be optically coupled to a photographic target 112, and may also be electrically coupled via system bus 116 to control module 118.

In alternate embodiments, camera device 110 may readily include various other components in addition to, or instead of, those components discussed in conjunction with the FIG. 1 embodiment. In addition, in certain embodiments, the present invention may alternately be embodied
5 in any appropriate type of electronic device other than the camera device 110 of FIG. 1. For example, camera device 110 may alternately be implemented as an imaging device, a computer device, or a consumer electronics device.

In the FIG. 1 embodiment, once a system user has focused capture
10 subsystem 114 on target 112 and requested camera device 110 to capture image data corresponding to target 112, then control module 118 may preferably instruct capture subsystem 114 via system bus 116 to capture image data representing target 112. The captured image data may then be transferred over system bus 116 to control module 118, which may
15 responsively perform various processes and functions with the image data. System bus 116 may also bi-directionally pass various status and control signals between capture subsystem 114 and control module 118.

Referring now to FIG. 2, a block diagram for one embodiment of the
20 FIG. 1 capture subsystem 114 is shown, in accordance with the present invention. In the FIG. 2 embodiment, capture subsystem 114 preferably comprises, but is not limited to, a shutter 218, a lens 220, an image sensor 224, red, green, and blue (R/G/B) amplifiers 228, an analog-to-digital (A/D) converter 230, and an interface 232. In alternate embodiments, capture
25 subsystem 114 may readily include various other components in addition to, or instead of, those components discussed in conjunction with the FIG. 2 embodiment.

In the FIG. 2 embodiment, capture subsystem 114 may preferably capture image data corresponding to target 112 via reflected light
30 impacting image sensor 224 along optical path 236. Image sensor 224, which may preferably include a charged-coupled device (CCD), may responsively generate a set of image data representing the target 112. The

image data may then be routed through red, green, and blue amplifiers 228, A/D converter 230, and interface 232. From interface 232, the image data passes over system bus 116 to control module 118 for appropriate processing and storage. Other types of image capture sensors, such as
5 CMOS or linear arrays are also contemplated for capturing image data in conjunction with the present invention. The utilization and functionality of shutter 218 is further discussed below in conjunction with FIGS. 5-9.

Referring now to FIG. 3, a block diagram for one embodiment of the
10 FIG. 1 control module 118 is shown, in accordance with the present invention. In the FIG. 3 embodiment, control module 118 preferably includes, but is not limited to, a viewfinder 308, a central processing unit (CPU) 344, a memory 346, and one or more input/output interface(s) (I/O) 348. Viewfinder 308, CPU 344, memory 346, and I/O 348 preferably are
15 each coupled to, and communicate, via common system bus 116 that also communicates with capture subsystem 114. In alternate embodiments, control module 118 may readily include various other components in addition to, or instead of, those components discussed in conjunction with the FIG. 3 embodiment.

20 In the FIG. 3 embodiment, CPU 344 may be implemented to include any appropriate microprocessor device. Alternately, CPU 344 may be implemented using any other appropriate technology. For example, CPU 344 may be implemented to include certain application-specific integrated circuits (ASICs) or other appropriate electronic devices. Memory 346 may be
25 implemented as one or more appropriate storage devices, including, but not limited to, read-only memory, random-access memory, and various types of non-volatile memory, such as floppy disc devices, hard disc devices, or flash memory. I/O 348 may provide one or more effective interfaces for facilitating bi-directional communications between camera device 110 and any external
30 entity, including a system user or another electronic device. I/O 348 may be implemented using any appropriate input and/or output devices. The

operation and utilization of control module 118 are further discussed below in conjunction with FIGS. 4 through 9.

Referring now to FIG. 4, a block diagram for one embodiment of the
5 FIG. 3 memory 346 is shown, in accordance with the present invention. In the FIG. 4 embodiment, memory 346 may include, but is not limited to, a camera application 412, an operating system 414, a depth map generator 416, overlaid images 418, a depth map 420, an auto-focus module 422, and one or more final image(s) 424. In alternate embodiments, memory 346 may
10 readily include various other components in addition to, or instead of, those components discussed in conjunction with the FIG. 4 embodiment.

In the FIG. 4 embodiment, camera application 412 may include program instructions that are preferably executed by CPU 344 (FIG. 3) to perform various functions and operations for camera device 110. The
15 particular nature and functionality of camera application 412 preferably varies depending upon factors such as the type and particular use of the corresponding camera device 110.

In the FIG. 4 embodiment, operating system 414 preferably controls and coordinates low-level functionality of camera device 110. In accordance
20 with the present invention, depth map generator 416 may control and coordinate a depth map recovery procedure to generate a depth map 420 from overlaid images 418. In the FIG. 4 embodiment, depth map 420 may include a set of depth values that each represent a specific distance from camera device 110 to a particular point or area in a photographic target 112.
25 The utilization of overlaid images 418 by depth map generator 416 to create a depth map 420 is further discussed below in conjunction with FIGS. 4-9. In the FIG. 4 embodiment, auto-focus module 422 may utilize depth map 420 to perform an auto-focus procedure before camera device 110 captures and stores one or more final image(s) 424.

30

Referring now to FIG. 5, a frontal view of a single-lens stereo-shutter configuration 510 is shown, in accordance with one embodiment of the

present invention. The FIG. 5 single-lens stereo-shutter configuration 510 includes lens 220 and shutter 218 as shown above in the FIG. 2 capture subsystem 114. In alternate embodiments, the present invention may utilize various other configurations and elements to implement a single-lens stereo-shutter configuration 510.

In the FIG. 5 embodiment, after entering a depth map mode, depth map generator 416 may cause capture subsystem 114 of camera device 110 to position shutter 218 adjacent to lens 220 to thereby block the transmission of light through lens 220 to image sensor 224 (FIG. 2) except for light that passes through a first opening 512(a) and a second opening 512(b) where shutter 218 does not cover lens 220. The single-lens stereo-shutter configuration 510 therefore permits image sensor 224 of camera device 110 to simultaneously capture two overlaid images 418 (FIG. 4) of a photographic target 112 through respective corresponding openings 512(a) and 512(b).

The present invention may utilize other single-lens stereo-shutter configurations that are implemented in any effective manner to allow two separate overlaid images 418 to be captured by image sensor 224. For example, in alternate embodiments, shutter 218 may cover the entire surface of lens 220 with the exception of two round openings that are separated by a finite distance. The utilization of single-lens stereo-shutter configuration 510 is further discussed below in conjunction with FIGS. 6-9.

Referring now to FIGS. 6A and 6B, plan views illustrating a disparity value 616 are shown, in accordance with one embodiment of the present invention. The FIG. 6A and FIG. 6B embodiments are presented for purposes of illustration, and in alternate embodiments of the present invention, the present invention may determine disparity values by utilizing techniques other than those discussed in conjunction with the FIG. 6 embodiment.

In the FIG. 6A embodiment, lens 220 with shutter 218 is positioned to focus light reflected from target 112 onto image sensor 224 as overlaid images 418(a+b) without any disparity value or image separation. However, in the FIG. 6B embodiment, the distance from target 112 to lens 220 has

been increased without changing the distance from lens 220 to image sensor 224. Therefore, in the FIG. 6B embodiment, a first overlaid image 418(a) is separated from a second overlaid image 418(b) by a disparity value 616. In accordance with the present invention, depth map generator 416 may
5 determine disparity value 616 for then calculating a depth value that represents the distance of object 112 from lens 220. The calculation and utilization of disparity value 616 is further discussed below in conjunction with FIGS. 7-9.

10 Referring now to FIG. 7, a diagram of one embodiment for the FIG. 4 overlaid images 418 is shown, in accordance with one embodiment of the present invention. The FIG. 7 embodiment is presented for purposes of illustration, and in alternate embodiments, overlaid images 418 may readily be implemented to include various configurations and elements in addition
15 to, or instead of, certain of those configurations and elements discussed in conjunction with the FIG. 7 embodiment.

In the FIG. 7 embodiment, depth map generator 416 calculates disparity values for various corresponding matching points in overlaid images 418. For example, in the FIG. 7 embodiment, a first matching point 712(a)
20 from overlaid image 418(a) corresponds to a second matching point 712(b) from overlaid image 418(b). Depth map generator 416 may determine disparity value 616 as the separation between matching point 712(a) and 712(b). Therefore, in order to determine a given disparity value 616, depth map generator 416 must establish the location of matching points 712 in
25 overlaid images 418.

In the present invention, depth map generator 416 may utilize any effective and appropriate techniques to identify matching points 712 in overlaid images 418. For example, in certain embodiments, feature matching techniques may be utilized in which all pixel values are replaced by a value
30 that characterizes their neighborhood (a so-called feature value). A search pixel whose feature value is closest to the feature value of a reference pixel is chosen as a candidate. An example of a feature value of a pixel is the local

variance. Generalizing this method to multiple features leads to a method of feature vector matching.

In other embodiments, a correlation matching technique may be utilized in which a neighborhood around each pixel is enumerated as a sequence of pixel values. This is done in the same way for all pixels. A search pixel is chosen whose sequence most closely resembles the sequence of the reference pixel. In order to compare the two sequences, a rate of similarity between them is defined by means of cross correlation. In addition, in certain cases where epipolar geometry exists, an epipolar matching technique may be utilized in which a row of pixels is matched at the same time by utilizing an optimal correspondent subsequence algorithm. Determining disparity values for use in calculating corresponding depth values to create a depth map is further discussed below in conjunction with FIGS. 8-9.

15

Referring now to FIG. 8, a plan view illustrating a calculation procedure for determining a depth value is shown, in accordance with one embodiment of the present invention. The FIG. 8 embodiment is presented for purposes of illustration, and in alternate embodiments, the present invention may determine depth values by utilizing techniques other than those discussed in conjunction with the FIG. 8 embodiment.

In the FIG. 8 embodiment, depth map generator may calculate a depth value "Z" that accurately represents the distance of a given point in photographic target from lens 220. In the FIG. 8 embodiment, as discussed above, depth map generator 416 may determine a disparity value "d" to be equal to the separation between matching point 712(a) in overlaid image 418(a) and a corresponding matching point 712(b) in overlaid image 418(b). In addition, a baseline value "b" may be defined as the distance between the centers of first opening 512(a) and second opening 512(b) in single-lens stereo-shutter configuration 510 (FIG. 5). Finally, a focal length "f" may be defined as the distance between lens 220 and image sensor 224.

30

In accordance with one embodiment of the present invention, for pinhole openings 512(a) and 512(b), depth map generator 416 may then calculate depth value "Z" according to the following formula:

$$Z = (f * b) / (d - b)$$

5

where "d" is disparity value 616, "b" is a baseline value representing the distance between first opening 512(a) and second opening 512(b) of single-lens stereo-shutter configuration 510, and "f" is the focal distance from lens 220 to image sensor 224. The calculation and utilization of depth values are
10 further discussed below in conjunction with FIG. 9.

Referring now to FIG. 9, a flowchart of method steps for performing a depth map recovery procedure is shown, in accordance with one embodiment of the present invention. The FIG. 9 embodiment is presented for purposes of
15 illustration, and in alternate embodiments, the present invention may readily utilize various other steps and sequences than those discussed in conjunction with the FIG. 9 embodiment.

In the FIG. 9 embodiment, in step 910, any appropriate entity may initially enable a depth map mode in camera device 110. In step 914,
20 capture subsystem 114 of camera device 110 may responsively engage a single-lens stereo-shutter configuration 510 by utilizing any effective techniques. In step 918, camera device 110 may then simultaneously capture overlaid images 418 corresponding to a selected photographic target 112. Next, in step 922, a depth map generator 416 may perform a matching
25 procedure to determine corresponding matching points 712 in the overlaid images 418.

In step 926, depth map generator 416 may calculate disparity values 616 corresponding to various pairs of matching points 712 in overlaid images 418. Finally, in step 930, depth map generator 416 may calculate individual
30 depth values by utilizing said disparity values 616 to thereby define a depth map 420 corresponding to the selected photographic target 112. In certain embodiments, an auto-focus module 422 may then utilize the depth map 420

to perform an auto-focus procedure before the camera device 110 captures and stores one or more final images 424.

In various alternate embodiments, depth map 420 may be utilized in any other appropriate and effective manner. For example, in certain
5 embodiments of the present invention, depth map 420 may be utilized for various types of machine vision or object tracking applications. The present invention therefore provides an improved system and method for effectively and efficiently performing a depth map recovery procedure.

10 The invention has been explained above with reference to certain embodiments. Other embodiments will be apparent to those skilled in the art in light of this disclosure. For example, the present invention may readily be implemented using configurations and techniques other than those described in the embodiments above. Additionally, the present invention may
15 effectively be used in conjunction with systems other than those described above. Therefore, these and other variations upon the discussed embodiments are intended to be covered by the present invention, which is limited only by the appended claims.

WHAT IS CLAIMED IS:

1. A system for performing a depth map recovery procedure, comprising:
an imaging device implemented with a single-lens stereo-shutter
5 configuration for simultaneously capturing overlaid images
corresponding to a photographic target; and
a depth map generator configured to analyze said overlaid images to
determine disparity values corresponding to separation distances
between matching points in said overlaid images.
10
2. The system of claim 1 wherein said depth map generator utilizes said
disparity values to calculate depth values that correspond to said matching
points, said depth map generator utilizing said depth values for creating a
depth map of said photographic target.
15
3. The system of claim 1 wherein said depth values are functions of said
disparity values, said depth values representing physical distances from said
single-lens stereo-shutter configuration to said physical locations in said
photographic target.
20
4. The system of claim 1 wherein said single-lens stereo-shutter
configuration and said depth map generator are implemented in an electronic
camera device with an auto-focus module that utilizes said depth values from
said depth map for performing an auto-focus procedure.
25
5. The system of claim 4 wherein said electronic camera device captures
one or more final images after said auto-focus procedure has been performed
by said auto-focus module.
30

6. The system of claim 1 wherein an electronic device utilizes said depth map for performing at least one of a machine vision procedure or an object tracking procedure.

5 7. The system of claim 1 wherein said single-lens stereo-shutter configuration includes a stereo shutter that is positionable adjacent to a single lens for passing reflected light from said photographic target only through a first opening and a second opening to an image sensor to thereby create a first overlaid image and a second overlaid image of said overlaid
10 images.

8. The system of claim 7 wherein said stereo shutter is implemented as a non-translucent rectangular object that covers all of said single lens except for an extreme left portion corresponding to said first opening and an extreme
15 right portion corresponding to said second opening.

9. The system of claim 7 wherein said stereo shutter is implemented as a non-translucent object that covers all of said single lens except for a first circular portion corresponding to said first opening and a second circular
20 portion corresponding to said second opening.

10. The system of claim 1 wherein said depth map generator performs a feature matching procedure to identify said matching points in said overlaid images, said feature matching procedure identifying said matching points by
25 locating corresponding features in said overlaid images.

11. The system of claim 1 wherein said depth map generator performs a correlation matching procedure to identify said matching points in said overlaid images, said correlation matching procedure identifying said
30 matching points by calculating correlation relationships in said overlaid images.

12. The system of claim 1 wherein said depth map generator performs an epipolar matching procedure to identify said matching points in said overlaid images, said epipolar matching procedure identifying said matching points by analyzing pixel rows in said overlaid images.

5

13. The system of claim 1 wherein said depth map generator enters a depth map mode to thereby activate said single-lens stereo-shutter configuration.

14. The system of claim 13 wherein an image sensor device simultaneously captures said overlaid images through said single-lens stereo-shutter configuration.

15. The system of claim 14 wherein each set of said overlaid images includes a first overlaid image of said photographic target and a second overlaid image of said photographic target, said first overlaid image being offset from said second overlaid image distances represented by said disparity values.

16. The system of claim 14 wherein said depth map generator performs a matching procedure to identify multiple pairs of said matching points in said overlaid images, each of said multiple pairs of said matching points corresponding to a different specific location in said photographic target.

17. The system of claim 16 wherein said depth map generator determines said disparity values by calculating said separation distances between said multiple pairs of said matching points from said overlaid images.

18. The system of claim 17 wherein said depth map generator utilizes said disparity values to calculate corresponding ones of said depth values that each represents a physical distance from said single-lens stereo-shutter configuration to said different specific location in said photographic target.

19. The system of claim 18 wherein said depth map generator calculates each of said depth values according to a formula:

$$Z = (f * b) / (d - b)$$

5

where said Z is said depth value, said d is said disparity value, said b is a baseline value representing a baseline distance between a first opening and a second opening in said single-lens stereo-shutter configuration, and said f is a focal distance from said single-lens stereo-shutter configuration to said
10 image sensor device.

20. The system of claim 18 wherein said depth map generator creates said depth map by populating an image of said photographic target with said depth values corresponding to different physical locations in said
15 photographic target.

21. A method for performing a depth map recovery procedure, comprising:
implementing an imaging device with a single-lens stereo-shutter
configuration for simultaneously capturing overlaid images
20 corresponding to a photographic target; and
analyzing said overlaid images with a depth map generator to
determine disparity values corresponding to separation distances
between matching points in said overlaid images.

25 22. The method of claim 21 wherein said depth map generator utilizes said disparity values to calculate depth values that correspond to said matching points, said depth map generator utilizing said depth values for creating a depth map of said photographic target.

30

23. The method of claim 21 wherein said depth values are functions of said disparity values, said depth values representing physical distances from said single-lens stereo-shutter configuration to said physical locations in said photographic target.

5

24. The method of claim 21 wherein said single-lens stereo-shutter configuration and said depth map generator are implemented in an electronic camera device with an auto-focus module that utilizes said depth values from said depth map for performing an auto-focus procedure.

10

25. The method of claim 24 wherein said electronic camera device captures one or more final images after said auto-focus procedure has been performed by said auto-focus module.

15 26. The method of claim 21 wherein an electronic device utilizes said depth map for performing at least one of a machine vision procedure or an object tracking procedure.

27. The method of claim 21 wherein said single-lens stereo-shutter
20 configuration includes a stereo shutter that is positionable adjacent to a single lens for passing reflected light from said photographic target only through a first opening and a second opening to an image sensor to thereby create a first overlaid image and a second overlaid image of said overlaid images.

25

28. The method of claim 27 wherein said stereo shutter is implemented as a non-translucent rectangular object that covers all of said single lens except for an extreme left portion corresponding to said first opening and an extreme right portion corresponding to said second opening.

30

29. The method of claim 27 wherein said stereo shutter is implemented as a non-translucent object that covers all of said single lens except for a first circular portion corresponding to said first opening and a second circular portion corresponding to said second opening.

5

30. The method of claim 21 wherein said depth map generator performs a feature matching procedure to identify said matching points in said overlaid images, said feature matching procedure identifying said matching points by locating corresponding features in said overlaid images.

10

31. The method of claim 21 wherein said depth map generator performs a correlation matching procedure to identify said matching points in said overlaid images, said correlation matching procedure identifying said matching points by calculating correlation relationships in said overlaid
15 images.

32. The method of claim 21 wherein said depth map generator performs an epipolar matching procedure to identify said matching points in said overlaid images, said epipolar matching procedure identifying said matching points by
20 analyzing pixel rows in said overlaid images.

33. The method of claim 21 wherein said depth map generator enters a depth map mode to thereby activate said single-lens stereo-shutter configuration.

25

34. The method of claim 33 wherein an image sensor device simultaneously captures said overlaid images through said single-lens stereo-shutter configuration.

30

35. The method of claim 34 wherein each set of said overlaid images includes a first overlaid image of said photographic target and a second overlaid image of said photographic target, said first overlaid image being offset from said second overlaid image distances represented by said disparity values.

36. The method of claim 34 wherein said depth map generator performs a matching procedure to identify multiple pairs of said matching points in said overlaid images, each of said multiple pairs of said matching points corresponding to a different specific location in said photographic target.

37. The method of claim 36 wherein said depth map generator determines said disparity values by calculating said separation distances between said multiple pairs of said matching points from said overlaid images.

38. The method of claim 37 wherein said depth map generator utilizes said disparity values to calculate corresponding ones of said depth values that each represents a physical distance from said single-lens stereo-shutter configuration to said different specific location in said photographic target.

39. The method of claim 38 wherein said depth map generator calculates each of said depth values according to a formula:

$$Z = (f * b) / (d - b)$$

where said Z is said depth value, said d is said disparity value, said b is a baseline value representing a baseline distance between a first opening and a second opening in said single-lens stereo-shutter configuration, and said f is a focal distance from said single-lens stereo-shutter configuration to said image sensor device.

40. The method of claim 38 wherein said depth map generator creates said depth map by populating an image of said photographic target with said depth values corresponding to different physical locations in said photographic target.

5

41. A system for performing a depth map recovery procedure, comprising:
means for simultaneously capturing overlaid images corresponding to a photographic target; and
means for analyzing said overlaid images to determine disparity values
10 corresponding to separation distances between matching points
in said overlaid images, said means for analyzing then utilizing
said disparity values to calculate depth values that correspond to
said matching points, said means for analyzing finally creating a
depth map of said photographic target by utilizing said depth
15 values.

15

42. A system for performing a depth map recovery procedure, comprising:
an imaging device implemented to simultaneously capture overlaid
images corresponding to a photographic target; and
20 a depth map generator configured to analyze said overlaid images to
determine disparity values corresponding to separation distances
between matching points from said overlaid images, said depth
map generator then utilizing said disparity values to create a
depth map of said photographic target.

25

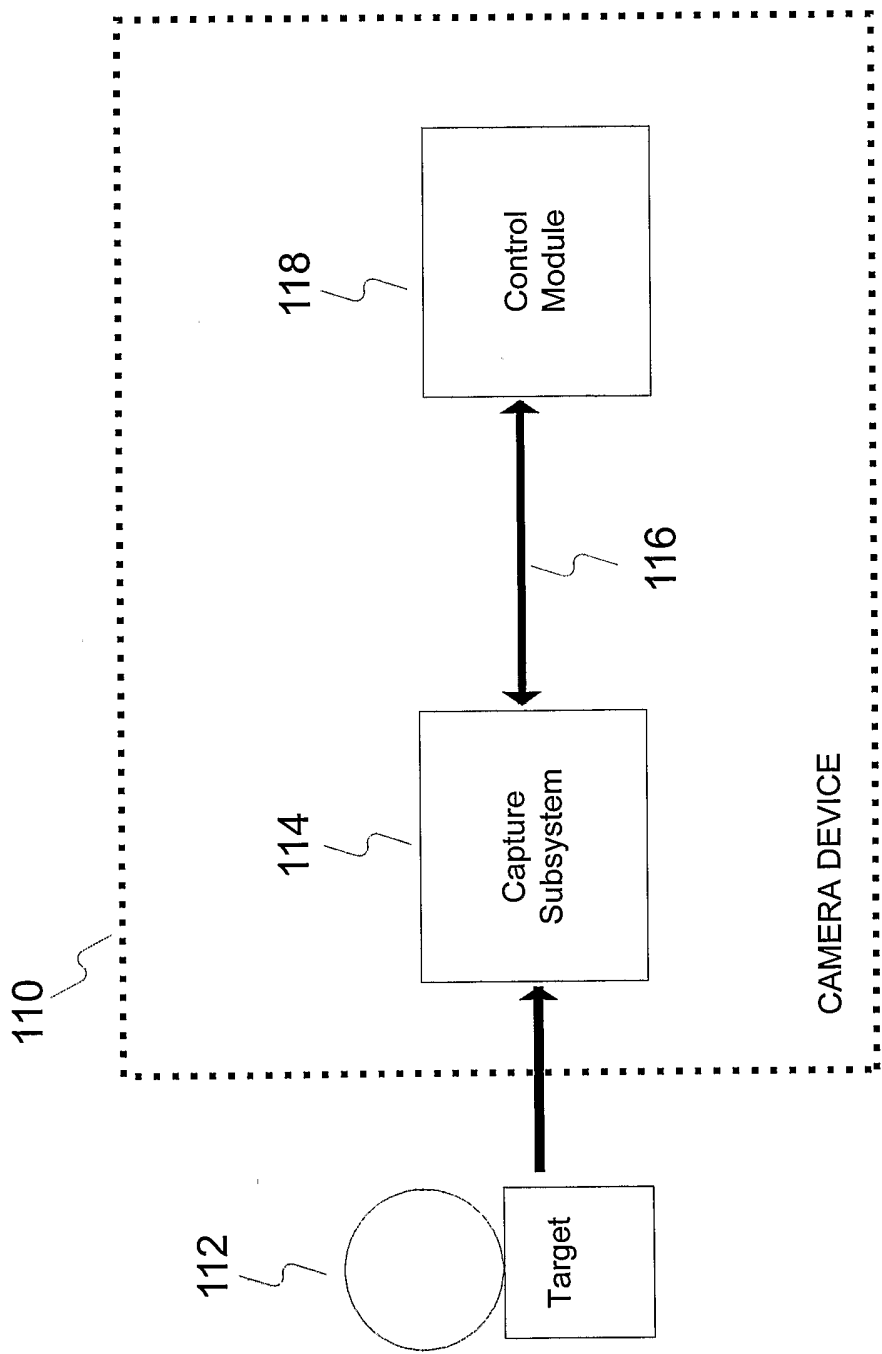


FIG. 1

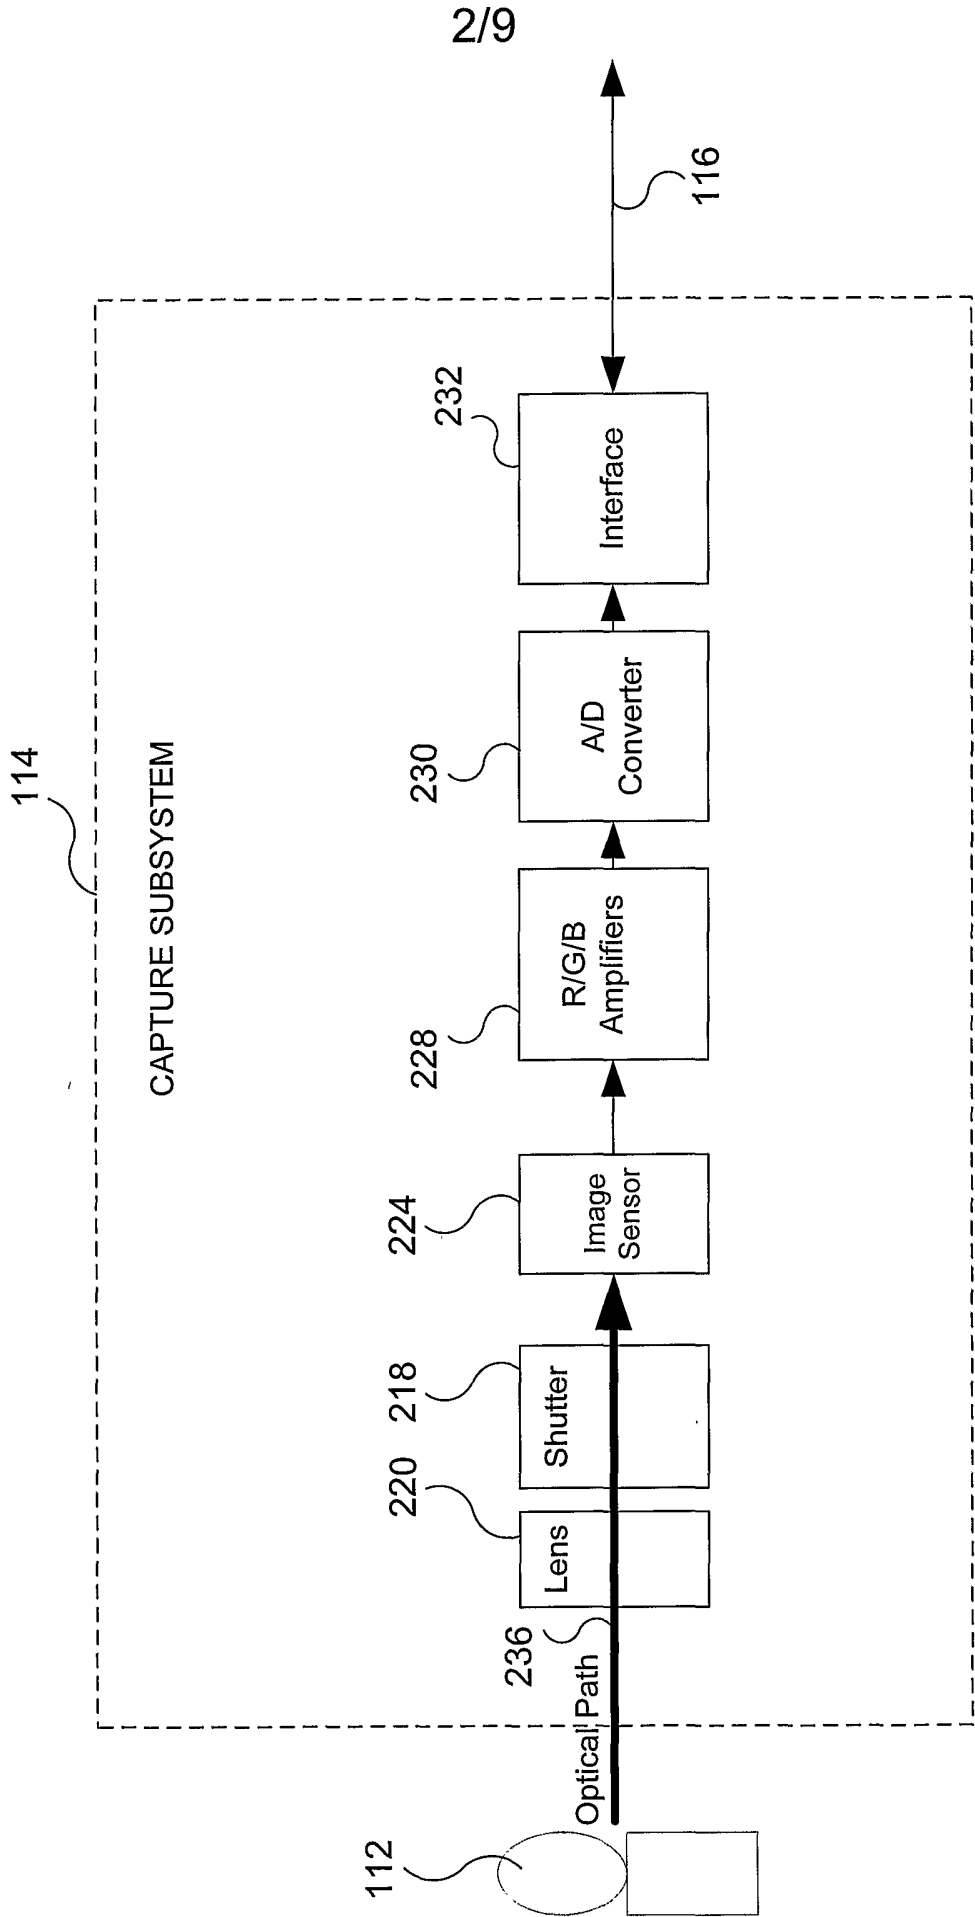


FIG. 2


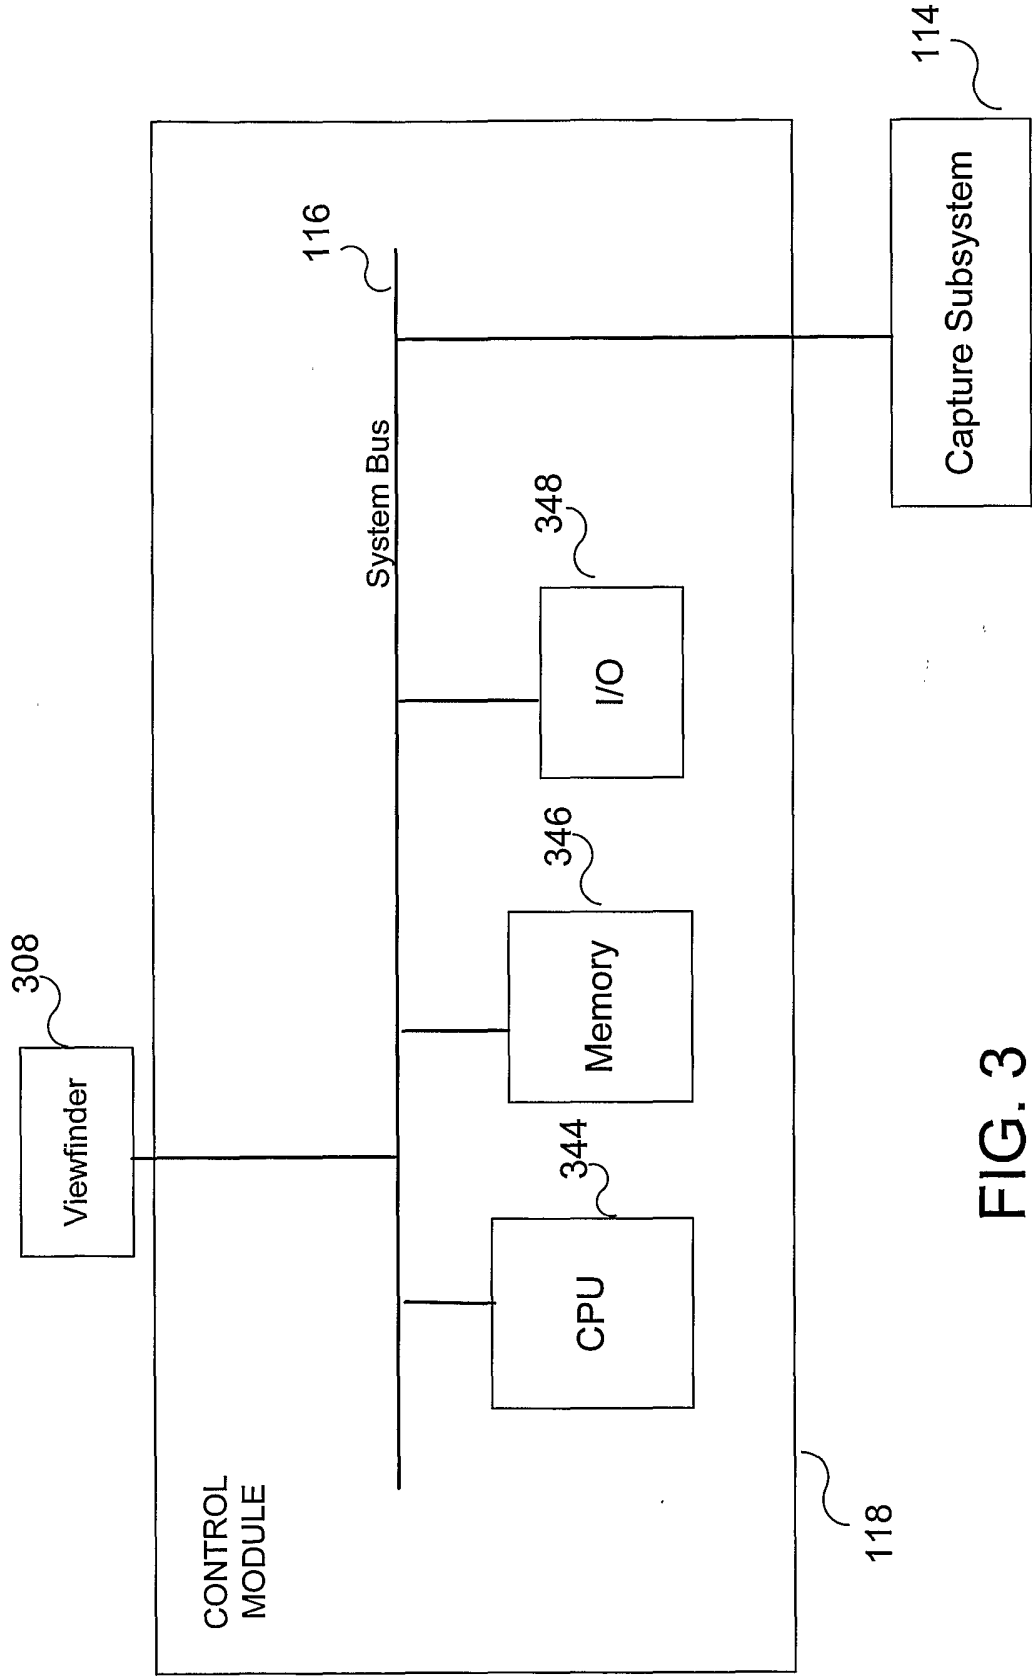


FIG. 3


4/9

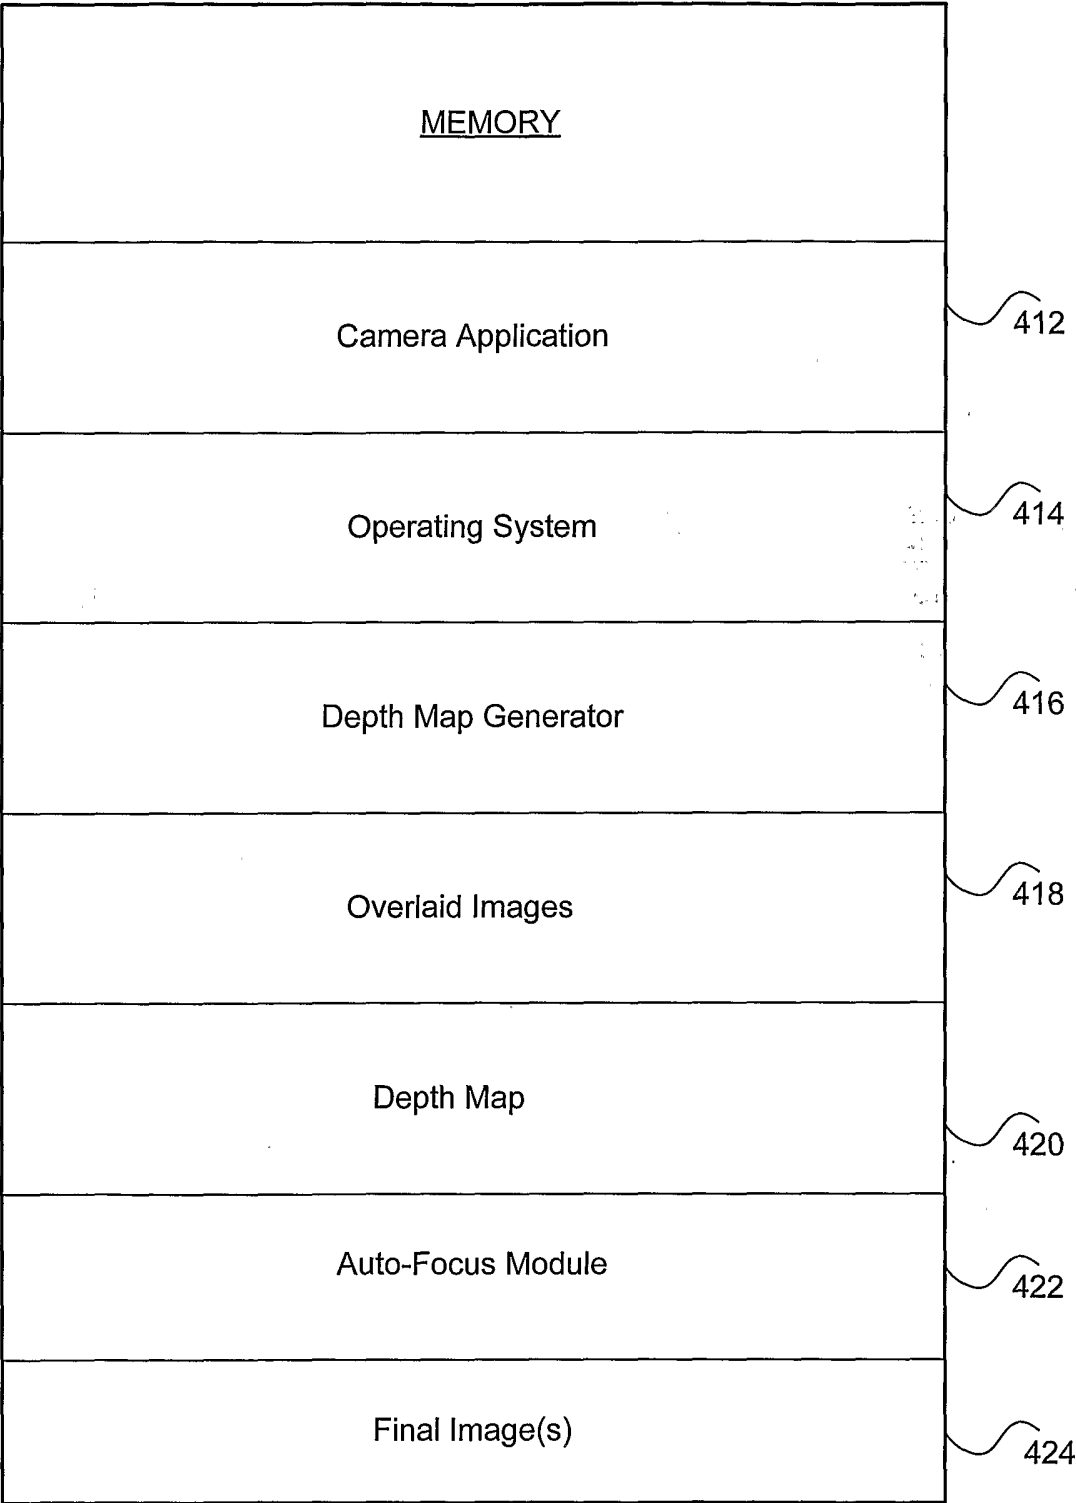

346

Fig. 4

5/9

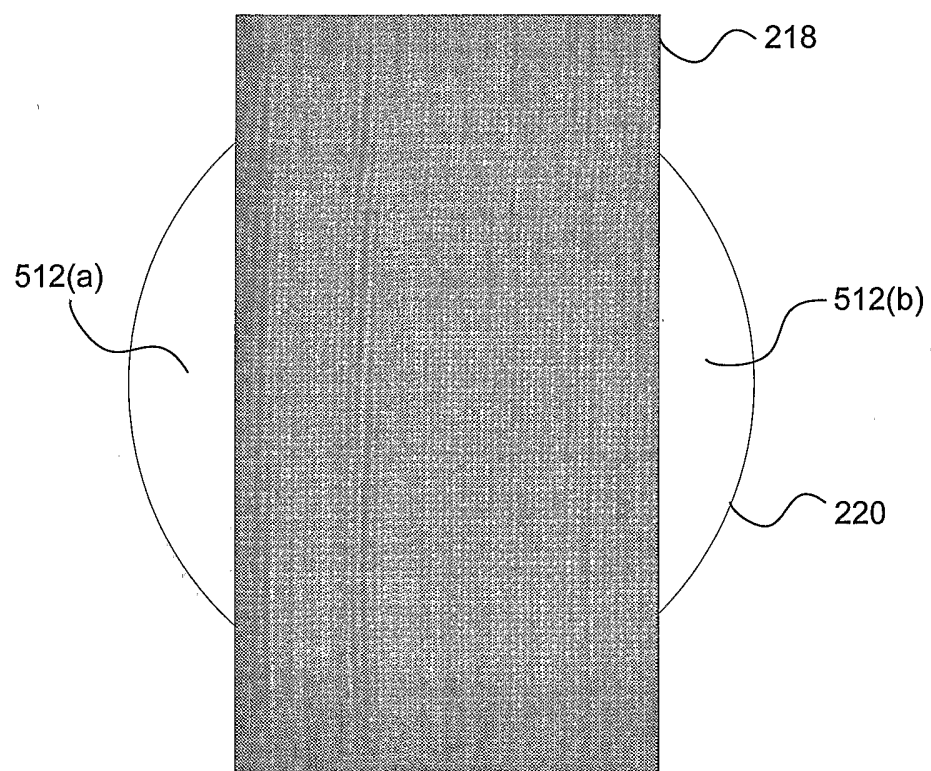

510

Fig. 5

6/9

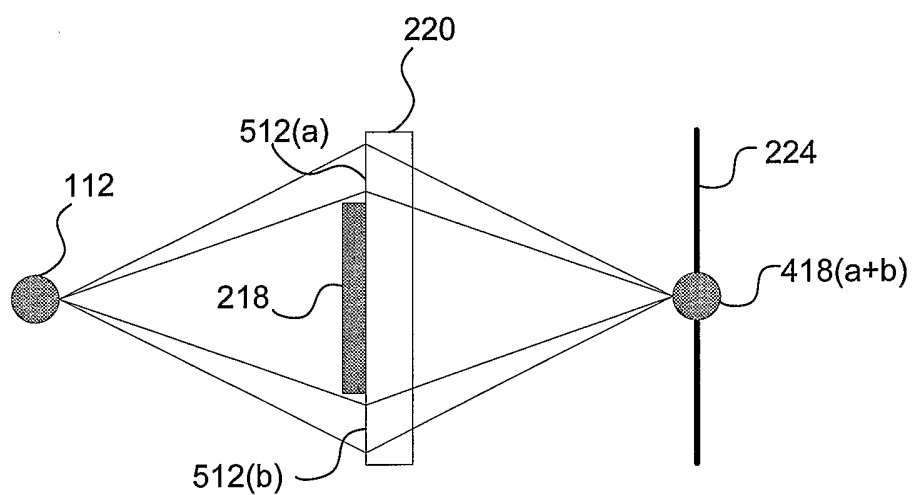


Fig. 6A

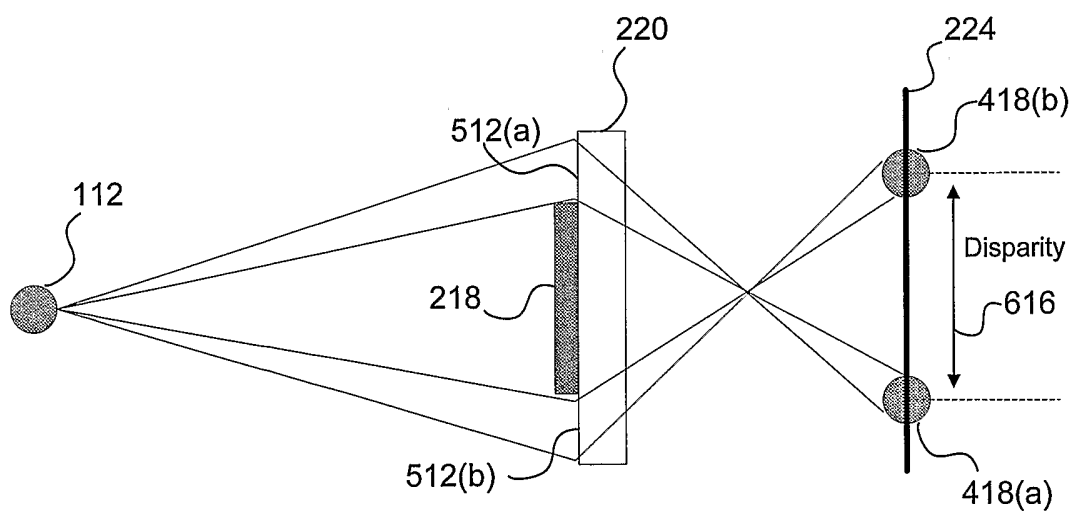


Fig. 6B

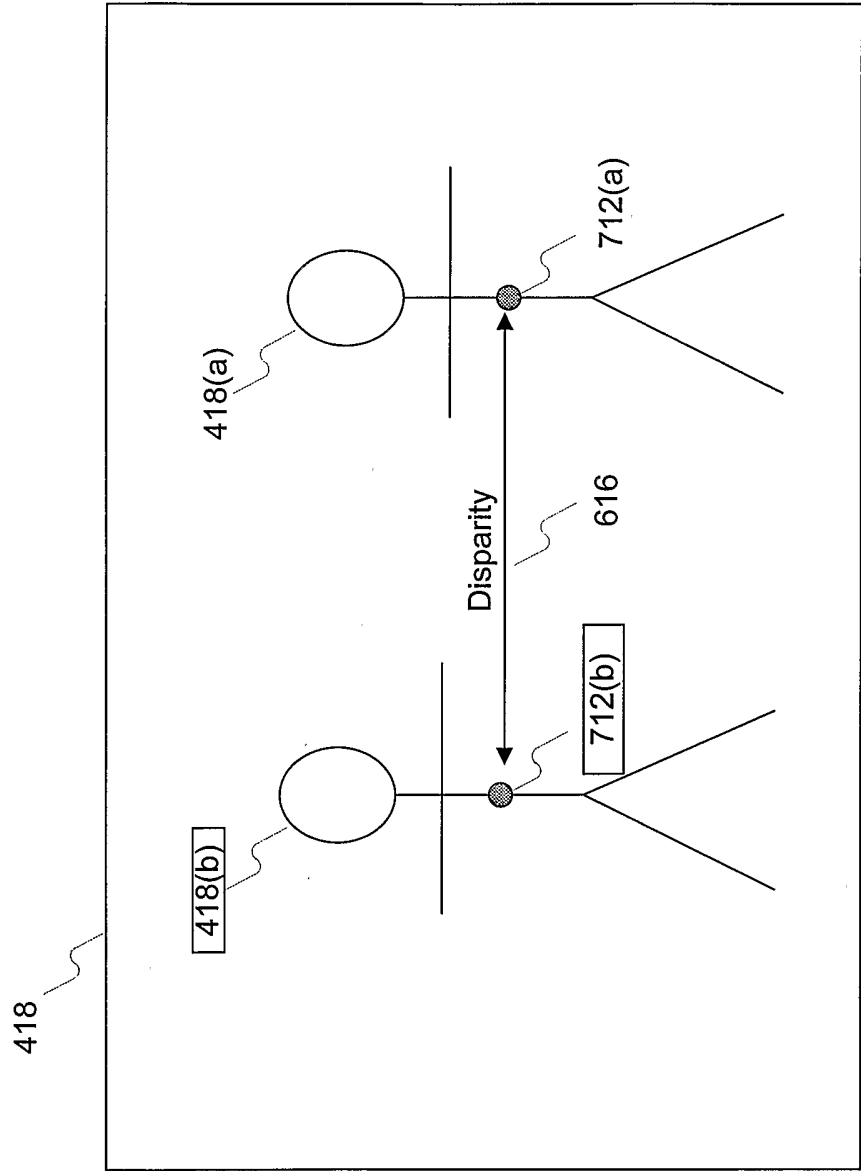


FIG. 7

8/9

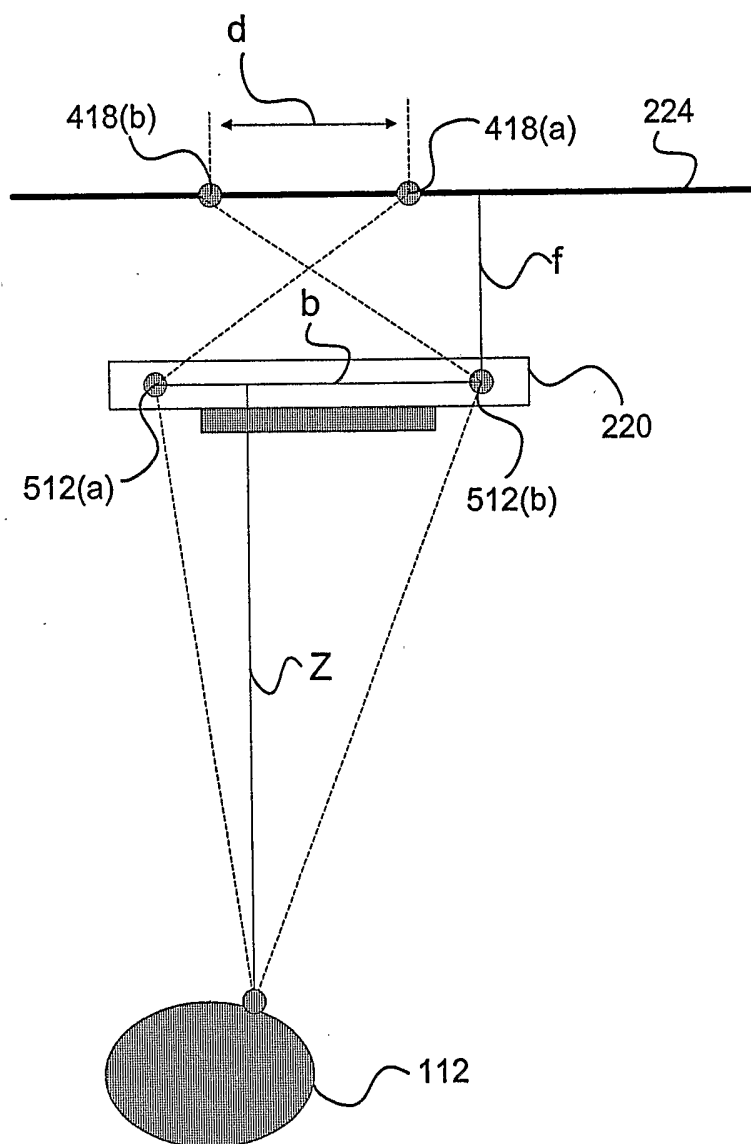


Fig. 8

810

9/9

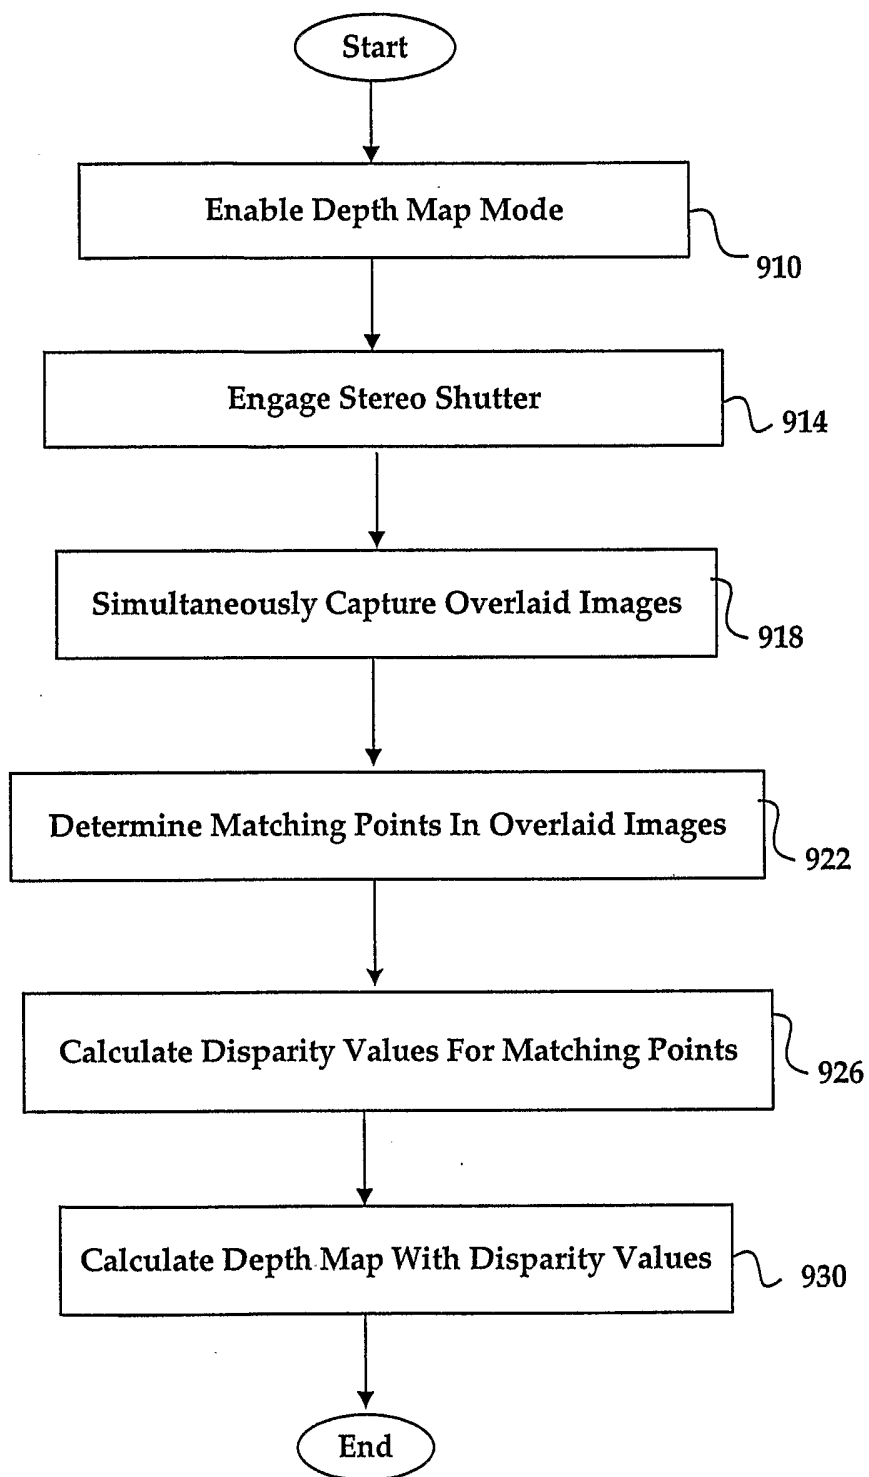


FIG. 9