

(19) **DANMARK**

(10) **DK/EP 3931991 T3**



Patent- og
Varemærkestyrelsen

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **H 04 J 13/00 (2011.01)**
- (45) Oversættelsen bekendtgjort den: **2024-01-15**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2023-10-11**
- (86) Europæisk ansøgning nr.: **20714267.0**
- (86) Europæisk indleveringsdag: **2020-02-24**
- (87) Den europæiske ansøgnings publiceringsdag: **2022-01-05**
- (86) International ansøgning nr.: **FR2020050345**
- (87) Internationalt publikationsnr.: **WO2020174167**
- (30) Prioritet: **2019-02-27 FR 1902035**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Ternwaves, 132 Boulevard de la République , Parc des Camélias - Bât.B, 06400 Cannes, Frankrig**
- (72) Opfinder: **CANONICI, Jean, Bât B - Parc des Camélias, 132 boulevard de la République, 06400 CANNES, Frankrig**
- (74) Fuldmægtig i Danmark: **Zacco Denmark A/S, Arne Jacobsens Allé 15, 2300 København S, Danmark**
- (54) Benævnelse: **Fremgangsmåde og indretning til modulation med Zadoff-Chu-sekvenser**
- (56) Fremdragne publikationer:
US-A1- 2012 207 118
KRENZ RAFAL ET AL: "Hybrid DS/FH spread spectrum data transmission system for telemetry", 2016 10TH INTERNATIONAL SYMPOSIUM ON COMMUNICATION SYSTEMS, NETWORKS AND DIGITAL SIGNAL PROCESSING (CSNDSP), IEEE, 20 juillet 2016 (2016-07-20), pages 1-5, XP032968135, DOI: 10.1109/CSNDSP.2016.7573935

DESCRIPTION

METHOD AND DEVICE FOR MODULATING WITH ZADOFF-CHU SEQUENCES

Technical field

The present invention generally relates to the field of digital telecommunications, and more particularly those using spread spectrum techniques. It is especially applicable to wireless communication systems and to the Internet of Things (IoT).

State of prior art

The emergence of pervasive and low data rate radio technologies, adapted to autonomous, low power consumption objects, has recently enabled the development of the Internet of Things (IoT). The wireless communication systems of an IoT network has to obey several constraints.

Firstly, the receiver of a connected object has to have a high sensitivity due to the small number of base stations deployed and therefore the large size of their coverage zones.

Secondly, the transmitter/receiver of a connected object has to be particularly simple and energy-efficient to allow autonomy durations of several years.

Finally, the radio access system has to be scalable insofar as a base station (also known as an IoT gateway) has to be able to serve a large number of connected objects.

The Internet of Things currently covers a wide variety of networks.

Some of them (LTE-M, NB-IoT) use technologies from existing cellular infrastructures. However, these often turn out to be too complex or too energy-consuming for common applications.

Others rely on specific or even proprietary technologies, such as LoRa using Chirped Spread Spectrum (CSS) modulation and SigFox using Ultra Narrow Band (UNB) modulation. These technologies are energy-efficient and can achieve very low reception thresholds, and therefore very wide coverage.

However, these specific technologies have limitations in terms of capacity, that is the number of users that can be served simultaneously in the same coverage zone, due to the

degradation of the signal-to-noise ratio plus interference affecting communications. In particular, the high number of unresolved collisions between CSS signals in a LoRa system, even when different spectral spreading factors (SFs) are used, is a barrier to the deployment of large LPWANs based on this technology or even to the deployment of networks by different operators. A discussion of these limitations will be found especially in the paper by D. Croce *et al.* entitled "Impact of LoRa imperfect orthogonality: analysis of link-level performance" published in IEEE Communication Letters, Vol. 22, No. 4, April 2018, pp. 796-799.

The paper by R. Krenz et al. entitled "Hybrid DS/FH spread spectrum data transmission system for telemetry" published in Proc of 10th Int'l Symposium on communication systems, networks and digital signal processing (CSNDSP), IEEE July 20, 2016, pages 1-5 as well as the patent application US-A-2012/0207118 describe a modulation method using Zadoff-Chu sequences with cyclic phase shifts representing the symbols to be transmitted.

The purpose of the present invention is therefore to provide a modulation method (and an associated modulator) that is particularly adapted to the constraints of IoT networks and provides greater robustness to inter-communication interference. Another purpose of the present invention is to provide a corresponding demodulation method (and an associated demodulator). Finally, a data transmission method is also provided, which takes advantage of the modulation method in question to reduce interference between communications of different users.

Disclosure of the invention

The present invention is defined by a method for modulating as claimed in claim 1.

The invention further relates to a modulation device as claimed in independent claim 10.

The invention further relates to a method for demodulating as claimed in independent claim 11.

The invention also relates to a device for demodulating as claimed in independent claim 12 or 13.

The invention finally relates to a transmitter/receiver system comprising a modulation device and at least one demodulation device, as defined above.

Advantageous embodiments of the invention are given in the dependent claims.

Brief description of the figures

Further characteristics and advantages of the invention will become apparent upon reading a preferential embodiment of the invention, described with reference to the accompanying figures, among which:

[Fig. 1] schematically represents a modulation device according to one embodiment of the invention;

[Fig. 2A] and [Fig. 2B] represent an example of a basic Zadoff-Chu sequence and an example of a modulated Zadoff-Chu sequence respectively;

[Fig. 3A], [Fig. 3B] and [Fig. 3C] represent a cyclic correlation peak matrix for three examples of Zadoff-Chu sequence families respectively;

[Fig. 4] schematically represents a transmission frame using the modulation method according to one embodiment of the invention;

[Fig. 5] schematically represents a sequence of pilot symbols multiplied by elements of a coverage code;

[Fig. 6] schematically represents a demodulation device according to a first embodiment of the invention;

[Fig. 7] schematically represents a demodulation device according to a second embodiment of the invention;

[Fig. 8] represents a preamble detection synchronisation device that can be used in conjunction with a demodulation device according to one embodiment of the invention;

[Fig. 9] schematically represents a first transmitter/receiver using a modulation device and a demodulation device according to one embodiment of the invention;

[Fig. 10] schematically represents a polar modulator usable in a second transmitter according to one embodiment of the invention.

Description of the embodiments

The idea underlying the present invention is to perform an K -ary-to-signal modulation by modulating the offset frequency of a Zadoff-Chu sequence, the separation between different

synchronous or asynchronous, uplink or downlink communications, being obtained by choosing different roots.

It is first reminded that a Zadoff-Chu sequence of root r , length N and frequency offset is defined by the sequence of complex elements:

$$ZC_N^r(k) = e^{-j\frac{\pi}{N}r(k+1+2q)k}, \quad k = 0, \dots, N-1 \text{ if } N \text{ is odd} \quad (1)$$

$$ZC_N^r(k) = e^{-j\frac{\pi}{N}r(k+2q)k}, \quad k = 0, \dots, N-1 \text{ if } N \text{ is even} \quad (2)$$

where N is a positive integer, q is a relative integer, $0 < r < N$ and r, N are prime to each other. An introduction to Zadoff-Chu sequences could be found in the paper by D.C. Chu entitled "Polyphase codes with good correlation properties", IEEE Trans. Inform. Theory, vol. IT-18, pp. 531-532, July 1972.

If phases of successive elements of a Zadoff-Chu sequence are considered, it can be seen that they include a linear component as well as a quadratic component depending on the time index k . The linear component corresponds to a frequency offset $-q \frac{r}{N} f_s$ where f_s is the frequency at which the elements of the sequence are generated and the quadratic component corresponds to a linear variation of the instantaneous frequency with a deviation of $-rf_s$ over the length of the sequence.

Zadoff-Chu (ZC) sequences have some very interesting characteristics for communication systems. First, they have a constant amplitude (all elements of a ZC sequence belong to the unit circle), giving rise to modulated signals with low PAPR. Secondly, the periodic autocorrelation of a ZC sequence is perfect in that it is zero for any non-zero offset (in other words, the periodic autocorrelation function of a ZC sequence is a Dirac comb having a period N). Finally, the periodic crosscorrelation of two ZC sequences of the same odd length N and distinct roots r, u with $|r-u|$ prime to N , is a periodic function whose modulus is bounded by $\sqrt{N}$. It has furthermore been shown in the paper by D.V. Sarwate entitled "Bounds on crosscorrelation and autocorrelation of sequences", published in IEEE Trans. on Information Theory, Vol. IT-25, No. 6, Nov. 79, pp. 720-724 that this bound on the periodic crosscorrelation function is optimal for a sequence with a perfect periodic autocorrelation function. In other words, there are no better sequences than Zadoff-Chu sequences in terms of autocorrelation and crosscorrelation properties.

In an original way, it is proposed to modulate the frequency offset of a Zadoff-Chu sequence to transmit a word of $K \leq \log_2 N$ bits. It should be noted that the frequency offset of a ZC sequence is generally taken to be zero in prior art, especially when it is used for synchronisation purposes, as is the case in the generation of preambles in the LTE system (see 3GPP TS 36.211, § 5.7.2 entitled "preamble sequence generation").

Fig. 1 schematically represents a modulation device according to a first embodiment of the invention.

The modulation device, 100, comprises a Binary to Decimal Converter (BDC), 110, which converts a word of K bits to be transmitted, $\alpha_0, \dots, \alpha_{K-1}$ (where α_0 is the LSB and α_{K-1} is the MSB)

into an integer value $q = \sum_{k=0}^{K-1} \alpha_k 2^k$. This integer value is provided as a frequency offset value to a Zadoff-Chu sequence generator, 120.

The word to be transmitted can result from a channel coding of information symbols, possibly after they have been interleaved. Alternatively, the word to be transmitted can be a pilot symbol for a transmission channel.

The word to be transmitted can also result from a Gray coding of information symbols. It is reminded that, according to this coding, two successive binary words produce code words differing by only one bit.

The generator 120 further receives as input parameters the root r and length N of the sequence to be generated. The parameters r and N can be provided by a transmission resource scheduler as set out later.

The complex elements of the Zadoff-Chu sequence $ZC_N^{r,q}$ generated by the generator 120, are then used to modulate an (RF or IF) carrier in a manner known per se.

It is important to note that in all cases, the complex element sequence at the output of the modulator is a Zadoff-Chu sequence as defined above. In particular, there is no need to perform any phase correction at the output of the generator 120 and the structure of the modulator is therefore particularly simple.

As has been seen above, the integers r and N are chosen to be prime to each other.

According to a first alternative, in order to respect this constraint, the number N is chosen to be prime. In the latter case, the interference between two communications of the same length N , but distinct roots r, u will be bounded by the same value, proportional to $\sqrt{N}$.

Preferably, however, for reasons of ease of implementation, the sequence $ZC_N^{r,q}$ generated by the generator can be truncated to a length $2^{K'} < N$ with $K' \geq K$, in particular it can be truncated to the length 2^K to obtain an optimal rate.

According to a second advantageous alternative, for reasons of simplicity of implementation previously indicated, the number N will be chosen equal to a power of 2, for example $N = 2^K$, the root r being then odd, so that r and N are prime to each other.

Furthermore, the roots of the ZC sequences will be chosen greater than 1 ($r > 1$). It is noticed that, in this case, the phase variation for an unmodulated ZC sequence (that is with $q = 0$) presents at least one aliasing between successive elements of the sequence, in other words the instantaneous frequency has at least one discontinuity over the length of the sequence. Indeed, the phase rotation between two successive elements can be written as:

$$\varphi(k+1) - \varphi(k) = -\frac{2\pi}{N} r(k+1) \text{ if } N \text{ is odd} \quad (3-1)$$

$$\varphi(k+1) - \varphi(k) = -\frac{2\pi}{N} r(k + \frac{1}{2}) \text{ if } N \text{ is even} \quad (3-2)$$

Thus, if $r > 1$, the phase rotation at the end of the sequence can exceed 2π .

Equivalently, the instantaneous frequency can be expressed as:

$$f(k) = \frac{1}{2\pi} \frac{d\varphi}{dk} = -\frac{r}{N} \cdot k \quad (4)$$

and, if $r > 1$, the instantaneous frequency can exceed the rate f_s at which the elements of the sequence are generated.

As an example, the successive elements of an unmodulated Zadoff-Chu sequence have been represented in Fig. 2A and those of the same sequence, modulated by a frequency offset, have been represented in Fig. 2B.

In the case illustrated, the length of the sequence is $N = 17$ and its root is $r = 4$. It is noticed that the first phase aliasing occurs between the 5th and 6th elements, with phase rotations between subsequent successive elements leading a fortiori to aliasing, given the relationship (3-1).

Similarly, in Fig. 2B, the same sequence, this time modulated with an offset $q=1$ has been considered. It is noted that the first phase aliasing occurs here as soon as the transition between the 4th and the 5th element.

Thus, for a same basic ZC sequence, it is understood that distinct distributions of the elements of the modulated sequence are obtained with different frequency offsets.

Fig. 3A schematically represents the matrix of cyclic correlation maxima of unmodulated Zadoff-Chu sequences ($q = 0$) of length $N = 521$ (prime number) and respective roots $r = 2, \dots, 520$. In other words, for two sequences of $ZC_N^{r,0}$ and $ZC_N^{r',0}$, the figure represents on the ordinate the maximum on τ of $\left[ZC_N^{r,0} \underset{\text{cycel}}{*} ZC_N^{r',0} \right](\tau)$ where τ is a shift between the two sequences $ZC_N^{r,0}$ and $ZC_N^{r',0}$, and $\underset{\text{cycel}}{*}$ represents the cyclic correlation of length N . It is actually checked that the maximum (N) is obtained on the diagonal (maxima of the autocorrelation functions) and that the cyclic crosscorrelation functions have a low modulus (bounded by $\sqrt{N}$).

Fig. 3B schematically represents the matrix of cyclic correlation maxima of unmodulated ZC sequences ($q = 0$) of length $N = 512$ and respective roots $r = 2, \dots, 511$. It will be noted that some of these sequences are not strictly speaking ZC sequences insofar as r and N are not prime to each other.

It is noticed that the diagonal of the matrix always consists of maximum values (N) but that the maxima of cyclic crosscorrelation strongly depend on the pair of sequences $ZC_N^{r,0}, ZC_N^{r',0}$. By suitably choosing the values of the roots (especially those which are prime to N), a subfamily whose cyclic crosscorrelation functions are bounded by a predetermined maximum value is obtained.

Fig. 3C schematically represents the matrix of cyclic correlation maxima of unmodulated ZC sequences ($q = 0$) of length equal to the prime $N = 521$ but truncated to 512 elements. It can be

seen that the autocorrelation and cyclic crosscorrelation performance is only slightly degraded with respect to that illustrated in Fig. 3A.

In general, if it is desired to opt for a sequence of length equal to a power of 2, $P = 2^K$ the ZC sequence whose length N is equal to the smallest prime number greater than P could be selected and truncated to P elements. Thus, performance losses will be minimal both in terms of rate and level of crosscorrelation.

Thus, for example, for a sequence of length 128, 256, 512, 1024, 2048, 4096, a ZC sequence with a length of 131, 257, 521, 1031, 2053, 4099 will be chosen respectively.

The length N of the sequences to be generated can be selected as a function of various criteria such as SNR (Signal to Noise Ratio), BER (Bit Error Rate), the required communication rate, or even the time spread of the transmission channel as set out later.

More precisely, the Spreading Factor (SF) is none other than N/K , the choice of a high value of N allows BER to be reduced for a same SNR value or to be in accordance with a BER rate for degraded SNR conditions. Likewise, a low value of N allows the transmission bandwidth to be reduced and the communication rate to be increased.

Then, for a given value of N , distinct roots are chosen for communications the interference of which is desired to be reduced. For example, two distinct roots can be assigned to two communications on a downlink channel, originating from the same base station and to two connected objects or two terminals located within the coverage of this base station, regardless of whether these two communications are synchronous or not. Furthermore, two distinct roots can be assigned for two distinct communications on the downlink channel to one and the same receiver.

Similarly, for the uplink channel, two connected objects or two terminals that can interfere can be assigned distinct roots.

The allocation of sequence lengths/roots can be done dynamically by a scheduler. In some cases, dynamic scheduling can be implicit. For example, if two uplink communications interfere, the base station can notify the connected objects concerned of this situation and at least one of them can switch to another following root in a predetermined root sequence, known to both the connected object and the base station. The person skilled in the art can provide for different alternatives of scheduling between neighbouring base stations, according to a centralised or distributed mode, without departing from the scope of the present invention.

Whatever the embodiment, the transmission of packets of K -ary symbols, namely words of K bits, is typically carried out by means of transmission frames whose structure is illustrated in Fig. 4.

This transmission frame comprises a preamble, 410, and a payload, 420. The preamble contains pilot symbols to enable the receiver to detect the start of the frame and be synchronised.

For example, the pilot symbols will be associated with a dedicated frequency offset, q_0 , for example $q_0 = 0$. In other words, in this case, the preamble of a transmission frame will only consist of unmodulated ZC sequences.

The pilot symbols will be detected by the receiver by means of a correlator that performs a running correlation (or continuous correlation) on the received signal. For example, the repetition of a predetermined number, M , of pilot symbols can be an indicator of the start of a frame. In order to facilitate synchronisation and detection of the start of a frame (or even a sequence of frames), these pilot symbols can be multiplied by elements of a coverage code with good aperiodic correlation properties, for example the elements of a Barker code. Receiver synchronisation by preamble detection will be described later in connection with Fig. 8. Receiver resynchronisation can be performed regularly during the reception time of a sequence of frames, at every frame or generally every J frames where J is a predetermined integer.

Fig. 5 shows a series of pilot symbols of a frame preamble, respectively multiplied by the M elements of a coverage code, denoted $CC(1), \dots, CC(M)$. In other words, the first ZC sequence, corresponding to the first pilot symbol, is multiplied by $CC(1)$, the second ZC sequence, corresponding to the second pilot symbol, is multiplied by $CC(2)$, and so on until the last ZC sequence, multiplied by $CC(M)$.

For example, the elements of a Barker code of length $M=11$ are given by:
+1,+1,+1,-1,-1,-1,+1,-1,-1,+1,-1

Upon reception, the individual pilot symbols (that is the ZC sequences corresponding to these pilot symbols), are multiplied by the same coverage code elements before or after continuous correlation. When the coverage code elements are perfectly aligned with the pilot symbols, the correlation result has a maximum.

The payload of the transmission frame consists of ZC sequences modulated by the K -ary words to be transmitted. It can also include a control header and ZC sequences modulated by CRC symbols.

Although K -ary symbols are successively transmitted and therefore the ZC sequences modulated by these symbols also succeed each other at the transmitter, the transmission channel can, if it is a multipath channel, give rise to inter-symbol interference. In other words, a replica of a ZC sequence modulated by a first symbol can be superimposed at the receiver with a ZC sequence modulated by a second symbol.

In order to reduce inter-symbol interference, a sequence of length N will be advantageously chosen such that:

$$N - \Delta > q_{\max} \quad (5)$$

where Δ is the time spread of the transmission channel and $q_{\max}$ is the maximum frequency offset for modulating the K -ary symbols, both expressed in number of element generation periods of the ZC sequence. Indeed, as long as the overlap between consecutive symbols, due to the transmission channel spread, is of a duration shorter than the duration $(N - 2^K)$ of the redundant part of the ZC sequence, the symbols in question can be recovered without loss of information.

Fig. 6 schematically represents a demodulation device according to a first embodiment of the invention.

This first embodiment corresponds to an implementation of the cyclic correlator in the frequency domain.

The demodulator receives the signal corresponding to a frame of symbols as described above, that is a series of ZC sequences obtained by modulating these symbols.

The demodulator, 600, includes an FFT module, 610, for performing an FFT of size N (equal to the length of the ZC sequence) on the received signal, previously sampled (by two quadrature clocks) at the frequency f_s at which the elements of the ZC sequences are generated. The result of the FFT is a block of N complex values.

Detection of the start of the frame and the ZC sequences is achieved by means of the series of pilot symbols in the preamble. It is assumed that the receiver has previously synchronised itself by means of preamble detection as described later.

The demodulator includes a local generator of a reference ZC sequence, 605, identical to the generator present in the modulator of Fig. 3 or 4. The local generator is parameterised by the length N of the ZC sequence, the root r used for communication and, if applicable, the frequency offset q_0 , dedicated to the pilot symbols. The root r used for communication can be provided by the preamble detector described later.

A discrete Fourier transform (DFT) module, 615, enables a DFT of size N to be performed on the block of elements of the ZC sequence provided by the local generator, 605. When N is a power of 2, the DFT will be performed using an FFT.

The block of N complex values thus obtained in the frequency domain is conjugated in the conjugation module, 625, before being multiplied term by term in 620 with the block of N complex values from the DFT module, 610.

The moduli of these N complex values are calculated in 630 and compared by the correlation peak detector 640. In other words, the peak detector 640 determines the frequency offset corresponding to the largest modulus complex value on the block received.

Since the cyclic correlation peak of two ZC sequences of the same length N , same root r and frequency offsets q, ℓ has the value $\left| \rho \left[ZC_{r,q}^N, ZC_{r,\ell}^N \right] \right| = N \delta(q - \ell)$, this peak discrimination is very effective, even in the presence of truncated ZC sequences. The 640 detector therefore determines:

$$\hat{q} = \arg \max_q \left(\left| \rho \left[ZC_{r,q}^N, \sigma \right] \right| \right) \quad (6)$$

where σ represents the sequence N of samples received by the demodulator and ρ represents the cyclic correlation operation.

This frequency offset is finally translated into a word of K bits, $\hat{\alpha}_0, \dots, \hat{\alpha}_{K-1}$ in the decimal to binary converter (denoted by bit demapper in the figure), 650.

It should be noted that generator 605 will be able to generate reference sequences for all possible values of r and, if applicable, N .

The reference sequence can be any ZC sequence of the same length and same root as that transmitted by the transmitter as long as the frequency offset can be determined relatively to that used to generate the reference frequency. Thus, for example, the reference sequence can be an unmodulated ZC sequence or a ZC sequence corresponding to a pilot symbol (and therefore an offset q_0).

In all cases, the set consisting of the reference sequence generator, 605, the DFT module, 615, and the conjugation module, 625, can be replaced by a simple memory addressed by the length N , root r and, if applicable, reference frequency offset. The value stored in the memory at this address will be simply $\left(\widetilde{ZC}_{r,q_0}^N(\nu)\right)^*$, where $\widetilde{ZC}_{r,q_0}^N(\nu)$ is the value taken by the discrete Fourier transform of ZC_{r,q_0}^N , at the frequency ν and z^* is the conjugate of z . The values $\left(\widetilde{ZC}_{r,q_0}^N(\nu)\right)^*$ read from memory are then provided in turn to the multiplier, 620.

Fig. 7 schematically represents a demodulation device according to a second embodiment of the invention.

This second embodiment corresponds to an implementation of the cyclic correlator in the time domain.

The signal received by the demodulator 700 is sampled (by two quadrature clocks) at the frequency f_s at which the elements of the ZC sequences are generated. The result is a block of N complex values. This block is provided to a cyclic correlator, 710.

The cyclic correlator 710 additionally receives the N successive elements of a reference ZC sequence generated by the local generator 705. This local generator is identical to the generator present in the modulator of Fig. 1. The local generator is parameterised by the length N of the ZC sequence, the root r used for communication and, if applicable, the frequency offset q_0 , dedicated to the pilot symbols.

The elements of the ZC reference sequence are provided to the cyclic correlator 710. The cyclic correlation results (corresponding to different delay times in the time domain) are modulus calculated in 730 and the maximum modulus value on the block is determined by the correlation peak detector 740. The peak detector 740 determines the position of the cyclic correlation peak

between the ZC reference sequence and the ZC sequence received by the demodulator and deduces the corresponding time offset therefrom.

Given the definition of the ZC sequences, it can be shown that a cyclic permutation of a ZC sequence by means of a time offset results in a frequency offset:

If N is an odd value:

$$ZC_N^{r,0}(k+q') = e^{-j\frac{\pi}{N}r(k+q'+1)(k+q')} = e^{-j\frac{\pi}{N}r[(k+2q'+1)k+(q'+1)q']} = e^{j\phi_0} e^{-j\frac{\pi}{N}rk(k+2q'+1)} \quad (7-1)$$

where $e^{j\phi_0} = e^{-j\frac{\pi}{N}r(q'+1)q'}$ is a constant phase term along the sequence.

Similarly, if N is an even value:

$$ZC_N^{r,0}(k+q') = e^{-j\frac{\pi}{N}r(k+q')(k+q')} = e^{-j\frac{\pi}{N}r[k^2+2q'k+q'^2]} = e^{j\phi_0} e^{-j\frac{\pi}{N}rk(k+2q')k} \quad (7-2)$$

where $e^{j\phi_0} = e^{-j\frac{\pi}{N}rq'^2}$ is a constant phase term along the sequence.

Since the detection is performed on the modulus of the cyclic correlation result, it will be understood that a time offset, q' , (expressed in number of periods $T_s = 1/f_s$) results in an offset in frequency q' (expressed in increments $\frac{r}{N}f_s$). In other words, for a same received signal, the time offset value provided by the peak detector 740 (expressed in number of periods $T_s = 1/f_s$) will be identical to the frequency offset value provided by the peak detector 640.

The decimal to binary converter 750 (referred to as the bit demapper in the figure) converts this offset value into a binary number, $\hat{\alpha}_0, \dots, \hat{\alpha}_{K-1}$.

It should be noted that generator 705 will be able to generate reference sequences for all possible values of r and, if applicable, N .

In any case, as previously, the set consisting of the reference sequence generator 705 can be replaced by a simple memory addressed by the length N , root r , reference time (or frequency) offset. The value stored in the memory at this address will simply be $ZC_{r,q}^N(k)$. The values $ZC_{r,q}^N(k)$ read from the memory are provided to the cyclic correlator, 710.

Fig. 8 schematically represents a preamble detection synchronisation device that can be used in conjunction with a demodulation device according to the invention.

More precisely, this synchronisation device makes it possible to provide the demodulator with the root r used for communication on the one hand, and on the other hand, the time instant corresponding to the start of the frame, or even of the payload.

A continuous correlator 820 receives, on a first input, the stream of (complex) samples of the received signal and, on a second input, a sequence of samples corresponding to a replica of the preamble.

The replica of the preamble is formed by the module 810 from the ZC sequences generated by the local generator 805. The local generator 805 is identical to the previously described generator 605 (or 705) and the same alternatives also apply. The preamble formation module 810 concatenates the ZC sequences of the pilot symbols of the preamble. For example, if the preamble consists of M repeating identical pilot symbols, the module 810 will repeat M times the ZC sequence of that pilot symbol. Furthermore, if the preamble uses a Barker cover sequence, the module 810 will multiply each ZC sequence with the corresponding code element.

Of course, the generator 805 and the module 810 can be implemented using a simple memory addressed by the frequency offset f_o corresponding to the pilot symbols, root r and length N of the sequence and the number M of repetitions of the pilot symbols.

The correlator 820 performs a running correlation of the sequence of samples of the received signal with the sequence of samples of the preamble provided by the module 810. In other words, at each period T_s , the correlator calculates a correlation result of the MN preamble samples with the last MN signal samples.

The modulus of these correlation results is calculated in 830 and a correlation peak detection is performed in the detector 840. In practice, the detector compares the modulus value provided by 830 with a predetermined threshold smaller than N .

The detector gives the time position of the correlation peak, indicating start of the preamble and hence of the frame. The demodulator can then lock onto the start of the payload to demodulate information symbols.

Furthermore, if the root r is not known to the receiver, the synchronisation device can perform a sequential or parallel search on preambles generated from values of roots belonging to

the set of possible roots or even a subset of the latter (for example if the set of roots is hierarchical and the receiver has a priori knowledge of the tree branch in which the root is located). By sequential search it is meant that the correlation is performed with a rate Rf_s on the R roots to be tested. By parallel search, it is meant that the correlation is performed on R branches in parallel, each branch being associated with one of the R roots to be tested. In any case, the correlation results are processed by the detector 840. The detector then determines both the root value (providing a correlation peak) and start of the preamble (from the position of this peak).

Fig. 9 schematically represents a first transmitter/receiver using a modulation device and a demodulation device according to one embodiment of the invention.

The transmitter/receiver 900 can be fitted to a base station or a connected object, for example.

It comprises a modulation device, 910, according to the embodiment as described in connection with Fig. 1. The modulation device transforms the K -ary symbols to be transmitted into ZC sequences, a K -ary symbol being converted into a frequency offset of a ZC sequence. The complex elements of a ZC sequence are provided by the modulation device at a rate f_s . The real part of these complex elements is provided to an in-phase channel and the imaginary part to a quadrature channel, each channel typically comprising a low-pass filter, 920 and a baseband amplifier 930. The I and Q signals of these channels are respectively mixed with two quadrature carrier signals in a quadrature modulator, 940. The carrier signals are generated by a frequency-stabilised sinusoidal oscillator, 950. The RF signal at the output of the quadrature modulator is amplified in a power amplifier, 960, and then transmitted by an antenna, 980, via a duplexer, 970.

Upon reception, the antenna signal received via the duplexer 970 is amplified by a low noise amplifier (LNA), 965, and then quadrature demodulated by the quadrature mixer 945. The I and Q signals at the output of the mixer are amplified by the amplifiers 935, filtered by the low pass filters 925 and then sampled at the rate f_s . The complex samples thus obtained are provided to a demodulation device 915, according to the first embodiment, as described in connection with Fig. 6, or according to the second embodiment, as described in connection with Fig. 7.

The quadrature modulator 940 in the direct conversion transmitter/receiver of Fig. 9 uses the real and imaginary parts of the elements of the ZC sequences to be transmitted. Instead of the quadrature modulator, a polar modulator can be used as described hereinafter.

Fig. 10 schematically represents a polar modulator usable within the scope of a second transmitter according to one embodiment of the invention.

In general, in a polar modulator, the complex symbols to be transmitted are converted in a polar baseband converter, 1020, into an envelope signal (modulus of the complex elements) and a phase signal (instantaneous phase of the complex elements) representing the baseband signal:

$$s(t) = A(t) \cos(2\pi f_0 t + \varphi(t)) \quad (8)$$

Where $A(t)$ is the envelope signal and $\cos(2\pi f_0 t + \varphi(t))$ is the phase signal. The phase signal is then translated into the RF band by virtue of the mixer 1050 before being amplified by the power amplifier 1060. The envelope signal is delayed at 1025 to compensate for differences in propagation time that may exist between the amplitude branch and the phase branch, and modulates the amplitude of the RF signal, by means of the envelope modulator 1040, by controlling the gain of the power amplifier. The RF signal thus modulated is then transmitted by the antenna 1070.

In the case where, as in the present invention, it is a question of transmitting complex elements of a ZC sequence, as generated by the modulator 1010, it is understood that the generation of the envelope signal will be unnecessary insofar as the modulus of these elements is constant and equal to 1. The delay 1025 and the envelope modulator 1040 can simply be removed and the gain of the power amplifier set to a set point value.

The skilled person will understand that, symmetrically, a polar demodulator can be implemented in reception.

RF transmitter/receiver architectures other than those illustrated in Figs. 9 and 10 can be further contemplated without departing from the scope of the present invention.

Of course, different elementary modulation/demodulation devices can be provided within a same transmitter/receiver to separate communications to/from different users. As previously indicated, these modulation/demodulation devices will then use distinct root values. Advantageously, for a ZC sequence length equal to N , root values $r_p, p = 1, \dots, P$ will be chosen such that $|r_p - r_{p'}|$ is prime to $N, \forall p, p'$.

Patentkrav

1. Fremgangsmåde til modulering af en flerhed af K -nære symboler, der skal transmitteres på en transmissionskanal, hvilken fremgangsmåde omfatter:

- 5 at konvertere de k bits af hvert K -nære symbol til en distinkt heltalsværdi og at generere en Zadoff-Chu-sekvens, der er forbundet med dette symbol, hvor Zadoff-Chu-sekvensen er defineret som:

$$ZC_N^{r,q}(k) = e^{-j\frac{\pi}{N}r(k+2q)k}, \quad k = 0, \dots, N-1 \text{ hvis } N \text{ er ulige} \quad (1)$$

$$ZC_N^{r,q}(k) = e^{-j\frac{\pi}{N}r(k+2q)k}, \quad k = 0, \dots, N-1 \text{ hvis } N \text{ er lige} \quad (2)$$

10

hvor Zadoff-Chu-sekvensen har en længde N , en rod r og en frekvensforskydning q , hvor N er et positivt heltal, således at $\log_2 N \geq K$, r er et heltal, således at $r > 1$ og primær med N , q er et relativt heltal, hvor hvert K -nære symbol moduleres i form af en sekvens, med en længde, der er større end eller lig med 2^K , af på hinanden følgende komplekse elementer af Zadoff-Chu-sekvensen med en længde N , en rod r og en frekvensforskydning q , der er lig med heltalsværdien forbundet med det K -nære symbol, hvor moduleringsfremgangsmåden er **kendetegnet ved, at** hvilke som helst to K -nære symboler af flerheden er forbundet med Zadoff-Chu-sekvenser med distinkte frekvensforskydninger.

20

2. Modulationsfremgangsmåde ifølge krav 1, **kendetegnet ved, at** sekvensen af på hinanden følgende komplekse elementer består af alle elementerne i Zadoff-Chu-sekvensen.

25

3. Modulationsfremgangsmåde ifølge krav 2, **kendetegnet ved, at** længden af Zadoff-Chu-sekvensen er lig med en potens på 2.

5 4. Modulationsfremgangsmåde ifølge krav 1, **kendetegnet ved, at** længden af Zadoff-Chu-sekvensen er valgt lig med det mindste primtal, der er større end 2^K , og at sekvensen af konsekutive komplekse elementer opnås ved at trukkere Zadoff-Chu-sekvensen med 2^K -elementer.

10 5. Modulationsfremgangsmåde ifølge et af kravene 1 til 4, **kendetegnet ved, at** længden af Zadoff-Chu-sekvensen vælges større end forskellen mellem en maksimal frekvensforskydning til modulering af de K -nære symboler og tids-spredningen af transmissionskanalen, udtrykt i antal transmissionsperioder for elementer af denne sekvens.

15 6. Modulationsfremgangsmåde ifølge et af kravene 1 til 5, **kendetegnet ved, at** den reelle del og den imaginære del af elementerne i sekvensen af på hinanden følgende komplekse elementer af en Zadoff-Chu-sekvens forbundet med et K -nært symbol modulerer henholdsvis to bærere i kvadratur, og at det således opnåede modulerede signal transmitteres på transmissionskanalen.

20 7. Modulationsfremgangsmåde ifølge et af kravene 1 til 5, **kendetegnet ved, at** der genereres et basisbånds-fasesignal, opnået som fasen af de på hinanden følgende komplekse elementer af Zadoff-Chu-sekvensen forbundet med et K -nært symbol, og at fasesignalet oversættes til RF-båndet, hvor det således opnåede RF-signal transmitteres på transmissionskanalen.

25

8. Fremgangsmåde til transmission af data om en flerhed af kommunikationer til eller fra forskellige brugere, **kendetegnet ved, at** de data, der skal transmitteres, transformeres til K -nære symboler, hvor de K -nære symboler af de forskellige brugere moduleres ved hjælp af modulationsfremgangsmåden ifølge

30

et af de foregående krav, hvor rødderne af Zadoff-Chu-sekvenserne, der bruges til at modulere de K -nære symboler af to distinkte brugere, er valgt til at være forskellige, og deres længder er valgt til at være lig med en fælles længde.

5

9. Datatransmissionsfremgangsmåde ifølge krav 8, **kendetegnet ved, at** de rødder, der anvendes til at modulere de K -nære symboler af to distinkte brugere, er valgt således, at den absolutte værdi af deres forskel er primær med den fælles længde.

10

10. Moduleringsindretning til modulering af en flerhed af K -nære symboler, der skal transmitteres på en transmissionskanal, omfattende en binær decimal-konverter (110), der transformerer de K bits af hvert K -nære symbol til en distinkt heltalsværdi, og en generator af Zadoff-Chu-sekvenser (120), der som inputparametre har en sekvenslængde N og en rod r således at r er et heltal, $r > 1$ og primær med N , såvel som en frekvensforskydning, q , hvor q er et relativt heltal, hvor generatoren for hvert K -nære symbol genererer en sekvens af en længde, der er større end eller lig med 2^K , dannet af komplekse elementer af en Zadoff-Chu-sekvens med længde N , en rod r og en frekvensforskydning q , der er lig med heltalsværdien leveret af den binære decimalkonverter, hvor Zadoff-Chu-sekvensen er defineret som:

15

20

$$ZC_N^{r,q}(k) = e^{-j\frac{2\pi}{N}r(k+1+2q)k}, \quad k = 0, \dots, N-1 \text{ hvis } N \text{ er ulige} \quad (1)$$

$$ZC_N^{r,q}(k) = e^{-j\frac{2\pi}{N}r(k+2q)k}, \quad k = 0, \dots, N-1 \text{ hvis } N \text{ er lige} \quad (2)$$

hvor generatoren af Zadoff-Chu-sekvenser er **kendetegnet ved, at** den er konfigureret således, at hvilke som helst to K -nære symboler af flerheden er forbundet med Zadoff-Chu-sekvenser med distinkte frekvensforskydninger.

25

11. Fremgangsmåde til demulering af et signal, der repræsenterer en Zadoff-Chu-sekvens, der er moduleret i frekvensforskydning ved hjælp af en modulationsfremgangsmåde ifølge et af kravene 1 til 7, **kendetegnet ved, at** signalet samples i frekvensbasisbåndet for at tilvejebringe en sekvens af komplekse prøver, at sekvensen af komplekse prøver er korreleret ved cyklisk korrelation (710) med en reference-Zadoff-Chu-sekvens for at tilvejebringe et cyklisk korrelationsresultat, hvor Zadoff-Chu-sekvensen er defineret som:

$$ZC_N^q(k) = e^{-j\frac{\pi}{N}(k+1+2q)k}, \quad k = 0, \dots, N-1 \text{ hvis } N \text{ er ulige} \quad (1)$$

$$ZC_N^q(k) = e^{-j\frac{\pi}{N}(k+2q)k}, \quad k = 0, \dots, N-1 \text{ hvis } N \text{ er lige} \quad (2)$$

hvor Zadoff-Chu-sekvensen har en længde N , en rod r og en frekvensforskydning q , hvor N er et positivt heltal, således at $\log_2 N \geq K$, r er et heltal, således at $r > 1$ og primær med N , q er et relativt heltal, og at den tidsmæssige position af en korrelationstop detekteres (740) i modulet af det således opnåede cykliske korrelationsresultat, og at der udledes en frekvensforskydning, hvor $\hat{q}$ svarer til denne tidsmæssige position, hvor frekvensforskydningen derefter konverteres af en decimal binærkonverter (750) til et K -nært symbol.

12. Indretning til demulering af et signal, der repræsenterer en Zadoff-Chu-sekvens, der er moduleret i frekvensforskydning ved hjælp af en modulationsfremgangsmåde ifølge et af kravene 1 til 7, hvilket signal samples i basisbånd for at tilvejebringe en første blok af komplekse elementer af størrelse N , **kendetegnet ved, at** indretningen omfatter et DFT-modul (610), der er konfigureret til at udføre en diskret Fourier-transformation af størrelse N af den første blok af komplekse elementer for at tilvejebringe en første blok af komplekse frekvenselementer, en multiplikator (620), der er konfigureret til at multiplicere led for led komplekse frekvenselementer i den første blok med de komplekse

frekvenselementer af en anden blok, der er opnået ved kompleks konjugation af en diskret Fourier-transformation af en reference-Zadoff-Chu-sekvens, hvor Zadoff-Chu-sekvensen er defineret som:

$$ZC_N^r(q)(k) = e^{-j\frac{\pi}{N}r(k+1+2q)k}, k = 0, \dots, N-1 \text{ hvis } N \text{ er ulige} \quad (1)$$

$$ZC_N^r(q)(k) = e^{-j\frac{\pi}{N}r(k+2q)k}, k = 0, \dots, N-1 \text{ hvis } N \text{ er lige} \quad (2)$$

5

hvor Zadoff-Chu-sekvensen har en længde N , en rod r og en frekvensforskydning q , hvor N er et positivt heltal, således at $\log_2 N \geq K$, r er et heltal, således at $r > 1$ og primær med N , q er et relativt heltal, hvilken indretning yderligere
 10 omfatter en modulberegner (630), der er konfigureret til at beregne modulet af multiplikationsresultaterne af det første og andet komplekse frekvenselement, en korrelationsspidsdetektor, der er konfigureret til at sammenligne de således opnåede modolværdier (640) til bestemmelse af frekvenspositionen af en cyk-
 15 lisk korrelationsspids, og udlede frekvensforskydningen, $\hat{q}$, svarende til denne frekvensposition, og en binær decimalkonverter, der er konfigureret til at kon-
 vertere frekvensforskydningen til et K -nært symbol.

13. Indretning til demodulering af et signal, der repræsenterer en Zadoff-Chu-sekvens, som er moduleret i frekvensforskydning ved hjælp af en modulator-
 20 onsfremgangsmåde ifølge et af kravene 1 til 7, hvilket signal samples i basisbånd for at tilvejebringe en første blok af komplekse elementer af størrelse N ,
kendetegnet ved, at den omfatter en cyklisk korrelator (710) af N -størrelse til cyklisk korrelation af den første blok med en anden blok, hvilken anden blok består af en reference-Zadoff-Chu-sekvens, hvilken Zadoff-Chu-sekvens er
 25 defineret som:

$$ZC_N^{\alpha,q}(k) = e^{-j\frac{\pi}{N}r(k+1+2q)k}, \quad k = 0, \dots, N-1 \text{ hvis } N \text{ er ulige} \quad (1)$$


$$ZC_N^{\alpha,q}(k) = e^{-j\frac{\pi}{N}r(k+2q)k}, \quad k = 0, \dots, N-1 \text{ hvis } N \text{ er lige} \quad (2)$$

hvor Zadoff-Chu-sekvensen har en længde N , en rod r og en frekvensforskydning q , hvor N er et positivt heltal, således at $\log_2 N \geq K$, r er et heltal, således at $r > 1$ og primær med N , q er et relativt heltal, hvilken indretning yderligere omfatter en modulferegner (730), der er konfigureret til at beregne modulet af den cykliske korrelation, og en korrelationsspidsdetektor (740), der er konfigureret til at bestemme, ud fra dette modul, den tidsmæssige position af en cyklisk korrelationsspids og konfigureret til at udlede en frekvensforskydning, $\hat{q}$, svarende til denne tidsmæssige position, og en binær decimalkonverter, der er konfigureret til at konvertere frekvensforskydningen til et K -nært symbol.

14. Sender/modtager, **kendetegnet ved, at** den omfatter mindst en modulationsindretning ifølge krav 10 og mindst en demodulationsindretning ifølge et af kravene 12 eller 13.

15. Sender/modtager ifølge krav 14, **kendetegnet ved, at** den omfatter en flerhed af modulationsindretninger ifølge krav 10, hvor hver modulationsindretning af flerheden svarer til en forskellig rodværdi, og/eller en flerhed af demodulationsindretninger ifølge et af kravene 12 eller 13, hvor hver demodulationsindretning af flerheden svarer til en forskellig rodværdi.

1/9

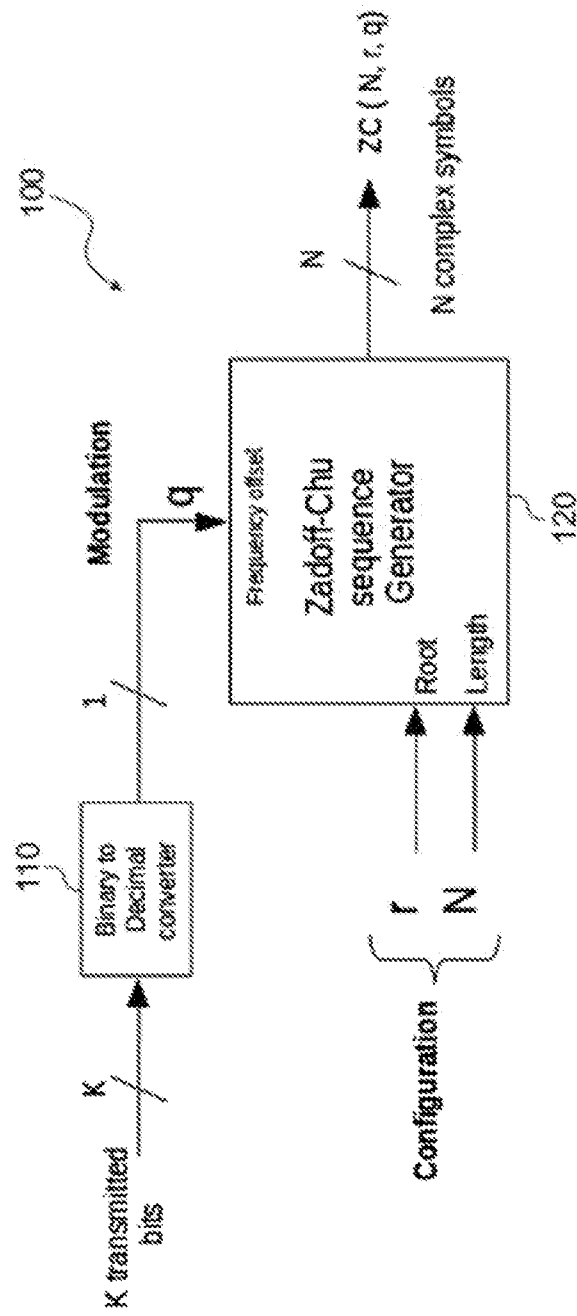**Fig. 1**

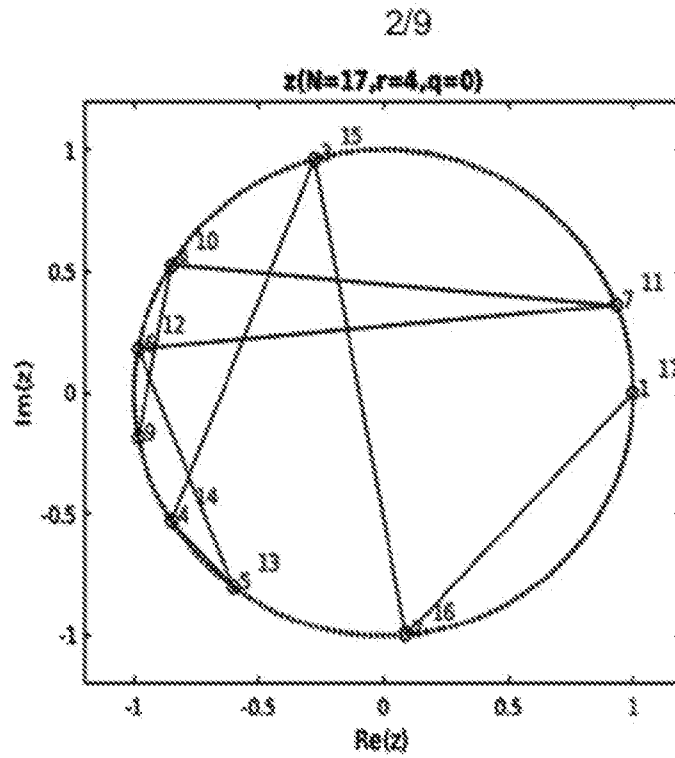


Fig. 2A

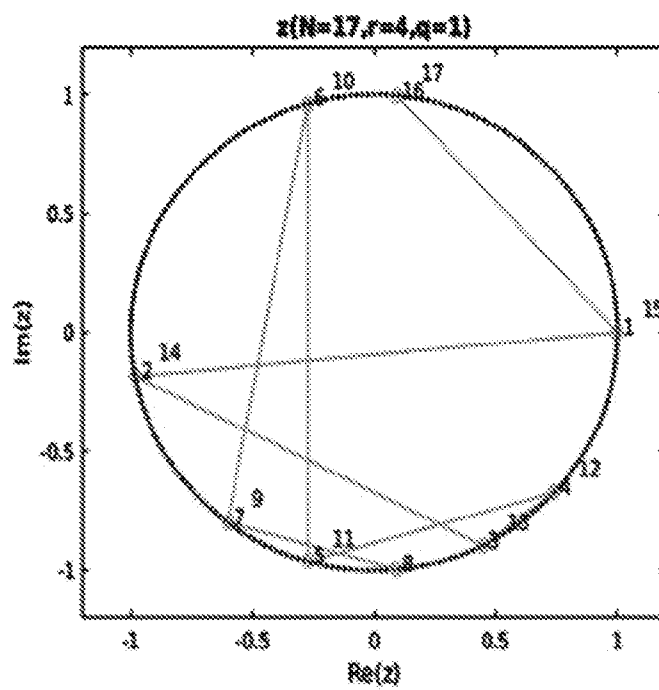


Fig. 2B

3/9

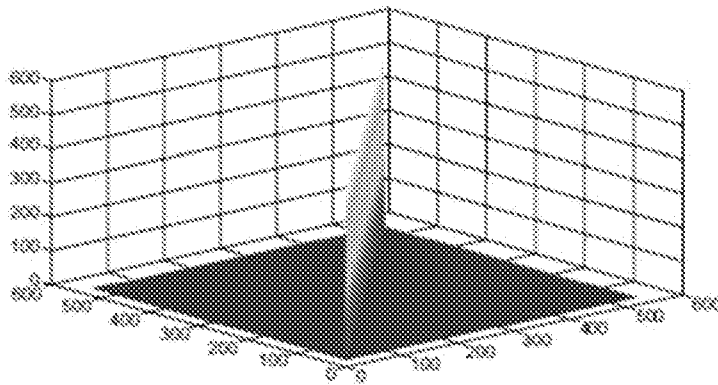


Fig. 3A

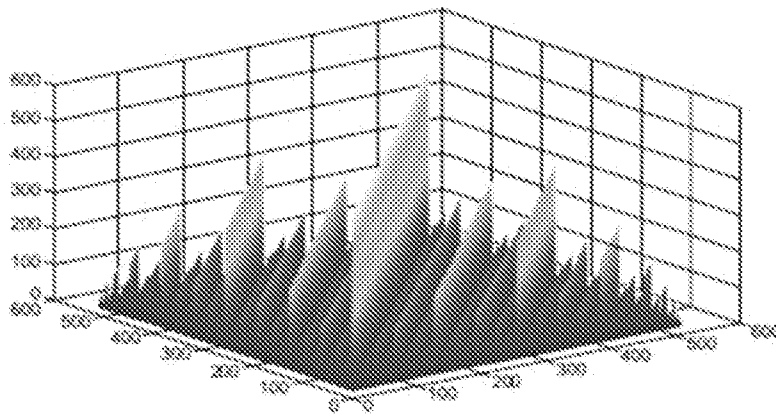


Fig. 3B

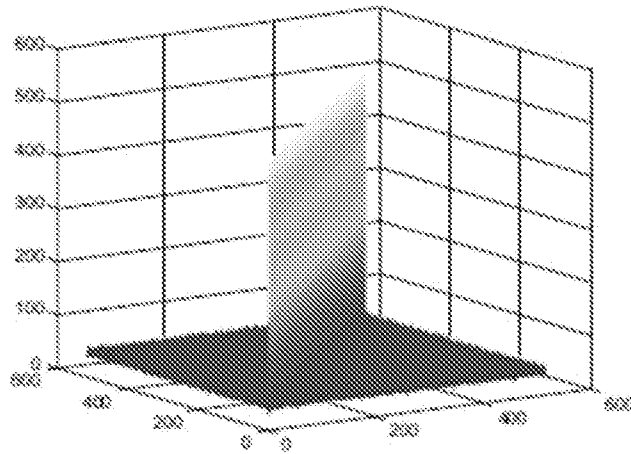


Fig. 3C

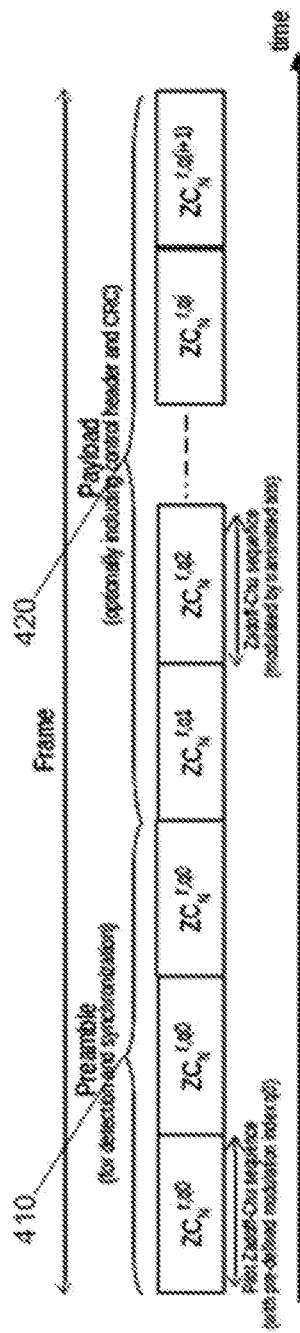


Fig. 4

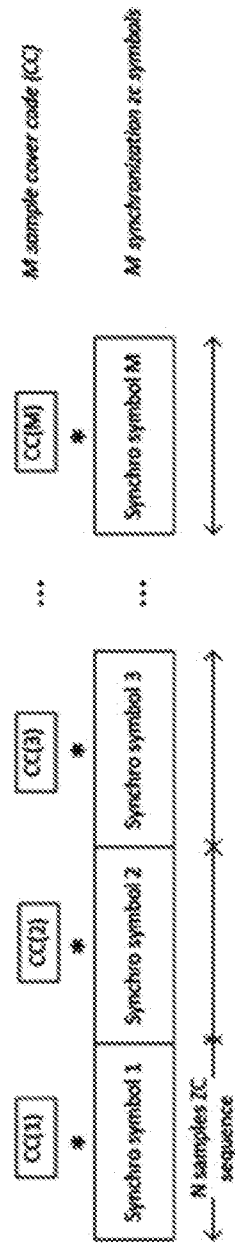


Fig. 5

5/9

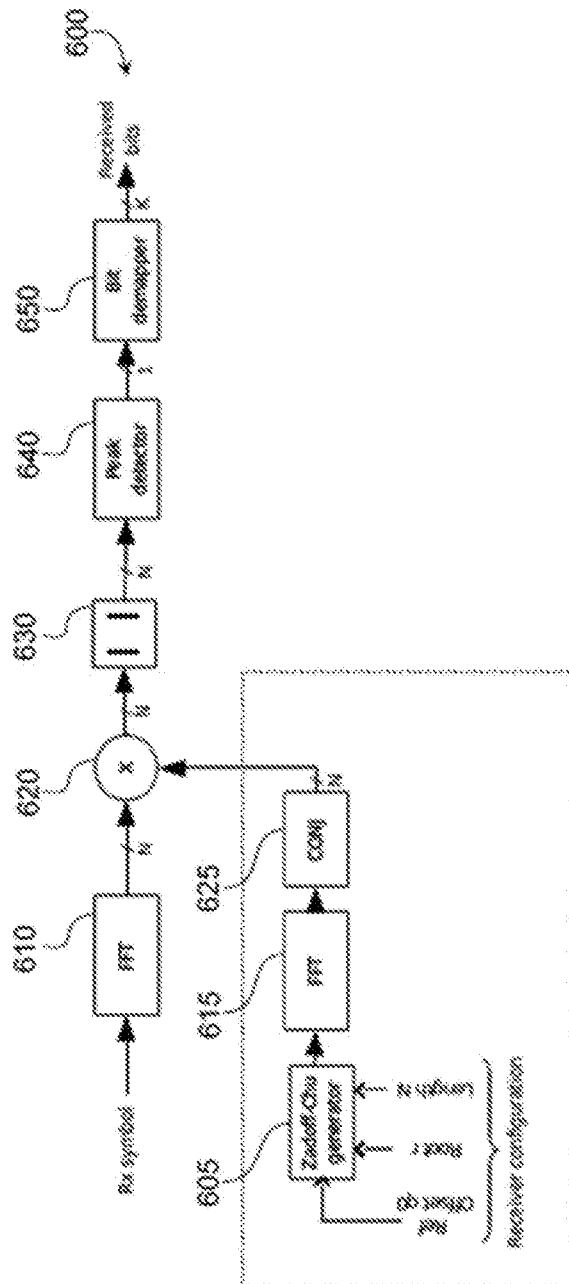
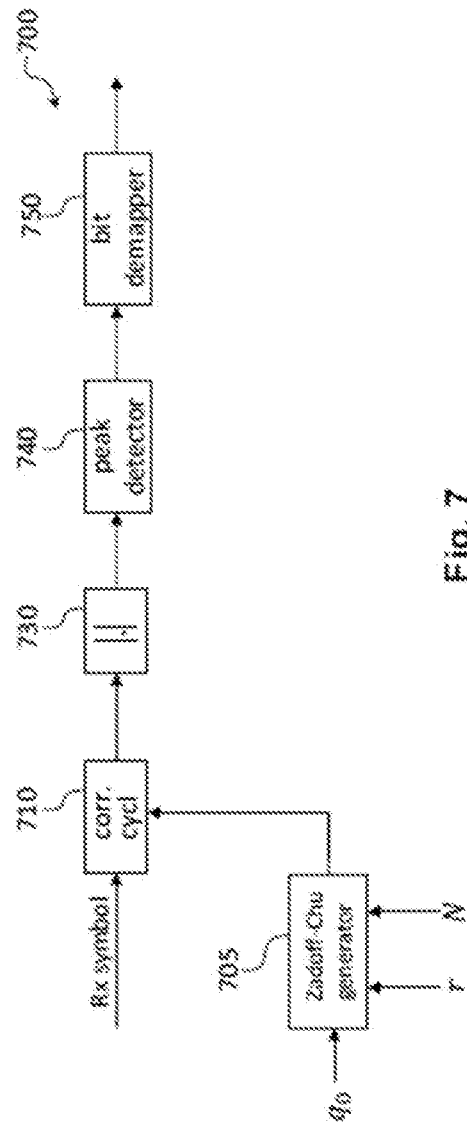
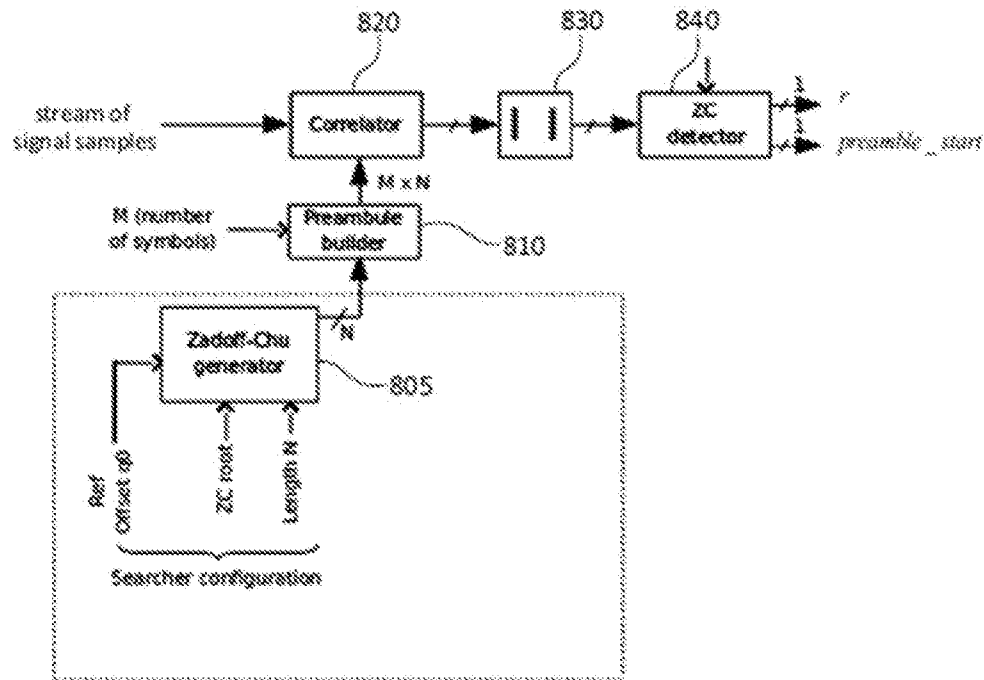


Fig. 6

6/9

Fig. 7

7/9

**Fig. 8**

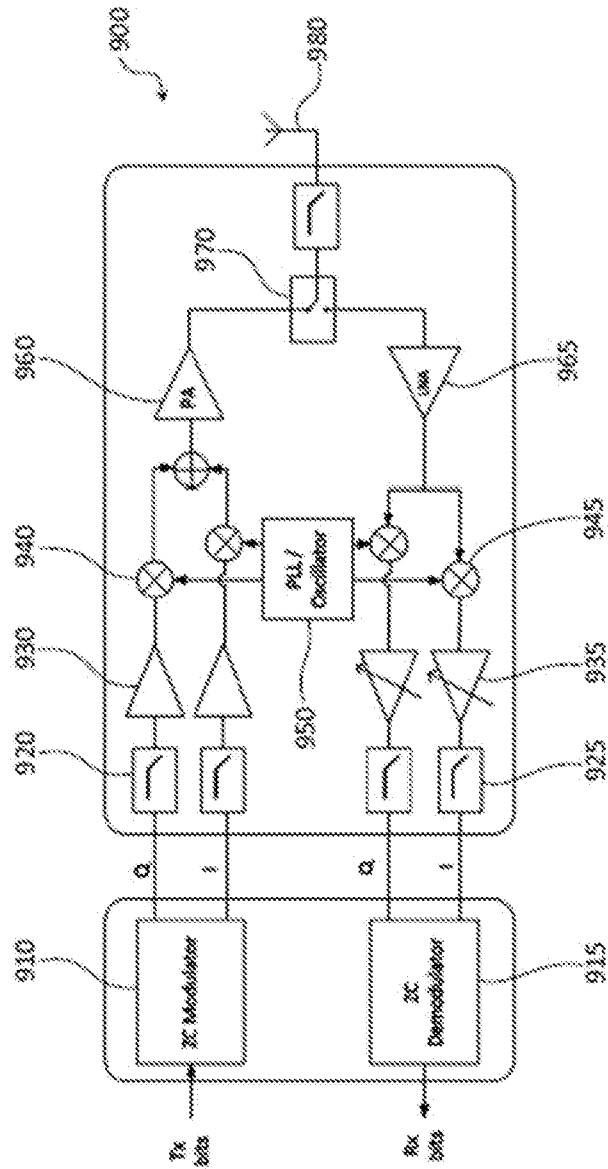
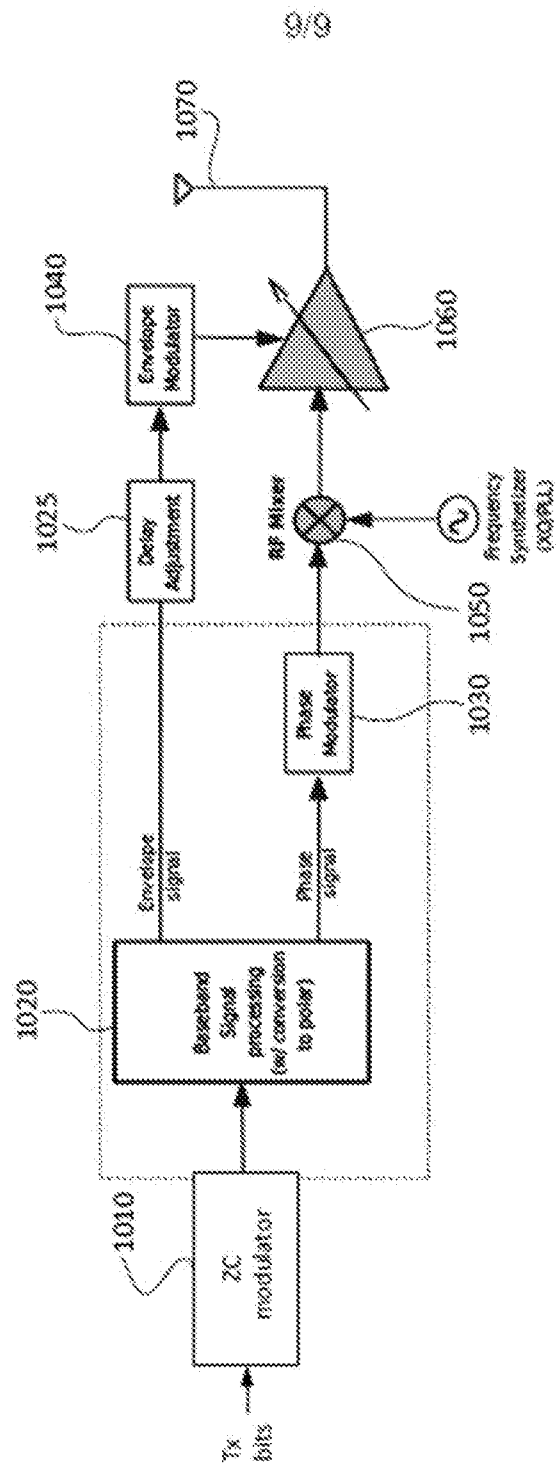


Fig. 9

Fig. 10