

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 573 086 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.03.1996 Bulletin 1996/11

(51) Int. Cl.⁶: **B41M 5/40**

(21) Application number: **93201268.5**

(22) Date of filing: **04.05.1993**

(54) **Dye-donor element for use according to thermal dye sublimation transfer**

Farbstoffgebendes Element für thermische Farbstoffübertragung durch Sublimation

Élément donneur de colorant pour utilisation dans le transfert thermique de colorant par sublimation

(84) Designated Contracting States:
BE DE FR GB NL

(30) Priority: **04.06.1992 EP 92201619**

(43) Date of publication of application:
08.12.1993 Bulletin 1993/49

(73) Proprietor: **AGFA-GEVAERT**
naamloze vennootschap
B-2640 Mortsel (BE)

(72) Inventors:
• **Defieuw, Geert,**
c/o Agfa-Gevaert N.V.
B-2640 Mortsel (BE)

- **Wehrmann, Rolf,**
c/o Agfa-Gevaert N.V.
B-2640 Mortsel (BE)
- **Dujardin, Ralf,**
c/o Agfa-Gevaert N.V.
B-2640 Mortsel (BE)
- **Reuter, Knud,**
c/o Agfa-Gevaert N.V.
B-2640 Mortsel (BE)

(56) References cited:
EP-A- 0 329 117

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 573 086 B1

Description

1. Field of the invention.

5 The present invention relates to dye-donor elements for use according to thermal dye sublimation transfer and in particular to a heat-resistant layer of said dye-donor element.

2. Background of the invention.

10 Thermal dye sublimation transfer also called thermal dye diffusion transfer is a recording method in which a dye-donor element provided with a dye layer containing sublimable dyes having heat transferability is brought into contact with a receiver sheet and selectively, in accordance with a pattern information signal, heated with a thermal printing head provided with a plurality of juxtaposed heat-generating resistors, whereby dye from the selectively heated regions of the dye-donor element is transferred to the receiver sheet and forms a pattern thereon, the shape and density of which is in accordance with the pattern and intensity of heat applied to the dye-donor element.

15 A dye-donor element for use according to thermal dye sublimation transfer usually comprises a very thin support e.g. a polyester support, one side of which is covered with a dye layer, which contains the printing dyes. Usually an adhesive or subbing layer is provided between the support and the dye layer.

20 Due to the fact that the thin support softens when heated during the printing operation and then sticks to the thermal printing head thereby causing malfunctioning of the printing apparatus and reduction in image quality, the backside of the support (side opposite to the dye layer) is typically provided with a heat-resistant layer to facilitate passage of the dye-donor element under the thermal printing head. An adhesive layer may be provided between the support and the heat-resistant layer.

25 The heat-resistant layer generally comprises a binder and optionally a lubricating material. In the conventional heat-resistant layers the binder is either a cured binder (as described in, for example, EP 153880, EP 194106, EP 314348, EP 329177, JP 60/151096, JP 60/229787, JP 60/229792, JP 60/229795, JP 62/48589, JP 62/212192, JP 62/259889, JP 01/5884, JP 01/56587, JP 02/128899) or a polymeric thermoplast (as described in, for example, EP 267469, JP 58/187396, JP 63/191678, JP 63/191679, JP 01/234292, JP 02/70485).

A disadvantage of cured binders is their cumbersome manufacture requiring relatively long curing times.

30 Polymeric thermoplasts known for use as binder for the heat-resistant layer such as i.a. poly(styrene-co-acrylonitrile), polystyrene and polymethylmethacrylate have the disadvantage of having a relatively low glass transition temperature (around 100°C) leading to a relatively low heat stability of the heat-resistant layer containing said binder and therefore to unsatisfactory performance of said heat-resistant layer. Further when dye-donor elements having such heat-resistant layers have been rolled up and stored for any length of time such that the backcoat of one portion of the donor element is held against the dyecoat of another portion, sticking occurs between the backcoat and the dyecoat.

35 Aromatic polyethers such as polyether ketones, polyethersulfones and polycyanoarylethers based on bisphenol A are insoluble in common solvents and exhibit a relative low glass transition temperature (140°C to 180°C).

3. Summary of the invention.


40 It is an object of the present invention to provide heat-resistant layers not having the disadvantages mentioned above.

According to the present invention, a dye-donor element for use according to thermal dye sublimation transfer is provided, said dye-donor element comprising a support having on one side a dye layer and on the other side a heat-resistant layer, characterized in that said heat-resistant layer comprises a polyether containing at least 10 mol % of the recurring structural unit corresponding to formula (I)



wherein

- O - E - O - represents a divalent diphenolate radical corresponding to the following general formula (II)

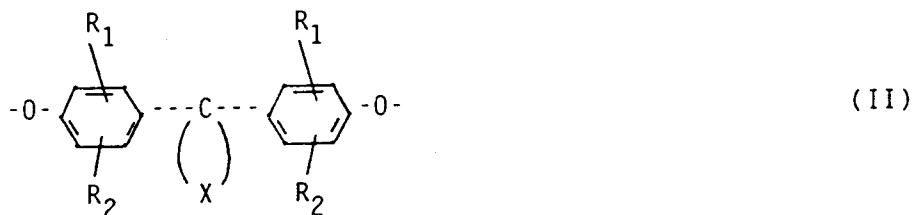

wherein

R₁ and R₂ (same or different) represent hydrogen, halogen, a C₁-C₈ alkyl group, a C₅-C₆ cycloalkyl group, a C₆-C₁₀ aryl group or a C₇-C₁₂ aralkyl group; and

X represents the necessary atoms to close a 5- to 8-membered cycloaliphatic ring which may be substituted with one or more C₁-C₆ alkyl groups or 5- to 6- membered cycloalkyl groups or carry fused-on 5- or 6-membered cycloalkyl groups;

- E' - represents a divalent radical of an aromatic sulfone corresponding to the following general formula (III)



or a divalent radical of a diarylketone corresponding to the following general formula (IV)



or a divalent radical of benzonitrile corresponding to the following general formula (V)



wherein Ar and Ar' in formula III and IV (same or different) represent difunctional aromatic radicals having 6 to 50 carbon atoms.




The polyethers for use according to the present invention have higher glass transition temperatures (typically in the range of 160°C to 250°C) than polyethers derived from bisphenol A due to the presence of a cycloaliphatic group in the diphenolate radical. Moreover, said polyethers are soluble in ecologically acceptable solvents such as ketones.

Heat-resistant layers comprising polyethers of the present invention exhibit high heat stability and a low friction coefficient at higher temperatures (and thus no occurrence of 'smiles' resulting from the wrinkling of the dye-donor element while passing under the thermal head) and don't stick to the dye layer when the dye-donor element is stored in a rolled form.

4. Detailed description of the invention.

Preferably one to two carbon atoms of X in formula (II), more preferably only one carbon atom, is dialkyl substituted. A preferred alkyl group is methyl; preferably the carbon atoms in Alpha-position to the diphenyl-substituted C-atom are not dialkyl substituted; alkyl disubstitution in Beta-position is preferred.

Preferred examples of diphenolate radicals -O-E-O- for use according to the present invention are those with 5- or 6-membered cycloaliphatic rings. Examples of such diphenolate radicals are given below.

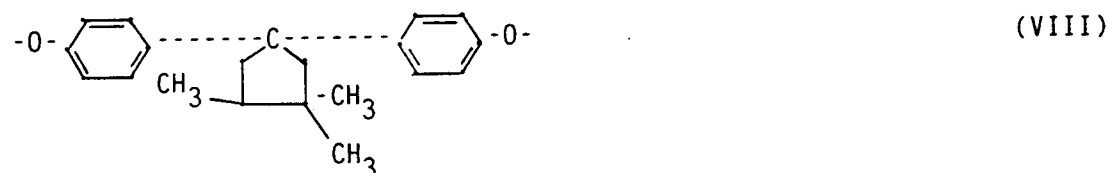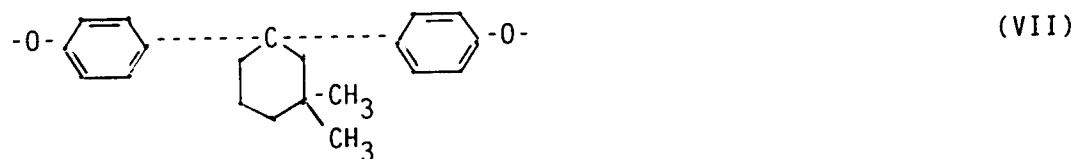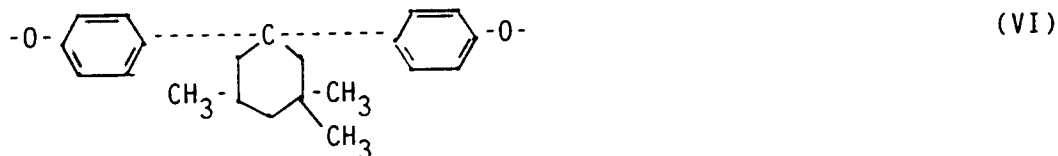

A particularly preferred diphenolate is the diphenolate radical derived from 1,1-bis-(4-hydroxyphenyl)-3,3,5-trimethylcyclohexane (formula (VI)).

The bis-(hydroxyphenyl)-cycloalkanes used for obtaining the diphenolate radical corresponding to formula (II) can be prepared according to a known method by condensation of phenols corresponding to formula (IX) and ketones corresponding to formula (X)



wherein R¹, R² and X have the same significances as given to them in formula (II).

The phenols corresponding to formula (IX) are known compounds or can be prepared according to known methods (see, for example, for cresols and xylenols Ullmanns Encyklopädie der technischen Chemie 4. neubearbeitete und erweiterte Auflage, Band 15, pages 61 to 77, Verlag Chemie-Weinheim-New York 1978; for chlorophenols Ullmanns Encyklopädie der technischen Chemie 4. Auflage, Band 9, pages 573 to 582, Verlag Chemie 1975; and for alkylphenols Ullmanns Encyklopädie der technischen Chemie 4. Auflage, Band 18, pages 191 to 214, Verlag Chemie 1979).

Examples of suitable phenols corresponding to formula IX are : phenol, o-cresol, m-cresol, 2,6-dimethylphenol, 2-chlorophenol, 3-chlorophenol, 2,6-dichlorophenol, 2-cyclohexylphenol, diphenylphenol and o- or p-benzylphenol.


Ketones corresponding to formula (X) are known compounds, see for example Beilsteins Handbuch der Organischen Chemie, 7. Band, 4. Auflage, Springer-Verlag, Berlin, 1925 and corresponding Ergänzungsbände 1-4; Journal of American Chemical Society, Vol. 79 (1957), pages 1488, 1490 and 1491; US 2692289; Journal of Chemical Society, 1954,

pages 2186 and 2191; Journal of Organic Chemistry, Vol. 38, No. 26, 1973, page 4431; Journal of American Chemical Society, Vol. 87, 1965, page 1353 (especially page 1355). A general method for preparing ketones corresponding to formula (X) is described in, for example, Organikum, 15. Auflage, 1977, VEB-Deutscher Verlag der Wissenschaften, Berlin, page 698.

Examples of suitable ketones corresponding to formula (X) are :

3,3-dimethylcyclopentanone, 2,2-dimethylcyclohexanone, 3,3-dimethylcyclohexanone, 4,4-dimethylcyclohexanone, 3-ethyl-3-methylcyclopentanone, 2,3,3-trimethylcyclopentanone, 2,4,4-trimethylcyclopentanone, 3,3,4-trimethylcyclopentanone, 3,3-dimethylcycloheptanone, 4,4-dimethylcycloheptanone, 3-ethyl-3-methylcyclohexanone, 4-ethyl-4-methylcyclohexanone, 2,3,3-trimethylcyclohexanone, 2,4,4-trimethylcyclohexanone, 3,3,4-trimethylcyclohexanone, 2,5,5-trimethylcyclohexanone, 3,3,5-trimethylcyclohexanone, 3,4,4-trimethylcyclohexanone, 2,3,3,4-tetramethylcyclopentanone, 2,3,4,4-tetramethylcyclopentanone, 3,3,4,4-tetramethylcyclopentanone, 2,2,5-trimethylcycloheptanone, 2,2,6-trimethylcycloheptanone, 2,6,6-trimethylcycloheptanone, 3,3,5-trimethylcycloheptanone, 3,5,5-trimethylcycloheptanone, 5-ethyl-2,5-dimethylcycloheptanone, 2,3,3,5-tetramethylcycloheptanone, 2,3,5,5-tetramethylcycloheptanone, 3,3,5,5-tetramethylcycloheptanone, 4-ethyl-2,3,4-trimethylcyclopentanone, 2-isopropyl-4,4-dimethylcyclopentanone, 4-isopropyl-2,4-dimethylcyclopentanone, 2-ethyl-3,5,5-trimethylcyclohexanone, 3-ethyl-3,5,5-trimethylcyclohexanone, 3-ethyl-4-isopropyl-3-methylcyclopentanone, 4-s-butyl-3,3-dimethylcyclopentanone, 2-isopropyl-3,3,4-trimethylcyclopentanone, 3-ethyl-4-isopropyl-3-methylcyclohexanone, 4-ethyl-3-isopropyl-4-methylcyclohexanone, 3-s-butyl-4,4-dimethylcyclohexanone, 3-isopropyl-3,5,5-trimethylcyclohexanone, 4-isopropyl-3,5,5-trimethylcyclohexanone, 3,3,5-trimethyl-5-propylcyclohexanone, 3,5,5-trimethyl-5-propylcyclohexanone, 2-butyl-3,3,4-trimethylcyclopentanone, 2-butyl-3,3,4-trimethylcyclohexanone, 4-butyl-3,3,5-trimethylcyclohexanone, 3-isohexyl-3-methylcyclohexanone, 5-ethyl-2,4-diisopropyl-5-methylcyclohexanone, 2,2-dimethylcyclooctanone, and 3,3,8-trimethylcyclooctanone.

Examples of preferred ketones are :

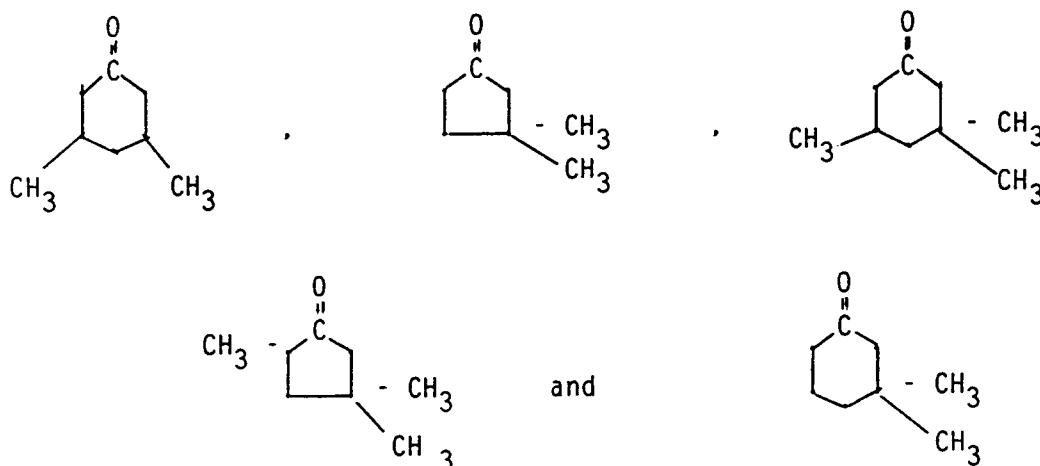

The synthesis of suitable diphenols is described in e.g. DE 3832396.

The divalent diphenolate radicals corresponding to the general formula II are introduced in the polyethers of the present invention by reaction of dialkali metal diphenolates



wherein Z represents an alkali metal;

with aromatic dihalogenated compounds which can be selected from the group of dihalogenated diarylsulfones (XII)



or from the group of dihalogenated diarylketones (XIII)



or the group of dihalogenbenzonitriles (XIV)






wherein Y in formula (XII), (XIII) and (XIV) represent a halogen atom and wherein Ar and Ar' in formula (XII) and (XIII) (same or different) represent difunctional aromatic radicals having 6 to 50 carbon atoms.


Sodium or potassium is preferably the alkali metal Z in the dialkali metal diphenolates (XI).

Chlorine or fluorine, in particular chlorine is preferably the halogen atom Y in the dihalogenated compounds (XII) and (XIV). Fluorine is preferred for (XIII).

Examples of dihalogenated diarylsulphones (XII) are e.g.


- 4,4'-dichlorodiphenyl-sulphone,
- 4,4'-difluorodiphenyl-sulphone,
- 4-chloro-4'-fluorodiphenyl-sulphone,
- 3,3'-dinitro-4,4'-dichlorodiphenyl-sulphone,
- 3,3'-dinitro-4,4'-difluorodiphenyl-sulphone,
- 4,4'-dibromodiphenyl-sulphone,

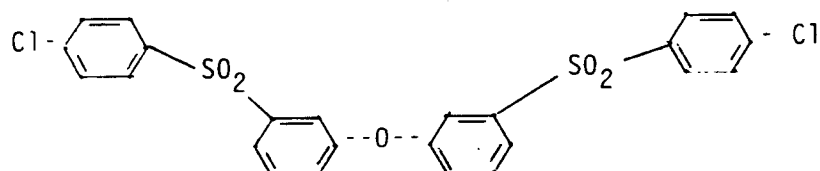



By reaction of dihalogenated diarylsulfones (XII) with the dialkali metal salts of the diphenolate (XI), a polyether sulfone is obtained. Polyether sulfones for use according to the present invention are described in DE 3833385.

Preferred polyether sulfones according to the present invention derived from dihalogenated diarylsulfones are those which contain at least 10 mol % of the following recurring unit

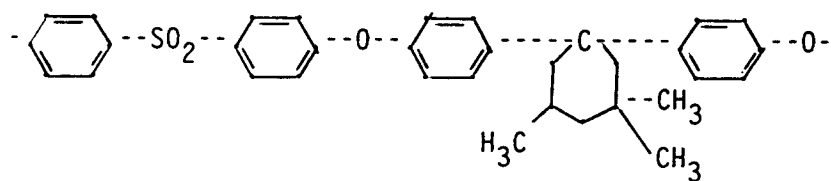


and have a molecular weight (weight-average) of more than 3000 g/mol.

Examples of dihalogenated diarylketones (XIII) are :


- 4,4'-dichlorobenzophenone
- 4-chloro-4'-fluorobenzophenone
- 4,4'-difluorobenzophenone
- 4,4'-dichloroterephthalophenone :



4,4'-difluoroterephthalophenone :




4,4'-dichloro-isophthalophenone :

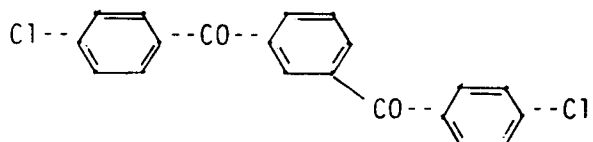

4,4'-difluoro-isophthalophenone :


5

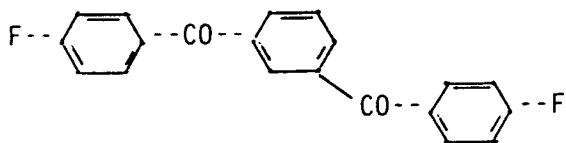

10

4,4'-bis-(p-chlorobenzoyl)-diphenyl ether :


15



20

4,4'-bis-(p-fluorobenzoyl)-diphenyl ether :

25




3,3'-dinitro-4,4'-dichlorobenzophenone

3,3'-dinitro-4,4'-difluorobenzophenone


30 4,4'-bis-(p-chlorobenzoyl)-biphenyl

35



4,4'-bis-(p-fluorobenzoyl)-biphenyl :


40



45


2,8-bis-(p-chlorobenzoyl)-diphenylene oxide :

50




55

and 4,4-bis-(p-halogenobenzoyl)-diphenylmethane derivatives:




10 wherein A and B, which may be the same or different, represent C₁-C₉ aliphatic, C₅-C₆ cycloaliphatic, C₆-C₁₀ aromatic or C₇-C₁₂ araliphatic radicals or hydrogen; and W represents a halogen atom e.g.



20 By reaction of dihalogenated diarylketones (XIII) with the dialkali metal salts of the diphenolate (XI), a polyether ketone is obtained. Polyether ketones for use according to the present invention are described in US 4964890.

Preferred polyether ketones according to the present invention are those which contain at least 10 mol % recurring structural units corresponding to the following general formula :

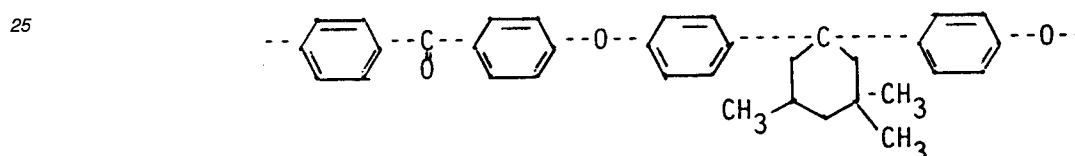

and have a molecular weight of more than 3000 g/mol (weight-average).


Examples of dihalogen benzonitriles (XIV) are e.g.

35 2,6-dichlorobenzonitrile, 3,5-dichlorobenzonitrile,
2,3-difluorobenzonitrile, 2,4-difluorobenzonitrile,
2,5-difluorobenzonitrile, 2,6-difluorobenzonitrile,
3,4-difluorobenzonitrile, 3,5-difluorobenzonitrile.

The use of 2,6-dichlorobenzonitrile is especially preferred.

40 By reaction of dihalogenated dihalogenbenzonitriles (XIV) with the dialkali metal salts of the diphenolate (XI), a polycyanoarylether is obtained.

Preferred polycyanoarylethers are those which contain at least 10 mol % recurring structural units corresponding to the following general formula

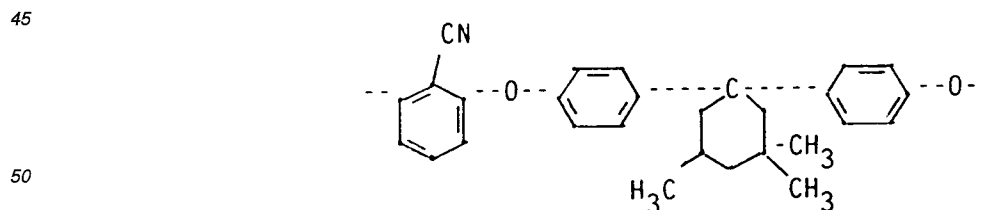

55 and have a molecular weight of more than 3000 g/mol (weight average).

The aromatic polyethers according to the present invention may be prepared, for example, by reaction of dialkali metal salts of diphenolates with the dihalogenated aromatic compounds described above, in a polar solvent, the polar solvent employed preferably being caprolactam which is C₁-C₅ alkyl-substituted on the nitrogen, such as N-methyl-caprolactam, N-ethyl-caprolactam, N-n-propyl-caprolactam or N-isopropyl-caprolactam, preferably N-methyl-caprol-

actam, or pyrrolidones which are C₁-C₅ alkyl-substituted on the nitrogen, such as N-methyl-pyrrolidone, or N,N-dimethyl-formamide, N,N-dimethylacetamide, dimethyl-sulphoxide, diphenyl-sulphone, sulpholane and tetramethylurea. A proportion, e.g. from 0.1 to 200 wt %, based on the weight of the polar solvent, of other less polar solvents may be used simultaneously, e.g. aromatic hydrocarbons, such as toluene, xylene, mesitylene or chlorobenzene, or aliphatic hydrocarbons, such as benzene or cyclohexane.

In the preparation of the polyethers for use according to the present invention a branching agent may be used. Small amounts, preferably between 0.05 and 2.0 mole % (with respect to the diphenolates) of tri- or higher functional compounds, in particular compounds with three or more phenolic groups, are added in order to obtain branched polyethers. Typical examples of branching agents are components with three or more phenolic groups such as phloroglucine and 1,3,5-tri-(4-hydroxyphenyl)-benzene.

The aromatic polyethers according to the present invention may be prepared at temperatures of from 120 to 320°C, preferably from 135°C to 280°C, under pressures of from 0.8 to 10 bar, preferably from 1 to 3 bar, in particular under ambient atmospheric pressure.

The molar ratio of the dialkali metal diphenolates and the aromatic dihalogenated compounds is from 0.5:1 to 2:1, preferably from 0.8:1 to 1.2:1, more preferably from 0.95:1 to 1.05:1, it being necessary to choose a ratio of 1:1 or very close to 1:1 for high molecular weights.

The amount of polar solvents is from 0.5 to 50, preferably from 2 to 20 parts, by weight, based on the total weight of the components which form the polyether.

The polyethers according to the present invention may be obtained from the resulting reaction mixtures as follows :

The reaction mixture is diluted, especially if very highly viscous solutions are present, e.g. with the polar reaction solvent or another solvent for the polyether and is filtered. After neutralization of the filtrate with a suitable acid, e.g. acetic acid, the polyether is precipitated by pouring into a suitable precipitation medium, e.g. water, alcohols (such as methanol or isopropanol) or water-alcohol mixtures, e.g. H₂O/methanol 1:1, and is isolated and then dried.

Polyethers of the present invention are used as binder in the heat-resistant layer of the dye-donor element according to the present invention in an amount of at least 10 % by weight, preferably in an amount from 30 to 100 % by weight. A mixture of two or more of said polyethers can also be used in the heat-resistant layer.

Polycyanoarylethers are especially preferred for use in a heat-resistant layer, since these compounds exhibit a good solubility in solvents such as ketones, more specifically in acetone and ethylmethylketone.

In addition to said polyethers, the heat-resistant layer of the dye-donor element according to the present invention can also contain one or more of the conventional thermoplastic binders for heat-resistant layers such as poly(styrene-co-acrylonitrile), poly(vinylalcohol-co-butylal), poly(vinylalcohol-co-acetal), poly(vinylalcohol-co-benzal), polystyrene, poly(vinylacetate), cellulose nitrate, cellulose acetate propionate, cellulose acetate hydrogen phthalate, cellulose acetate, cellulose acetate butyrate, cellulose triacetate, ethyl cellulose, poly(methylmethacrylate), copolymers of methylmethacrylate and polycarbonates. Especially preferred polycarbonates for use in the heat-resistant layer of the present invention are those described in EP-A-527520, particularly polycarbonates derived from 1,1-bis-(4-hydroxyphenyl)-3,3,5-trimethylcyclohexane.

Heat-resistant layers according to the present invention can contain a lubricating material such as a surface active agent, a liquid lubricant, a solid lubricant or mixtures thereof. The surface active agents may be any agents known in the art such as carboxylates, sulfonates, phosphates, aliphatic amine salts, aliphatic quaternary ammonium salts, polyoxyethylene alkyl ethers, polyethyleneglycol fatty acid esters, fluoroalkyl C₂-C₂₀ aliphatic acids. Examples of liquid lubricants include silicone oils, synthetic oils, saturated hydrocarbons and glycols. Examples of solid lubricants include various higher alcohols such as stearyl alcohol, fatty acids and fatty acid esters. Particularly preferred lubricants are polysiloxane-polyether copolymers and polytetrafluoroethylene. Suitable lubricants are described in e.g. US 4753921, US 4916112, US 4717711, US 4717712, US 4866026, US 4829050.

The amount of lubricant used in the heat-resistant layer depends largely on the type of lubricant, but is generally in the range of from about 0.1 to 50 wt %, preferably 0.5 to 40 wt % of the binder or binder mixture employed.

The heat-resistant layer according to the present invention may contain other additives provided such materials do not inhibit the anti-stick properties of the heat-resistant layer and provided that such materials do not scratch, erode, contaminate or otherwise damage the printhead or harm image quality. Examples of suitable additives are described in EP 389153.

The heat-resistant layer of the thermal dye sublimation transfer donor element according to the present invention is formed preferably by adding the polymeric thermoplastic binder or binder mixture, the lubricant(s), and other optional components to a suitable solvent or solvent mixture, dissolving or dispersing the ingredients to form a coating composition that is applied to a support, which may have been provided first with an adhesive or subbing layer, and dried.

The heat-resistant layer of the dye-donor element may be coated on the support or printed thereon by a printing technique such as a gravure process.

The heat-resistant layer thus formed has a thickness of about 0.1 to 3 µm, preferably 0.3 to 1.5 µm.

As mentioned above the lubricants can be incorporated into the heat-resistant layer. Advantageously, however, a separate top layer comprising at least one lubricant is coated on top of the heat-resistant layer. Preferably, a top layer

of a polyether-polysiloxane copolymer, optionally in combination with glycerol monostearate, is coated from a non-solvent for the heat-resistant layer on the latter layer. Another preferred separate top layer comprising lubricants has been described in EP-A-554576.

Preferably a subbing layer is provided between the support and the heat-resistant layer to promote the adhesion between the support and the heat-resistant layer. As subbing layer any of the subbing layers known in the art for dye-donor elements can be used. Suitable binders that can be used for the subbing layer can be chosen from the classes of polyester resins, polyurethane resins, polyester urethane resins, modified dextrans, modified cellulose, and copolymers comprising recurring units such as i a. vinylchloride, vinylidenechloride, vinylacetate, acrylonitrile, methacrylate, acrylate, butadiene, and styrene (e.g. poly(vinylidenechloride-co-acrylonitrile)). Suitable layers are described in e.g. EP 138483, EP 227090, US 4567113, US 4572860, US 4717711, US 4559273, US 4695288, US 4727057, US 4737486, US 4965239, US 4753921, US 4895830, US 4929592, US 4748150, US 4965238 and US 4965241. Preferably the subbing layer further comprises an aromatic polyol such as 1,2-dihydroxybenzene as described in EP 433496.

Especially preferred are subbing layers such as those described in EP-A-564010. Herein, a subbing layer is disclosed comprising a polyester formed by polycondensation of at least one aromatic dicarboxylic acid and at least one aliphatic diol, wherein said polyester is a copolyester further comprising units derived from at least one multifunctional comonomer carrying at least 3 functional groups, which may be same or different and are chosen from hydroxy and carboxy groups including so-called latent carboxy groups. By the expression 'latent carboxy groups' an anhydride group is meant, which has been formed by ring closure using 2 carboxy groups, the anhydride group in this context thus accounting for 2 carboxy groups.

Any dye can be used in the dye layer of the dye-donor element of the present invention provided it is transferable to the dye-image-receiving layer by the action of heat. Examples of suitable dyes have been described in e.g. EP 432829, EP 400706, EP 485665, EP 453020, EP-A-498083, and in the references cited in the above documents.

The ratio of dye or dye mixture to the binder ranges from 9:1 to 1:3 by weight, preferably from 3:1 to 1:2 by weight.

At least one of the following polymers can be chosen for use as a binder for the dye layer : cellulose derivatives e.g. ethyl cellulose, hydroxyethyl cellulose, ethylhydroxyethyl cellulose, hydroxypropyl cellulose, methyl cellulose, cellulose nitrate, cellulose acetate formate, cellulose acetate hydrogen phthalate, cellulose acetate, cellulose acetate propionate, cellulose acetate butyrate, cellulose acetate pentanoate, cellulose acetate benzoate, and cellulose triacetate; vinyl-type resins and derivatives e.g. polyvinyl alcohol, polyvinyl acetate, polyvinyl butyral, poly(vinylbutyral-co-vinylacetal-co-vinylalcohol), polyvinyl pyrrolidone, polyvinyl acetoacetal, and polyacrylamide; polymers and copolymers derived from acrylates and acrylate derivatives e.g. polyacrylic acid, polymethyl methacrylate, and styrene-acrylate copolymers; polyester resins; polycarbonates; poly(styrene-co-acrylonitrile); polysulfones; polyphenylene oxide; organosilicones e.g. polysiloxanes; epoxy resins; natural resins e.g. gum arabic; and alkyd resins.

Preferably, the dye layer of the present invention comprises a poly(styrene-co-acrylonitrile).

The dye layer may also contain other additives such as e.g. thermal solvents, stabilizers, curing agents, preservatives, organic or inorganic fine particles, dispersing agents, antistatic agents, defoaming agents, and viscosity-controlling agents, these and other ingredients being described more fully in EP 133012, EP 111004 and EP 279467.

Especially preferred organic fine particles for use in the dye layer are polyethylene, polypropylene, or amide wax particles.

A dye-barrier layer comprising a hydrophilic polymer may also be provided in the dye-donor element between the support and the dye layer to prevent wrong-way transfer of dye towards the support and thus enhance the dye transfer density values. The dye barrier layer may contain any hydrophilic material that is useful for the intended purpose. In general, good results have been obtained with e.g. gelatin, polyacrylamide, polyisopropyl acrylamide, butyl methacrylate-grafted gelatin, ethyl methacrylate-grafted gelatin, ethyl acrylate-grafted gelatin, cellulose monoacetate, methyl cellulose, polyvinyl alcohol, polyethylene imine, polyacrylic acid, a mixture of polyvinyl alcohol and polyvinyl acetate, a mixture of polyvinyl alcohol and polyacrylic acid, and a mixture of cellulose monoacetate and polyacrylic acid. Suitable dye barrier layers have been described in e.g. EP 227091 and EP 228065.

Any material can be used as the support for the dye-donor element provided it is dimensionally stable and capable of withstanding the temperatures involved, up to about 400°C over a period of up to 20 msec, and is yet thin enough to transmit heat applied on one side through to the dye on the other side to effect transfer to the receiver sheet within such short periods, typically from 1 to 10 msec. Such materials include polyesters such as polyethylene terephthalate, polyamides, polyacrylates, polycarbonates, cellulose esters, fluorinated polymers, polyethers, polyacetals, polyolefins, polyimides, glassine paper, and condenser paper. Preference is given to a support comprising polyethylene terephthalate. In general, the support has a thickness of 2 to 30 µm.

The support for the receiver sheet used in combination with the dye-donor element may be a transparent film of e.g. polyethylene terephthalate, a polyether sulfone, a polyimide, a cellulose ester, or a polyvinyl alcohol-co-acetal. The support may also be a reflective one such as baryta-coated paper, polyethylene-coated paper, or white polyester i.e. white-pigmented polyester. Blue-coloured polyethylene terephthalate film can also be used as a support.

To avoid poor adsorption of the transferred dye to the support of the receiver sheet this support should be coated with a special coating, called dye-image-receiving layer. This layer may comprise e.g. a polycarbonate, a polyurethane,

a polyester, a polyamide, polyvinyl chloride, poly(styrene-co-acrylonitrile), and polycaprolactone or mixtures thereof. Suitable dye-image-receiving layers have been described in e.g. EP 133011, EP 133012, EP 144247, EP 227094, EP 228066. The dye-image-receiving layer may also comprise a cured binder such as the heat-cured product of poly(vinylchloride-co-vinyl acetate-co-vinyl alcohol) and polyisocyanate.

In order to improve the light resistance and other stabilities of recorded images, UV absorbers, singlet oxygen quenchers such as HALS-compounds (Hindered Amine Light Stabilizers) and/or antioxidants can be incorporated into the dye-image-receiving layer.

The dye layer of the dye-donor element and/or the dye-image-receiving layer of the receiver sheet may also contain a releasing agent that aids in separating the dye-donor element from the receiver sheet after transfer. The releasing agents can also be provided in a separate layer on at least part of the dye layer or of the dye-image-receiving layer. Solid waxes, fluorine- or phosphate-containing surfactants and silicone oils can be used as releasing agent. Suitable releasing agents have been described in e.g. EP 133012, JP 85/19138, and EP 227092.

The thermal dye sublimation transfer printing process comprises placing the dye layer of the donor element in face-to-face relation with the dye-image-receiving layer of the receiver sheet and image-wise heating from the back of the dye-donor element. The transfer of the dye is accomplished by heating for several milliseconds at about 400°C.

When the process is performed for but one single colour, a monochrome dye transfer image is obtained. A multicolour image can be obtained by using a dye-donor element containing three or more primary colour dyes and sequentially performing the-process steps described above for each colour. The above sandwich of dye-donor element and receiver sheet is formed on three occasions during the time when heat is applied by the thermal printing head. After the first dye has been transferred, the elements are peeled apart. A second dye-donor element (or another area of the dye-donor element with a different dye area) is then brought in register with the receiving sheet and the process is repeated. The third colour and optionally further colours are obtained in the same manner.

In addition to thermal printing heads, laser light, infrared flash, or heated pens can be used as the heat source for supplying heat energy. Thermal printing heads that can be used to transfer dye from the dye-donor elements of the present invention to a receiver sheet are commercially available. In case laser light is used, the dye layer or another layer of the dye donor-element should contain a compound e.g. carbon black that absorbs the light emitted by the laser and converts it into heat.

Alternatively, the support of the dye-donor element may be an electrically resistive ribbon consisting of e.g. a multilayer structure of a carbon-loaded polycarbonate coated with a thin aluminium film. Current is injected into the resistive ribbon by electrically addressing a print head electrode resulting in highly localized heating of the ribbon beneath the relevant electrode. The fact that in this case the heat is generated directly in the resistive ribbon and that it is thus the ribbon that gets hot leads to an inherent advantage in printing speed using the resistive ribbon/electrode head technology as compared to the thermal head technology, in which latter case the various elements of the thermal printing head get hot and must cool down before the head can move to the next printing position.


The following examples illustrate the invention in more detail without, however, limiting the scope thereof.

EXAMPLES


A dye-donor element for use according to thermal dye sublimation transfer was prepared as follows :

A solution comprising 8 wt% of dye A, 2.4 wt% of dye B, 6.4 wt% of dye C, 1 % of an amide wax and 8 wt% of poly(styrene-co-acrylonitrile) as binder in methylethylketone as solvent was prepared. From this solution a layer having a wet thickness of 10 µm was coated on 6 µm thick polyethylene terephthalate film, provided with a conventional subbing


layer. The resulting layer was dried by evaporation of the solvent.



dye A

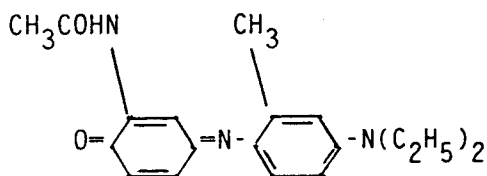

dye B

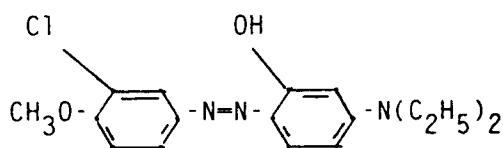

dye C

The back side of the polyethylene terephthalate film was provided with a subbing layer coated from a solution in methylethylketone comprising the ingredients as indicated in table 1 below.

On top of said subbing layer a heat-resistant layer and a topcoat layer were coated from a solution containing ingredients, the nature and amount of which is indicated below in table 1. Percentages are weight percentages in the coating solution. These solutions were coated at a wet thickness of 10 μm .

A receiving element for use according to thermal dye sublimation transfer was prepared as follows :

A receiving layer containing 7.2 g/m² poly(vinylchloride-co-vinylacetate-co-vinylalcohol) (VINYLITE VAGD supplied by Union Carbide), 0.72 g/m² diisocyanate (DESMODUR VL supplied by Bayer AG) and 0.2 g/m² hydroxy modified polydimethylsiloxane (TEGOMER H SI 2111 supplied by Goldschmidt) was provided on a 175 μm thick polyethylene terephthalate film.

The dye-donor element was printed in combination with the receiving element in a Mitsubishi color video printer CP100E.

After printing, the dye-donor element and dye receiving element were separated. The damage to the back side of the heat-resistant layer was visually inspected and the occurrence of 'smiles' on the printed image was evaluated. The stability of the dye-donor element was evaluated after storage at elevated temperatures (45-60°C) in rolled form during 1 week.

For all the above visual evaluations the following categories were established : poor (P), moderate (M), good (G) and excellent (E).

This experiment was repeated for each of the dye-donor elements identified in table 1 below. The amounts in table 1 are indicated in % by weight in coating solution (solvent is added up to 100 %)

EP 0 573 086 B1

All subbing layers were coated from ethylmethylketone, heat-resistant layers were coated from ethylmethylketon (binder B1 to B5) or tetrahydrofurane (binder B6 and B7). The topcoat layer was casted from isopropanol.

Table I

Ex.n°	Subbing layer	Heat-resistant layer	Topcoat layer	Damage	'Smiles'	Storage stability
COMP1	1.5%A1	13 % B1	0.5 % C1	P	M	P
COMP2	"	13 % B2	0.5 % C1	G	M	M
1	"	13 % B3	0.5 % C1	E	E	E
2	"	13 % B4	0.5 % C1	G	G	G
3	"	13 % B5	0.5 % C1	G	G	G
4	1.5%A2	13 % B3	0.5 % C1	E	E	E
5	1.0%A2 1.5%A3	13 % B3	0.5 % C1	E	E	G
6	1.5%A1	7 % B3,6 % B2	0.5 % C1	G	G	G
7	1.5%A1	13 % B6	0.5 % C1	E	E	E
8	1.5%A1	13 % B7	0.5 % C1	E	E	E


A1 : Copolyester comprising ethyleneglycol, neopentylglycol, terephthalic acid, isophthalic acid, adipic acid and glycerol

A2 : Dynapol L206 (supplied by Goodyear)


A3 : 1,2-dihydroxybenzene

B1 : Poly(styrene-co-acrylonitrile) Luran 388S (supplied by BASF, Germany)


B2 : Polycarbonate containing 45 mol % bisphenol A and 55 mol % of a bisphenol with the following structure

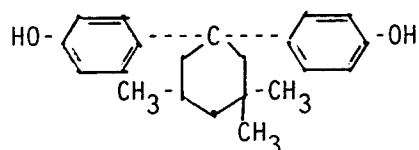

B3 : Polycyanoarylether with the following structure

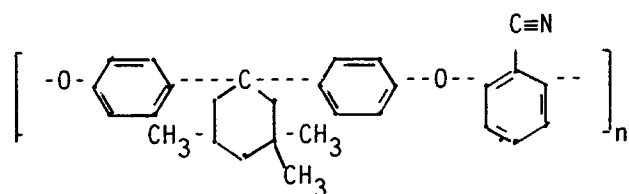

B4 : Polycyanoarylether with the following structure

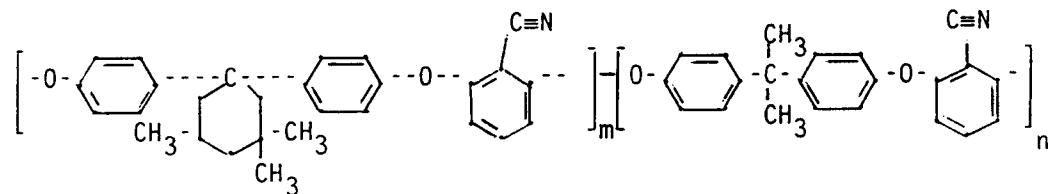


wherein m = 35 mol %

n = 65 mol %


B5 : Polycyanoarylether of B4 wherein m = 55 mol %

n = 65 mol %

B6 : Polyetherketone having the following structure

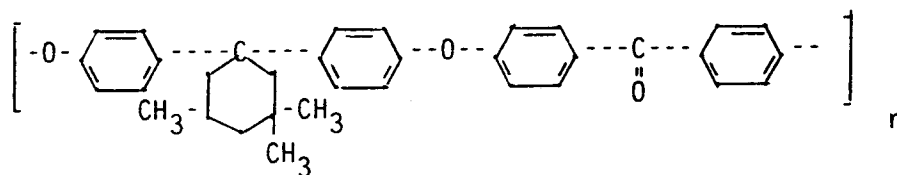

B7 : Polyethersulfone having the following structure

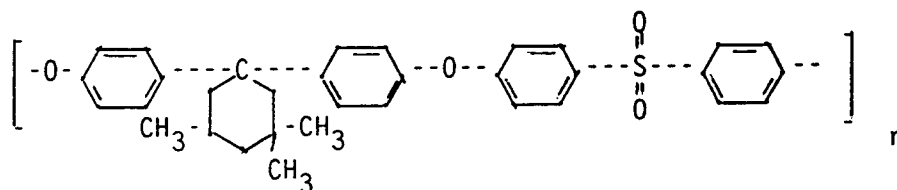

C1 : Tegoglide 410 (supplied by Goldsmidt, Germany)

As can be seen from table I, the heat-resistant layers of the present invention perform better than conventional heat-resistant layers. The heat stability of the heat-resistant layers of the present invention is high and little or no damage can be seen after printing. Moreover, a low friction coefficient against the thermal head results in the absence of 'smiles' in the printed image. The storage stability of the dye-donor element in rolled form is better than in conventional dye-donor elements.


Claims

1. Dye-donor element for use according to thermal dye sublimation transfer comprising a support having on one side a dye layer and on the other side a heat-resistant layer, characterized in that said heat-resistant layer comprises a polyether containing at least 10 mol % recurring units corresponding to the following formula (I)



wherein

-O-E-O- represents a divalent diphenolate radical corresponding to the following general formula (II)

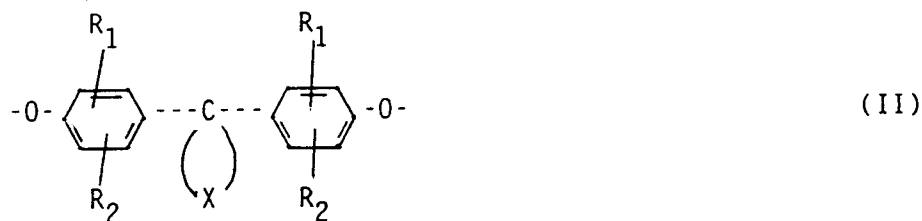

wherein

R₁ and R₂ (same or different) represent hydrogen, halogen, a C₁-C₈ alkyl group, a C₅-C₆ cycloalkyl group, a C₆-C₁₀ aryl group or a C₇-C₁₂ aralkyl group; and

X represents the necessary atoms to close a 5- to 8-membered cycloaliphatic ring which may be substituted with one or more C₁-C₆ alkyl groups or 5- to 6-membered cycloalkyl groups or carry fused-on 5- or 6-membered

cycloalkyl groups;

- E' - represents a divalent radical of an aromatic sulfone corresponding to the following general formula (III)



or a divalent radical of a diarylketone corresponding to the following general formula (IV)




or a divalent radical of benzonitrile corresponding to the following general formula (V)




wherein Ar and Ar' in formula III and IV (same or different) represent difunctional aromatic radicals having 6 to 50 carbon atoms.


2. Dye-donor element according to claim 1, wherein - E' - represents a divalent radical of benzonitrile corresponding to the following formula



3. Dye-donor element according to claim 1, wherein - E' - represents a divalent radical of benzophenone corresponding to the following formula



4. Dye-donor element according to claim 1, wherein - E' - represents a divalent radical represented by the following formula



5. Dye-donor element according to claim 1, wherein - O - E - O - represents a divalent diphenolate radical corresponding to the formula (VI)




6. Dye-donor element according to claim 1, wherein said polyether is present in an amount of at least 10 % by weight.
7. Dye-donor element according to claim 1, wherein said heat-resistant layer further comprises a polycarbonate derived from 1,1-bis-(4-hydroxyphenyl)-3,3,5-trimethylcyclohexane.
8. Dye-donor element according to claim 1, wherein said heat-resistant layer further comprises a lubricant.
9. Dye-donor element according to claim 1, wherein a topcoat layer comprising lubricants is further provided on the heat-resistant layer.
10. Dye-donor element according to claim 9, wherein said topcoat comprises a polyether-polysiloxane blockcopolymer.
11. Dye-donor element according to claim 1, wherein a subbing layer is provided between the heat-resistant layer and the support.
12. Dye-donor element according to claim 11, wherein said subbing layer comprises a polyester formed by polycondensation of at least one aromatic dicarboxylic acid and at least one aliphatic diol, wherein said polyester is a copolyester further comprising units derived from at least one multifunctional comonomer carrying at least 3 functional groups, which may be same or different and are chosen from hydroxy and carboxy groups including so-called latent carboxy groups.

Patentansprüche

1. Farbstoffgebendes Element für thermische Farbstoffübertragung durch Sublimation, das einen Träger enthält, auf dessen eine Seite eine Farbstoffschicht und auf dessen anderen Seite eine hitzebeständige Schicht enthalten ist, dadurch gekennzeichnet, daß diese hitzebeständige Schicht einen Polyether mit wenigstens 10 Mol-% sich wiederholenden Einheiten nach der folgenden Formel (I) enthält :



in der - O - E - O - ein zweiwertiges Diphenolatradikal nach der folgenden allgemeinen Formel (II) bedeutet :

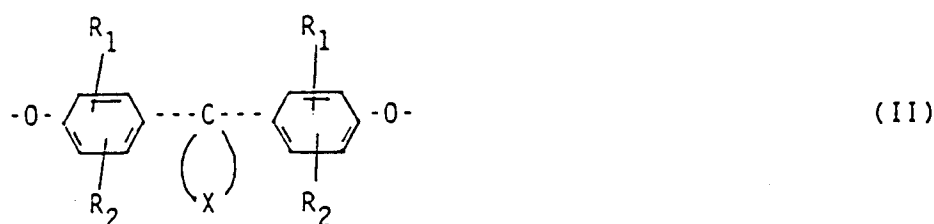


in der bedeuten :

R₁ und R₂ (gleich oder verschieden) Wasserstoff, Halogen, eine C₁-C₈-Alkylgruppe, eine C₅-C₈-Cycloalkylgruppe, eine C₆-C₁₀-Arylgruppe oder eine C₇-C₁₂-Aralkylgruppe, und

X die zum schließen eines fünf- bis achtgliedrigen cycloaliphatischen Ringes, der mit einer oder mehreren C₁-C₆-Alkylgruppen oder fünf- oder sechsgliedrigen Cycloalkylgruppen substituiert sein kann oder anellierte fünf- oder sechsgliedrige Cycloalkylgruppen tragen kann, benötigten Atome,

- E' ein zweiwertiges Radikal eines aromatischen Sulfons nach der folgenden allgemeinen Formel (III) :



oder ein zweiwertiges Radikal eines Diarylketons nach der folgenden allgemeinen Formel (IV) :




oder ein zweiwertiges Radikal von Benzonitril nach der folgenden allgemeinen Formel (V) :




in der Ar und Ar' in der Formel III und IV (gleich oder verschieden) difunktionelle aromatische Radikale mit 6 bis 50 Kohlenstoffatomen bedeuten.


2. Farbstoffgebendes Element nach Anspruch 1, dadurch gekennzeichnet, daß - E' ein zweiwertiges Radikal von Benzonitril nach der folgenden Formel bedeutet :



3. Farbstoffgebendes Element nach Anspruch 1, dadurch gekennzeichnet, daß - E' - ein zweiwertiges Radikal von Benzophenon nach der folgenden Formel bedeutet :



4. Farbstoffgebendes Element nach Anspruch 1, dadurch gekennzeichnet, daß - E' - ein durch die folgende Formel dargestelltes, zweiwertiges Radikal bedeutet :



5. Farbstoffgebendes Element nach Anspruch 1, dadurch gekennzeichnet, daß - O - E - O - ein Diphenolatradikal nach der Formel (VI) bedeutet :



6. Farbstoffgebendes Element nach Anspruch 1, dadurch gekennzeichnet, daß der Polyether in einer Menge von wenigstens 10 Gew.-% enthalten ist.
7. Farbstoffgebendes Element nach Anspruch 1, dadurch gekennzeichnet, daß die hitzebeständige Schicht weiterhin ein von 1,1-bis-(4-Hydroxyphenyl)-3,3,5-trimethylcyclohexan abgeleitetes Polycarbonat enthält.
8. Farbstoffgebendes Element nach Anspruch 1, dadurch gekennzeichnet, daß die hitzebeständige Schicht weiterhin einen Schmierstoff enthält.
9. Farbstoffgebendes Element nach Anspruch 1, dadurch gekennzeichnet, daß sich auf der hitzebeständigen Schicht weiterhin ebenfalls eine Schmierstoffe enthaltende Deckschicht befindet.
10. Farbstoffgebendes Element nach Anspruch 9, dadurch gekennzeichnet, daß die Deckschicht ein Polyether-polysiloxan-Blockcopolymeres enthält.
11. Farbstoffgebendes Element nach Anspruch 1, dadurch gekennzeichnet, daß sich zwischen der hitzebeständigen Schicht und dem Träger eine Haftschrift befindet.
12. Farbstoffgebendes Element nach Anspruch 11, dadurch gekennzeichnet, daß die Haftschrift einen durch Polykondensation von wenigstens einer aromatischen Dicarbonsäure und wenigstens einem aliphatischen Diol erzeugten Polyester enthält, dadurch gekennzeichnet, daß der Polyester ein Copolyester ist, der weiterhin von wenigstens einem multifunktionellen Comonomer abgeleitete Einheiten enthält, wobei das Comonomere wenigstens 3 funktionelle Gruppen enthält, die gleich oder verschieden sein können und Hydroxy- und Carboxygruppen einschließlich sogenannter latenter Carboxygruppen sind.


Revendications

1. Elément donneur de colorant à utiliser conformément au transfert thermique de colorant par sublimation, comprenant un support comportant, sur un côté, une couche de colorant et, sur l'autre côté, une couche thermorésistante, caractérisé en ce que ladite couche thermorésistante comprend un polyéther contenant au moins 10 moles % d'unités récurrentes répondant à la formule (I) ci-après



dans laquelle

- O - E - O - représente un radical diphenolate divalent répondant à la formule générale (II) ci-après

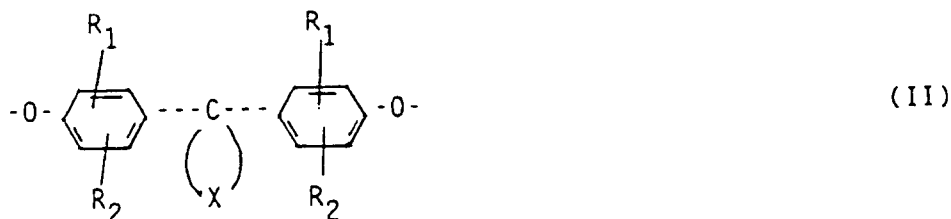

dans laquelle

R₁ et R₂ (identiques ou différents) représentent un atome d'hydrogène, un atome d'halogène, un groupe alkyle en C₁-C₈, un groupe cycloalkyle en C₅-C₆, un groupe aryle en C₆-C₁₀ ou un groupe aralkyle en C₇-C₁₂; et

X représente les atomes nécessaires pour fermer un noyau cycloaliphatique penta- à octogonal, qui peut être substitué avec un ou plusieurs groupes alkyle en C₁-C₆ ou avec des groupes cycloalkyle penta- à hexagonaux, ou encore porte des groupes cycloalkyle penta- ou hexagonaux condensés;

- E' - représente un radical divalent d'une sulfone aromatique répondant à la formule générale (III) ci-après



ou encore un radical divalent d'une diarylcétone répondant à la formule générale (IV) ci-après




ou encore un radical divalent d'un benzonitrile répondant à la formule générale (V) ci-après




dans lesquelles Ar et Ar' dans les formules (III) et (IV) (identiques ou différents) représentent des radicaux aromatiques difonctionnels contenant de 6 à 50 atomes de carbone.


2. Elément donneur de colorant selon la revendication 1, dans lequel - E' - représente un radical divalent d'un benzonitrile répondant à la formule ci-après




3. Elément donneur de colorant selon la revendication 1, dans lequel - E' - représente un radical divalent d'une benzophénone répondant à la formule ci-après



4. Elément donneur de colorant selon la revendication 1, dans lequel - E' - représente un radical divalent représenté par la formule ci-après



5. Elément donneur de colorant selon la revendication 1, dans lequel - O - E - O - représente un radical diphenolate divalent répondant à la formule (VI)

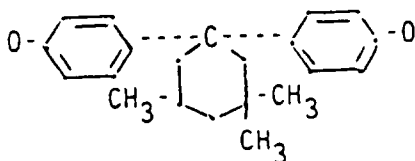

(VI)

6. Elément donneur de colorant selon la revendication 1, dans lequel ledit polyéther est présent en une quantité à au moins 10 % en poids.
7. Elément donneur de colorant selon la revendication 1, dans lequel ladite couche thermorésistante comprend en outre un polycarbonate dérivé du 1,1-bis-(4-hydrophényl)-3,3,5-triméthylcyclohexane.
8. Elément donneur de colorant selon la revendication 1, dans lequel ladite couche thermorésistante comprend en outre un lubrifiant.

9. Élément donneur de colorant selon la revendication 1, dans lequel on prévoit en outre une couche superficielle comprenant des lubrifiants sur la couche thermorésistante.

5 10. Élément donneur de colorant selon la revendication 9, dans lequel ladite couche superficielle comprend un copolymère séquencé de polyétherpolysiloxane.

11. Élément donneur de colorant selon la revendication 1, dans lequel on prévoit une couche adhérente entre la couche thermorésistante et le support.

10 12. Élément donneur de colorant selon la revendication 11, dans lequel ladite couche adhérente comprend un polyester obtenu par polycondensation d'au moins un acide dicarboxylique aromatique et d'au moins un diol aliphatique, dans lequel ledit polyester est un copolyester comprenant en outre des unités dérivées d'au moins un comonomère multifonctionnel portant au moins trois groupes fonctionnels qui peuvent être identiques ou différents et qui sont choisis parmi le groupe comprenant des groupes hydroxyle et carboxyle, y compris ce que l'on appelle des groupes
15 carboxyle latents.

20

25

30

35

40

45

50

55