

(19)



(11)

EP 1 669 563 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.06.2008 Bulletin 2008/26

(51) Int Cl.:
F01N 3/027^(2006.01) F01N 3/035^(2006.01)

(21) Application number: **04787865.7**

(86) International application number:
PCT/JP2004/013225

(22) Date of filing: **10.09.2004**

(87) International publication number:
WO 2005/026506 (24.03.2005 Gazette 2005/12)

(54) **EXHAUST GAS PURIFYING DEVICE**

ABGASREINIGUNGSVORRICHTUNG

DISPOSITIF DE PURIFICATION DE GAZ D'ÉCHAPPEMENT

(84) Designated Contracting States:
DE FR GB

(30) Priority: **11.09.2003 JP 2003319850**

(43) Date of publication of application:
14.06.2006 Bulletin 2006/24

(73) Proprietor: **Hino Motors, Ltd.**
Hino-shi,
Tokyo 191-8660 (JP)

(72) Inventor: **IGARASHI, Tatsuki,**
c/o Hino Motors, Ltd.
Hino-shi, Tokyo 1918660 (JP)

(74) Representative: **Köhler, Walter et al**
Louis, Pöhlau, Lohrentz
Patentanwälte
Postfach 30 55
90014 Nürnberg (DE)

(56) References cited:
WO-A-99/38603 JP-A- 4 047 113
JP-A- 10 121 946 JP-A- 11 336 527
JP-A- 2002 276 333 JP-A- 2003 214 141
JP-U- 2 104 830

EP 1 669 563 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to an exhaust emission control device for removing particulates in exhaust gas from an internal combustion engine such as diesel engine.

Background Art

[0002] Particulates or particulate matter discharged from a diesel engine is mainly constituted by carbonic soot and a soluble organic fraction (SOF) of high-boiling hydrocarbon and contains a trace of sulfate (misty sulfuric acid fraction). In order to suppress such kind of particulates from being discharged into atmosphere, it has been envisaged as shown in Fig. 1 that a particulate filter 4 is incorporated in an exhaust pipe 3 through which exhaust gas 2 from a diesel engine 1 flows.

[0003] As detailedly shown in Fig. 2, the particulate filter 4 comprises a filter body 7 in the form of a porous honeycomb made of ceramics such as cordierite. The filter body 7 has passages 5 or grid-like compartments with inlets alternately plugged by plugs 8, the passages 5 with the unplugged inlets being plugged by the plugs 8 at their outlets; only the exhaust gas 2 passing through porous thin walls 6, which compartmentalize the passages 5, is discharged downstream and the walls 6 capture the particulates at their inner surfaces.

[0004] The particulates in the exhaust gas 2 are thus captured by and accumulated on the inner surfaces of the walls 6 and spontaneously ignite to be burned off upon shifting to a region of operation with increased exhaust temperature. However, when an operation or driving with temperature at or above a predetermined temperature requisite tends not to continue for a long time, for example, in a vehicle such as a shuttle-bus running mainly on congested city roads, there may be a fear that an accumulated particulate amount exceeds a treated amount, disadvantageously resulting in clogging of the particulate filter 4.

[0005] Thus, development of a plasma assisted exhaust emission control device has been promoted so as to satisfactorily burn off the particulates even in a region of operation with lower exhaust temperature. In the kind of plasma assisted exhaust emission control device, electric discharge to the exhaust gas 2 to thereby generate plasma excites the exhaust gas 2 to convert oxygen into ozone and NO into NO₂. Because of these excited exhaust gas components being activated, the particulates can be satisfactorily burned off even in a region of operation with lower exhaust temperature.

[0006] Prior publications on plasma assisted exhaust emission control devices are recited in, for example, the following Reference 1. [Reference] WO 99/38603 A1 JP 2002 276333 A describes an exhaust emission control device according to the preamble of claim 1.

Summary of the Invention

Problems to be Solved by the Invention

[0007] However, in such conventional plasma assisted exhaust emission control devices, much electric power consumption is required for regeneration of the particulate filter 4 so that power source is needed which has larger capacity to an extent that cannot be afforded by any existing vehicle battery. Moreover, charging is required which matches the consumed electric power, resulting in deterioration of fuel mileage.

[0008] Since the particulates are burned off at relatively low temperature upon regeneration of the particulate filter 4, there may be also a fear that harmful gas such as highly concentrated CO or HC is generated and discharged into atmosphere.

[0009] The invention was made in view of the above and has its object to provide a plasma assisted exhaust emission control device with less electric power consumption and with no harmful gas discharged into atmosphere.

Means or Measure for Solving the Problems

[0010] The invention is directed to an exhaust emission control device comprising a filter body constituted by porous members through which exhaust gas passes for capture of particulates entrained in the exhaust gas and electrodes for generating plasma in said filter body, thereby providing a plasma regenerative particulate filter, said particulate filter being incorporated in a filter casing within an exhaust pipe, oxidation catalysts being arranged upstream and downstream of and adjacent to the particulate filter in the filter casing so as to obtain heat insulation effect to the particulate filter.

[0011] Thus, when the exhaust gas having flown into the filter casing passes through the upstream oxidation catalyst, NO occupying majority of NO_x in the exhaust gas is converted into highly reactive NO₂, which substantially accelerates an oxidization reaction of the particulates to bring about satisfactory burn-off of the particulates in a condition of operation with exhaust temperature over about 250°C.

[0012] However, when a condition of light-load operation with exhaust temperature greatly falling below 250°C continues for a long time, for example, during running or driving on congested city roads, satisfactory burn-off of the particulates cannot be expected; then, at a right moment when an accumulated particulate amount is estimated to exceed a predetermined amount (estimation may be based on, for example, pressure difference between the entering and discharge sides of the filter body or operational time period), voltage is applied across the electrodes of the filter body to discharge electricity in the filter body.

[0013] When voltage is thus applied across the electrodes of the filter body to discharge electricity in the filter

body, inner gas is excited to convert oxygen into ozone and NO into NO₂, these excited gas components which are being activated accelerate the oxidation reaction of the particulates captured by the filter body. As a result, the particulates are satisfactorily burned off even in a condition of operation with lower exhaust temperature.

[0014] The plasma regenerative particulate filter is sandwiched and heat insulated by the upstream and downstream oxidation catalysts in one and the same filter casing, so that the filter body is rapidly elevated in temperature when the oxidization reaction of the captured particulates begins. As a result, the particulates have tendency of being more readily burned off and can be burned off with a shorter electric discharge time than they could conventionally and thus required electric power consumption is less than that required conventionally.

[0015] The harmful gas such as highly concentrated CO or HC generated due to combustion of the particulates with relatively low temperature by the aid of the plasma is oxidized into harmless CO₂ or H₂O when it passes through the downstream oxidation catalyst and is discharged.

[0016] It is preferable in the invention that the plasma regenerative particulate filter is divided into a plurality of smaller units which are arranged in parallel with each other in the filter casing, voltage for electric discharge being separately applied to the respective smaller units.

[0017] Thus, the smaller units of the plasma regenerative particulate filter can be separately regenerated, with an advantageous result that power source with relatively small capacity will suffice. Division into the smaller units improves combustibility of the particulates per unit, so that regeneration of the filter through plasma can be attained during stoppage of an engine for example in a vehicle with an idle stopper.

[0018] In the invention, it is preferable that the porous members constituting the filter body integrally carry oxidation catalysts, which accelerates the oxidation reaction of the particulates captured by the filter body to lower ignition temperature. As a result, combustibility of the particulates in a condition of operation with lower exhaust temperature is further enhanced to attain further satisfactory burn-off of the particulates.

[0019] Upon carrying out the invention more concretely, employable is a filter body having a plurality of passages in the form of honeycomb through which exhaust gas passes, inlet and outlet ends of the passages being alternately plugged. When such filter body is employed, the filter body may have a rod-like electrode inserted at its axis and a cylindrical electrode fitted over an outer periphery of the filter body.

Effects of the Invention

[0020] According to an exhaust emission control device of the invention, various meritorious effects can be obtained as follows.

[0021] (I) Even in a condition of operation with lower

exhaust temperature such as light-load operation, the particulates captured by the filter body can be effectively burned off by the aid of plasma. Moreover, due to the heat insulation effect by the upstream and downstream oxidation catalysts, the filter body can be rapidly elevated in temperature into environment for ready burn-off of the particulates, so that the particulates can be burned off with a shorter electric discharge time than they could conventionally, whereby electric power consumption can be substantially reduced.

[0022] (II) The harmful gas such as highly concentrated CO or HC generated due to combustion of the particulate with relatively low temperature by the aid of plasma can be oxidized into harmless CO₂ or H₂O when it passes through the downstream oxidation catalyst and is discharged. Thus, the harmful gas is prevented from remaining in the exhaust gas finally discharged into the atmosphere.

[0023] (III) NO occupying majority of NO_x in the exhaust gas can be converted into highly reactive NO₂ when the exhaust gas passed through the upstream oxidation catalyst, which can substantially accelerate the oxidation reaction of the particulates under a condition of operation with relatively high exhaust temperature. This promotes spontaneous combustion of the particulates by no aid of plasma to obtain sufficient burn-off.

[0024] (IV) When the plasma regenerative particulate filter is divided into a plurality of smaller units which are arranged in parallel with each other in the filter casing, voltage for electric discharge being separately applied to the respective smaller units, even a power source with relatively small capacity will suffice. Regeneration of the filter through plasma can be also attained during stoppage of an engine for example in a vehicle with an idle stopper.

[0025] (V) When employed are porous members constituting the filter body and integrally carrying oxidation catalysts, the oxidation reaction of the particulates captured by the filter body can be accelerated by the oxidation catalysts, so that the particulates can be further reliably burned off in a region of operation with lower exhaust temperature.

Brief Description of the Drawings

[0026]

[Fig. 1] A schematic view showing arrangement of a conventional particulate filter.

[Fig. 2] A sectional view showing particulars of the particulate filter shown in Fig. 1.

[Fig. 3] A sectional view showing an embodiment of the invention.

[Fig. 4] A sectional view looking in the direction of arrows II in Fig. 3.

Explanation of the Reference Numerals

[0027]

- 2 exhaust gas
- 3 exhaust pipe
- 4 particulate filter
- 5 passage
- 7 filter body
- 9 rod-like electrode (electrode)
- 10 cylindrical electrode (electrode)
- 11 plasma regenerative particulate filter
- 11A, 11B, 11C and 11D smaller unit
- 12 filter casing
- 16 upstream oxidation catalyst
- 17 downstream oxidation catalyst

Best Mode for Carrying Out the Invention

[0028] An embodiment of the invention will be described in conjunction with the drawings.

Figs. 3 and 4 show an embodiment of the invention in which parts similar to those in Figs. 1 and 2 are represented by the same reference numerals.

[0029] As shown in Figs. 3 and 4, used in an exhaust emission control device of the invention is a plasma regenerative particulate filter 11 comprising a filter body 7 similar to that shown in Fig. 2 above and rod-like and cylindrical electrodes 9 and 10 so as to generate plasma in the filter body 7. Shown is an example of the plasma regenerative particulate filter 11 divided into a plurality of (four in the figure shown) smaller units 11A, 11B, 11C and 11D which are arranged in parallel with each other within the filter casing 12.

[0030] The filter body 7 in each of the smaller units 11A, 11B, 11C and 11D has the rod-like electrode 9 inserted into an axis of the filter body 7 and the cylindrical electrode 10 fitted over the outer periphery of the filter body 7. The rod-like electrodes 9 of the smaller units 11A, 11B, 11C and 11D are connected to an anode of a power source or battery 14 through change-over relays 13a, 13b, 13c and 13d, respectively. The cylindrical electrodes 10 of the smaller units 11A, 11B, 11C and 11D are connected to a cathode of the power source 14 through an electrically conductive support member 15 and the filter casing 12 so that voltage for electric discharge may be separately applied to the respective smaller units 11A, 11B, 11C and 11D.

[0031] The support member 15 serves for support of the smaller units 11A, 11B, 11C and 11D of the particulate filter 11 in the filter casing 12 and also serves as partition or filler for gap between the smaller units 11A, 11B, 11C and 11D.

[0032] The above-mentioned particulate filter 11 divided into the plural smaller units 11A, 11B, 11C and 11D is accommodated in the filter casing 12 within the exhaust pipe 3. Arranged upstream and downstream of and adjacent to the particulate filter 11 in the filter casing 12 are

oxidation catalysts 16 and 17, respectively, so as to obtain heat insulation effect to the particulate filter 11.

[0033] Each of the upstream and downstream oxidation catalysts 16 and 17 is of flow-through type and comprises a carrier with a honeycomb structure made of ceramics such as cordierite, said carrier carrying an appropriate amount of platinum. The upstream catalyst 17 may have its capacity and platinum-carrying amount less than those of the downstream catalyst 16.

10 [0034] The porous members constituting the filter body 7 of each of the above-mentioned smaller units 11A, 11B, 11C and 11D may carry oxidation catalysts so as to promote the oxidation reaction of the particulates captured by the filter body 7.

15 [0035] In the exhaust emission control device thus constructed, when the exhaust gas 2 having flown into the filter casing 12 passes through the upstream oxidation catalyst 16, NO occupying majority of NO_x in the exhaust gas 2 is converted into highly reactive NO_2 , so that oxidation reaction of the particulates is substantially accelerated into satisfactory burn-off of the particulates under a condition of operation with exhaust temperature over about 250°C.

25 [0036] However, when a condition of light-load operation with exhaust temperature greatly falling below 250°C continues for a long time, for example, during running or driving on congested city roads, satisfactory burn-off of the particulates cannot be expected; for this reason, at a right moment when an accumulated particulate amount is estimated to exceed a predetermined amount (estimation may be based on, for example, pressure difference between the entering and discharge sides of the filter body or operational time period), voltage for electric discharge is applied separately to the smaller units 11A, 11B, 11C and 11D to discharge electricity across the respective rod-like electrodes 9 and cylindrical electrodes 10, thereby generating plasma in the inner gas of the filter body 7.

35 [0037] Thus, the inner gas of the filter body 7 is excited to convert oxygen into ozone and NO into NO_2 . These excited exhaust gas components are being activated so that oxidization reaction of the particulates captured by the filter body 7 is accelerated by the excited exhaust gas components, whereby the particulates are satisfactorily burned off even in a condition of operation with lower exhaust temperature.

40 [0038] In this case, the plasma regenerative particulate filter 11 is sandwiched and heat insulated by the upstream and downstream oxidation catalysts 16 and 17 in one and the same filter casing 12, so that when the oxidation reaction of the captured particulates begins, the filter body 7 is rapidly elevated in temperature. As a result, the particulates have tendency of being more readily burned off and can be burned off with a shorter electric discharge time than they could conventionally and thus required electric power consumption is less than that required conventionally.

45 [0039] Since voltage is applied across each of the

smaller units 11A, 11B, 11C and 11D in the particulate filter 11 so as to discharge electricity, the power source 14 with relatively small capacity will suffice. Division into the smaller units 11A, 11B, 11C and 11D improves combustibility of the particulates per unit, so that regeneration of the filter through plasma can be attained during stoppage of an engine for example in a vehicle with an idle stopper.

[0040] The harmful gas such as highly concentrated CO or HC generated due to combustion of the particulates with relatively low temperature by the aid of plasma is oxidized into harmless CO₂ or H₂O when it passes through the downstream oxidation catalyst 17 and is discharged.

[0041] Thus, according to the above embodiment, even in a condition of operation with lower exhaust temperature such as light-load operation, the particulates captured by the filter body 7 can be efficiently burned off by the aid of plasma; the filter body 7 can be rapidly elevated in temperature due to heat insulation effect by the upstream and downstream oxidation catalysts 16 and 17 into environment for ready burn-off the particulates, so that the particulates can be burned off with a shorter electric discharge time than they could conventionally, whereby electric power consumption can be substantially reduced.

[0042] The harmful gas such as highly concentrated CO or HC generated due to combustion of the particulates with relatively low temperature by the aid of plasma is oxidized into harmless CO₂ or H₂O when it passes through the downstream oxidation catalyst 17 and is discharged. As a result, the harmful gas is prevented from remaining in the exhaust gas 2 finally discharged into the atmosphere.

[0043] NO occupying majority of NO_x in the exhaust gas 2 can be converted into highly reactive NO₂ when the exhaust gas passes through the upstream oxidation catalyst 16, which substantially accelerates the oxidation reaction of the particulates under a condition of operation with relatively high exhaust temperature, whereby spontaneous combustion of the particulates is promoted by no aid of plasma, thereby providing satisfactory burn-off of the particulates.

[0044] As especially shown in the embodiment, when the particulate filter 11 is divided into the plural smaller units 11A, 11B, 11C and 11D which are arranged in parallel with each other within the filter casing 12, voltage for electric discharge being separately applicable to the respective smaller units 11A, 11B, 11C and 11D, even the power source 14 with relatively small capacity will suffice; regeneration of the filter through plasma can be attained during stoppage of an engine, for example, in a vehicle with an idle stopper.

[0045] In a case where employed are the porous members constituting the filter body 7 and integrally carrying oxidation catalysts, the oxidation reaction of the particulates captured by the filter body 7 can be accelerated by the oxidation catalysts, so that further reliable burn-off of

the particulates can be attained in a region of operation with lower exhaust temperature.

[0046] It is to be understood that an exhaust emission control device of the invention is not limited to the above-mentioned embodiment and that various changed and modifications may be made. For example, the plasma regenerative particulate filter may be constituted by a single unit. The filter body may or may not carry oxidation catalysts. Shapes and arrangement of the filter body and electrodes are not limited to those shown.

Claims

1. An exhaust emission control device comprising a filter body (7) constituted by porous members through which exhaust gas (2) passes for capture of particulates entrained in the exhaust gas (2) and electrodes (9,10) for generating plasma in said filter body (7), thereby providing a plasma regenerative particulate filter (11), said particulate filter (11) being incorporated in a filter casing (12) within an exhaust pipe (3),
characterized in,
that oxidation catalysts (16,17) being arranged respectively upstream and downstream of and adjacent to the particulate filter (11) in the filter casing (12) so as to obtain heat insulation effect to the particulate filter (11), and
that the plasma regenerative particulate filter (11) is divided into a plurality of smaller units (11A, 11B, 11C, 11D) which are arranged in parallel with each other within the filter casing (12), voltage for electric discharge being separately applicable to the respective smaller units (11A, 11B, 11C, 11 D).
2. The exhaust emission control device according to claim 1,
characterized in,
that the filter body (7) is constituted by porous members integrally carrying oxidation catalyst.
3. The exhaust emission control device according to claim 1,
characterized in,
that the filter body (7) is employed which comprises a number of passages in the form of honeycomb through which exhaust gas (2) passes, inlet and outlet ends of the respective passages being alternately plugged.
4. The exhaust emission control device according to claim 2, **characterized in, that** the filter body (7) is employed which comprises a number of passages in the form of honeycomb through which exhaust gas (2) passes, inlet and outlet ends of the respective passages being alternately plugged.

5. The exhaust emission control device according to claim 3, **characterized in, that** the filter body (7) has a rod-like electrode (9) inserted at an axis of the filter body (7) and a cylindrical electrode (10) fitted over an outer periphery of the filter body (7).
6. The exhaust emission control device according to claim 4, **characterized in, that** the filter body (7) has a rod-like electrode (9) inserted at an axis of the filter body (7) and a cylindrical electrode (10) fitted over an outer periphery of the filter body (7).

Patentansprüche

1. Abgasemissions-Steuervorrichtung, die einen Filterkörper (7) umfasst, der durch poröse Elemente, durch die sich Abgas (2) bewegt, um in dem Abgas (2) mitgeführte Partikel einzufangen, und Elektroden (9, 10), um in dem Filterkörper (7) ein Plasma zu erzeugen, gebildet ist, wodurch ein regenerativer Plasma-Partikelfilter (11) gebildet wird, wobei der Partikelfilter (11) in ein Filtergehäuse (12) in einem Abgasrohr (3) eingebaut ist, **dadurch gekennzeichnet, dass** in dem Filtergehäuse (12) stromaufseitig bzw. stromabseitig und benachbart zu dem Partikelfilter (11) Oxidationskatalysatoren (16, 17) angeordnet sind, um so einen Wärmeisolationseffekt zu dem Partikelfilter (11) zu erhalten, und **dass** der regenerative Plasma-Partikelfilter (11) in mehrere kleinere Einheiten (11A, 11B, 11C, 11D) unterteilt ist, die in dem Filtergehäuse (12) parallel zueinander angeordnet sind, wobei die Spannung für die elektrische Entladung an die jeweiligen kleineren Einheiten (11A, 11B, 11C, 11D) getrennt angelegt werden kann.
2. Abgasemissions-Steuervorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der Filterkörper (7) durch poröse Elemente gebildet ist, die einen Oxidationskatalysator einteilig tragen.
3. Abgasemissions-Steuervorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** ein Filterkörper (7) verwendet wird, der zahlreiche Durchgänge in Form von Bienenwaben umfasst, durch die sich das Abgas (2) bewegt, wobei Einlass- und Auslassenden der jeweiligen Durchgänge abwechselnd verstopft sind.
4. Abgasemissions-Steuervorrichtung nach Anspruch 2, **dadurch gekennzeichnet, dass** ein Filterkörper (7) verwendet wird, der zahlreiche Durchgänge in Form von Bienenwaben um-

fasst, durch die sich das Abgas (2) bewegt, wobei Einlass- und Auslassenden der jeweiligen Durchgänge abwechselnd verstopft sind.

5. Abgasemissions-Steuervorrichtung nach Anspruch 3, **dadurch gekennzeichnet, dass** der Filterkörper (7) eine stabartige Elektrode (9), die längs einer Achse des Filterkörpers (7) eingesteckt ist, und eine zylindrische Elektrode (10), die über einem äußeren Umfang des Filterkörpers (7) angebracht ist, besitzt.
6. Abgasemissions-Steuervorrichtung nach Anspruch 4, **dadurch gekennzeichnet, dass** der Filterkörper (7) eine stabartige Elektrode (7), die längs einer Achse des Filterkörpers (7) eingesteckt ist, und eine zylindrische Elektrode (10), die über einem äußeren Umfang des Filterkörpers (7) angebracht ist, besitzt.

Revendications

1. Dispositif de commande des gaz d'échappement comprenant un corps de filtre (7) constitué d'éléments poreux à travers lesquels les gaz d'échappement (2) passent afin de capturer des particules entraînées dans les gaz d'échappement (2) et des électrodes (9, 10) destinées à générer du plasma dans ledit corps de filtre (7), proposant ainsi un filtre à particules régénérateur de plasma (11), ledit filtre à particules (11) étant intégré à un boîtier de filtre (12) à l'intérieur d'une conduite d'échappement (3), **caractérisé en ce que,** des catalyseurs d'oxydation (16, 17) sont agencés respectivement en amont et en aval de et adjacents au filtre à particules (11) dans le boîtier de filtre (12) afin d'obtenir un effet d'isolation thermique avec le filtre à particules (11), et **en ce que** le filtre à particules régénérateur de plasma (11) est divisé en une pluralité d'unités plus petites (11A, 11B, 11C, 11D) qui sont agencées parallèlement les unes par rapport aux autres à l'intérieur du boîtier de filtre (12), une tension de décharge électrique étant applicable séparément aux unités plus petites respectives (11A, 11B, 11C, 11D).
2. Dispositif de commande des gaz d'échappement selon la revendication 1, **caractérisé en ce que,** le corps de filtre (7) est constitué d'éléments poreux supportant intégralement le catalyseur d'oxydation.
3. Dispositif de commande des gaz d'échappement selon la revendication 1, **caractérisé en ce que,** le corps de filtre (7) est utilisé et comprend un nombre de passages sous la forme de nids d'abeille à travers

lesquels les gaz d'échappement (2) passent, des extrémités d'admission et de décharge des passages respectifs étant obstruées de manière alternative.

4. Dispositif de commande des gaz d'échappement selon la revendication 2, **caractérisé en ce que**, le corps de filtre (7) est utilisé et comprend un nombre de passages sous la forme de nids d'abeille à travers lesquels les gaz d'échappement (2) passent, des extrémités d'admission et de décharge des passages respectifs étant obstruées de manière alternative. 5 10
5. Dispositif de commande des gaz d'échappement selon la revendication 3, **caractérisé en ce que**, le corps de filtre (7) comprend une électrode en forme de tige (9) insérée au niveau d'un axe du corps de filtre (7) et une électrode cylindrique (10) montée sur une périphérie extérieure du corps de filtre (7). 15 20
6. Dispositif de commande des gaz d'échappement selon la revendication 4, **caractérisé en ce que**, le corps de filtre (7) comprend une électrode en forme de tige (9) insérée au niveau d'un axe du corps de filtre (7) et une électrode cylindrique (10) montée sur une périphérie extérieure du corps de filtre (7). 25

30

35

40

45

50

55

FIG.1

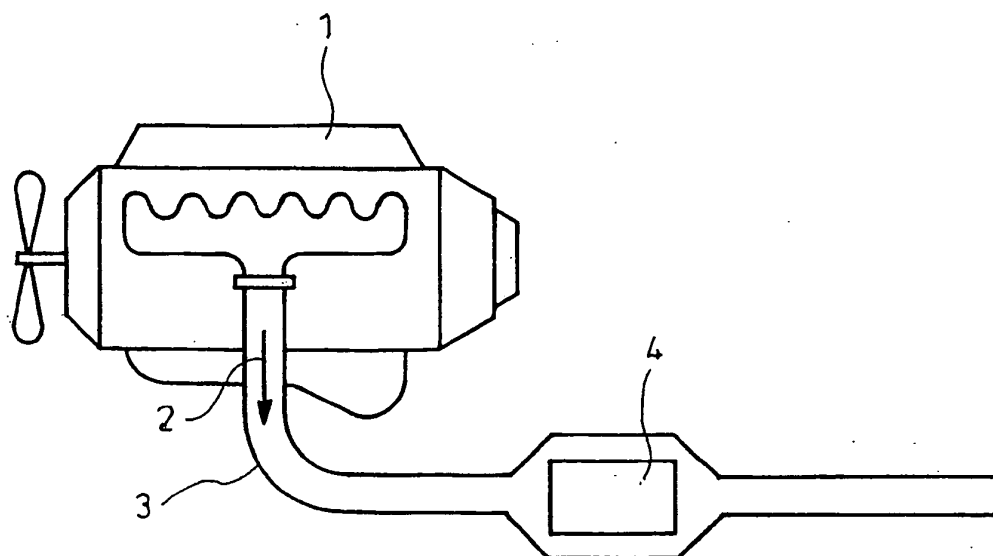


FIG.2

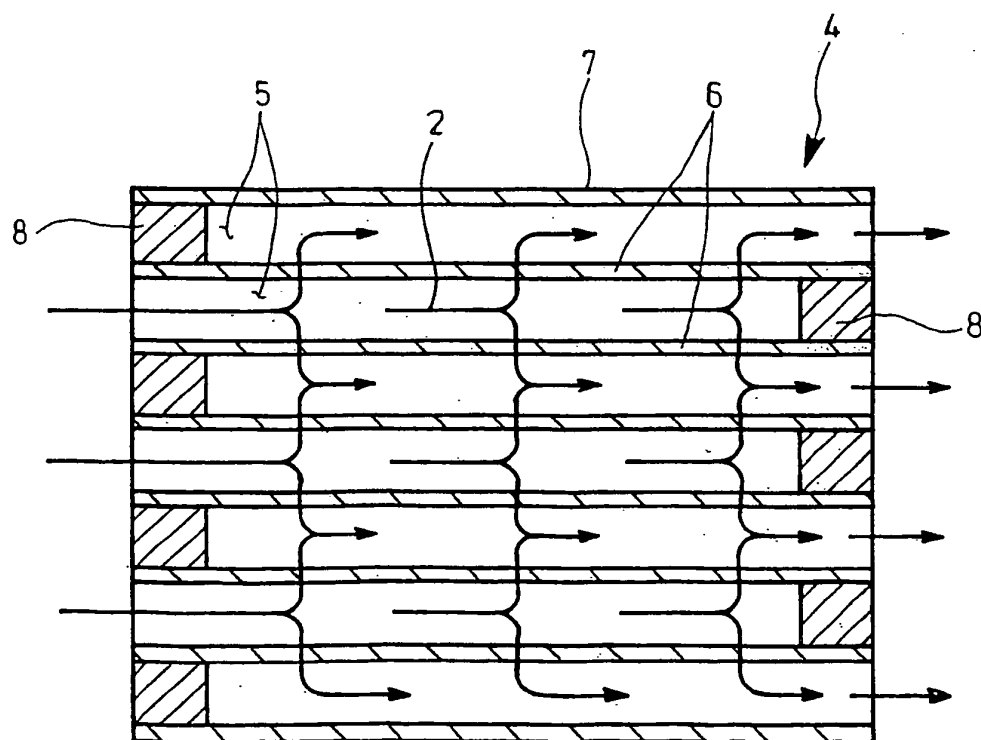


FIG.3


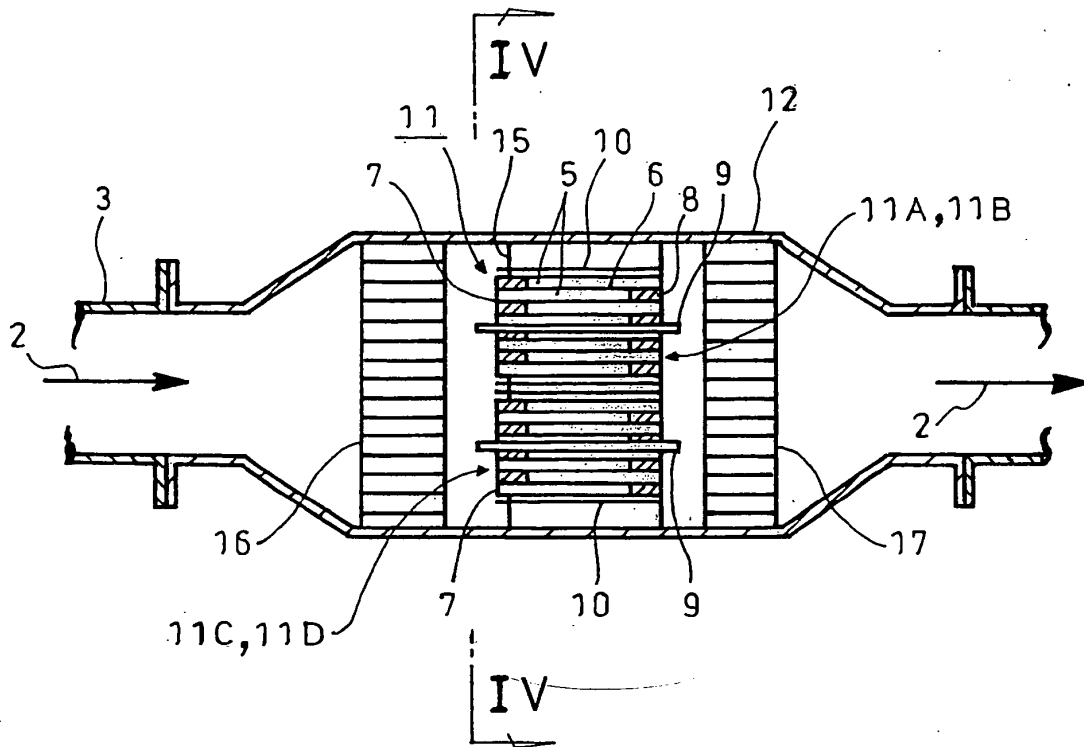


FIG.4

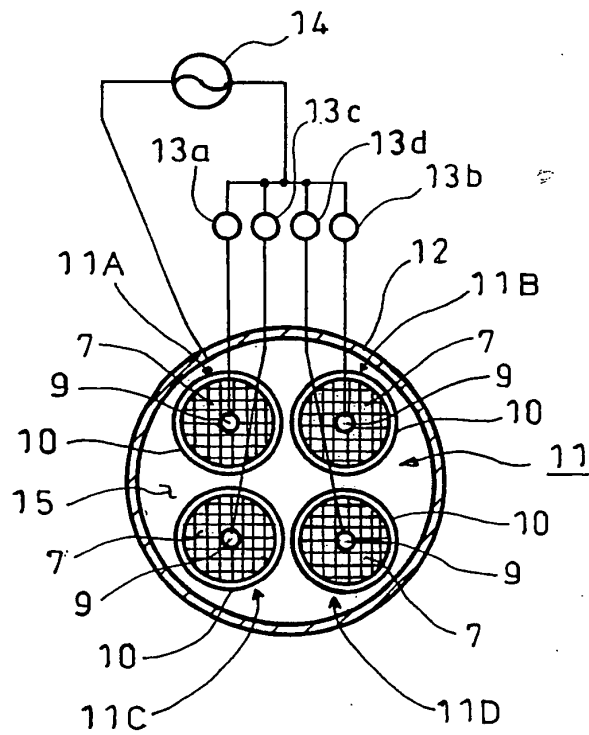

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9938603 A1 [0006]
- JP 2002276333 A [0006]