

F. AMES.
FABRIC DISPLAY RACK.

No. 563,004.

Patented June 30, 1896.

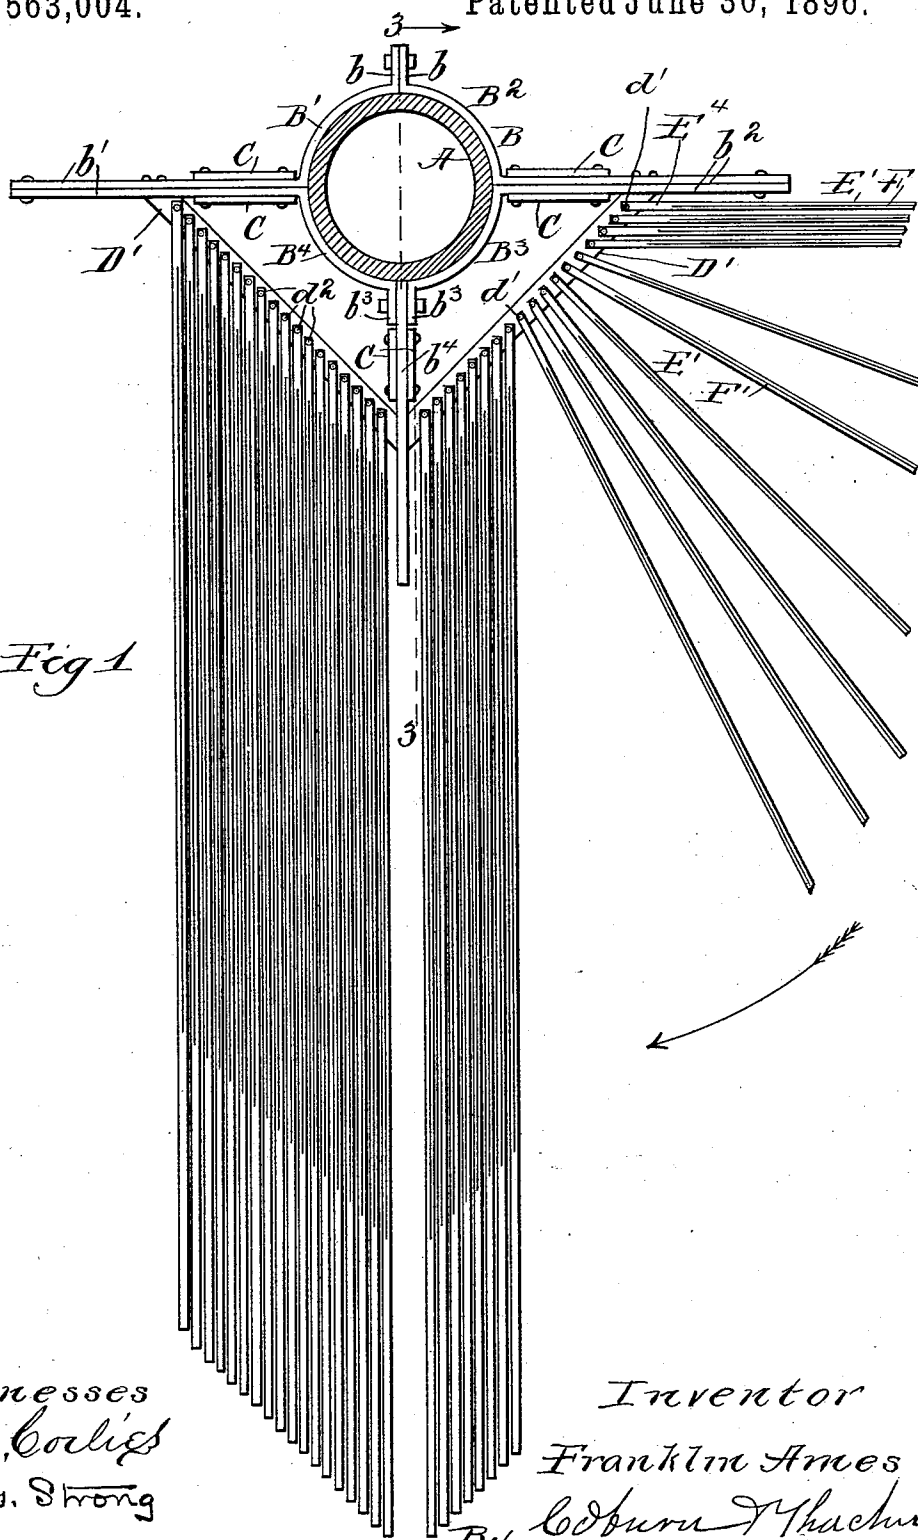


Fig 1


Witnesses
W. C. Corlies
H. S. Strong

Inventor
Franklin Ames
By Odorus Thacher
Attys

F. AMES.
FABRIC DISPLAY RACK.

No. 563,004.

Patented June 30, 1896.

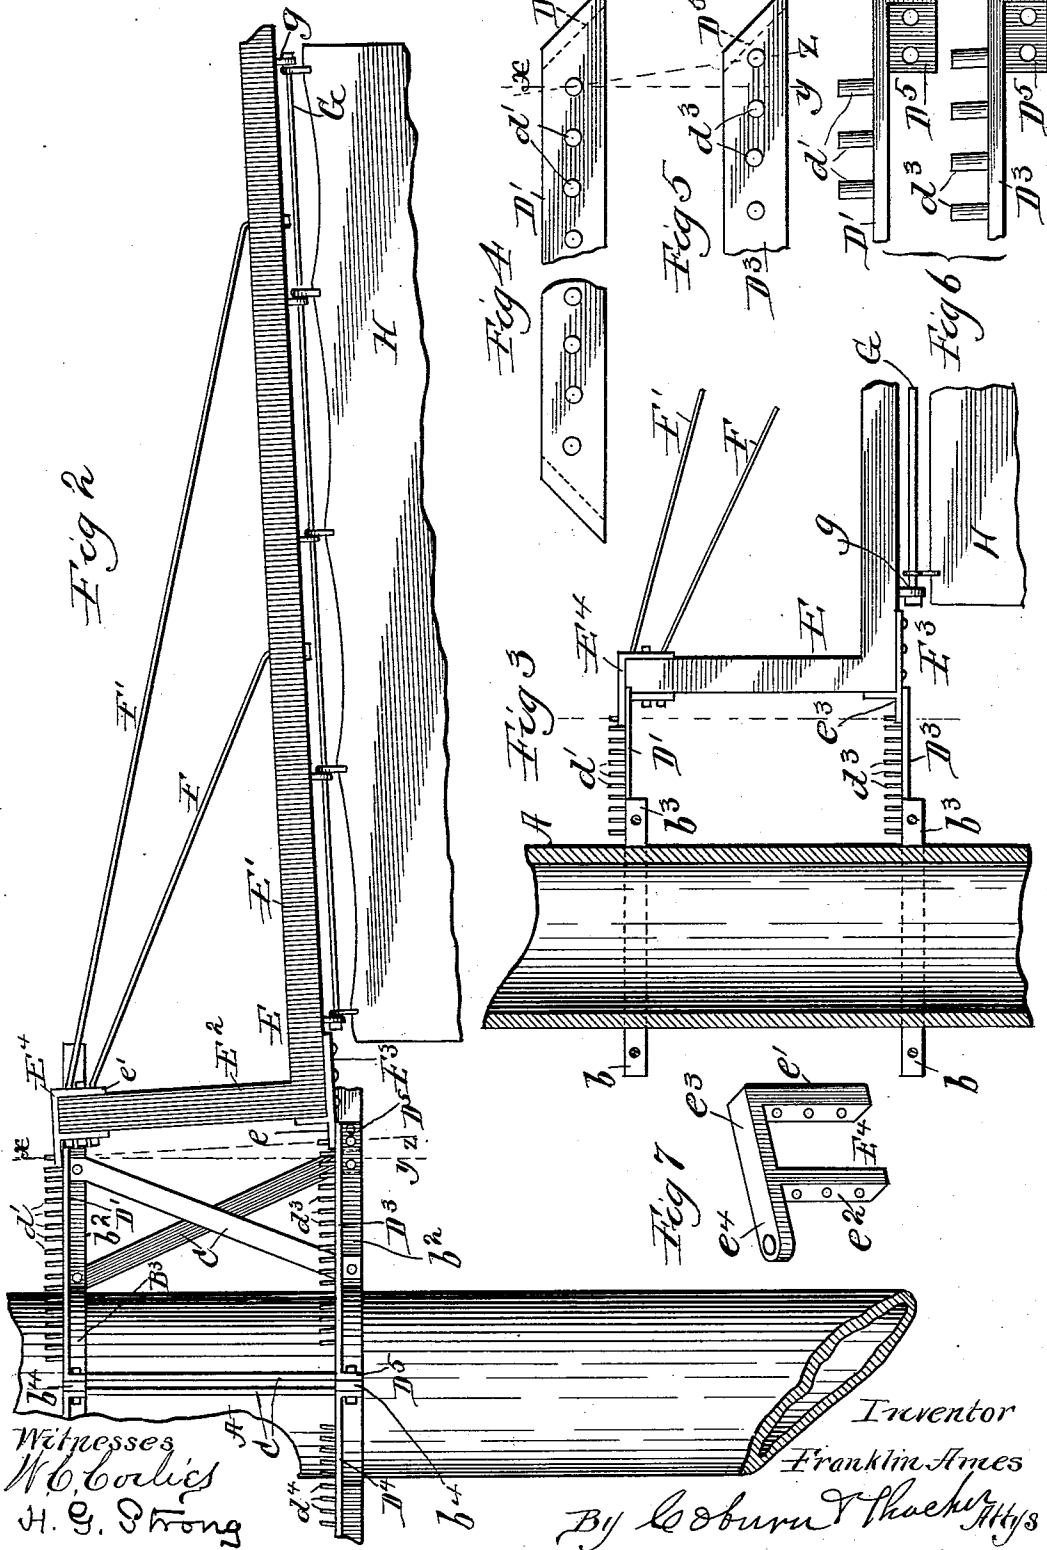

Witnesses
W. C. Corlies
H. G. Strong

Inventor
Franklin Ames
By C. C. Burn & Thacker & Co.

UNITED STATES PATENT OFFICE.

FRANKLIN AMES, OF CHICAGO, ILLINOIS.

FABRIC-DISPLAY RACK.

SPECIFICATION forming part of Letters Patent No. 563,004, dated June 30, 1896.

Application filed January 13, 1896. Serial No. 575,262. (No model.)

To all whom it may concern:

Be it known that I, FRANKLIN AMES, a citizen of the United States, residing at Chicago, in the county of Cook and State of Illinois, have invented a certain new and useful Improvement in Fabric-Display Racks, which is fully set forth in the following specification, reference being had to the accompanying drawings, in which—

Figure 1 is a plan view of my invention. Fig. 2 is a front elevation with parts broken away and parts removed. Fig. 3 is a vertical section of the line 3 3, Fig. 1. Figs. 4 and 5 are plan views of portions of the upper and lower pin-bars, respectively, so placed as to show the relative positions of the pins thereon. Fig. 6 is an elevation of the same. Fig. 7 is a detailed perspective of one of the upper hinge-castings.

My invention relates to the device for displaying fabrics, particularly for displaying carpets. It has been and is the usual practice in exhibiting carpets to the purchasers to unroll partially or wholly the rolls of carpets, a practice which requires considerable floor-room and much time and labor. To obviate these disadvantages, I have devised the construction hereinafter described in the form of a display-rack, to which a large number of carpet-samples may be attached, and upon which they may be conveniently and successively displayed.

Referring to the drawings by letter, A indicates the ordinary upright column, to which, or to any similar post, my display-rack may be attached. In the case of a circular column, as here represented, I form two collars, an upper and a lower, B B, about the same, each of which may be composed of the four quadrant-sections B' B² B³ B⁴. The sections B' and B² may be clamped together by the perforated ears b b. The sections B' and B⁴ and B² and B³ are similarly clamped together, the ears in these cases being prolonged to form horizontally-projecting arms b' b' and b² b², respectively. Finally, the sections B³ and B⁴ are secured to each other through the ears b³ b³, between which is clamped a horizontally-extending arm b⁴. The arms b' b' of the upper collar are attached to the corresponding arms b' b' of the lower collar by the braces C C.

Supported by and between the arms b² and

b⁴ and b' and b⁴, respectively, of the upper collar I secure the diagonally-disposed pin-bars D' and D². Similarly on the arms of the lower collar are arranged the corresponding pin-bars D³ and D⁴ vertically beneath D' and D². These pin-bars may be supported from the said arms in any convenient way, as by being bolted through the downwardly-projecting bracket portions D⁵ at the ends of the pin-bars. Each of the pin-bars is provided with a series of upright pins d' d² d³ d⁴, respectively. The pins upon the lower pin-bars are not placed vertically beneath the corresponding pins upon the upper pin-bars. Thus the lines x y and x z of Fig. 2 show the divergence from such a vertical arrangement in the case of the pins d³ and d'. Similarly, the lines x' y' and x' z' in Figs. 4 and 5 illustrate further the arrangement employed, which is again, from another point of view, clearly shown in Fig. 6.

The display-rack arms E are formed each of a horizontal portion E' and a perpendicular portion E², and are strengthened each by braces F F'. To the lower end of these two is screwed a hinge-casting E³, divided with a projecting perforated ear e, adapted to be pivoted upon one of the pins d'. The upper end of E² is provided with a hinge-casting E⁴, which is preferably formed with the vertical portions e' and e² and the connecting cross part e³, inclosing the end of the arm upright E². The part e³ is prolonged to form the perforated ear e⁴, adapted to be pivoted upon one of the pins d'.

The rod G is threaded through the ring-screws g, carried on the lower edge of each of the arms E. From the rod G is suspended the carpet or other fabric H to be exhibited.

The operation of my device is apparent from the foregoing description of its construction. The normal position of the display-rack arms is that which a majority of them occupy in Fig. 1. To exhibit the samples of fabrics, the salesman will swing an entire group of arms outward. Each arm will thus be brought into the position illustrated in Fig. 2, slightly out of the horizontal and with its center of gravity raised. Each arm will therefore tend to return from such position to its normal position, as in Fig. 1. The salesman, commencing with the innermost

arm of the group of arms so swung outward, will allow each arm in succession to swing back to its normal position, whereby all the fabrics are exhibited in succession. More-
 5 over, by my construction, since the arms are thicker than the fabrics which they support, when the arms lie side by side and in contact in their normal position they form a dust-proof roof over the said fabrics. Finally,
 10 since the arms lie normally side by side, the display-rack occupies a minimum of space when not in use.

Various modifications of the construction which I have illustrated and described may
 15 be made without departing from the spirit of my invention, and naturally suggest themselves. Thus there may be but one pair of pin-bars D' and D^3 , and such a pair of pin-bars, instead of being supported upon the rectan-
 20 gularly-disposed supporting-arms b' and b^4 , &c., secured to a single column, may be extended in length and supported from adjoining columns by any convenient form of bracket. I do not, therefore, limit myself
 25 strictly to the aforesaid construction; but

What I claim, and desire to secure by Letters Patent, is—

1. In a fabric-display rack, upper and lower pin-bars secured to suitable supports; a series of display-arms each pivoted to both of
 30 the said pin-bars, the lower pivotal point being slightly offset with reference to the corresponding upper pivotal point of each display-arm, so that the said arms tend to remain closed in some one given position; the

said display-arms being of such width, and so disposed relatively to each other, as to form a continuous dust-proof roof or covering over the fabrics supported by the said arms, when the said arms are closed. 40

2. In a fabric-display rack, a framework comprising an upper and lower set of horizontal supporting-arms arranged at right angles to each other, means for adapting the said arms to an upright support, upper and
 45 lower pin-bars diagonally disposed between the said supporting-arms provided with pins d' and d^3 respectively, the pins d^3 being slightly offset from a position vertically beneath the pins d' , and the display-arms each
 50 pivoted to a pin d' and a pin d^3 in such a manner that the said display-arm is raised when swung outward from its normal position and tends to return thereto.

3. In a fabric-display rack, the horizontal
 55 upper and lower supporting-arms arranged at right angles to each other, means for attaching the same to an upright support, pin-bars arranged diagonally between and supported by the said supporting-arms; pins d'
 60 and d^3 upon the upper and lower pin-bars, respectively, arranged as shown and described; the display-arms E pivoted to the pins d' and d^3 and provided with means for
 65 attaching the fabrics to be exhibited thereto.

FRANKLIN AMES.

Witnesses:

ALOYSIA HELMICH,
 A. A. MURRAY.