



(51) International Patent Classification:

C22B 34/12 (2006.01) *C01G 23/053* (2006.01)
C22B 3/08 (2006.01) *C01F 5/40* (2006.01)

(21) International Application Number:

PCT/NZ2015/050085

(22) International Filing Date:

8 July 2015 (08.07.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

627180	8 July 2014 (08.07.2014)	NZ
627185	8 July 2014 (08.07.2014)	NZ
627187	8 July 2014 (08.07.2014)	NZ

(71) Applicant: **AVERTANA LIMITED** [NZ/NZ]; Brooke House, 24 Balfour Road, Parnell, Auckland, 1052 (NZ).

(72) Inventors: **HASSELL, David, Jonathan**; Brooke House, 24 Balfour Road, Parnell, Auckland, 1052 (NZ). **OBERN, James, Kevin**; Brooke House, 24 Balfour Road, Parnell, Auckland, 1052 (NZ). **MOLLOY, Sean, Daniel, James**; Brooke House, 24 Balfour Road, Parnell, Auckland, 1052 (NZ). **IBRAHIM, Sherif, Owen, Zaki, Emad, Marshall**; Brooke House, 24 Balfour Road, Parnell, Auckland, 1052 (NZ). **ALI, Mohammed, Shereez**; Brooke House, 24 Balfour Road, Parnell, Auckland, 1052 (NZ).

(74) Agent: **BALDWINS INTELLECTUAL PROPERTY**; PO Box 5999, Wellesley Street, Auckland, 1141 (NZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: EXTRACTION OF PRODUCTS FROM TITANIUM-BEARING MINERALS

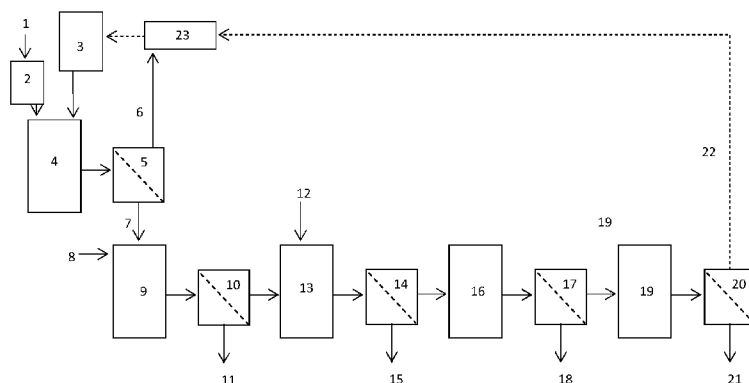Figure 1



(57) Abstract: The invention relates to a process for extracting metals and salts from titanium-bearing minerals such as perovskite. More particularly, although not exclusively, the invention relates to extracting titanium dioxide and optionally other compounds from melter slag derived from an iron-making process.

EXTRACTION OF PRODUCTS FROM TITANIUM-BEARING MINERALS**Field of Invention**

- 5 The invention relates to a process for extracting metals and salts from titanium-bearing minerals, and more particularly, although not exclusively, extracting titanium dioxide and optionally other compounds from melter slag derived from an iron-making process.

Background

- 10 There are numerous reserves of minerals from which valuable constituents cannot currently be recovered through means that are economically viable. The primary reason for this is that the grade of such constituents within the mineral reserves is too low, resulting in large effluent or by-product generation rates.

- Melter slag, produced as a by-product during iron and steel making processes, is one such mineral that
15 contains low grades of commercially valuable components, including titanium, aluminium and magnesium. During production of molten-pig iron, impurities are removed as melter slag. For some deposits, the slag is primarily perovskite (calcium titanate) and may typically contain between 20-40% titanium dioxide. Known melter slag extraction processes focus on extraction of titanium, due to it having the highest concentration within melter slag and the highest value. Titanium is a valuable pigment used in a number of
20 commercial applications such as the production of paints, paper, cement and polymers. In melter slag, titanium is present in the form of perovskite, a titanium-calcium oxide crystalline structure from which recovery is difficult. An example of a known method of extraction of titanium from perovskite includes reacting perovskite with carbon at high temperatures in an electrical furnace to produce titanium carbide. The titanium carbide is then chlorinated to produce titanium tetrachloride. Unfortunately, this method is
25 energy intensive and the carbide produced has an extremely high melting point, which creates handling problems in the furnace.

- Another method of extracting titanium from perovskite is that published in CA1,052,581. In this method, perovskite is treated by roasting at 1200°C in hydrogen sulphide gas. This is followed by leaching to remove calcium and iron sulphides which leaves the titanium as titanium oxides. The disadvantages of this
30 process are the high temperatures and use of highly toxic gas.

Even minor improvements to a process for extracting saleable products from minerals can have a significant impact on the efficiency, and more particularly, the commercial viability, of such a process. The methods detailed above are economically inefficient due to the high temperatures used, and only titanium is extracted by these processes. It is an object of the present invention to provide a method of extraction

of products from a titanium-bearing mineral, or to at least provide the public with a useful choice.

Summary of the Invention

The present invention provides a response to the need in the art. The present invention provides methods

5 for extracting valuable products from titanium-bearing minerals.

In a first aspect, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material, said method comprising:

- a. contacting the particulate material with sulphuric acid and heating to form a sulphated mixture;
 - 10 b. filtering the sulphated mixture to produce a filter cake and a first permeate comprising sulphuric acid;
 - c. contacting the filter cake with water to form a sulphated suspension comprising titanyl sulphate;
 - d. filtering the sulphated suspension to produce a permeate comprising at least titanyl sulphate, and a retentate comprising insoluble residue;
 - 15 e. contacting the permeate comprising at least titanyl sulphate with water to produce a hydrolysis liquor;
 - f. hydrolysing the titanyl sulphate; and
 - g. separating titanium dioxide hydrate from the hydrolysis liquid,
- wherein the at least one other product is selected from the group consisting of calcium sulphate, silica,
- 20 aluminium sulphate or magnesium sulphate.

In some embodiments, the titanium dioxide hydrate is separated by filtering the hydrolysis liquor to produce a permeate, and a retentate comprising titanium dioxide hydrate. In alternative embodiments, the titanium dioxide hydrate is separated by centrifugation and collection of the precipitate.

25

In particular embodiments, the insoluble residue comprises at least one product selected from calcium sulphate and silica.

In particular embodiments, the invention provides a method of recovering titanium dioxide and at least

30 one other product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 10m%, greater than 15m% or greater than 20m% silica. In other embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater

than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 15m%, greater than 20m% or greater than 25m% calcium oxide.

In some embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, greater than 10m%, greater than 15m% or greater than 20m% silica, and greater than 15m%, greater than 20m% or greater than 25m% calcium oxide.

In some embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising a ratio of titanium dioxide to calcium oxide ($\text{TiO}_2:\text{CaO}$) in the particulate matter of between 0.2 and 3.0, more preferably between 0.3 and 2.5.

In particular embodiments, the method further comprises separation of calcium sulphate from the insoluble residue using a floatation process.

In one embodiment, the invention provides a method of recovering titanium dioxide and aluminium sulphate from a particulate material, said method comprising:

- a. contacting the particulate material with sulphuric acid and heating to form a sulphated mixture;
- b. filtering the sulphated mixture to produce a filter cake and a first permeate comprising sulphuric acid;
- c. contacting the filter cake with water to form a sulphated suspension comprising titanyl sulphate;
- d. filtering the sulphated suspension to produce a permeate comprising at least titanyl sulphate, and a retentate comprising insoluble residue;
- e. contacting the permeate comprising at least titanyl sulphate with water to produce a hydrolysis liquor;
- f. hydrolysing the titanyl sulphate;
- g. separating titanium dioxide hydrate from the hydrolysis liquor to produce a permeate comprising aluminium sulphate, and a retentate comprising titanium dioxide hydrate; and
- h. precipitating aluminium sulphate from the permeate;

wherein step h. may be carried out after step d or after step g.

In particular embodiments, the method of the first aspect further comprises a step of precipitating aluminium sulphate after step g. In one embodiment, the precipitation comprises the steps of:

- cooling the permeate produced from the hydrolysis liquor to produce a cooled liquor comprising precipitated aluminium sulphate; and

- filtering the cooled liquor to produce a retentate comprising precipitated aluminium sulphate, and a permeate.

In particular embodiments, the method of the first aspect further comprises a step of precipitating

5 aluminium sulphate after step g. wherein the particulate material comprises greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 10m% or greater than 13m% aluminium oxide.

In particular embodiments, the method of the first aspect further comprises a step of precipitating

10 aluminium sulphate after step g. wherein the particulate material comprises a ratio of titanium dioxide to aluminium oxide ($\text{TiO}_2:\text{Al}_2\text{O}_3$) in the particulate matter of approximately 0.2 to 2.6, more preferably 0.25 to 2.1.

In particular embodiments, the method of the first aspect further comprises a step of precipitating

15 aluminium sulphate prior to step f. In one embodiment, the precipitation comprises:

- cooling the permeate comprising at least titanium sulphate to produce a cooled liquor comprising precipitated aluminium sulphate; and
- filtering the cooled liquor comprising aluminium sulphate to produce a retentate comprising precipitated aluminium sulphate, and a permeate.

20

In particular embodiments the step of precipitating aluminium sulphate comprises cooling the permeate to between 10°C and 4°C such that the aluminium sulphate crystallizes. In preferred embodiments, the permeate comprising aluminium sulphate is cooled to approximately 5°C.

In particular embodiments, greater than 90% of the aluminium sulphate present in the sulphated

25 suspension is recovered.

In particular embodiments, the method of the first aspect further comprises a step of precipitating

magnesium sulphate from a permeate comprising magnesium sulphate, wherein the permeate comprising

magnesium sulphate is either the hydrolysis liquor (after separation of titanium dioxide hydrate), or the

30 permeate produced following aluminium sulphate precipitation.

In one embodiment, the invention provides a method of recovering titanium dioxide and magnesium sulphate from a particulate material, said method comprising:

- a. contacting the particulate material with sulphuric acid and heating to form a sulphated mixture;

- b. filtering the sulphated mixture to produce a filter cake and a first permeate comprising sulphuric acid;
- c. contacting the filter cake with water to form a sulphated suspension comprising titanyl sulphate;
- d. filtering the sulphated suspension to produce a permeate comprising at least titanyl sulphate, and
5 a retentate comprising insoluble residue;
- e. contacting the permeate comprising at least titanyl sulphate with water to produce a hydrolysis liquor;
- f. hydrolysing the titanyl sulphate;
- g. separating titanium dioxide hydrate from the hydrolysis liquor to produce a permeate comprising
10 magnesium sulphate, and a retentate comprising titanium dioxide hydrate; and
- h. precipitating magnesium sulphate from the permeate.

In one embodiment, the magnesium sulphate is precipitated by the steps of:

- increasing the acid concentration of a permeate comprising magnesium sulphate to form an
15 acidified liquor; and
- filtering the acidified liquor to produce a retentate comprising precipitated magnesium sulphate.

In particular embodiments, the acid concentration of the permeate comprising magnesium sulphate is increased by the addition of sulphuric acid. Preferably the pH of the permeate comprising magnesium sulphate is reduced to less than approximately pH1 by the addition of sulphuric acid. In particular
20 embodiments, the acid concentration of the permeate comprising magnesium sulphate is increased by heating the permeate to remove water. Preferably heating is carried out at boiling point or at a temperature of greater than 130°C. Preferably heating is carried out to achieve a final acid concentration of 90%, or less than approximately pH1.

25 In particular embodiments, the method of the first aspect further comprises a step of precipitating magnesium sulphate from a permeate comprising magnesium sulphate, wherein the method includes the recovery of titanium dioxide and magnesium sulphate product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 7m% or greater than 10m% magnesium oxide.

30 In particular embodiments, the method of the first aspect further comprises a step of precipitating magnesium sulphate from a permeate comprising magnesium sulphate, wherein the method includes the recovery of titanium dioxide and magnesium sulphate product from a particulate material comprising a

ratio of titanium dioxide to magnesium oxide ($\text{TiO}_2:\text{MgO}$) in the particulate matter of approximately 0.5 to 3.0, more preferably 0.8 to 2.8.

In one embodiment, the step of precipitating magnesium sulphate comprises cooling the acidified liquor or a permeate comprising magnesium sulphate to a temperature where precipitation rate is increased.

5 In another embodiment, the step of precipitating magnesium sulphate comprises:

- cooling the permeate comprising magnesium sulphate to produce a cooled liquor comprising magnesium sulphate; and
- filtering the cooled liquor comprising magnesium sulphate to produce a retentate comprising precipitated magnesium sulphate, and a permeate.

10 In preferred embodiments, the permeate comprising magnesium sulphate or the acidified liquor is cooled to less than 4°C , between 0°C and 4°C or approximately 3°C .

In particular embodiments, greater than 90% of the magnesium sulphate present in the sulphated suspension is recovered following filtration.

15 In particular embodiments, the method of the first aspect further comprises:

- precipitation of aluminium sulphate as described above, either before or after hydrolysis; and
- the retentate obtained from the sulphated suspension comprises at least one of calcium sulphate and silica.

20 In particular embodiments, the method of the first aspect further comprises:

- precipitation of magnesium sulphate as described above; and
- the retentate obtained from the sulphated suspension comprises at least one of calcium sulphate and silica.

25 In particular embodiments, the method of the first aspect further comprises:

- precipitation of aluminium sulphate as described above, either before or after hydrolysis; and
- precipitation of magnesium sulphate as described above; and
- the retentate obtained from the sulphated suspension comprises at least one of calcium sulphate and silica.

30

In particular embodiments, the method of the first aspect further comprises:

- precipitation of aluminium sulphate as described above, either before or after hydrolysis; and
- precipitation of magnesium sulphate as described above.

In one embodiment, the invention provides a method of recovering titanium dioxide, aluminium sulphate and magnesium sulphate from a particulate material, said method comprising:

- a. contacting the particulate material with sulphuric acid and heating to form a sulphated mixture;
- b. filtering the sulphated mixture to produce a filter cake and a first permeate comprising sulphuric acid;
- c. contacting the filter cake with water to form a sulphated suspension comprising titanyl sulphate;
- d. filtering the sulphated suspension to produce a permeate comprising at least titanyl sulphate, and a retentate comprising insoluble residue;
- e. contacting the permeate comprising at least titanyl sulphate with water to produce a hydrolysis liquor;
- f. hydrolysing the titanyl sulphate;
- g. separating titanium dioxide hydrate from the hydrolysis liquor to produce a permeate comprising aluminium sulphate and magnesium sulphate, and a retentate comprising titanium dioxide hydrate;
- h. precipitating aluminium sulphate from the permeate; and
- i. precipitating magnesium sulphate from the permeate,

wherein step h. may be carried out after step d or after step g.

In particular embodiments of the first aspect, the particulate material is iron slag or obtained from iron slag. In particular embodiments, the particulate material is melter slag from an iron manufacturing process. In particular embodiments, the material is melter slag from a steel manufacturing process.

In particular embodiments, the particulate material comprises i. titanium dioxide and at least one of the following components:

- ii. silica;
- iii. calcium oxide;
- iv. aluminium oxide; and
- v. magnesium oxide,

In particular embodiments, the method of the first aspect further comprises the step of grinding raw material comprising components i. to v. to form the particulate material of step a. In particular embodiments, the particulate material has a particle size of less than 180µm. In preferred embodiments, the particulate material has a particle size from 10 to 180µm, or from 40 to 110 µm. In particular

embodiments, the particulate material has a particle size of approximately 30µm, 45µm, 60µm, 70µm, 80µm, 90µm, or 100µm.

5 In particular embodiments, the particulate material comprises greater than 8m% titanium dioxide. In other embodiments, the particulate material comprises greater than 10m%, greater than 15m%. greater than 20m% or greater than 25m% titanium dioxide.

10 In particular embodiments of the first aspect, the particulate material of a. is contacted with 4-10 times its stoichiometric quantity of sulphuric acid. In preferred embodiments, the particulate material of b. is contacted with 5-6, or approximately 6 times its stoichiometric quantity of sulphuric acid.

In particular embodiments, the sulphuric acid concentration is at least 50m%. In other embodiments, the acid concentration is at least 60m%, 70m%, 80m%, 90m% or 98m%.

15 In particular embodiments of the first aspect, the sulphated mixture is heated to achieve substantially complete sulphation of the oxides (particularly titanium dioxide/calcium titanate) present. In particular embodiments, the sulphated mixture is heated to at least 100°C following contact with sulphuric acid. In preferred embodiments, the mixture is heated to a maximum of approximately 250°C.

20 In particular embodiments, the sulphated mixture is heated to a temperature between 130°C and 200°C, more preferably approximately 150°C-160°C. In particular embodiments, the mixture is heated for a heating period which allows substantially complete sulphation of the titanium dioxide (and optionally other components) to occur. In one embodiment, the heating period is between 15 minutes and one hour. In particular embodiments, the heating period is at least 30 minutes or approximately 40 minutes. In
25 particular embodiments, step a. occurs in a reactor.

In particular embodiments of the first aspect, the step of filtering the sulphated mixture further comprises contacting the mixture with compressed air. The temperature of the compressed air is preferably below 85°C. In particular embodiments, the temperature of the compressed air is from 10°C to 85°C. Preferably,
30 the compressed air is from 30°C to 85°C, or approximately 50°C, 60°C, 70°C or 80°C.

In particular embodiments of the first aspect, the sulphuric acid removed from the sulphated mixture is collected for re-use in step a.

In particular embodiments of the first aspect, the permeate comprising at least titanyl sulphate is dehydrated using a membrane to produce a concentrated permeate comprising at least titanyl sulphate in which the metal sulphates are concentrated.

5 In particular embodiments of the first aspect, the permeate comprising at least titanyl sulphate is heated to remove water and increase the free acidity. Preferably the permeate comprising at least titanyl sulphate is heated to greater than 100°C, more preferably greater than 130°C and most preferably to greater than 160°C or to boiling. In particular embodiments, the heated permeate comprising at least titanyl sulphate is filtered to remove residual sulphuric acid and the resulting filter cake (comprising precipitated titanyl sulphate and preferably other precipitated sulphates) is contacted with water to obtain
10 a concentrated permeate comprising at least titanyl sulphate. This permeate may then be subjected to downstream process steps including hydrolysis and optionally precipitation of aluminium/magnesium.

In particular embodiments, the free acidity of the hydrolysis liquor is from 8-25%. In other embodiments, the free acidity of the hydrolysis liquor is from 9-15%.

15 In particular embodiments of the first aspect, the hydrolysis liquor is heated to a temperature between 85 and 140°C, 80 and 140°C, 90°C and 120°C, or between 105°C to 110°C. Preferably the hydrolysis liquor is heated for a period such that substantially all of the titanyl sulphate has reacted. Preferably, the heating period is from one hour to three hours. More preferably from 90 minutes to two hours or approximately
20 100 minutes. In particular embodiments, the solution is heated for about two hours at a temperature above 85°C in order for hydrolysis to be completed.

In particular embodiments of the first aspect, the hydrolysis liquor is contacted with water containing titanium dioxide particles. Preferably the titanium dioxide particles are nanoparticles. Preferably, the
25 amount of titanium dioxide particles added to the hydrolysis liquor is between 2m% and 30m% of the mass of the titanium dioxide calculated to be present in the liquor. More preferably, between 2m% and 15m% and preferably between 5m% and 9m%. Preferably, the particle size of the titanium particles added to the liquor is from 2nm to 10nm, more preferably 3 to 6nm.

30 In particular embodiments of the first aspect, the method further comprises the step of sonicating the hydrolysis liquor to precipitate titanium dioxide hydrate from the solution. Preferably, the hydrolysis liquor is sonicated in the absence of heating.

In one embodiment of the first aspect, the method further comprises the step of calcining the titanium dioxide hydrate. Preferably calcining is carried out at a temperature of between 800 and 1100°C, between 850°C and 950°C, or between 890 and 910°C.

- 5 In a second aspect, the invention provides at least one product produced by the method of the first aspect, the product being selected from:
- a. titanium dioxide;
 - b. silica;
 - c. calcium sulphate;
 - 10 d. aluminium sulphate; or
 - e. magnesium sulphate.

In a third aspect, the invention provides a system for the recovery of products from a particulate material, the system comprising:

- 15 a. a sulphation reactor adapted to receive and heat sulphuric acid and particulate material comprising at least titanium dioxide and produce a sulphated mixture;
- b. a first filtration unit adapted to receive the sulphated mixture and produce a first permeate comprising at least sulphuric acid, and a filter cake comprising at least titanyl sulphate;
- c. a hydrolysis reactor adapted to receive a solution comprising titanyl sulphate and heat said
- 20 solution to produce a hydrolysis liquor;
- d. a separation unit adapted to receive the hydrolysis liquor and separate titanium dioxide hydrate.

In particular embodiments of the third aspect, the separation unit comprises a second filtration unit adapted to receive the hydrolysis liquor and produce a retentate comprising titanium dioxide. In alternative embodiments the separation unit comprises a centrifugation unit adapted to separate the

25 precipitated titanium dioxide hydrate.

In particular embodiments of the third aspect, the system further comprises at least one precipitation tank to facilitate precipitation of aluminium sulphate or magnesium sulphate.

- 30 In particular embodiments, the particulate material further comprises at least one of aluminium oxide, magnesium oxide, calcium oxide or silica.

In particular embodiments, the system further comprises at least one further filtration unit to facilitate separation of precipitated aluminium sulphate or precipitated magnesium sulphate.

In a fourth aspect, the invention provides a method of recovering products from a particulate material comprising the following components:

- i. titanium dioxide;
- 5 ii. silica;
- iii. calcium oxide;
- iv. aluminium oxide; and
- v. magnesium oxide,

said method comprising:

- 10 a. contacting the particulate material with sulphuric acid and heating to form a sulphated mixture;
- b. filtering the sulphated mixture to produce a filter cake and a first permeate comprising sulphuric acid;
- c. contacting the filter cake with water to form a sulphated suspension comprising titanyl sulphate;
- d. filtering the sulphated suspension to produce a retentate comprising silica and calcium sulphate,
- 15 and a permeate comprising at least titanyl sulphate;
- e. contacting the permeate comprising at least titanyl sulphate with water to produce a hydrolysis liquor;
- f. heating the hydrolysis liquor to hydrolyse the titanyl sulphate;
- g. separating titanium dioxide hydrate by filtering the hydrolysis liquor to produce a retentate
- 20 comprising titanium dioxide hydrate and a permeate comprising aluminium sulphate and magnesium sulphate;
- h. precipitating aluminium sulphate and separating the precipitate by filtering the liquor to produce a retentate comprising precipitated aluminium sulphate, and a permeate comprising magnesium sulphate;
- 25 i. precipitating magnesium sulphate and separating the precipitate by filtering the liquor to produce a retentate comprising precipitated magnesium sulphate.

Preferably, the step of precipitating aluminium sulphate in the method of the fourth aspect comprises cooling the permeate comprising aluminium sulphate and magnesium sulphate to produce a cooled liquor

30 comprising precipitated aluminium sulphate; and filtering the cooled liquor to produce a retentate comprising precipitated aluminium sulphate, and a permeate comprising magnesium sulphate.

Preferably, the step of precipitating magnesium sulphate in the method of the fourth aspect comprises increasing the acid concentration of the permeate comprising magnesium sulphate to form an acidified

liquor; and filtering the acidified liquor to produce a retentate comprising precipitated magnesium sulphate.

The invention also includes the parts, elements and features referred to or indicated in the specification of the application, individually or collectively, in any or all combinations of two or more of said parts, elements or features, and where specific integers are mentioned herein which have known equivalents in the art to which the invention relates, such known equivalents are deemed to be incorporated herein as if individually set forth.

Further aspects of the invention, which should be considered in all its novel aspects, will become apparent to those skilled in the art upon reading of the following description which provides at least one example of a practical application of the invention.

Brief Description of the Drawings

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 shows a process flow diagram depicting an embodiment of the invention.

Figure 2 shows the chemical composition of different slag samples as detailed in example 2.

Figure 3 shows the chemical composition of different slag samples as measured by XRF in example 2 (for New Zealand and South Africa) and obtained from the literature in example 1 (for China and Russia).

Figure 4a shows the amount of titanium dioxide measured in the permeate comprising titanyl sulphate as measured by the titration method in example 3. Figure 4b shows the amount of titanium measured in the permeate as measured by the ICP-OES method in example 3.

Figure 5 shows the ICP-OES measurements of titanium, calcium, aluminium and magnesium in the permeate.

Detailed Description of Preferred Embodiments

Definitions

Unless otherwise defined, the following terms as used throughout this specification are defined as follows:

The term “product” or the like is intended to encompass minerals recovered from the raw material or particulate material utilised in the described process. In particular embodiments, the products are titanium dioxide and at least one of magnesium, aluminium, calcium sulphate and silica, or their corresponding salts (if applicable).

The term “particulate material” is intended to encompass a raw material ground to small particles to permit contact of the sulphuric acid with each species of metal oxide. In particular embodiments, the particulate material has a particle size of less than 180µm. In preferred embodiments, the particulate material has a particle size from 10 to 180µm, or from 40 to 110 µm. In particular embodiments, the particulate material has a particle size of approximately 30µm, 45µm, 60µm, 70µm, 80µm, 90µm, or 100µm.

The term “filter cake”, “cake” and the like refers to solid material present on a filter or membrane following evacuation of liquid (typically acid) from the mixture. In particular embodiments, the filter cake comprises titanyl sulphate and at least one of magnesium sulphate, aluminium sulphate, calcium sulphate and silica.

The term “residue” is intended to encompass a solid material from which water soluble metal sulphates have been recovered following a leaching process. In particular embodiments, the residue comprises calcium sulphate (gypsum) and silica. In particular embodiments, the residue further comprises unreacted metal oxides.

The term “free acidity” refers to the portion of the total acidity that exists in the form of acid, both ionized and un-ionized.

The term “reactor” includes any device consisting of one or more vessels and/or towers or piping arrangements in which materials of the invention can be processed, mixed and/or heated. Examples of reactors of the invention include continuous or batch infusion reactors.

The terms “mixture”, “solution” and “permeate” are used throughout the specification, wherein the constituents alter depending on the stage of the process in which the terms are used. Where appropriate, the term “mixture” refers to a liquid with at least one solid substance in suspension. The term “solution” refers to an aqueous substance. The term “permeate” refers to a liquid obtained from a filtration process. Throughout this specification and any claims which follow, unless the context requires otherwise, the words “comprise”, “comprising”, “contain”, “containing” and the like, are to be construed in an inclusive sense as opposed to an exclusive sense, that is to say, in the sense of “including, but not limited to”.

“Perovskite” refers to a titanium-calcium oxide mineral composed of calcium titanate CaTiO_3 . Perovskite typically has a cubic crystalline structure although the term as used herein is intended to refer to any form of calcium titanate. The terms perovskite and calcium titanate are used interchangeably.

“Fluid” refers to a material comprising one or more compounds that is able to flow. The fluid may also include one or more liquids, dissolved substances, suspended substances or solid substances.

“Calcining” refers to a process whereby a substance is heated to a high temperature but below the melting or fusing point, causing loss of moisture, reduction or oxidation, and the decomposition of carbonates and other compounds.

“Gypsum” is $\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$. This term and “calcium sulphate” or CaSO_4 are used interchangeably throughout this specification.

The term “titanyl sulphate” is intended to cover other sulphate forms of titanium which may also be present following sulphation. Those of skill in the art will appreciate such further titanium sulphate
5 reactants.

“Titanium dioxide hydrate” as referred to herein is intended to encompass solutions containing both titanium dioxide and titanium dioxide hydrate and any degree of hydration of the titanium dioxide. It will be appreciated by those of skill in the art that the product of the hydrolysis of titanyl sulphate will be a mixture of titanium dioxide and titanium dioxide hydrate. Unless the context requires otherwise, where
10 the term titanium dioxide is referred to herein, it will be understood that titanium dioxide hydrate may also be present in any proportion. Likewise, unless the context requires otherwise, where the term titanium dioxide hydrate is referred to herein, it will be understood that titanium dioxide may also be present in any proportion. Where a proportion, ratio or percentage of titanium dioxide in a feedstock is referred to, it will be appreciated by a person skilled in the art that the actual form of the titanium dioxide
15 may not be in a form appropriate to be purified. For example in perovskite, the form of the titanium dioxide is predominantly as calcium titanate (CaTiO_3). Where analytical results referring to titanium dioxide are provided, those analytical results give the amount of titanium dioxide that may be bound with other elements, for example in calcium titanate.

A “melter” refers to any apparatus appropriate to use high temperatures to convert a solid mineral into a
20 molten state. This term is also intended to incorporate smelters and blast furnaces.

While the following description focuses on particular embodiments of the invention, namely the production of titanium dioxide and at least one of magnesium sulphate, aluminium sulphate, calcium sulphate and silica using melter slag from a steel manufacturing process as the primary feedstock, it should be appreciated that the invention may be applicable to production of alternative minerals and the use of
25 alternative feedstocks as will be known by persons of ordinary skill in the art to which the invention relates.

A “system” comprises pipework and other features that would be typically employed to enable the extraction of minerals from a particulate feed. By way of example, the “system” may include pressure valves, heat exchangers, filters, instrumentation (pressure sensors, flow sensors, pH sensors) and mixing
30 tees (static mixers).

As discussed hereinbefore, the inventors have devised methods for recovering valuable products from titanium-bearing minerals, such as calcium titanate or perovskite, in a way that is commercially viable. In particular, the present invention provides methods for extraction of titanium dioxide and at least one of

magnesium sulphate, aluminium sulphate, calcium sulphate or silica from melter slag, preferably from an iron-manufacturing process. In the case of melter slag, the process is surprisingly advantageous in that a number of high value minerals can be extracted from a material that is otherwise considered a waste product. In addition the invention provides a means for extracting said minerals that is economically efficient (e.g. is not energy intensive/does not require excessive heating steps) compared to methods known in the art.

In one embodiment, the inventors provide a method for the extraction of the products titanium dioxide, aluminium sulphate, magnesium sulphate, calcium sulphate and silica from a waste material using environmentally sustainable methods, including recycling extraction acids. Achieving the successful extraction of these products provides commercial advantages by enabling further value to be extracted from what is currently a waste product (perovskite). Accordingly, in a further aspect, the invention provides a method of minimising waste from a titanium dioxide -containing product from an iron-making process. Minimising waste also has environmental advantages including reduction of pollution and reduction of land use for iron slag.

Figure 1 shows an embodiment of the invention in which minerals 1 are ground in a grinder 2 to produce a particulate material. The particulate material is contacted with sulphuric acid from an acid holding tank 3 in a sulphation reactor 4 before being filtered in a first filtration unit 5 to produce a permeate comprising sulphuric acid 6, and a filter cake 7. The filter cake is contacted with water 8 to form a sulphated suspension in a reactor 9. The sulphated suspension is filtered in a second filtration unit 10 to yield a retentate comprising insoluble residue 11 and a permeate comprising at least titanyl sulphate. Water 12 is added to the permeate which is then passed to a hydrolysis reactor 13. Following hydrolysis, the fluid is filtered in a third filtration unit 14 and precipitated material (predominantly titanium dioxide hydrate) is removed in a retentate 15. The permeate is passed to a precipitation tank 16 in which aluminium sulphate is precipitated. The precipitate is then separated by filtration in a fourth filtration unit 17. The retentate comprising aluminium sulphate is removed 18 and the permeate passed to a second precipitation tank 19. Following precipitation of dissolved magnesium sulphate, the fluid is filtered in a fifth filtration unit 20 and a retentate comprising magnesium sulphate 21 collected. The permeate (comprising predominantly acid) is collected and may be recycled 22 through an acid regeneration plant 23.

Accordingly, in one aspect, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material, said method comprising:

- a. contacting the particulate material with sulphuric acid and heating to form a sulphated mixture;

- b. filtering the sulphated mixture to produce a filter cake and a first permeate comprising sulphuric acid;
- c. contacting the filter cake with water to form a sulphated suspension comprising titanyl sulphate;
- d. filtering the sulphated suspension to produce a permeate comprising at least titanyl sulphate, and
- 5 a retentate comprising insoluble residue;
- e. contacting the permeate comprising at least titanyl sulphate with water to produce a hydrolysis liquor;
- f. hydrolysing the titanyl sulphate; and
- g. separating titanium dioxide hydrate from the hydrolysis liquor,

10 wherein the at least one other product is selected from the group consisting of calcium sulphate, silica, aluminium sulphate or magnesium sulphate.

Unless indicated otherwise, the order of steps described in the methods described herein is very much preferred and has been optimised by trials carried out by the inventors to ensure that the process provides an efficient yield and an economically viable recovery method.

15

Feedstock

The feedstock used in the process is a titanium-bearing mineral. However, for ease of describing the process, the feedstock exemplified is melter slag from an iron manufacturing process. Melter slag is typically a by-product of the iron or steel manufacturing process, produced at the melter stage of the

20 process. It is commonly used as an aggregate for road building and surfacing.

In particular embodiments, the material is iron slag. In particular embodiments, the material is melter slag from an iron manufacturing process. In particular embodiments, the material is melter slag from a steel manufacturing process. Melter slag is primarily comprised of perovskite by mass (CaTiO_3) in a mixed metal oxide matrix. An example of melter slag constituents is provided below in Table 1, which details the

25 constituents of melter slag produced in New Zealand by NZ Steel's steel manufacturing process.

Table 1: NZ Steel Melter Slag

Constituent	m%
TiO_2	32.1
Al_2O_3	17.8
MgO	13.3
CaO	15.9
SiO_2	15.2
Fe_2O_3	2.34

V ₂ O ₅	0.2
-------------------------------	-----

In order to prepare the feedstock for use in the process, the raw material (e.g. melter slag) is preferably ground into a particulate material by any means known by persons of ordinary skill in the art. The rate and efficiency of mineral extraction from perovskite is dependent on the grind size. In particular embodiments, the material is ground to less than 180µm. In preferred embodiments, the material is ground to approximately 45µm.

Accordingly, in particular embodiments, any of the methods of recovery of products described herein may contain the further step of grinding raw material comprising one or more of the constituents in table 1 to form particulate material. In particular embodiments, the particulate material has a particle size of less than 180µm. Having this particle size provides for efficient sulphation of the oxides. However, using the methods described herein, the inventors have found that a smaller particle size is only beneficial up to a point. If the particle size is reduced too far, for example to less than around 10µm, the efficiency of the filtration step to remove acid is reduced. It is believed that this reduction in efficiency is caused by the filter becoming blocked. Accordingly, in preferred embodiments, the particulate material has a particle size from 10 to 180µm, or from 40 to 110µm. In particular embodiments, the particulate material has a particle size of approximately 30µm, 45µm, 60µm, 70µm, 80µm, 90µm, or 100µm.

A skilled person will appreciate the methods to achieve particle size reduction. In one embodiment, the grinding is carried out in a ballmill. Particle size may be measured according to methods known to those of skill in the art, for example laser diffraction.

The inventors have found that the relatively high level of titanium dioxide and other materials in melter slag make it a suitable feedstock for use in the recovery methods described herein. Accordingly, in particular embodiments, the invention provides a method of recovering at least one product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide. Generally the higher the titanium dioxide content, the more valuable the particulate material, and the more economically viable the process of recovery is. Accordingly, it is preferably that the particulate material comprises at least than 15m% titanium dioxide.

One of the key advantageous aspects of the methods of the invention described herein is the ability to recover more than one substantially purified product from the particulate material. By doing this, the waste from the process is reduced, and the products can be used or sold separately. This increases the

economic viability of the process and reduces land use for storage of the waste material. Accordingly, the invention provides a method of recovery of titanium dioxide and at least one other product selected from silica, calcium sulphate, aluminium sulphate and magnesium sulphate.

- 5 The inventors have found that the order of the steps in the method described herein is an important factor in optimising yields of the most valuable materials. Early trials by the inventors (see example 3, samples 7,8,9 and 10) tested the aluminium sulphate precipitation step prior to the titanium dioxide production and recovery step (i.e. hydrolysis). The yield of titanium dioxide when hydrolysis was carried out after aluminium sulphate precipitation was lower than when carried out before, probably due to co-
- 10 precipitation of the two components. Accordingly, it is preferable to carry out titanium hydrolysis prior to aluminium sulphate precipitation. This is especially true where the ratio of titanium dioxide to aluminium oxide is relatively low (see example 1 table 3). Additionally, the step of magnesium sulphate precipitation is carried out after the precipitation of aluminium sulphate and titanium dioxide. If magnesium sulphate precipitation is carried out prior to recovery of either aluminium sulphate or titanium dioxide, the co-
- 15 precipitation of these components with magnesium sulphate would reduce the economic viability of the method and reduce the purity with which the products could be obtained.

In particular embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 10m% or greater



20 than 13m% aluminium oxide. It is particularly preferable to use a feedstock comprising at least 15m% titanium dioxide and at least 13m% aluminium oxide. The method preferably comprises carrying out the step of titanium hydrolysis prior to aluminium sulphate precipitation when the ratio of titanium dioxide to aluminium oxide ($\text{TiO}_2:\text{Al}_2\text{O}_3$) 0.2 to 2.6, more preferably 0.25 to 2.1.

25 **Metal Sulphation**

The particulate material is introduced to an appropriate reactor, such as a fusion reactor, where it is combined with the desired amount of sulphuric acid to form a sulphated mixture. Although it would generally be thought of as being inefficient to use a large stoichiometric excess of reagents in a reaction, the inventors have found that a substantial excess of sulphuric acid results in decreased viscosity of the

30 sulphated mixture. In particular, it was found that using a stoichiometric excess of two times or less results in a highly viscous mixture that is difficult to pump. Accordingly, in particular embodiments, the particulate material is contacted with greater than 2 times, and preferably 4-10 times its stoichiometric quantity of sulphuric acid. In preferred embodiments, the particulate material is contacted with between 5 and 6 times, or approximately 6 times its stoichiometric quantity of sulphuric acid.

The key reactions relating to the processes and which are used by the inventors to determine the stoichiometric quantities of reaction components are:



In particular embodiments, the sulphuric acid is introduced to a sulphation reactor in the form of a concentrated acid solution, wherein the particulate material is contacted with the acid solution to form an aqueous sulphated mixture. The inventors have found that if the acid strength is too low (i.e. the amount of H_2SO_4 molecules by mass in the acid solution is too low), the reaction will fail to proceed, or will proceed at a rate that is too low to be economically viable. Accordingly, in particular embodiments, the sulphuric acid concentration is at least 50m%. A low acid concentration also affects the overall titanium dioxide yield. Therefore the strength of the acid is preferably greater than 70%, preferably 90%. In other embodiments, the acid concentration is at least 60m%, 70m%, 80m%, 90m% or 98m%.

In particular embodiments of the first aspect, the sulphated mixture is heated to achieve substantially complete sulphation of the oxides (particularly titanium dioxide/calcium titanate) present. In particular embodiments, the sulphated mixture is heated to at least 100°C following contact with sulphuric acid. In preferred embodiments, the mixture is heated to at least 200°C, preferably 250°C, in the sulphation reactor. The inventors have found that using a temperature of over 250°C is generally undesirable due to the apparatus constraints of using very hot acid. Preferably, the temperature is between 130°C and 200°C, more preferably approximately 150°C-160°C.

In particular embodiments, preheated air or steam is introduced to the reactor, preferably through the bottom of the reactor. The air/steam is allowed to rise through the mixture in order to heat the mixture to the point where reaction commences. The purpose of this heating step is to decrease the reaction time of the metal oxides converting to sulphates, and to evaporate the water as it is evolved, so as to maintain a high free acidity. High free acidity is desired so that the sulphate salts precipitate, and can be filtered afterwards.

In particular embodiments, the sulphated mixture is heated such that substantially complete sulphation of the calcium titanate/titanium dioxide occurs. During heating, the viscosity of the mixture increases as a function of the liquid content decreasing as the evolved water evaporates. In particular embodiments, the

mixture is heated for a heating period which allows substantially complete sulphation of the oxides (in particular calcium titanate/titanium dioxide) to occur. In one embodiment, the heating period is at between 15 minutes and one hour. In particular embodiments, the heating period is at least 30 minutes or approximately 40 minutes.

- 5 In particular embodiments, following the heating step, the mixture is further dehydrated using a membrane in order to increase the free acidity of the mixture. In particular embodiments, the free acidity of the mixture exceeds 70% following dehydration.

It will be appreciated by those of skill in the art that heating of a mixture may be achieved in any appropriate way. In one embodiment, one or more of the components of the mixture may be pre-heated
10 and the heat transferred to the mixture during mixing. References to "heating" of a mixture herein are intended to encompass heating of one or more of the components of that mixture prior to mixing.

Leaching

The sulphated mixture is next subjected to a first filtration step (otherwise known as leaching) in order to
15 remove the sulphuric acid. Accordingly, the method of recovering products from a particulate material comprises the step of filtering the sulphated mixture in a suitable filtration unit to produce a filter cake and a permeate comprising sulphuric acid. The inventors found during trials that a higher acid content in the filter cake had an inhibitory effect on the downstream process steps including hydrolysis and precipitation of metal sulphates. Accordingly, the step of acid recovery using a first filtration unit was introduced. This
20 had the effect of reducing acid concentration and provided unexpected efficiency increases of downstream process steps including hydrolysis and precipitation i.e. increased product yield.

Those of skill in the art will understand that any appropriate filtration unit (filter) may be used for this purpose and exemplary filtration units will be known to them. In particular embodiments, the filtration
25 unit comprises a filter press. In one embodiment, the filtration unit is assisted by a differential pressure gradient across the filter. Preferably, the pressure differential is at least 1 bar. In particular embodiments, the mixture is circulated through a filtration unit which permits acids to pass through, while a solid filter cake is collected on the surface of the filter. In particular embodiments, the pressure differential across the filter is from 2 to 10 bar. Preferably, the pressure differential is approximately 6 bar. Using a filter cake is
30 particularly advantageous to achieve maximum acid extraction from the sulphated mixture. At this stage, the filter cake is comprised of titanyl sulphate and at least one of magnesium sulphate, aluminium sulphate, calcium sulphate or silica.

It is desirable to reduce the acid content of the filter cake as much as possible. Preferably, the moisture content of the filter cake is reduced to less than 30%, more preferably less than 20%, or between 15 and

20%. The remaining liquid in the filter cake is largely acid. In particular embodiments, this first filtration step further comprises contacting the filter cake with compressed air. The compressed air acts as an agitator to evacuate acid from the filter and filter cake, and dries the filter cake further. The temperature of the compressed air is preferably below 85°C to prevent the premature hydrolysis of titanyl sulphate. In particular embodiments, the temperature of the compressed air is from 10°C to 85°C. Although the compressed air is expected to assist with drying the filter cake at any temperature, the inventors have found that using a heated compressed air stream assists in maintaining the temperature of the filter cake and the subsequent sulphated suspension. Accordingly, it is preferable that the compressed air is from 30°C to 85°C, or approximately 50°C, 60°C, 70°C or 80°C. If the temperature of the compressed air is too low (i.e. lower than 35°C), the viscosity of the sulphated suspension is increased which can detrimentally affect fluid flow.

Sulphuric acid recovered from the mixture is preferably passed to an acid regeneration plant. The collected sulphuric acid may then optionally be reused in the metal sulphation step described previously, wherein recycle of the sulphuric acid provides an economic and environmental advantage. In particular embodiments, the sulphuric acid is processed prior to being recycled for use in the metal sulphation step.

The filter cake remaining on the filter now has a minimal acid content. Water is circulated through the filter cake in order to dissolve the soluble salts from the filter cake. Preferably, the filter cake is washed on the filter and water is passed through the filter. Alternatively, the filter cake is washed with water and the solution does not pass through the filter. Optionally, the filter cake is removed and washed in a separate vessel. In situ washing (i.e. on the filter) reduces the need for an extra tank. Preferably, the filter cake is agitated using vibration or mechanical agitation during washing. Preferably, the temperature of the filter cake during washing is less than 80°C. If higher temperatures are used, the inventors have found that partial or complete hydrolysis of the titanyl sulphate occurs thus reducing downstream titanium dioxide yield. The water may be obtained from any appropriate source. This step produces a solution comprising titanyl sulphate and at least one of magnesium sulphate and aluminium sulphate. In particular embodiments, an insoluble residue remains on the filter comprising calcium sulphate and silica. The solution comprising titanyl sulphate and at least one of magnesium sulphate and aluminium sulphate is optionally passed to a membrane that dehydrates the solution to produce a substantially concentrated solution of the metal sulphates. Concentration using the membrane may be by known membrane concentration methods including reverse osmosis.

The method of recovering products further comprises the step of filtering the sulphated suspension to produce a retentate comprising an insoluble residue and a permeate comprising at least titanyl sulphate.

In particular embodiments, the insoluble residue of the retentate comprises silica and calcium sulphate. In particular embodiments, the permeate comprises titanyl sulphate, aluminium sulphate and magnesium sulphate.

5 Silica/Calcium sulphate separation

The inventors have found that the perovskite product produced from melter slag often has a high amount of silica and calcium oxide present. These components are relatively low value and are often viewed as problematic waste products that contaminate compositions containing higher value materials such as titanium dioxide. However, through extensive trials, the inventors have found that these components can be extracted in a substantially purified form as silica and calcium sulphate. Both products have use in industry, for example in the production of tyres and in the production of gypsum for building materials respectively. The inventors have found that sulphation of the calcium oxide and removal as an insoluble residue prior to titanium sulphate hydrolysis provides a particularly efficient and cost-effective method of recovery of these components. In addition, where the particulate material also contains quantities of at least one of aluminium oxide and magnesium oxide, removal of the insoluble residue comprising silica and calcium sulphate enables the recovery of substantially pure titanium dioxide, and at least one of aluminium sulphate and magnesium sulphate in later method steps. Overall, these steps and their order contribute to providing an inventive, cost-effective and industrially efficient method of recovering said products with minimal waste.

In particular embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 10m%, greater than 15m% or greater than 20m% silica. In other embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 15m%, greater than 20m% or greater than 25m% calcium oxide.

In some embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, greater than 10m%, greater than 15m% or greater than 20m% silica, and greater than 15m%, greater than 20m% or greater than 25m% calcium oxide.

Where the method comprises a step of recovering calcium sulphate and/or silica, the insoluble residue may be processed to obtain these products. This residue is typically comprised of calcium sulphate, resulting from the cleavage of calcium titanate and the sulphation of calcium oxide, and silica. Quantities of unreacted metal oxides are typically present also, as a result of being encapsulated by a refractory material.

In one embodiment the insoluble residue of the retentate from the filtration of the sulphated suspension step is passed to a floatation tank and at least one of calcium sulphate and silica is separated according to known methods.

In one aspect of the invention, there is provided a method of recovering products from a raw material containing perovskite, silica, aluminium oxide and magnesium oxide, said method comprising:

- a) grinding a material comprising perovskite, silica, aluminium oxide and magnesium oxide to produce a particulate material;
- b) contacting the particulate material with sulphuric acid to form a mixture containing titanyl sulphate, gypsum, silica, aluminium sulphate and magnesium sulphate;
- c) filtering the mixture to remove the sulphuric acid;
- d) contacting the mixture with water to dissolve the mixture and separating the mixture using filtration to produce a solution comprising titanyl sulphate, aluminium sulphate and magnesium sulphate and a residue comprising gypsum and silica;
- e) cooling the solution to a temperature at which aluminium sulphate crystallizes and recovering the resulting crystallized aluminium sulphate;
- f) precipitating the solution to produce titanium dioxide;
- g) cooling the remaining solution to a temperature at which magnesium sulphate crystallizes and recovering the crystallized magnesium sulphate; and
- h) calcining the titanium dioxide to remove residual acid and water to produce substantially pure titanium dioxide.

Due to the difference in density between calcium sulphate and silica, and the hydrophilic nature of silica, calcium sulphate can be separated and recovered from silica using a floatation process. In particular embodiments, calcium sulphate is recovered from the residue using a froth floatation process. In particular embodiments, the residue is ground and/or cleaned prior to being subjected to a froth floatation process. In particular embodiments, the residue is subjected to a pre-floatation step prior to the floatation process in order to recover unreacted metal oxides. In particular embodiments, the residue is subjected to a post-

floatation step following the floatation process in order to recover unreacted metal oxides. The pre/post-floatation step preferably comprises a floatation process using xanthates and/or hydroxamates to scavenge unreacted metal oxides. The pre/post-floatation step may also be used to recover sulphates that were not dissolved during leaching.


- 5 In alternative embodiments, the calcium sulphate may be recovered from the insoluble residue by precipitation methods known to those of skill in the art.

Concentration of permeate comprising titanyl sulphate

- A low free acidity is desirable for the titanium hydrolysis reaction to proceed efficiently. The free acidity of the liquor following leaching (i.e. the first permeate) or aluminium precipitation/crystallisation is generally too high to permit direct application of the liquor. Since acid is produced in the hydrolysis reaction, the inventors have found that it is desirable to minimise acid flow-through from the earlier sulphation step. Doing this minimises equipment constraints and costs around using highly concentrated acids.
- The inventors found that an effective way to minimise acid flow-through to the hydrolysis reaction is to first increase free acidity by removing water from the liquor, then precipitate the metal sulphates and separate them from the acid. In particular embodiments, the free acidity of the permeate comprising titanyl sulphate and optionally at least one of magnesium sulphate and aluminium sulphate is first raised such that the metal sulphates precipitate and are more easily separated from the acid. In particular embodiments, the free acidity is raised by heating the solution to a temperature at which the water evaporates. Preferably the permeate comprising titanyl sulphate is heated to greater than 100°C, more preferably greater than 130°C and most preferably to greater than 160°C or to boiling point. Since the liquor contains a high concentration of acid, the boiling point is approximately 160°C. In alternative embodiments, the free acidity is raised by contacting the solution with a membrane capable of dehydrating the solution, preferably to remove substantially all water.
- Once the free acidity of the solution has been raised, the solution is filtered in order to remove substantially all acids and produce a filter cake on the surface of the filter. Following filtration, water is circulated through the filter in order to dissolve the soluble salts from the filter cake. This step is similar in nature to the leaching step described previously, and produces a reduced-acid permeate comprising titanyl sulphate and optionally at least one of magnesium sulphate and aluminium sulphate. In this embodiment, the permeate is filtered to remove residual acids and the resulting filter cake is contacted with water to obtain a concentrated permeate comprising at least titanyl sulphate.

Titanium Sulphate Hydrolysis

Titanium hydrolysis refers to the cleavage of sulphate from titanium. The reaction is as follows:



Experiments carried out by the inventors indicate that the optimal free acidity of hydrolysis liquor ranges from 8-25%. Experiments have indicated that at lower than 8% free acidity, the hydrolysis liquor is

unstable which is undesirable. This is due to firstly, the hydrolysis of titanyl sulphate can spontaneously

5 occur at room temperature while standing. Secondly, the rate of hydrolysis is difficult to control. During hydrolysis the rate of hydrolysis is in part controlled by the free acidity. If the rate of hydrolysis exceeds

approximately 1% per-minute, new nucleation sites are generated in solution resulting in a wide size

distribution of titanium dioxide aggregate, which is undesirable for pigment production. Accordingly, in

some embodiments, the free acidity of the hydrolysis liquor comprises at least 8% free acidity. A free

10 acidity of greater than 25% is undesirable as the hydrolysis reaction does not proceed to completion even

when heated and seeded. The hydrolysis of titanyl sulphate is under equilibrium control, as titanyl sulphate

is hydrolysed free sulphate ions are produced hence increasing free acidity in the hydrolysis liquor.

According to the Le Chatelier's principle, the concentration of the product (free acid) directly controls the

forward rate of the reaction. Hence, a high starting free acidity in the hydrolysis liquor can slow or

15 completely stop the hydrolysis of titanyl sulphate. Accordingly, in some embodiments, the free acidity of

the hydrolysis liquor comprises at less than 25% free acidity. In some embodiments, the free acidity of the

hydrolysis liquor comprises between 8% and 25%. Within this specified range, the hydrolysis of titanyl

sulphate can proceed to completion in a controlled manner resulting in hydrated titanium dioxide of a

particularly suitable size distribution for pigment production.

20 Having achieved a solution which has an appropriate level of free acidity, and preferably in which the

titanyl sulphate is concentrated, the step of hydrolysing the titanyl sulphate is initiated. Hydrolysis

comprises adding water to the permeate comprising titanyl sulphate (and optionally at least one of

magnesium sulphate and aluminium sulphate) to produce a hydrolysis liquor and heating the hydrolysis

25 liquor. Hydrolysis is carried out in a hydrolysis reactor appropriate to contain the reactions described

herein. Preferably the hydrolysis liquor is heated to a temperature between 80 and 140°C, between 85

and 140°C or between 85 and 120°C. The inventors have found that a minimum activation energy for the

hydrolysis reaction must be achieved by heating the liquor. In a particular embodiment, the hydrolysis

liquor is heated to between 90°C and 120°C. The inventors have found that a particularly efficient

30 temperature which initiates the reaction quickly while maintaining energy efficiency is from 105°C to

110°C.

Preferably the hydrolysis liquor is heated for a period such that substantially all of the titanyl sulphate has

reacted. A skilled person will be able to determine when all of the titanyl sulphate has reacted. In

particular embodiments, the heating period is from one hour to three hours. More preferably from 90 minutes to two hours or approximately 100 minutes. In particular embodiments, the solution is heated for about two hours at a temperature above 85°C in order for hydrolysis to be completed.

- 5 In particular embodiments, the hydrolysis process comprises contacting the solution with water containing titanium dioxide or rutile and heating the solution to a temperature between 85 to 120°C. In preferred embodiments, titanium dioxide particles or nanoparticles, also referred to as seed particles, or nuclei, are added to the hydrolysis liquor. The titanium dioxide particles act as nucleating sites for crystallization, so as to achieve uniform particle formation. The titanium dioxide particles may be added to the hydrolysis
- 10 liquor or the water added to form said liquor. The titanium dioxide particles may be added and the hydrolysis liquor heated to any of the temperature ranges described herein for hydrolysis. Preferably, the amount of titanium dioxide particles added to the hydrolysis liquor is between 1m% and 30m% of the mass of the titanium dioxide calculated to be present in the liquor. More preferably, between 2m% and 15m% and preferably between 5m% and 8m%. Preferably, the particle size of the titanium particles added to the
- 15 liquor is from 2nm to 10nm, more preferably 3 to 6nm or approximately 5nm. Titanium dioxide particles may be anatase, or obtained therefrom.

Separation of the hydrated titanium dioxide may be achieved by methods known to those of skill in the art. In particular embodiments, separation is carried out in a separation unit adapted to receive the hydrolysis

20 liquor and separate titanium dioxide hydrate.

In particular embodiments, the separation unit comprises a second filtration unit adapted to receive the hydrolysis liquor and produce a retentate comprising titanium dioxide hydrate. In alternative embodiments the separation unit comprises a centrifugation unit adapted to separate the precipitated titanium dioxide hydrate.

25 In an alternative embodiment to the hydrolysis process described above, the hydrolysis liquor may instead be subjected to a sonication process in order to precipitate titanium dioxide hydrate from the solution. In this embodiment, the bulk fluid requires less heating or does not require heating.

Preferably, the step of separation of the titanium dioxide hydrate may be carried out by filtering the

30 hydrolysis liquor to produce a permeate, and a retentate comprising titanium dioxide hydrate. In alternative embodiments, the titanium dioxide is removed by centrifugation and collection of the precipitate.

Filtration of the hydrolysis liquor is carried out in a suitable filtration unit in order to recover the hydrated titanium dioxide. In preferred embodiments, the hydrolysis liquor remains heated to a maximum of approximately 80°C in order to keep the titanium dioxide particles large enough to be captured by the filtering medium. The permeate preferably comprises aluminium sulphate and magnesium sulphate.

5

The titanium dioxide recovered from the hydrolysis or sonication process may be calcined (heated) in an oxidative environment by passing heated air through the product, which removes any residual sulphuric acid and water. In preferred embodiments, the titanium dioxide is heated to 950°C in a reactor for about an hour. In other embodiments, the heating period is from 30 minutes to two hours. In particular

10 embodiments, calcining is carried out at a temperature of between 800 and 1050°C, between 850°C and 950°C, or between 890 and 910°C. The recovered sulphuric acid can be reused in the sulphation step described earlier. In order to obtain a finished titanium dioxide product, the calcined titanium dioxide is milled, coated and washed. Such processes will be known to those of skill in the art.

15 **Aluminium Sulphate Recovery**

Aluminium sulphate is precipitated from the liquor at an appropriate stage. The inventors have found that a higher yield of titanium dioxide can be achieved by carrying out aluminium sulphate precipitation after hydrolysis and titanium dioxide removal (see example 3, samples 7,8,9 and 10). It is believed that if aluminium sulphate precipitation is carried out before hydrolysis, some titanyl sulphate is co-precipitated

20 with the aluminium sulphate thus reducing TiO₂ yield.

In one embodiment, aluminium sulphate is precipitated from the permeate comprising titanyl sulphate. In another embodiment, aluminium sulphate is precipitated from the permeate comprising magnesium sulphate and aluminium sulphate. These permeates are typically obtained following sulphation and

25 removal of insoluble residue. Alternatively, if the aluminium sulphate is not required to be separated from the insoluble residue, this step of aluminium sulphate precipitation may be carried out before removal of the insoluble residue.

The process of aluminium sulphate precipitation preferably comprises cooling the permeate to a

30 temperature at which aluminium sulphate precipitates and crystallizes. In particular embodiments, the solution is cooled in the same vessel in which the previous filtration step occurred. In alternative embodiments, the solution is passed to a separate tank for cooling.

The crystalized aluminium sulphate is recovered from the solution by any method known to those skilled in the art. The precipitation and recovery step can be carried out on liquors containing aluminium sulphate, for example those produced by the methods described in example 3. Filtration is particularly preferred. In particular embodiments, >90% of the aluminium sulphate present in the solution is recovered during this stage. In particular embodiments, the solution is cooled to between 10 and 4°C such that the aluminium sulphate crystalizes. In preferred embodiments, the solution is cooled to approximately 5°C.

In particular embodiments, the invention provides a method of recovering at least one product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 10m% or greater than 13m% aluminium oxide. The inventors have found that the method provides an economically viable method of recovery of such components when the feedstock meets these component proportions.

Examples 1 and 2 show the deduction of component ratios in particular feedstocks. In particular embodiments, the invention provides a method of recovering titanium dioxide and aluminium sulphate product from a particulate material comprising a ratio of titanium dioxide to aluminium oxide ($\text{TiO}_2:\text{Al}_2\text{O}_3$) in the particulate matter of approximately 0.2 to 2.6, more preferably 0.25 to 2.1. In this embodiment, the inventors have found that the method steps provide particularly economically viable recovery of titanium dioxide and aluminium sulphate. The titanium hydrolysis step being carried out prior to aluminium sulphate precipitation is particularly preferred at this ratio range. Further, where magnesium sulphate precipitation is also carried out, the titanium hydrolysis step being carried out prior to aluminium sulphate precipitation, which in turn is carried out before magnesium sulphate precipitation is particularly preferred at this ratio range.

In a particular embodiment of the invention, there is provided a method of recovering products from a raw material containing perovskite and aluminium oxide, said method comprising:

- a) grinding a material comprising perovskite and aluminium oxide to produce a particulate material;
- b) contacting the particulate material with sulphuric acid to form a mixture containing titanyl sulphate and aluminium sulphate;
- c) filtering the mixture to remove the sulphuric acid;
- d) contacting the mixture with water to dissolve the mixture and separating the mixture using filtration to produce a solution comprising titanyl sulphate and aluminium sulphate;
- e) cooling the solution to a temperature at which aluminium sulphate crystalizes and recovering the resulting crystalized aluminium sulphate;

- f) precipitating the solution to produce titanium dioxide; and
- g) calcining the titanium dioxide to remove residual acid and water to produce substantially pure titanium dioxide.

5 Magnesium Sulphate Recovery

The solution remaining after subjection to the hydrolysis or sonication process, and optionally removal of aluminium sulphate, typically comprises magnesium sulphate that can also be recovered. The inventors have found that it is preferable to recover magnesium sulphate after recovery of other products because the purity of the resultant magnesium sulphate precipitate is increased if the other components have been removed prior. This is because the methods described below to precipitate magnesium sulphate would also precipitate aluminium sulphate, titanyl sulphate and other components. If the magnesium sulphate precipitation was not carried out after recovery of the other components, the precipitated mixture would be difficult and uneconomically viable to separate to yield substantially pure components. The resultant lack of value in the mixture increases the probability that it will be disposed of in an uncontrolled and unregulated manner, thus causing environmental degradation.

The precipitation and recovery step can be carried out on liquors containing magnesium sulphate, for example those produced by the methods described in example 3.

In particular embodiments, the method of recovering products comprises the step of increasing the acid concentration of the permeate comprising magnesium sulphate to form an acidified liquor comprising precipitated magnesium sulphate. The increased acidity causes the magnesium sulphate to precipitate. The method preferably further comprises filtering the acidified liquor in to produce a retentate comprising precipitated magnesium sulphate.

In particular embodiments, the acid concentration of the permeate comprising magnesium sulphate is increased by the addition of sulphuric acid. Preferably the pH of the permeate comprising magnesium sulphate is reduced to less than approximately pH1 by the addition of sulphuric acid.

In particular embodiments, the acid concentration of the permeate comprising magnesium sulphate is increased by heating the permeate to remove water. Preferably heating is carried out at boiling point or at a temperature of greater than 130°C.

The inventors have also found that it is preferable to carry out magnesium sulphate precipitation after aluminium sulphate precipitation. The lower precipitation temperature of magnesium sulphate results in aluminium sulphate precipitating first during cooling of a solution comprising both dissolved aluminium sulphate and magnesium sulphate. Accordingly, it is preferable to carry out magnesium sulphate precipitation after aluminium sulphate precipitation. In particular embodiments, the invention provides a

method of recovering at least one product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 7m% or greater than 10m% magnesium oxide. It is particularly preferable to use a feedstock comprising at least 15m% titanium dioxide and at least 10m% magnesium oxide.

5

In some embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 7m% or greater than 10m% magnesium oxide. It is particularly preferable to use a feedstock comprising at least 15m% titanium

10 dioxide and at least 10m% magnesium oxide.

The method preferably comprises carrying out the step of titanium hydrolysis prior to magnesium sulphate precipitation. This enables the yield of titanium dioxide to be maximised and reduces co-precipitation losses of titanium dioxide (or titanium sulphate) that could occur if magnesium sulphate precipitation was carried out prior to titanium dioxide recovery. Examples 1 and 2 show the deduction of component ratios

15 in particular feedstocks. The method preferably comprises carrying out the step of titanium hydrolysis prior to magnesium sulphate precipitation when the ratio of titanium dioxide to magnesium oxide ($\text{TiO}_2:\text{MgO}$) in the particulate matter is from 0.5 to 3.0, more preferably 0.8 to 2.8.

In some embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, and greater than 7m% or greater than 10m% magnesium oxide, and greater 10m% or greater than 13m% aluminium oxide. It is particularly preferable to use a feedstock comprising at least 15m% titanium dioxide, at least 13m% aluminium dioxide and at least 10m% magnesium oxide.

25

In some embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, greater than 10m%, greater than 15m% or greater than 20m% silica, greater than 15m%, greater than 20m% or greater than 25m% calcium oxide

30 and greater than 7m% or greater than 10m% magnesium oxide.

In some embodiments, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 8m%, greater than 10m%, greater than 15m% greater than 20m% or greater than 25m% titanium dioxide, greater than 10m%, greater than 15m%

or greater than 20m% silica, greater than 15m%, greater than 20m% or greater than 25m% calcium oxide, greater than 10m% or greater than 13m% aluminium oxide and greater than 7m% or greater than 10m% magnesium oxide.

- 5 In a particular embodiment, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 8m% titanium dioxide, greater than 10m% silica, greater than 15m% calcium oxide, greater than 10m% aluminium oxide and greater than 7m% magnesium oxide. In this embodiment the method provides a commercially viable and useful method for the extraction of these compounds from what was previously viewed as a waste material.

10

In an alternative embodiment, the invention provides a method of recovering titanium dioxide and at least one other product from a particulate material comprising greater than 15m% titanium dioxide, greater than 10m% silica, greater than 15m% calcium oxide, greater than 10m% aluminium oxide and greater than 7m% magnesium oxide.

15

In particular embodiments, the invention provides a method of recovering titanium dioxide and magnesium sulphate product from a particulate material comprising a ratio of titanium dioxide to magnesium oxide ($\text{TiO}_2:\text{MgO}$) in the particulate matter of approximately 0.5 to 3.0, more preferably 0.8 to 2.8. In this embodiment, the inventors have found that the method steps provide particularly economically viable recovery of titanium dioxide and magnesium sulphate. The titanium hydrolysis step being carried out prior to magnesium sulphate precipitation is particularly preferred at this ratio. Further, where aluminium sulphate precipitation is also carried out, the titanium hydrolysis step being carried out prior to aluminium sulphate precipitation, which in turn is carried out before magnesium sulphate precipitation is particularly preferred at this ratio range.

20

In one embodiment, the inventors provide a method of recovering products from a raw material containing perovskite and magnesium oxide, said method comprising:

- a) grinding a material comprising perovskite and magnesium oxide to produce a particulate material;
- b) contacting the particulate material with sulphuric acid to form a mixture containing titanyl sulphate and magnesium sulphate;
- 30 c) filtering the mixture to remove the sulphuric acid;
- d) contacting the mixture with water to dissolve the mixture and separating the mixture using filtration to produce a solution comprising titanyl sulphate and magnesium sulphate;
- e) precipitating the solution to produce titanium dioxide;

f) cooling the remaining solution to a temperature at which magnesium sulphate crystallizes and recovering the crystallized magnesium sulphate; and
g) calcining the titanium dioxide to remove residual acid and water to produce substantially pure titanium dioxide.

5

In particular embodiments, the acidified liquor comprising magnesium sulphate or a permeate comprising magnesium sulphate is cooled to a temperature at which magnesium sulphate crystallizes. In particular embodiments, the solution is cooled in the same reactor in which the previous precipitation, hydrolysis process or sonication process occurred. In alternative embodiments, the solution is passed to a separate
10 tank for cooling.

In particular embodiments, the permeate comprising magnesium sulphate or the acidified liquor comprising magnesium sulphate is cooled to induce precipitation/crystallisation of magnesium sulphate. In preferred embodiments, the permeate comprising magnesium sulphate or the acidified liquor is cooled to less than 4°C or between 0°C and 4°C, more preferably approximately 3°C. In particular embodiments,
15 greater than 90% of the magnesium sulphate present in the acidified liquor or the permeate comprising magnesium sulphate is recovered during filtration. The crystallized magnesium sulphate is recovered from the solution by any method known to those skilled in the art.

In addition, the systems or processes of the invention may optionally include means for regulating and/or
20 controlling other parameters to improve overall efficiency of the process. One or more processors may be incorporated into the system to regulate and/or control particular parameters of the process. For example particular embodiments may include determining means to monitor the composition of mixtures or solutions. In addition, particular embodiments may include a means for controlling the delivery of a mixture or solution to particular stages or elements within a particular system if the determining means
25 determines the mixture or solution has a composition suitable for a particular stage.

In addition, it may be necessary to heat or cool particular system components or mixtures, solutions or additives prior to or during one or more stages in the process. In such instances, known heating or cooling means may be used.

Furthermore, the system may include one or more pre/post treatment steps to improve the operation or
30 efficiency of a particular stage. For example, a pre-treatment step may include means for removing unwanted particulate matter from the ground feedstock prior to the metal sulphation process. Other pre- or post-operations that may be conducted include separation of desired product(s) from particular stages. The invention has been described herein with reference to certain preferred embodiments, in order to enable the reader to practice the invention without undue experimentation. Those skilled in the art will

appreciate that the invention can be practiced in a large number of variations and modifications other than those specifically described. It is to be understood that the invention includes all such variations and modifications. Furthermore, titles, headings, or the like are provided to aid the reader's comprehension of this document, and should not be read as limiting the scope of the present invention. The entire

disclosures of all applications, patents and publications cited herein are herein incorporated by reference. More particularly, as will be appreciated by one of skill in the art, implementations of embodiments of the invention may include one or more additional elements. Only those elements necessary to understand the invention in its various aspects may have been shown in a particular example or in the description.

However, the scope of the invention is not limited to the embodiments described and includes methods including one or more additional steps and/or one or more substituted steps, and/or and/or methods omitting one or more steps.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgement or any form of suggestion that that prior art forms part of the common general knowledge in the field of endeavour in any country.

Examples

Example 1 – Determination of composition of slag from different sources

The composition of slag from steel manufacturing facilities was obtained.

Results

Slag source	Component (m%)					
	TiO ₂	SiO ₂	CaO	Al ₂ O ₃	MgO	Sum
New Zealand	34.8	14.1	16.3	19.0	13.8	98.0
South Africa	28.2	16.5	16.6	13.6	14	99.2
China 1	21.5	15.55	24.6	14.11	7.65	83.84
China 2	16.03	24.94	32.12	14.89	7.47	96.02
Russia	9	29	31	14.5	12	96.54

Table 2 – composition of raw material feedstock

Slag source	Component ratio			
	TiO ₂ :Al ₂ O ₃	TiO ₂ :MgO	TiO ₂ :SiO ₂	TiO ₂ :CaO
New Zealand	1.8	2.5	2.5	2.1
South Africa	2.1	2.0	1.7	1.7
China 1	1.5	2.8	1.4	0.9
China 2	1.1	2.1	0.6	0.5
Russia	0.6	0.8	0.3	0.3

Table 3 – ratio of feedstock components to titanium dioxide

Figure 3 shows the composition of the above slag samples measured by the inventors (for New Zealand) and obtained from the following literature for South Africa, China and Russia:

South Africa - Control of open slag bath furnaces at Highveld Steel and Vanadium Ltd: development of operator guidance tables. Steinberg and Pistorius, Ironmaking and Steelmaking, 2009, vol 36 no. 7.

China 1 and China 2 - 3rd International Symposium on High Temperature Metallurgical Processing. Tao Jiang Jiann-Yang Hwang Patrick Masset Onuralp Yucel Rafael Padilla Guifeng Zhou - 9 May 2012. John Wiley & Sons

Russia - Titania-containing slag processing method - RU 2295582

10 Conclusion

All five sources of slag for which data were obtained had varying degrees of metal oxides capable of extraction using the methods described herein.

Example 2

15 Materials and methods

Six samples containing mixtures of titanium dioxide, aluminium oxide, magnesium oxide, silica and calcium oxide were analysed using x-ray fluorescence spectrometry. The mass percentage composition of these samples was determined and ratios of titanium dioxide to a second component calculated.

Results

Slag source	Component (m%)					Ratio			
	TiO ₂	SiO ₂	CaO	Al ₂ O ₃	MgO	TiO ₂ :Al ₂ O ₃	TiO ₂ :MgO	TiO ₂ :SiO ₂	TiO ₂ :CaO
1 - NZ-P112-Ti : Ca = 2.1	34.8	14.1	16.3	19.0	13.8	1.84	2.52	2.47	2.14
2 - ZA-P114-Ti : Al = 2.1	30.3	19.3	15.8	15.0	12.0	2.02	2.53	1.57	1.92
3 - L108-Ti : Al = 0.3	16.1	6.0	7.7	61.5	6.7	0.26	2.40	2.68	2.09
4 - L109-Ti : Ca = 0.2	15.3	6.0	58.1	8.9	7.7	1.72	1.98	2.55	0.26
5 - L110-Ti : Al = 0.3	15.9	6.0	7.7	61.7	6.7	0.26	2.38	2.65	2.06
6 - L111-Ti : Ca = 0.3	19.3	7.6	49.1	11.2	9.2	1.72	2.11	2.54	0.39

Table 4 – compositions and component ratios of samples measured using x-ray fluorescence spectrometry

Figure 2 shows the composition of samples 1-6.

5 Conclusion

Samples were obtained with a range of compositions. These compositions are representative of a range of industrial slag compositions and core component ratios.

Example 3 – sulphation of slag comprising titanium dioxide

10 Materials and methods

Sulphation and hydrolysis (samples 1 and 3 to 6)

1. 100g samples of particulate material corresponding to samples 1 to 6 from example 2 were transferred to a 1L round bottom flask;
2. 1kg of 98% sulphuric acid was added;
- 15 3. the mixture was heated, stirred and held at a temperature of 200°C for around 4 hours;
4. the resultant sulphated mixture was cooled and filtered through a 46K filter cloth under vacuum;
5. the filter cake was transferred to a 1L conical flask and washed with 1:1 stoichiometry (mass) of RO water for 2 hours at 70°C;
6. the mixture was stirred and for approximately 15 hours then filtered through a 46K filter cloth
- 20 7. the permeate (comprising at least titanyl sulphate) was sampled and the samples subjected to inductively coupled plasma atomic emission spectroscopy (ICP-OES) analysis for titanium, calcium, aluminium and magnesium. The titanium dioxide content of the samples was also analysed using lab titration;

8. the permeate comprising at least titanyl sulphate was transferred to a 1L round bottom flask and diluted 1:2 stoichiometry (mass) with RO water (3x dilution) to produce a hydrolysis liquor;
9. the hydrolysis liquor was heated to boiling point (approximately 104°C) for 5 hours with stirring to hydrolyse the titanyl sulphate;
- 5 10. the precipitated titanium dioxide was separated from the hydrolysis liquor by centrifugation at 8000rpm for 20 minutes to pellet the precipitated hydrated titanium dioxide;
11. The remaining hydrolysis liquor was analysed using ICP-OES to determine the amount of remaining titanium, aluminium and magnesium in mg/L. A yield of titanium dioxide was calculated from this value. The amount of aluminium and magnesium remaining (as sulphate salts) for downstream
10 extraction was also measured.

The free acidity of the reaction liquor was measured at the following stages:

- a. the filtered acid removed following the initial filtration;
- b. the permeate comprising titanyl sulphate from the second filtration; and
- 15 c. the hydrolysis liquor remaining after the hydrated titanium dioxide had been precipitated and centrifuged.

Sulphation and hydrolysis method (sample 2)

1. A 1.5kg sample of sample 2-(P114) (see example 2) was ground to form a particulate material of a
20 particulate size of approximately $x\mu\text{m}$ using a ball mill;
2. 8L of 98% sulphuric acid was added;
3. the mixture was heated and held at a temperature of 200°C for around 4.5 hours while under 2 bar pressure and stirred at 300rpm;
4. the resultant sulphated mixture was cooled and filtered through a 46K filter cloth at 50°C;
- 25 5. the filtration was carried out at 5 bar pressure and blown with compressed air for 30-40mins;
6. the permeate (comprising at least titanyl sulphate) was sampled and the samples subjected to inductively coupled plasma atomic emission spectroscopy (ICP-OES) analysis for titanium, calcium, aluminium and magnesium. The titanium dioxide content and free acidity of the samples was also analysed using lab titration according to the methods described in example 3.
- 30 7. the filter cake was leached with 1:1 stoichiometry (mass) of RO water for 2.5 hours at 70°C i.e. 3028g of filter cake was leached with 3000g of RO water, to produce a hydrolysis liquor;
8. the hydrolysis liquor was then filtered through a 46K filter cloth for 15mins at 1-3 bar and air blown for 20mins;

9. The hydrolysis liquor was then transferred to a 3L round bottom flask and diluted 1:2 stoichiometry (mass) with RO water (3x dilution);
10. this diluted liquor was then heated to boiling to hydrolyse the titanyl sulphate for 5 hours with stirring;
- 5 11. the hydrated titanium dioxide was centrifuged out at 8000rpm for 20 minutes to pellet the precipitated hydrated titanium dioxide;
12. The remaining hydrolysis liquor was analysed using ICP-OES to determine the amount of remaining titanium, aluminium and magnesium. A yield of titanium dioxide was calculated from this value. The amount of aluminium and magnesium remaining (as sulphate salts) for downstream extraction
- 10 was also measured.

Precipitation of aluminium sulphate

13. Following hydrolysis the acidity of the liquor comprising aluminium sulphate was increased to around 40% (w/w) with 98% sulphuric acid.
- 15 14. This high acidity liquor was then centrifuged at 8000rpm and 20°C for 3 hours to precipitate out the aluminium sulphate and pelletise it for separation.

Titration method to determine concentration of titanium dioxide

1. Pipetted out approximately 1mL of the sample into the 500mL Erlenmeyer flask and determined the exact mass of the sample.
- 20 2. Added 60mL of 10% HCl, 20mL of 98% H₂SO₄ and about 1.3g of aluminium foil.
3. Once the reaction was complete allowed for some cooling to occur. This was when some NaHCO₃ was sucked back into the flask and formed a buffering CO₂ layer.
4. Added 6 drops of methylene blue indicator while the solution was still warm.
- 25 5. Titrated against an acidified 0.1M Cerium sulphate standard.
6. The endpoint of the titration is when the colour changes from pale yellow to pale green.

Determination of Free Acidity

1. Pipetted out approximately 1mL of the sample into a 500mL Erlenmeyer flask and determined the exact mass of the sample.
- 30 2. Added 100mL of RO water to the flask
3. Added 4 drops of the phenolphthalein indicator
4. Titrated against a standardised 1M NaOH solution.
5. The endpoint of the titration is when the colour changes from colourless to a slight pink.

Results

Samples subjected to the sulphation method described above were analysed and the compositions of the permeate in table 5 were measured:

Sample number	Lab titration results		ICP-OES results (mg/L)			
	Titanium Dioxide (g/kg)	Free Acidity (%)	Titanium	Calcium	Aluminium	Magnesium
1 - NZ-P112-Ti : Ca = 2.1	33.76	31.54	30379	159	13103	10429
2 - ZA-P114-Ti : Al = 2.1	39.15	29.47	37835	478	19492	18099
3 - L108-Ti : Al = 0.3	22.53	32.44	18063	110	26012	6287
4 - L109-Ti : Ca = 0.2	16.64	31.06	11297	144	5068	4799
5 - L110-Ti : Al = 0.3	20.66	32.97	15723	107	24542	5539
6 - L111-Ti : Ca = 0.3	24.29	29.07	19852	233	8341	8332

Table 5 – analysis results of permeate produced following filtration

- 5 The free acidity of the permeate was in a range of 29% to 33%.

Figure 4a shows the amount of titanium dioxide measured in the permeate comprising titanyl sulphate as measured by the titration method. Figure 4b shows the amount of titanium measured in the permeate as measured by the ICP-OES method. It can be seen that the measurements obtained using the lab titration method closely correlate to the measurements obtained using the ICP-OES method. Figure 5 shows the ICP-OES measurements of titanium, calcium, aluminium and magnesium in the permeate.

Sample number	Titanium in permeate (mg/L)	Titanium in spent hydrolysis liquor (mg/L)	Yield (%)
1 - NZ-P112-Ti : Ca = 2.1	30379	1546	95
2 - ZA-P114-Ti : Al = 2.1	37835	4199	89
3 - L108-Ti : Al = 0.3	18063	1612	91
4 - L109-Ti : Ca = 0.2	11297	292	97
5 - L110-Ti : Al = 0.3	15723	1022	93
6 - L111-Ti : Ca = 0.3	19852	1415	93

Table 6 – ICP-OES results showing titanium present in the permeate comprising titanyl sulphate (prior to hydrolysis) and titanium remaining in the spent hydrolysis liquor (after precipitation of titanium dioxide and centrifugation/filtration to remove the precipitate).

Sample number	ICP-OES results (spent hydrolysis liquor) (mg/L)	
	Aluminium	Magnesium
1 - NZ-P112-Ti : Ca = 2.1	5069	3126
2 - ZA-P114-Ti : Al = 2.1	3167	2821
3 - L108-Ti : Al = 0.3	6280	1552
4 - L109-Ti : Ca = 0.2	1250	1253
5 - L110-Ti : Al = 0.3	5362	1307
6 - L111-Ti : Ca = 0.3	2377	2124

Table 7 - ICP-OES results showing aluminium and magnesium present in the hydrolysis liquor following removal of titanium dioxide.

Sample number	Free acidity (%)		
	Filtered acid	Permeate comprising titanyl sulphate	Hydrolysis liquor
1 - NZ-P112-Ti : Ca = 2.1	85.53	31.54	10.7
2 - ZA-P114-Ti : Al = 2.1	90.85	29.47	9.52
3 - L108-Ti : Al = 0.3	85.23	32.44	10.85
4 - L109-Ti : Ca = 0.2	86.73	31.06	10.03
5 - L110-Ti : Al = 0.3	84.27	32.97	9.52
6 - L111-Ti : Ca = 0.3	83.98	29.07	9.34

5 Table 8 – Free acidity of reaction liquor at specific reaction stages.

In the instance where aluminium sulphate is precipitated first and filtered out, there is a loss of titanyl sulphate to this material stream. Table 9 describes the losses to the precipitated aluminium sulphate due to hold-up of the titanyl sulphate in the aluminium sulphate as it precipitates (occlusion)

Sample number	Lab titration results		Mass Calculations			
	Titanium Dioxide (g/kg)	Free Acidity (%)	Mass of Liquor (g)	Mass of TiO ₂ (g)	Loss of TiO ₂ (g)	% Loss
7 - L112-Ti : Al = 0.3 Leach Liquor	16.11	27.81	678	10.92		
8 - L112-Ti : Al = 0.3 Post Al Sulphate Precipitation Liquor	14.01	38.43	533	7.47	3.45	31.6
9 – ZA-P114-Ti : Al = 2.1 Leach Liquor	39.15	29.47	630	24.66		
10 - ZA-P114-Ti : Al = 2.1 Post Al Sulphate Precipitation Liquor	29.05	35.22	588	17.08	7.58	30.7

10 Table 9 – Equivalent titanium dioxide losses when extracting aluminium sulphate prior to hydrolysis

Conclusions

The ICP-OES results in table 5 show that substantial quantities of titanium, aluminium and magnesium are dissolved and pass through the filter substantially devoid of insoluble residues and other undesirable impurities. The titanium, aluminium and magnesium in the permeate are in the form of sulphate salts and can be separately precipitated according to the methods described herein.

The free acidity measurements indicate that the permeate comprising titanyl sulphate is in a range of 29% to 33%.

The amount of calcium in the ICP-OES analyses is very low indicating that the calcium oxide present in the original samples (see figure 2/3 and table 4) is precipitated and removed as calcium sulphate during the filtration step.

The yield measurements shown in table 6 indicate a high efficiency extraction of titanium salts (89-97% efficiency). The yield measurements also indicate that the methods described herein are effective and highly efficient for a range of particulate matter compositions and component ratios (see table 4 and figure 2).

Table 7 shows that there is a substantial quantity of aluminium and magnesium present in the liquor following hydrolysis and removal of titanium dioxide. These other components (present in the form of sulphate salts) are available for extraction in later method step precipitations.

Table 8 shows that the free acidity of the samples filtered acid is very high. The permeate comprising titanyl sulphate contains a reduced amount of free acid and the hydrolysis liquor contains approximately 10% free acidity. Additional experiments carried out by the inventors indicated that if the free acidity of the hydrolysis liquor is greater than 25%, the hydrolysis reaction is energetically unfavourable and does not proceed, or does not proceed to completion. Additionally, the inventors have found that it is preferable that the hydrolysis liquor contains a free acidity of greater than approximately 8% to enable complete hydrolysis of the titanium sulphate to occur.

Table 9 shows that there are significant losses of equivalent titanium dioxide that would otherwise be available for hydrolysis, in the instance where aluminium sulphate is precipitated prior to hydrolysis. The losses are due in large part to titanyl sulphate being occluded in the coarse aluminium sulphate crystals

that form during precipitation. In developing the technique of hydrolysing titanyl sulphate to titanium dioxide prior to aluminium sulphate precipitation, the inventors have improved the economic viability of the process.

- 5 A comparison of the two sulphation/hydrolysis methods used shows that they produce comparable results. In a commercial context, the second method (used for sample 2) is generally preferable due to the higher throughput available. Additionally, the inventors contemplate that in a commercial context, the centrifugation step would be replaced by an alternative, higher throughput separation technique such as filtration. Those of skill in the art will appreciate that such separation techniques may be used to obtain
10 the products referred to herein from the liquor/permeate comprising said products..

Example 4 – recovery of magnesium sulphate

Materials and methods

Extraction of Magnesium Sulphate

1. 1000 mL of the liquor is received from the hydrolysis reaction (optionally following recovery of
15 aluminium sulphate). The liquor comprising magnesium sulphate and sulphuric acid is heated to a temperature above 180°C by placing in a heated, stirred vessel.
2. As the liquor reaches boiling point at 180°C, the concentration of the acid in solution will reach approximately 75%.
3. The liquor is held at 180°C for 60 minutes
- 20 4. The magnesium sulphate in solution will precipitate as the acid concentration rises
5. The liquor is allowed to cool to ambient temperature
6. The liquor and precipitate is filtered in a vacuum filter with 46K cloth
7. The retentate is removed, dried and analysed with XRF to determine composition
8. The permeate will be high concentration sulphuric acid. A sample of this will be analysed for
25 composition with ICP-OES or ICP-MS technique.
9. A sample of the permeate will also be titrated for free acidity

Example 5

This example describes a proposed method to achieve higher acid concentration in a permeate comprising magnesium sulphate. This method dehydrates the liquor thus decreasing pH. The higher sulphuric acid
30 concentration results in magnesium sulphate precipitating from the permeate.

A permeate comprising magnesium sulphate is obtained from a method of recovering products from a particulate material as described in example 3. The permeate is passed to a reverse osmosis unit

comprising at least one reverse osmosis membrane. The permeate is fed to the unit under a pressure greater than the pressure on the other side of the membrane, for example 1.5 bar.

The retentate is collected and allowed to settle. Magnesium sulphate precipitation occurs spontaneously or may be assisted by cooling or addition of further acid. Precipitated magnesium sulphate is collected via

5 filtration.

Claims

1. A method of recovering titanium dioxide and magnesium sulphate from a particulate material, said method comprising:
 - a. contacting the particulate material with sulphuric acid and heating to form a sulphated mixture;
 - b. filtering the sulphated mixture to produce a filter cake and a first permeate comprising sulphuric acid;
 - c. contacting the filter cake with water to form a sulphated suspension comprising titanyl sulphate;
 - d. filtering the sulphated suspension to produce a permeate comprising at least titanyl sulphate, and a retentate comprising insoluble residue;
 - e. contacting the permeate comprising at least titanyl sulphate with water to produce a hydrolysis liquor; and
 - f. hydrolysing the titanyl sulphate;
 - g. separating titanium dioxide hydrate from the hydrolysis liquor to produce a permeate comprising magnesium sulphate, and a retentate comprising titanium dioxide hydrate; and
 - h. precipitating magnesium sulphate from the permeate.
2. The method of claim 1 wherein the retentate comprising insoluble residue comprises at least one product selected from calcium sulphate and silica.
3. The method of claim 1 or 2 wherein the precipitation of magnesium sulphate comprises the steps of:
 - a. increasing the acid concentration of the permeate comprising magnesium sulphate to form an acidified liquor; and
 - b. filtering the acidified liquor to produce a retentate comprising precipitated magnesium sulphate.
4. A method as claimed in claim 3 wherein the acid concentration of the permeate comprising magnesium sulphate is increased by the addition of sulphuric acid.
5. A method as claimed in claim 3 or 4 wherein the pH of the permeate comprising magnesium sulphate is reduced to less than approximately pH1 by the addition of sulphuric acid.
6. A method as claimed in any one of claims 3 to 5 wherein the acid concentration of the permeate comprising magnesium sulphate is increased by heating the permeate to remove water.
7. The method of any one of the preceding claims wherein the particulate material comprises greater than 8m% titanium dioxide and greater than 7m% magnesium oxide.

8. The method of claim 7 wherein the particulate material comprises greater than 15m% titanium dioxide and greater than 10m% magnesium oxide.
9. The method of any one of the preceding claims wherein the particulate material comprises a ratio of titanium dioxide to magnesium oxide ($\text{TiO}_2:\text{MgO}$) of approximately 0.5 to 3.0.
- 5 10. The method of any one of the preceding claims wherein the step of precipitating magnesium sulphate comprises:
 - a. cooling the permeate comprising magnesium sulphate or the acidified liquor to produce a cooled liquor comprising magnesium sulphate; and
 - 10 b. filtering the cooled liquor comprising magnesium sulphate to produce a retentate comprising precipitated magnesium sulphate, and a permeate.
11. The method of claim 10 wherein the permeate or liquor is cooled to between 0°C and 4°C .
12. The method of any one of the preceding claims, further comprising a step of precipitating aluminium sulphate from either:
 - a. the permeate produced from the hydrolysis liquor; or
 - 15 b. the permeate comprising at least titanyl sulphate.
13. The method of any one of the preceding claims wherein the particulate material is selected from the group consisting of iron slag, melter slag, obtained from iron slag, obtained from melter slag, obtained from an iron manufacturing process, and obtained from a steel manufacturing process.
14. The method of any one of the preceding claims wherein the method further comprises the step of
20 grinding raw material to form the particulate material of step a.
15. The method of claim 14 wherein the particulate material has a particle size between 10 and $180\mu\text{m}$.
16. The method of any one of the preceding claims wherein the particulate material is contacted with 4-10 times its stoichiometric quantity of sulphuric acid.
- 25 17. The method of any one of the preceding claims wherein the step of filtering the sulphated mixture further comprises contacting the mixture with compressed air.
18. The method of claim 17 wherein the temperature of the compressed air is from 10°C to 85°C .
19. The method of any one of the preceding claims wherein the permeate comprising at least titanyl sulphate is heated to remove water and increase the free acidity.
- 30 20. The method of any one of the preceding claims wherein the hydrolysis liquor is contacted with water containing titanium dioxide particles.
21. A product produced by the method of any one of the preceding claims, the product being selected from:

- a. titanium dioxide;
- b. silica;
- c. calcium sulphate;
- d. aluminium sulphate; or
- e. magnesium sulphate.

5

22. A system for the recovery of products from a particulate material, the system comprising:

- a. a reactor adapted to receive and heat sulphuric acid and particulate material comprising at least titanium dioxide and produce a sulphated mixture;
- b. a first filtration unit adapted to receive the sulphated mixture and produce a first permeate comprising at least sulphuric acid, and a filter cake comprising at least titanyl sulphate;
- c. a reactor adapted to receive a solution comprising titanyl sulphate and heat said solution to produce a hydrolysis liquor;
- d. a separation unit adapted to receive the hydrolysis liquor and separate titanium dioxide hydrate;
- e. at least one precipitation tank to facilitate precipitation of magnesium sulphate; and
- f. at least one further filtration unit to facilitate separation of precipitated magnesium sulphate.

10

15

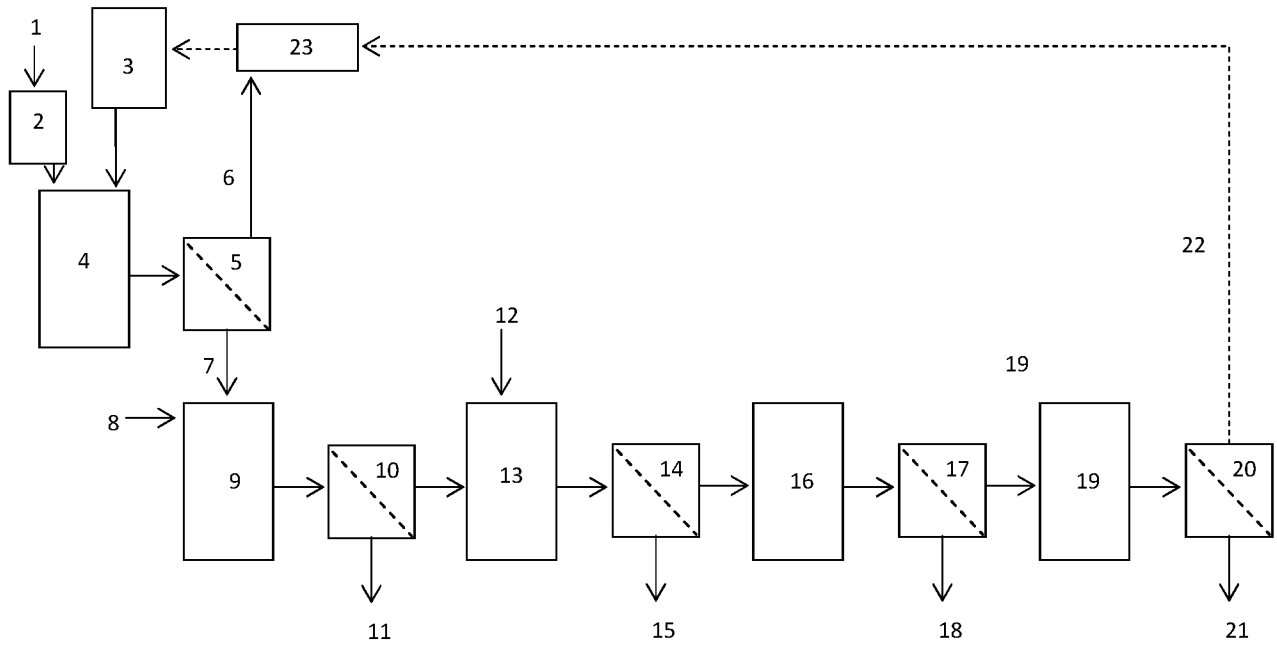
Figure 1

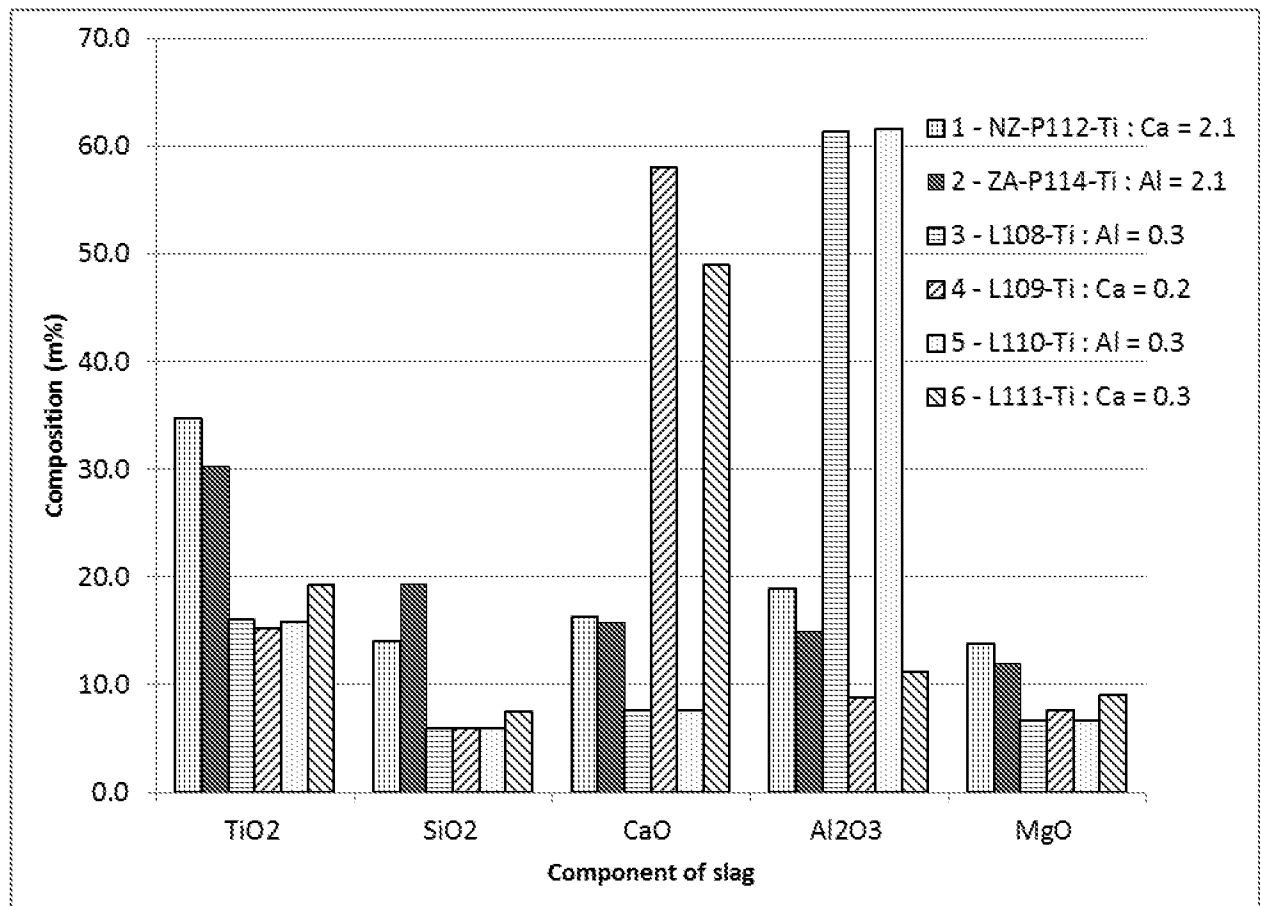
Figure 2

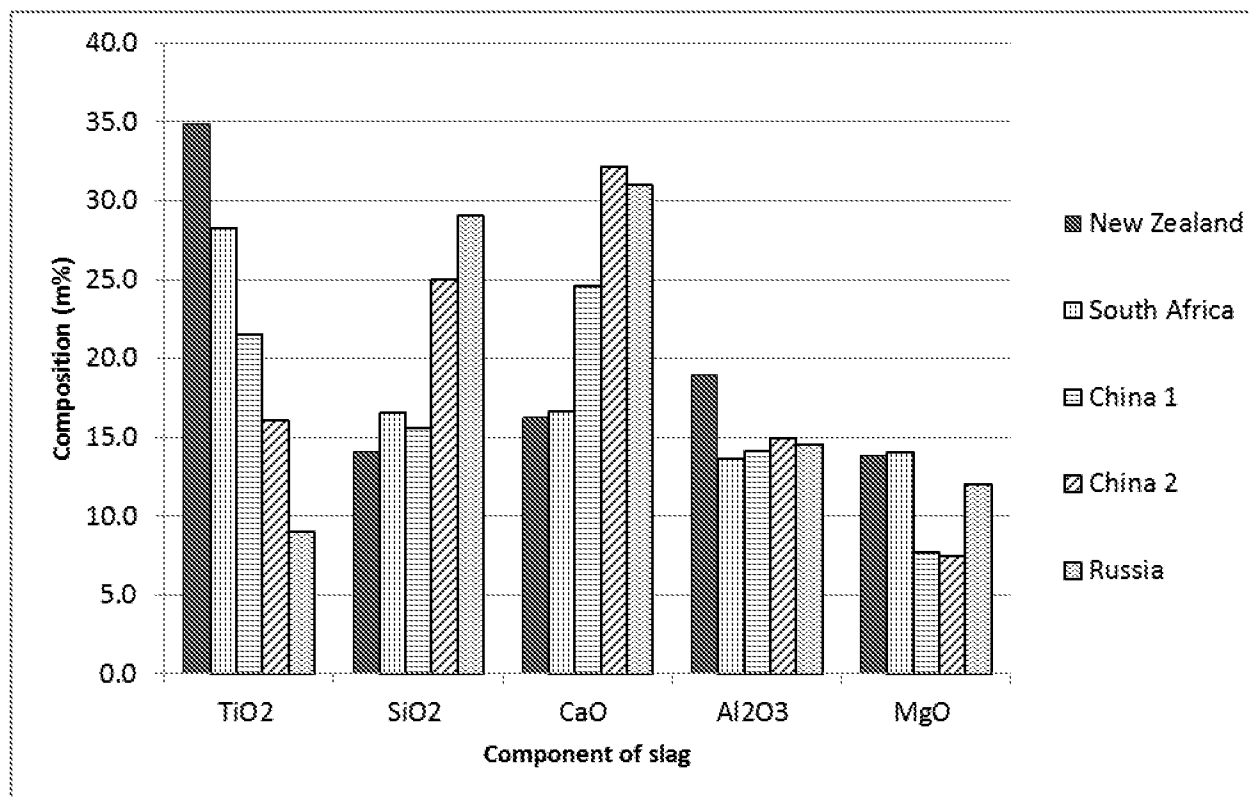
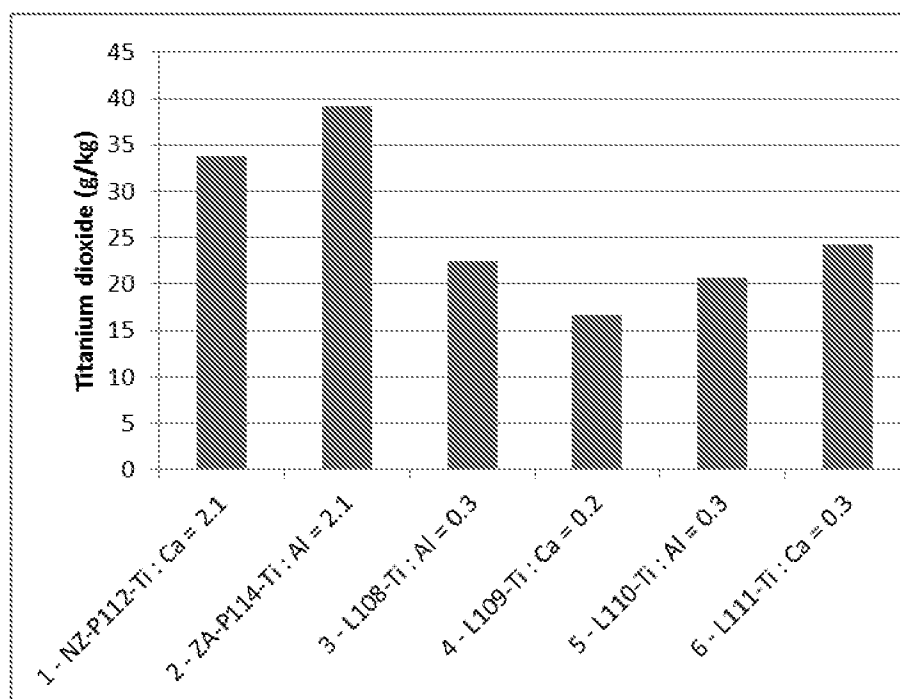
Figure 3**Figure 4a**

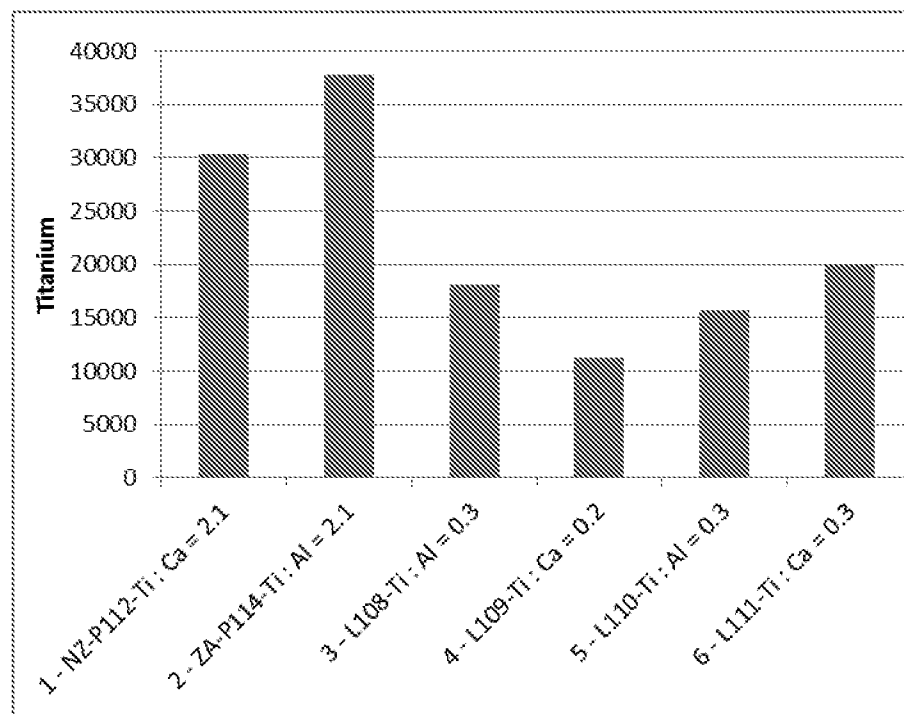
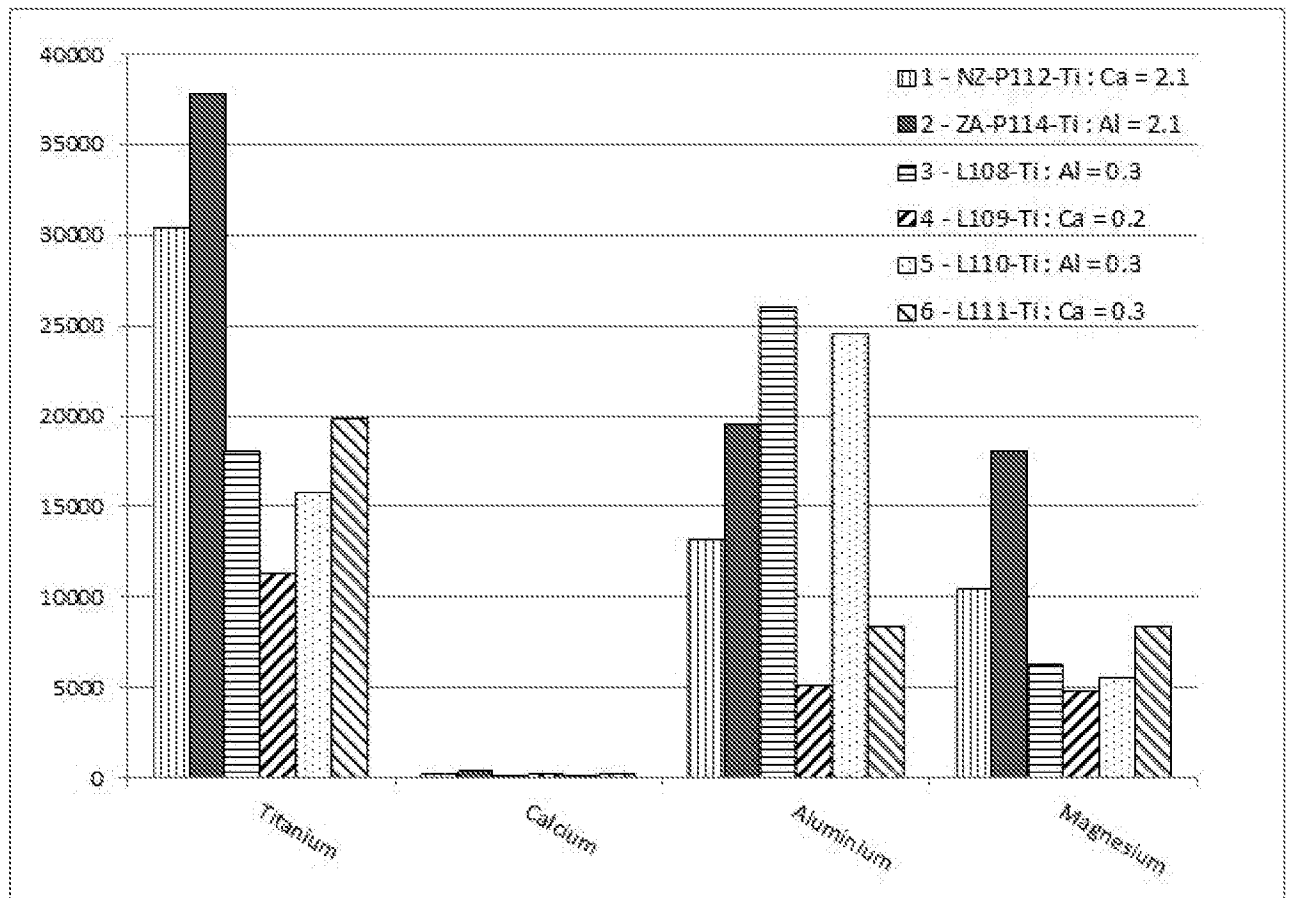
Figure 4b

Figure 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NZ2015/050085

A. CLASSIFICATION OF SUBJECT MATTER

C22B 34/12 (2006.01) C22B 3/08 (2006.01) C01G 23/053 (2006.01) C01F 5/40 (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPOQUE X-FULL: TXPEA, TXPEB, TXPEC, TXPEE, TXPEF, TXPEH, TXPEI, TXPEP, TXPEPEA, TXPES, TXPUSE0A, TXPUSE1A, TXPUSEA, TXPUSEB, TXPWOEA, EPODOC, WPIAP: (/IC/CC OR C22B, C01G, C01F, B01D) & Keywords (titanium dioxide, titania, rutile, magnesium sulphate, leach, extract, filter, hydrolysis, water, titanyl sulphate, titanium oxysulphate and similar terms).

Google Patents, Espacenet, The Lens, Google Scholar, Science Direct: Keywords (titanium dioxide, magnesium sulphate, sulphuric acid, filtration, titanyl sulphate and similar terms).

Applicant(s)/Inventor(s) search conducted on Espacenet, AusPat and all internal databases provided by IP Australia.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	



Further documents are listed in the continuation of Box C



See patent family annex

* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search
21 October 2015Date of mailing of the international search report
21 October 2015

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
Email address: pct@ipaustralia.gov.au

Authorised officer

Khalid Shamim
AUSTRALIAN PATENT OFFICE
(ISO 9001 Quality Certified Service)
Telephone No. 0262832560

INTERNATIONAL SEARCH REPORT		International application No.
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		PCT/NZ2015/050085
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/0237719 A1 (BECKER et al.) 02 December 2004 abstract; figure; paragraphs [0004]-[0027], [0029]-[0054]	21, 22
A	EP 0440406 A2 (SOLEX RESEARCH CORPORATION OF JAPAN) 07 August 1991 abstract; claims 1-16; figures 1-9	1-22
A	WO 2013/037649 A1 (TIOXIDE EUROPE SAS) 21 March 2013 abstract; claims 1-24	1-22

Form PCT/ISA/210 (fifth sheet) (July 2009)

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/NZ2015/050085	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
US 2004/0237719 A1	02 December 2004	US 2004237719 A1	02 Dec 2004
		US 7258847 B2	21 Aug 2007
		AU 2002354885 B2	01 Feb 2007
		BR 0211945 A	28 Sep 2004
		CA 2457837 A1	30 Jan 2003
		CN 1555343 A	15 Dec 2004
		EP 1409410 A1	21 Apr 2004
		EP 1409410 B1	15 Dec 2004
		WO 03008335 A1	30 Jan 2003
		ZA 200401215 A	16 Feb 2005
		EP 0440406 A2	07 August 1991
CA 2035085 A1	30 Jul 1991		
JP H03223114 A	02 Oct 1991		
JP H04119919 A	21 Apr 1992		
US 5277816 A	11 Jan 1994		
WO 2013/037649 A1	21 March 2013	WO 2013037649 A1	21 Mar 2013
		CA 2847717 A1	21 Mar 2013
		CN 103796955 A	14 May 2014
		EP 2755916 A1	23 Jul 2014
		JP 2014530160 A	17 Nov 2014
		KR 20140063806 A	27 May 2014
		TW 201318973 A	16 May 2013
		US 2014245804 A1	04 Sep 2014
		US 9073797 B2	07 Jul 2015
End of Annex			
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			