



US 20060190886A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2006/0190886 A1**

Lu et al.

(43) **Pub. Date: Aug. 24, 2006**

(54) **OPTIMIZING IC CLOCK STRUCTURES BY MINIMIZING CLOCK UNCERTAINTY**

Related U.S. Application Data

(75) Inventors: **Aiguo Lu**, Pleasanton, CA (US); **Ivan Pavisic**, San Jose, CA (US); **Nikola Radovanovic**, Santa Clara, CA (US)

(62) Division of application No. 10/616,623, filed on Jul. 10, 2003.

Publication Classification

Correspondence Address:
LSI Logic Corporation
Timothy R. Croll
1621 Barber Lane, MS D-106
Milpitas, CA 95035 (US)

(51) **Int. Cl.**
G06F 17/50 (2006.01)
(52) **U.S. Cl.** **716/6; 716/10**


(57) **ABSTRACT**

A process is provided for optimizing a clock net in the form of a tree having a root defined by a driver pin and a plurality of leaves defined by driven pins. The process includes forcing a first buffer to a center of gravity of the plurality of leaves, inserting a set of second buffers so each leaf is driven by an inserted buffer without timing violations, and moving the first buffer to a center of gravity of the set of second buffers.

(73) Assignee: **LSI Logic Corporation**, Milpitas, CA (US)

(21) Appl. No.: **11/402,146**

(22) Filed: **Apr. 11, 2006**

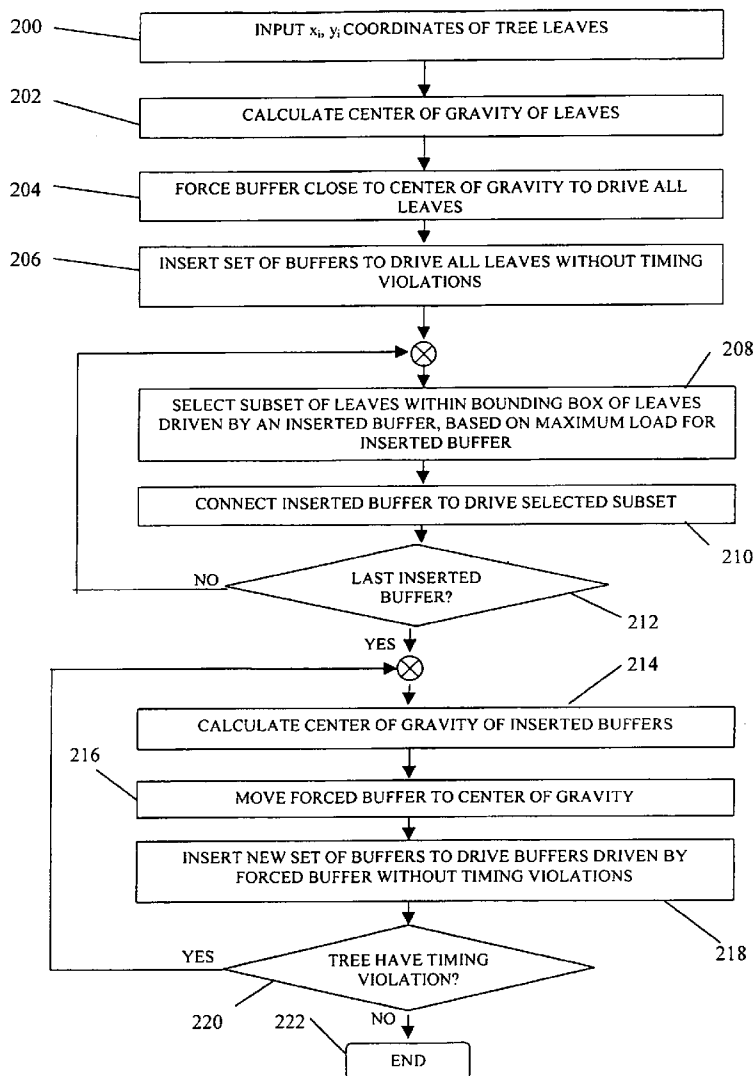

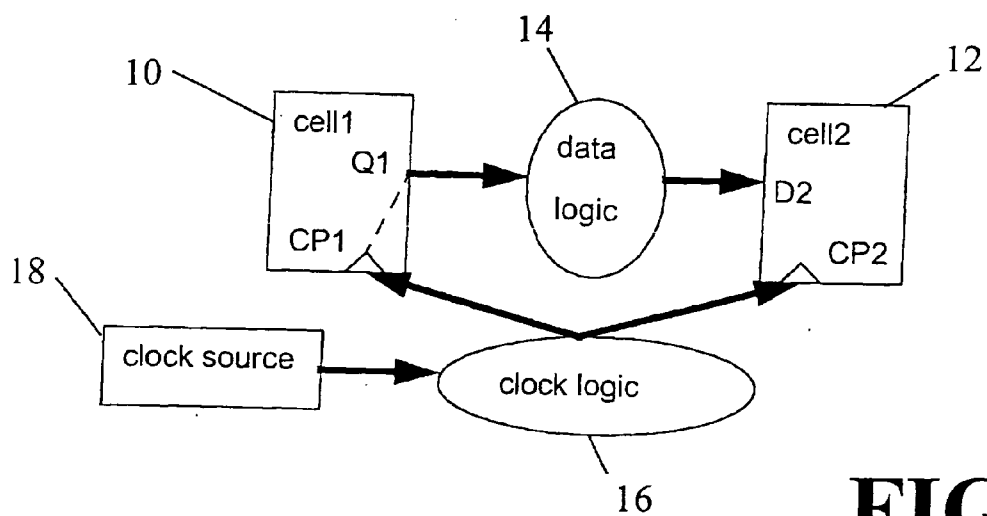


FIG. 1

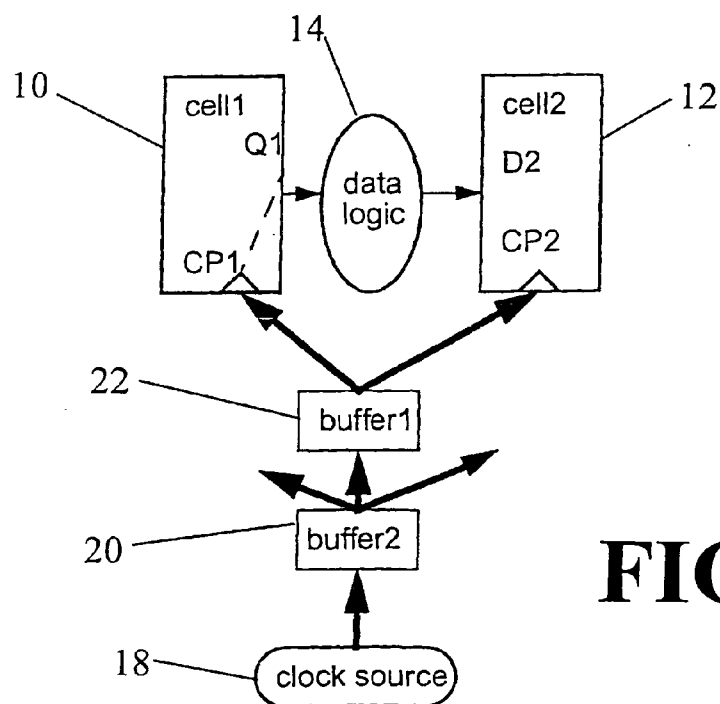


FIG. 2

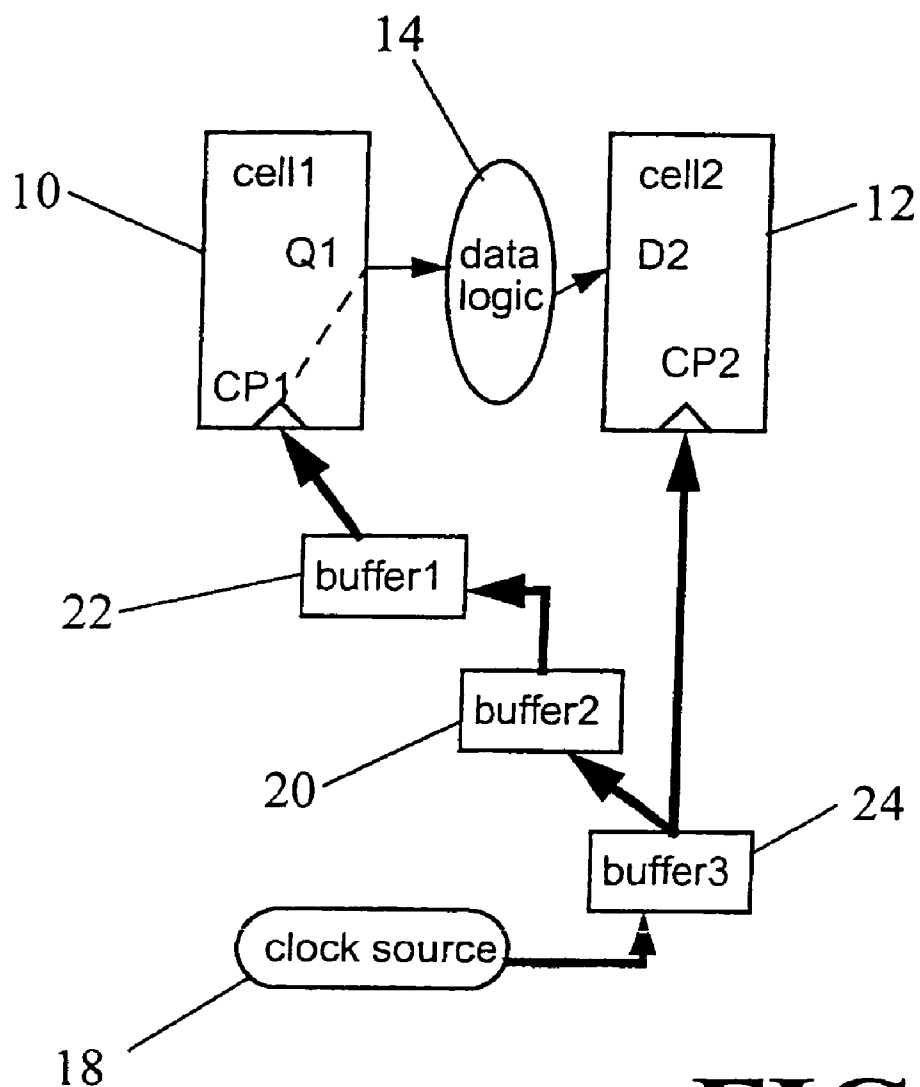


FIG. 3

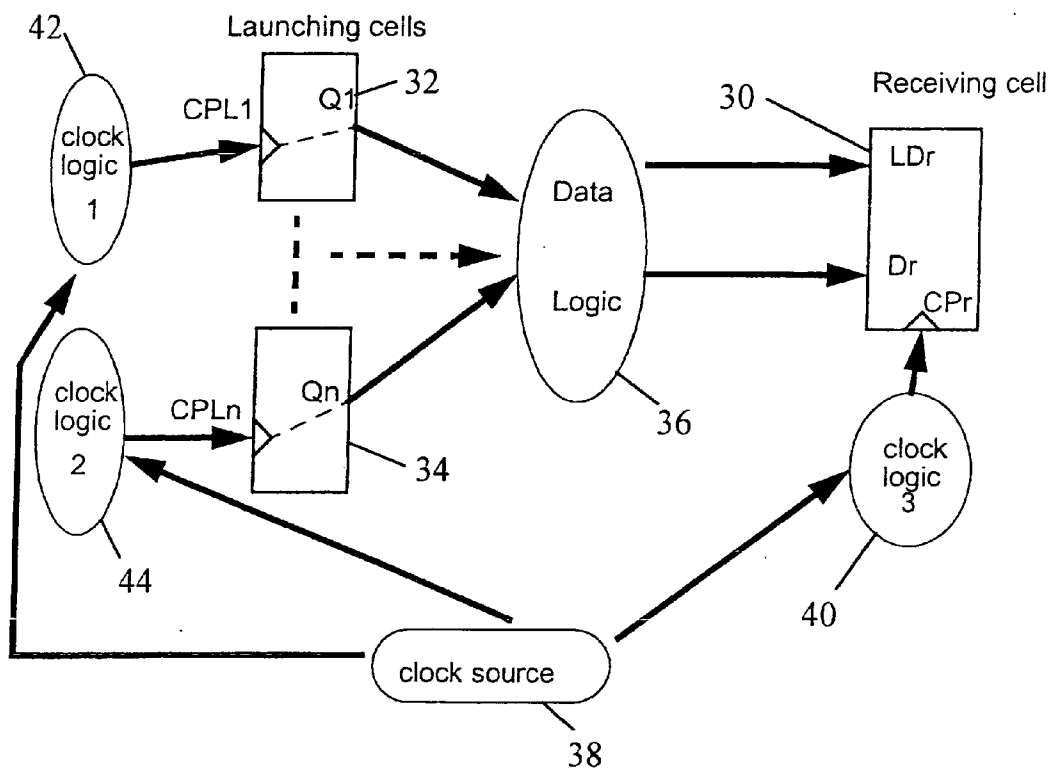
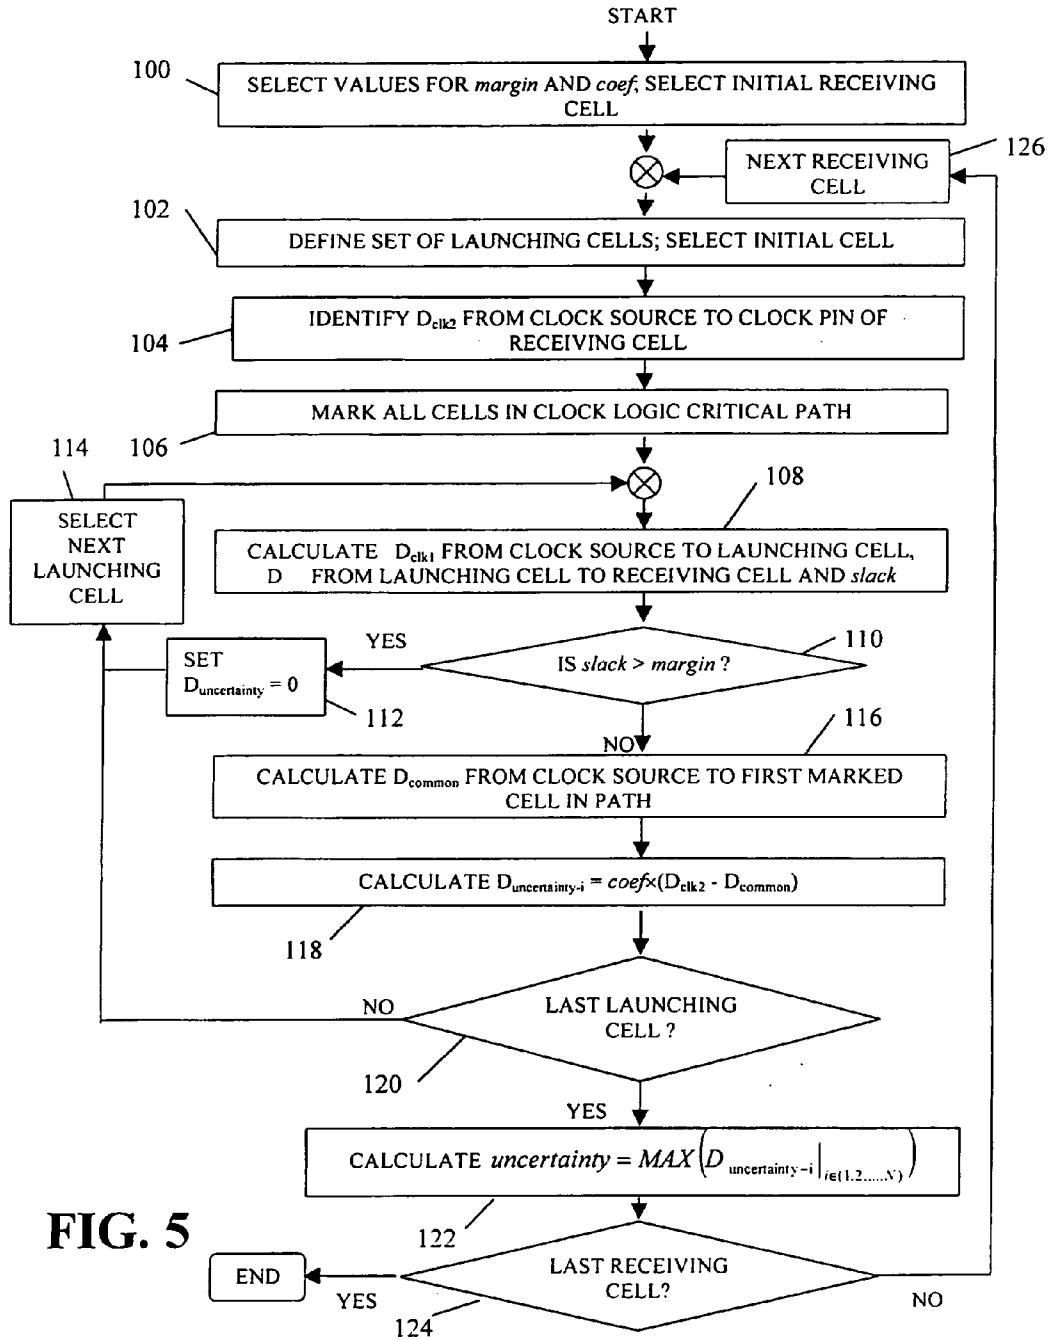


FIG. 4



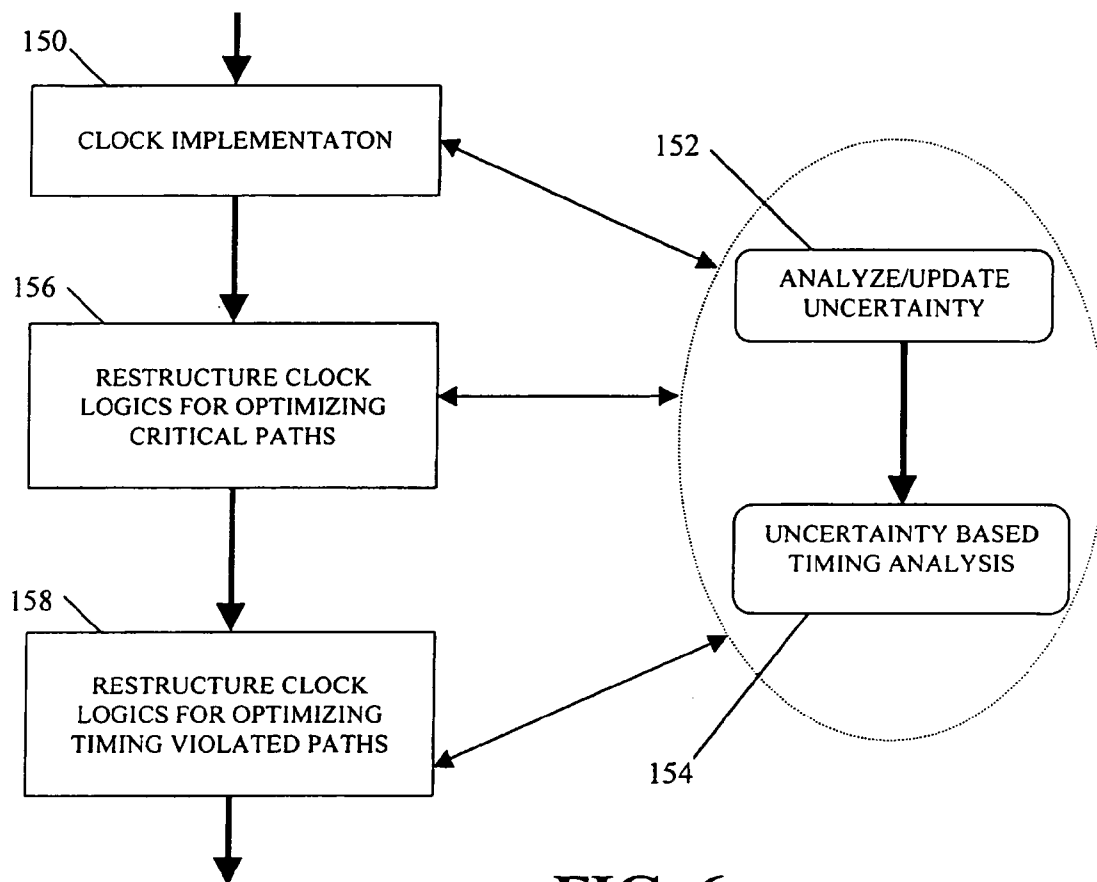


FIG. 6

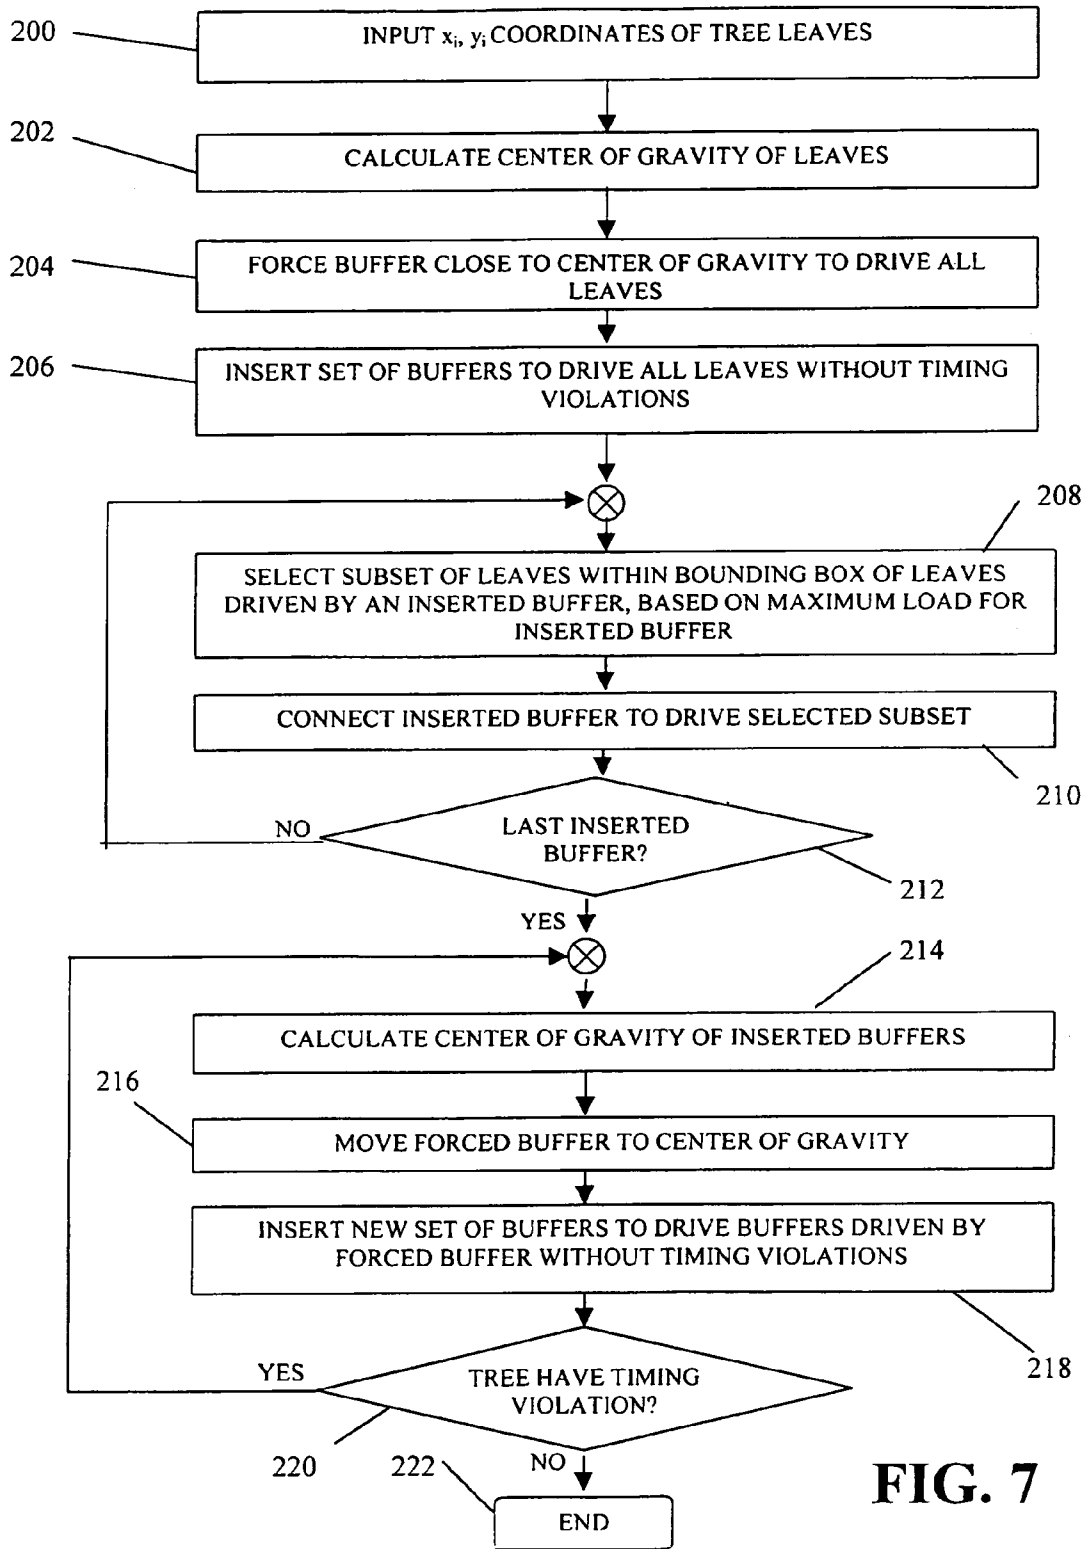


FIG. 7

OPTIMIZING IC CLOCK STRUCTURES BY MINIMIZING CLOCK UNCERTAINTY

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application is a division of and claims priority from U.S. patent application Ser. No. 10/616,623, filed Jul. 10, 2003, the content of which is hereby incorporated by reference in its entirety.

FIELD OF THE INVENTION

[0002] This invention relates to designing clock logics in integrated circuits or chips, and particularly to optimizing clock logics during the design phase by minimizing clock uncertainty.

BACKGROUND

[0003] Integrated circuits (ICs) comprise a large number of circuit elements, such as transistors, interconnected by a large number of wires. Some elements (“drivers”) drive other elements (“driven elements”). Fanout of a given driver is the number of driven elements coupled to the output of the driver.

[0004] The “ramptime” of a driven element is the time required to drive a driven element to operation. Ramptime depends on the amount of capacitance and resistance “seen” by the driver, which in turn depends on the number of driven elements connected to the output of the driver and the length of the wires that interconnect the driver with its driven elements. If a driver’s load exceeds a design threshold, the ramptime for the driven elements will also exceed a threshold.

[0005] It is common to selectively insert buffers, in the form of additional drivers, between the driver and the driven elements to reduce the number of driven elements for a given driver, thereby minimizing capacitance and resistance “seen” by that driver and minimizing timing violations. However, each added buffer increases power consumption of the integrated circuit. Consequently, it is desirable to minimize the number of buffers. Moreover, because each buffer introduces a delay in signal propagation, it is also desirable to minimize the number of levels of buffers and to minimize the overall interconnect length.

[0006] In the hierarchical design flow of digital systems, interconnect information is available only at lower levels of the design process. For example, coupling capacitance information is available only after detailed routing is completed, and not at the higher logic synthesis, placement and global routing stages. While lower levels of the design process provide more detailed interconnect information, the circuit design is usually so advanced at the lower levels that only minimal changes to the circuit structure can be performed to improve performance.

[0007] If a clock network is implemented after detailed routing, it is difficult to implement clock logic changes without changing the placement and the routing of data logics. It is also difficult to place the buffers and route the clock nets simultaneously in order to take into account the coupling and other detailed information of the chip fabrication and materials (“silicon information”).

[0008] To achieve the overall optimal results from the design specification to implementation, it is crucial to estimate the interconnect information at higher levels of the design process, such as during the placement stage and before routing, where there exists more freedom to restructure the design. Clock logics are very important and also sensitive to the timing closure of a design. A mis-estimation of clock delays may cause thousands or more violated timing paths, and attempts to correct a poorly routed clock net may inadvertently cause other timing violations. Therefore, good delay estimations for the clock logics are important at early stages of the design process. It is also important to implement the clock logics so that they are robust with respect to the interconnect implementations in fabrication of the chip.

[0009] A calculated clock delay will unavoidably have estimation errors. To compensate this estimation error, a “clock uncertainty” factor is employed in the estimation of clock delays. To make sure that the circuit under design will operate satisfactorily when implemented into a chip, the value of clock uncertainty is usually set conservatively. However, a conservative clock uncertainty value leads to other problems, such as adding unnecessary buffers to fix timing violations.

SUMMARY

[0010] An embodiment of the present invention is directed to a technique for an early estimation of clock delay, and for reduction of estimation errors. The technique is useful in design optimization tools, and because delay changes dynamically during the optimization process, the developed technique is efficient in computation and memory usage.

[0011] In one embodiment of the invention, clock uncertainty between a receiving cell and a launching cell of a net is estimated by back-tracing a first path from the receiving cell toward the clock source. Each cell in the first path having a predetermined characteristic (e.g., in a critical path) is marked. A second path from the launching cell is back-traced toward the clock source to one of the marked cells having the predetermined characteristic (e.g., first marked cell). Clock uncertainty is calculated based on a delay associated with the first path between the marked cell and the receiving cell.

[0012] In preferred environments, there are a plurality of data launching cells capable of launching data to a data receiving cell. The second path is back-traced from each launching cell and clock uncertainty is calculated for each data path between the plurality of launching cells and the receiving cell. The maximum value of clock uncertainty is selected as a clock uncertainty for the receiving cell.

[0013] In some embodiments, a first clock delay between the clock source and the launching cell is calculated, and a second clock delay between the clock source and the receiving cell is identified. A data delay between the launching cell and the receiving cell is calculated, and a slack is calculated based on the first and second clock delays and the data delay. Clock uncertainty is calculated if the slack does not exceed a predetermined value.

[0014] In some embodiments, buffer placement to the clock net is optimized by forcing a buffer to the center of gravity of a plurality of inserted buffers driving respective

clock nets without timing violations. The path between the root and the forced buffer defines a common path of maximum length to the leaves so that the non-common paths between the inserted buffer and the leaves is minimized, thereby minimizing clock uncertainty.

[0015] In other embodiments a computer having a computer useable medium has a computer readable program containing code that causes the computer to perform the process.

[0016] An embodiment of the present invention is directed to a process for optimizing a clock net in the form of a tree having a root defined by a driver pin and a plurality of leaves defined by driven pins. The process includes forcing a first buffer to a center of gravity of the plurality of leaves, inserting a set of second buffers so each leaf is driven by an inserted buffer without timing violations, and moving the first buffer to a center of gravity of the set of second buffers.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] FIGS. 1-4 are diagrams useful in explaining features of an embodiment of the present invention.

[0018] FIG. 5 is a flowchart of a process for calculating an uncertainty parameter in accordance with an embodiment of the present invention.

[0019] FIG. 6 illustrates application of the application of uncertainty based to optimization of clock logic.

[0020] FIG. 7 is a flowchart of a process for constructing a net using timing analysis in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0021] FIG. 1 illustrates a portion of an integrated circuit design having two sequential cells 10 and 12, data logics 14 and clock logics 16. If the circuit operates at frequency 400 MHz, the clock cycle, T , is 2.5 ns (nanoseconds). The data path delay, D_{data} , is the delay from clock pin CP1 in cell 10, through pin Q1 in cell 10 and data logic 14, to data pin D2 in cell 12. Clock delay, D_{clk1} , is the delay from clock source 18, through clock logic 16, to clock pin CP1, and clock delay, D_{clk2} , is the delay from clock source 18, through clock logic 16, to clock pin CP2. If $D_{clk1} + D_{data} + \text{setup} + \text{uncertainty} - D_{clk2} > T$, (1) where setup is a constant dependent on the technology and cell type, then the path ending at pin D2 has a timing violation. In other words, this design cannot work at the frequency of 400 MHz (but might operate at a lower frequency).

[0022] The value of uncertainty represents the maximal clock delay estimation errors. (As mentioned above, the clock delay estimation at the placement stage cannot be accurate because no routing information is available.) Larger timing violations may occur where the value of uncertainty is greater; large timing violations is minimized if the value of uncertainty is small.

[0023] The value of uncertainty can be quite large if the clock network delay is large. For example, if the clock network delay is 4 ns and, in the worst case, the estimation error is 15% of the clock network delay, the uncertainty value can be as high as $0.15 * 4 = 0.6$ ns. Considering the clock cycle (T) is only 2.5 ns for a 400 MHz frequency, the

uncertainty value is 24% of the clock cycle. Thus, the uncertainty value plays an important role in the timing closure of the design process.

[0024] An embodiment of the present invention provides an analysis approach for reducing the uncertainty value based on the clock network topology, rather than applying the worst case percentage. A robust clock network can be implemented to further reduce the uncertainty value.

[0025] FIGS. 2 and 3 illustrate certain principles of an embodiment of the present invention. In FIG. 2, the clock path to pin CP1 in cell 10 is from clock source 18, through buffer 20 labeled "buffer2" and buffer 22 labeled "buffer1", to pin CP1. The clock path to pin CP2 in cell 12 is from clock source 18, through buffer 20 and buffer 22, to pin CP2. It is clear that both paths have a common part, which is from clock source 18 through buffer 22. From Equation (1), the entire clock delay impact to the timing violation is $D_{clk1} - D_{clk2}$, where $D_{clk1} = D_{common} + d_{CP1}$ and $D_{clk2} = D_{common} + d_{CP2}$, where D_{common} is the delay from clock source 18 through buffer 22, d_{CP1} is the delay from buffer 22 to pin CP1, and d_{CP2} is the delay from buffer 22 to pin CP2. Therefore

$$\begin{aligned} (D_{clk1} - D_{clk2}) &= D_{common} + d_{CP1} - (D_{common} + d_{CP2}) \\ &= d_{CP1} - d_{CP2} \end{aligned} \quad (2)$$

This indicates that D_{common} (i.e., the common part of clock delays in both clock paths to pins CP1 and CP2) does not have any impact on the timing violation. So when uncertainty is being estimated, D_{common} can be ignored. Consequently, a larger D_{common} will provide a smaller uncertainty.

[0026] In FIG. 2, D_{common} accounts for a major part of the clock delay, so uncertainty is small for the data path from pin CP1 to pin D2. However in FIG. 3, the common part of the clock paths is only from clock source 18 through buffer 24. In this case, D_{common} is small and uncertainty is large. Therefore it is important to analyze uncertainty based on the specific paths. By ignoring D_{common} in calculating uncertainty, confidence of the clock uncertainty can be increased.

[0027] FIG. 4 illustrates a more general situation of a receiving cell 30 receiving data from each of a plurality of launching cells 32, . . . , 34. Receiving cell 30 has a plurality of path ending points defined by pins LD_r and D_r receiving data from launching cells 32, . . . , 34. A plurality of n pins CPL_1, \dots, CPL_n of launching cells 32, . . . , 34 define path starting points for up to n data paths through data logic 36 to each ending point LD_r and D_r in receiving cell 30. Thus, there may be a data path from each starting point $CPL_1, CPL_2, \dots, CPL_n$ to path ending point LD_r and from each starting point $CPL_1, CPL_2, \dots, CPL_n$ to path ending point D_r .

[0028] Clock logic 40 supplies clock signals from clock source 38 to pin CP_r of receiving cell 30, and n clock logics 42, . . . , 44 supplies clock signals from clock source 38 to pins CPL_1, \dots, CPL_n of launching cells 32, . . . , 34. Clock logics 40, 42 and 44 may have common elements like buffer 24 in FIG. 3, as well as distinct elements like buffers 20 and 22 in FIG. 3, and the common elements between logics 40 and 42 may be different from the common elements between

logics **40** and **44**. Consequently, there are different common clock logic delays $D_{\text{common-}i}$ for clock paths from different starting points CPL_i , where $i \in (1, 2, \dots, n)$.

[0029] It is time-consuming, and therefore impractical, to analyze and update each $D_{\text{common-}i}$ on a path by path with an optimization tool. But it is also unnecessary to extract every path-based uncertainty because most paths are not timing-critical (in other words they are not likely to become timing violated paths).

[0030] To understand the calculation of uncertainty according to an embodiment of the present invention, the parameters slack, margin and coef are defined.

[0031] Slack is a measure of a potential timing violation for a given data path, and is defined as the clock cycle period, T , less the sum of the data path delay, D_{data} , the difference in clock delay, $D_{\text{clk1}} - D_{\text{clk2}}$, setup and uncertainty:

[0032] $\text{slack} = T - \{D_{\text{data}} + (D_{\text{clk1}} - D_{\text{clk2}}) + \text{setup} + \text{uncertainty}\}$. A timing violation might occur if the sum of the data path delay, D_{data} , the difference in clock path delay, $D_{\text{clk1}} - D_{\text{clk2}}$, setup and uncertainty exceed the clock cycle period, T , that is, if $\text{slack} < 0$. Thus in **FIG. 3**, the data path from pin **Q1** (starting point) in cell **10** to pin **D2** (ending point) in cell **12** has a potential timing violation if $\text{slack} < 0$.

[0033] Margin is a pre-determined value based on whether the time analysis is for setup time or hold time. For example, if the time analysis is for setup time, margin might be 2 ns, whereas if the time analysis is for hold time, margin might be 1 ns.

[0034] Coef is a user-specified parameter, which indicates the percentage-wise possible delay estimation errors at the placement stage. For example, if $\text{coef} = 0.15$ (15%) and the clock delay is 3 ns, the worst case uncertainty $= 0.15 \times 3 = 0.45$ ns.

[0035] $D_{\text{uncertainty-}i}$ is the calculated clock uncertainty value from i -th launching cell to one path ending point in the receiving cell under analysis.

[0036] **FIG. 5** is a flowchart of a process for calculating the value of uncertainty according to an embodiment of the present invention. At step **100**, values for margin and coef are selected and an initial receiving cell, such as cell **30** in **FIG. 4**, is selected. Cell **30** is a data receiving cell, such as a flip-flop, memory, etc. At step **102**, the data path is back traced through data logic **36** to identify all data launching cells **32** and **34** that launch data to the data receiving cell under consideration. One of those cells, such as cell **32**, is selected, thereby selecting a data path through data logic **36** from cell **32** to cell **30** for consideration.

[0037] At step **104**, the delay, D_{clk2} , from clock source **38** to the clock pin CP_r of receiving cell **30** is identified. At step **106** the clock path is back traced through clock logic **40** to clock source **38** and each intermediate cell in the clock logic that is in a "critical path" to pin CP_r is marked. An intermediate cell in the clock logic is in the critical path if the arrival time of a signal from clock source **38** to the intermediate cell, plus the time required to propagate a signal from the intermediate cell to pin CP_r of the receiving cell is equal to clock delay D_{clk2} .

[0038] At step **108**, the clock delay, $D_{\text{clk1-}i}$, from the clock source **38** to the clock pin of the selected launching cell **32**

is calculated. Also, the data logic delay $D_{\text{data-}i}$ from the selected launching cell **32** to receiving cell **30** end point is calculated. As will become evident, the clock delay, $D_{\text{clk1-}i}$, and data logic delay, $D_{\text{data-}i}$, are calculated for each launching cell i to the receiving cell.

[0039] The Slack_i the data path from the respective i -th launching cell to the receiving cell is calculated as

$$\text{Slack}_i = T - D_{\text{clk1-}i} - D_{\text{data-}i} - \text{setup} + (1 - \text{coef}) \times D_{\text{clk2}}$$

If, at step **110**, $\text{slack}_i > \text{margin}$, the launching cell (e.g., cell **32**) can be ignored at step **112**, that is, $D_{\text{uncertainty-}i} = 0$, and next launching cell (e.g., cell **34**) will be selected at step **114**.

[0040] If at step **110** $\text{slack}_i < \text{margin}$, then at step **116** the clock circuit is back traced from the clock pin CPL_i of i -th launching cell (such as cell **32**) through the respective clock logic (such as logic **42**) to clock source **38**. Upon reaching the first marked cell, namely the cell that was marked at step **106** and first encountered in the back tracing of step **116**, a clock delay, $D_{\text{common-}i}$, is calculated from clock source **38** to that marked cell. The selected marked cell is that cell that is electrically closest to the launching cell, and hence represents the marked cell of the longest common clock path to both the launching i and the receiving cell. At step **118**, a clock uncertainty for launching cell i is calculated as $D_{\text{uncertainty-}i} = \text{coef} \times (D_{\text{clk2}} - D_{\text{common-}i})$.

[0041] At step **120**, if all of the launching cells i in the set identified at step **102** have not been considered, then the process loops to step **114** to select the next launching cell for the receiving cell being considered. The process thus iterates to calculate $D_{\text{uncertainty-}i}$ for each launching cell capable of launching data to the receiving cell under consideration. When the last launching cell has been considered at step **120**, the value of uncertainty is selected at step **122** as the maximum value of $D_{\text{uncertainty-}i}$ for all launching cells i to the receiving cell, thus representing the uncertainty for the path ending point under analysis:

$$\text{uncertainty} = \text{MAX}(D_{\text{uncertainty-}i} | i \in (1, 2, \dots, N))$$

where $1, 2, \dots, N$ are the launching cells.

[0042] The value of uncertainty is applied to Equation 1 for the timing analysis for the path end point.

[0043] To complete analysis of the entire integrated circuit design, at step **124** if the receiving cell under consideration is not the last receiving cell, the process advances to step **126** to select the next receiving cell and repeat the process. The process ends when, at step **124**, the last receiving cell has been considered.

[0044] The value of uncertainty is used in Equation 1 for timing analysis for each path end point of the integrated circuit. The process is a dynamic process, used to update the clock uncertainty during the structuring and restructuring of the clock net. As shown in **FIG. 6**, the uncertainty is analyzed and updated at each of the three main phases of clock synthesis. At the clock implementation stage **150**, which includes initial cell placement for the clock net, uncertainty is calculated for each end point at step **152**, as described in **FIG. 5**, and Equation 1 is executed at step **154** to perform timing analysis. Based on the results of the timing analysis, the cell placement might be changed at phase **150**.

[0045] After the cells of the clock network are placed, critical paths of the clock logic are identified and optimized

at phase **156**. The processes of steps **152** and **154** are again executed during the restructure of the clock logic at phase **156**. Similarly, the processes of steps **152** and **154** are executed during the third phase **158** when the clock logic is optimized for timing violated paths. Hence, the process is performed during the cell placement and wire routing phase **150**, during the phase **156** of optimizing critical paths, and during the phase **158** of minimizing timing violation paths. After each phase of the synthesis, clock uncertainty will be analyzed and updated based on the current clock network topology and the over-all delay (clock logic delay and data logic delay) information.

[0046] As indicated by Equation 2, different clock structures will have quite different clock uncertainties. Thus, the clock structure of **FIG. 2** has a small clock uncertainty, whereas the clock structure of **FIG. 3** has a large clock uncertainty. A robust clock net can be constructed as a clock tree to reduce estimation errors during the clock implementation phase (**FIG. 6**).

[0047] **FIG. 7** is a flowchart of a process of implementing a clock network and inserting buffers so that the clock uncertainty can be reduced. More particularly, the process of **FIG. 7** maximizes the common path(s), thereby minimizing clock uncertainty. The process of **FIG. 7** is a modification of that described in U.S. Pat. No. 6,487,697 granted to Lu et al. on Nov. 26, 2002 for "Distribution Dependent Clustering in Buffer Insertion of High Fanout Nets" and assigned to the same assignee as the present invention. For a given a clock net, the driver pin of the net is treated as the tree root and all driven pins of the net are considered as the tree leaves. Assume there are M leaves in the net, identified as 1, 2, . . . , M.

[0048] At step **200** the coordinates of each tree leaf are input to the process as (x_i, y_i) , where $i \in (1, 2, \dots, M)$. At step **202**, the center of gravity (x, y) of the leaves is calculated as

$$x = \left(\sum_{i=1}^M x_i \right) / M \quad \text{and} \quad y = \left(\sum_{i=1}^M y_i \right) / M.$$

At step **204**, a buffer is forced into a free space location close to (x, y) , namely a location near the center of gravity of the leaves where there is sufficient free space for the buffer. "Forcing a buffer" means that no timing information or ramp time information will be considered. The forced buffer is arranged to drive all tree leaves.

[0049] At step **206**, a set of buffers is inserted to drive all tree leaves. The set of buffers are inserted so that the new nets introduced by the inserted buffers do not have any ramp time violations. At step **208**, a set of leaves within the bounding box of one of the inserted buffers is selected. The selected set of leaves are all those leaves that are driven by the selected one inserted buffer. A subset of the set is selected based on the drive capability of the inserted buffer, namely the maximum load that the inserted buffer can drive without causing ramp time violation. Preferably, priority is given to the inclusion within the subset of leaves between which there are timing paths. At step **210**, the inserted buffer is then connected to drive the selected subset of leaves.

[0050] At step **212**, if additional inserted buffers exist for which steps **208-210** have not been performed, the process loops back and iteratively performs steps **208** and **210** for each inserted buffer. When the last inserted buffer has been processed, as identified at step **212**, then at step **214** the center of gravity of the inserted buffers is calculated.

[0051] For example, if there are K new inserted buffers such that each k-th buffer is inserted at respective coordinates (x_k, y_k) . The center of gravity of the K buffers is calculated as

$$x = \left\{ \sum_{k=1}^K x_k / K \right\}, \quad y = \left\{ \sum_{k=1}^K y_k / K \right\}.$$

At step **216** the forced buffer inserted at step **204** is moved to this new center of gravity.

[0052] At step **218** another set of buffers is inserted to drive those buffers currently driven by the forced buffer such that all new nets driven by inserted buffers do not have any ramp time violation. At step **220** the net is tested to identify if the tree has any ramp time violations. If ramp time violations exist, the process loops back to step **214** to repeat steps **214-218** until no ramp time violations remain. The process then ends at step **220** with an implemented net having placed cells and routed wires.

[0053] The process of **FIG. 7** places the forced buffer at the center of gravity of the clock network. Consequently, the common path to the forced buffer is maximized, thereby minimizing the non-common paths and minimizing clock uncertainty, which may be calculated as described in connection with **FIG. 5**.

[0054] The process is preferably carried out in a computer, with a memory medium, such as a recording disk of a disk drive, having a computer readable program therein containing computer readable program code that causes the computer to calculate the uncertainty parameter and carry out the processes of an embodiment of the invention. In preferred embodiments, the process is carried out in a computer in conjunction with an optimizing tool used during synthesis of the integrated circuit design.

[0055] Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

What is claimed is:

1. A process of optimizing a clock net in the form of a tree having a root defined by a driver pin and a plurality of leaves defined by driven pins, comprising steps of:

forcing a first buffer to a center of gravity of the plurality of leaves;

inserting a set of second buffers so each leaf is driven by an inserted buffer without timing violations; and

moving the first buffer to a center of gravity of the set of second buffers.

2. The process of claim 1, further including:
inserting a set of buffers to drive the second set of buffers without timing violations.

3. The process of claim 1, wherein the step of inserting a set of second buffers comprises:
selecting a subset of leaves driven by each second buffer based on a maximum load for the respective second buffer, and
connecting the respective second buffer to drive the selected subset of leaves.

4. The process of claim 1 and further comprising including estimating clock uncertainty based on a delay associated with a path from the first buffer to each leaf.

5. The process of claim 4 and further comprising:
identifying a second clock delay between the first buffer and each leaf, and
estimating clock uncertainty based on the maximum second clock delay.

* * * * *